

Effects of Reservoir Operations on Water Quality and Fish Habitat in Lake Murray and Saluda Releases

Andy Sawyer and Jim Ruane, REMI

August 7, 2007

Relicensing Issues Identified by the Water Quality Technical Working Committee

- The causes of striped bass fish kills reported in previous years, especially factors related to Saluda Hydro operations
- The effects of Unit 5 operations on entrainment of blue-back herring
- Determination of operational changes that might increase habitat for striped bass and blue-back herring
- Track any impacts that could occur to the tailwater cold-water fishery due to potential operational changes

Factors Considered to Address Relicensing Issues

- Annual flow regimes
- Pool level management
- Unit 5 operations
- In-lake and release water quality
- Habitat for striped bass and blue-back herring
- Water quality, meteorological, and operations data over the period 1990-2005
- Emphasis will be placed on section of reservoir from Blacks Bridge to Saluda Dam

Plan for Using CE-QUAL-W2 to Address the Water Quality TWC Relicensing Issues

1. Analyze water quality, meteorological, flow, and operations data for the period of study
2. Set up CE-QUAL-W2 for the years when major striped bass fish kills occurred
3. Run models to identify the causes that apparently contributed to the fish kills
4. Use the models to explore ways to avoid such fish kills in the future

Preliminary Findings Reported in March

- High flow, especially during March-August, is the primary cause for fish kills
- Higher flows cause the bottom of the lake to warm which in turn increases the rate of DO depletion
- Meteorological conditions can affect striped bass habitat
- Model results indicate that the temperature and DO range of tolerable striped bass habitat in Lake Murray is approximately:
 $T < 27^{\circ}\text{C}$ and $\text{DO} > 2.5 \text{ mg/l}$
- Preferential use of Unit 5 helps preserve colder bottom water and was predicted to improve DO and increase striped bass habitat

Preliminary Conclusions Reported in May


- Nutrients are the single dominant factor that can enhance striped bass habitat
- Flow is a dominant factor, but cannot be controlled to avoid fish kills
- Met conditions can be a periodic factor that alleviates otherwise dominant factors like flow
- Striped bass habitat conditions can be improved in some years by maintaining high summer pool levels (~ elev. 358 ft)
- Unit 5 preferential operations can improve striped bass habitat in some years

Next Steps Selected at May Meeting

1. For selected years, finalize assessment (i.e., assess changes in releases) of operating guide for U5 preference for “first on, last off” operation using the hourly releases
2. For selected years, finalize assessment of maintaining summer pool levels at 358
3. For selected years, finalize assessment of the combination of maintaining summer pool levels at 358 with U5 preference for “first on, last off” operation using the hourly releases
4. Analyze additional years, especially a low flow year
5. Assess effects of minimum winter pool level, including effects on Little Saluda embayment, increased SOD, internal nutrient cycling, aquatic plants, sedimentation in coves

1998 Model Calibration


1998 Lake Murray Water Surface Model vs. Data

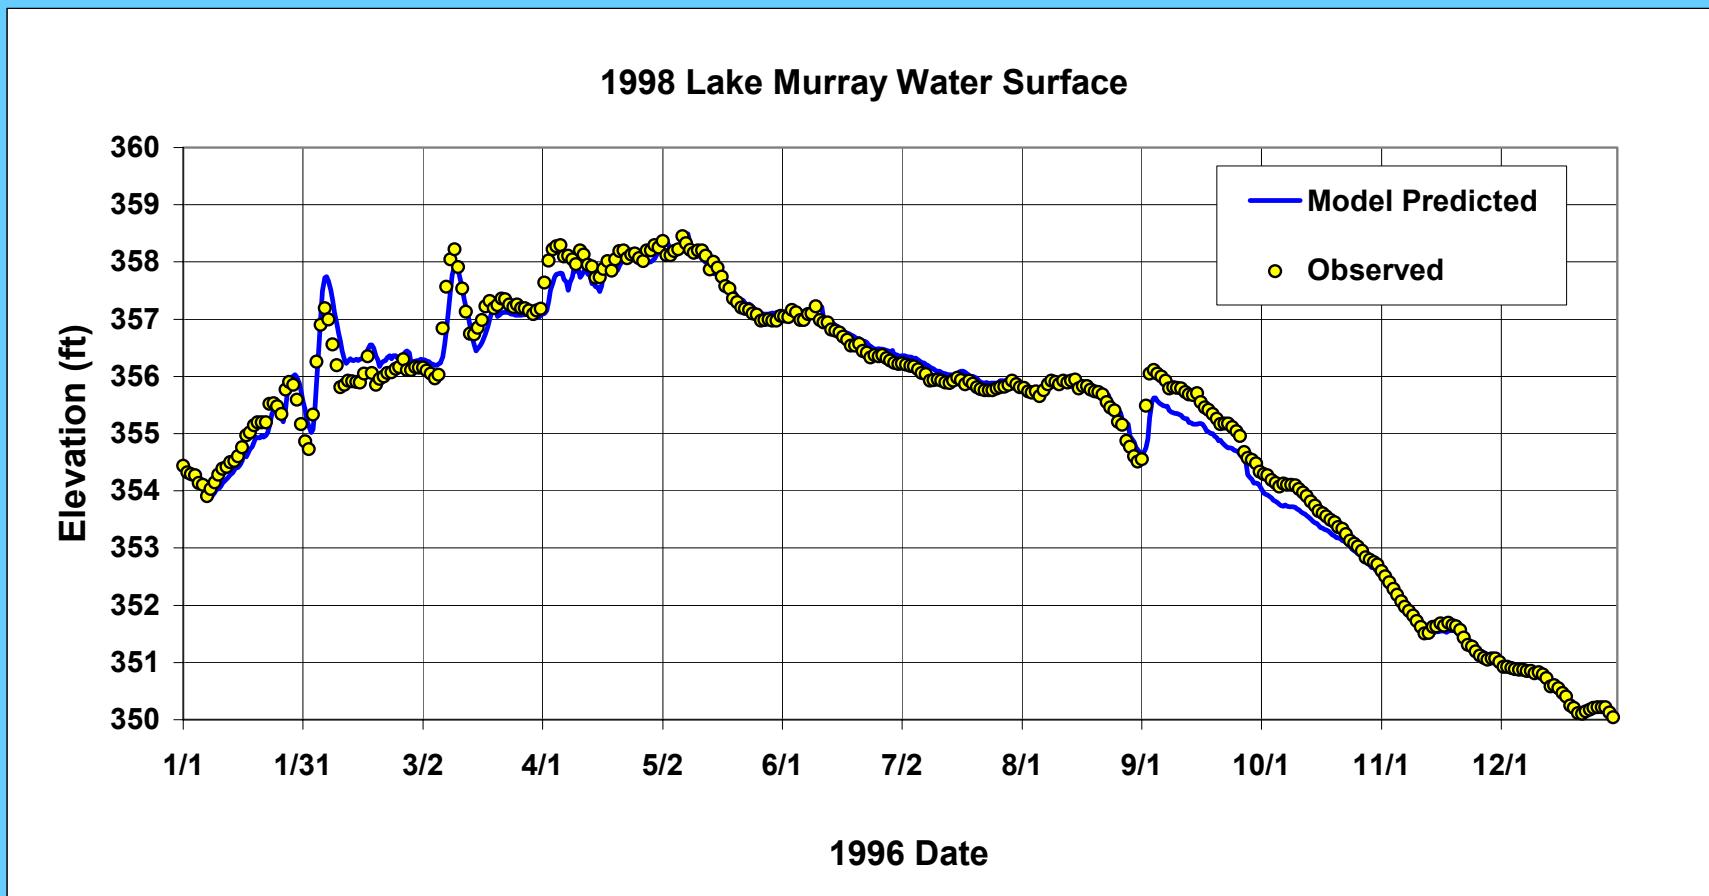

1998 Lake Murray Temperature Profiles

Forebay












Model vs. Data

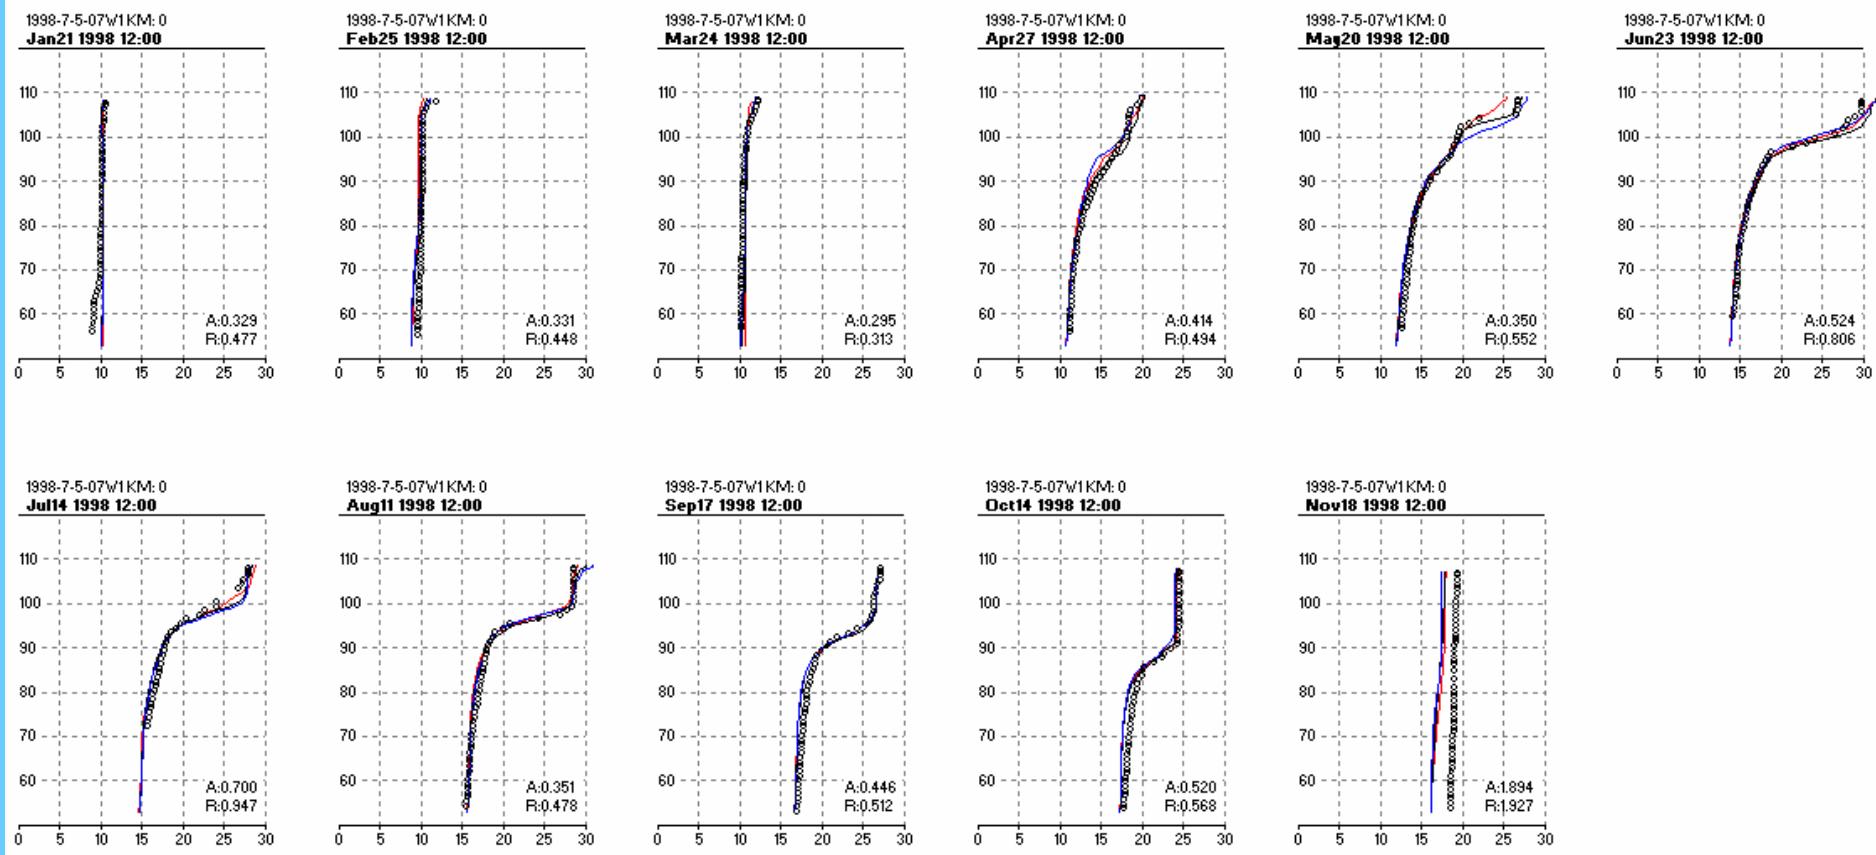

1998 Lake Murray Temperature Profiles

6 Kilometers Upstream of Dam












Model vs. Data

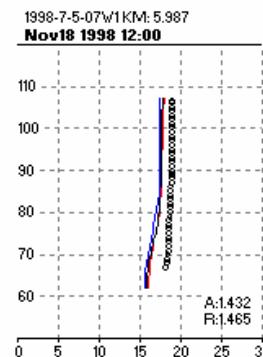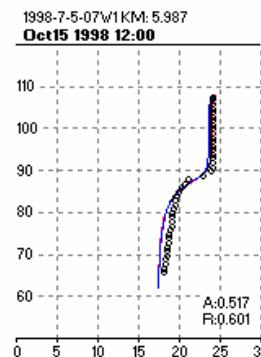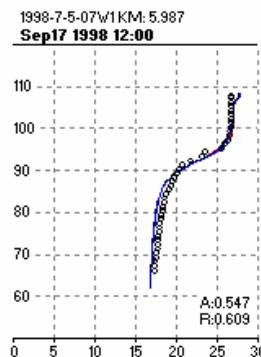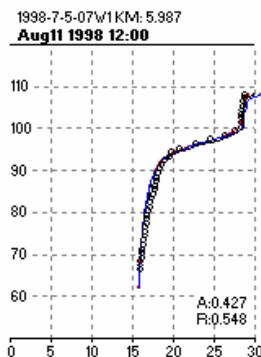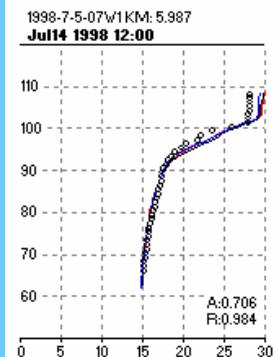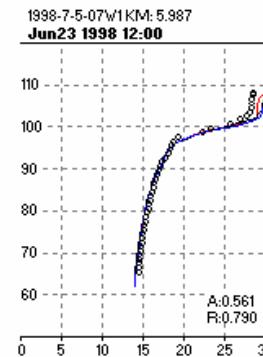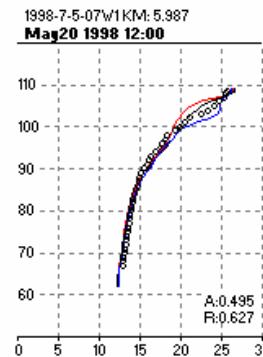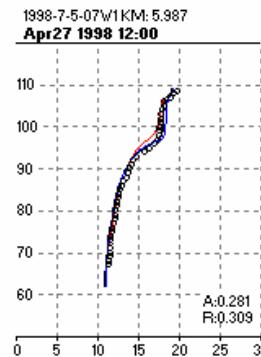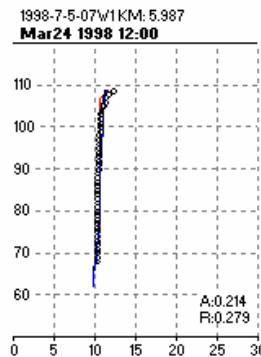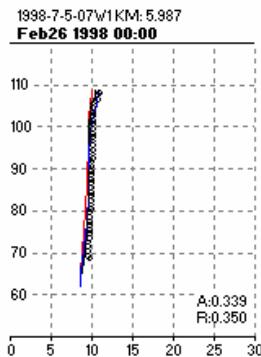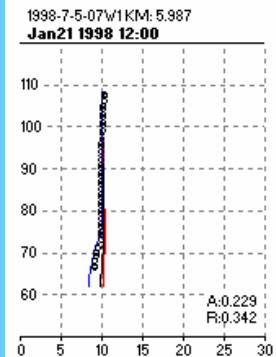

1998 Lake Murray Temperature Profiles

19 Kilometers Upstream of Dam


Model vs. Data

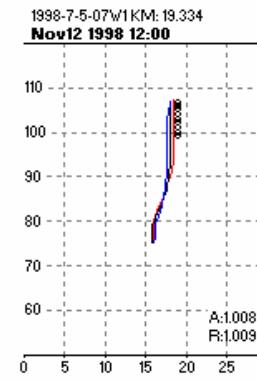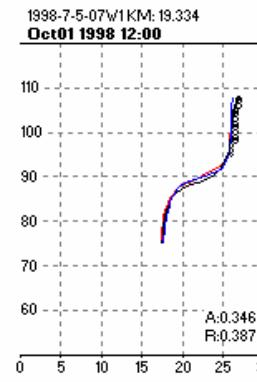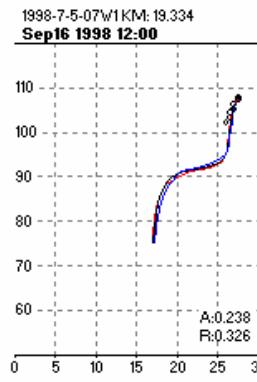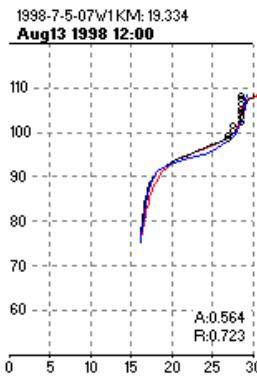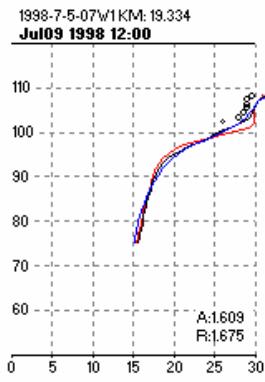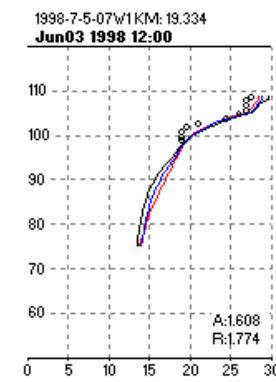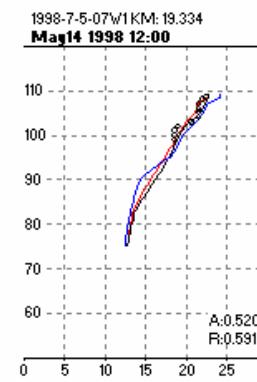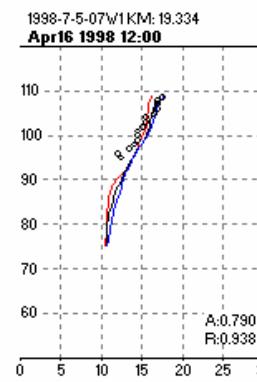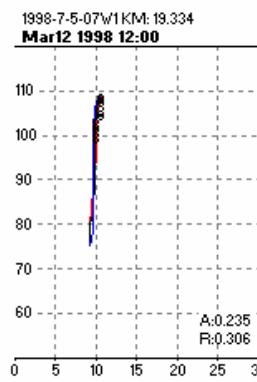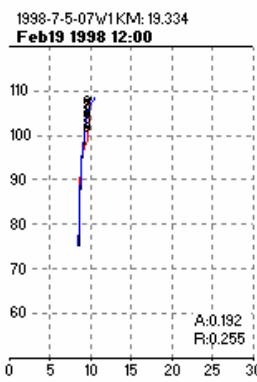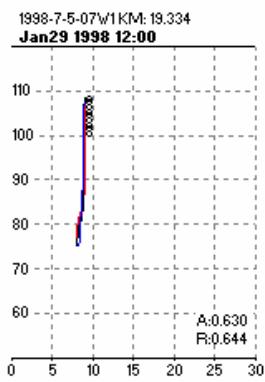

1998 Lake Murray DO Profiles

Forebay












Model vs. Data

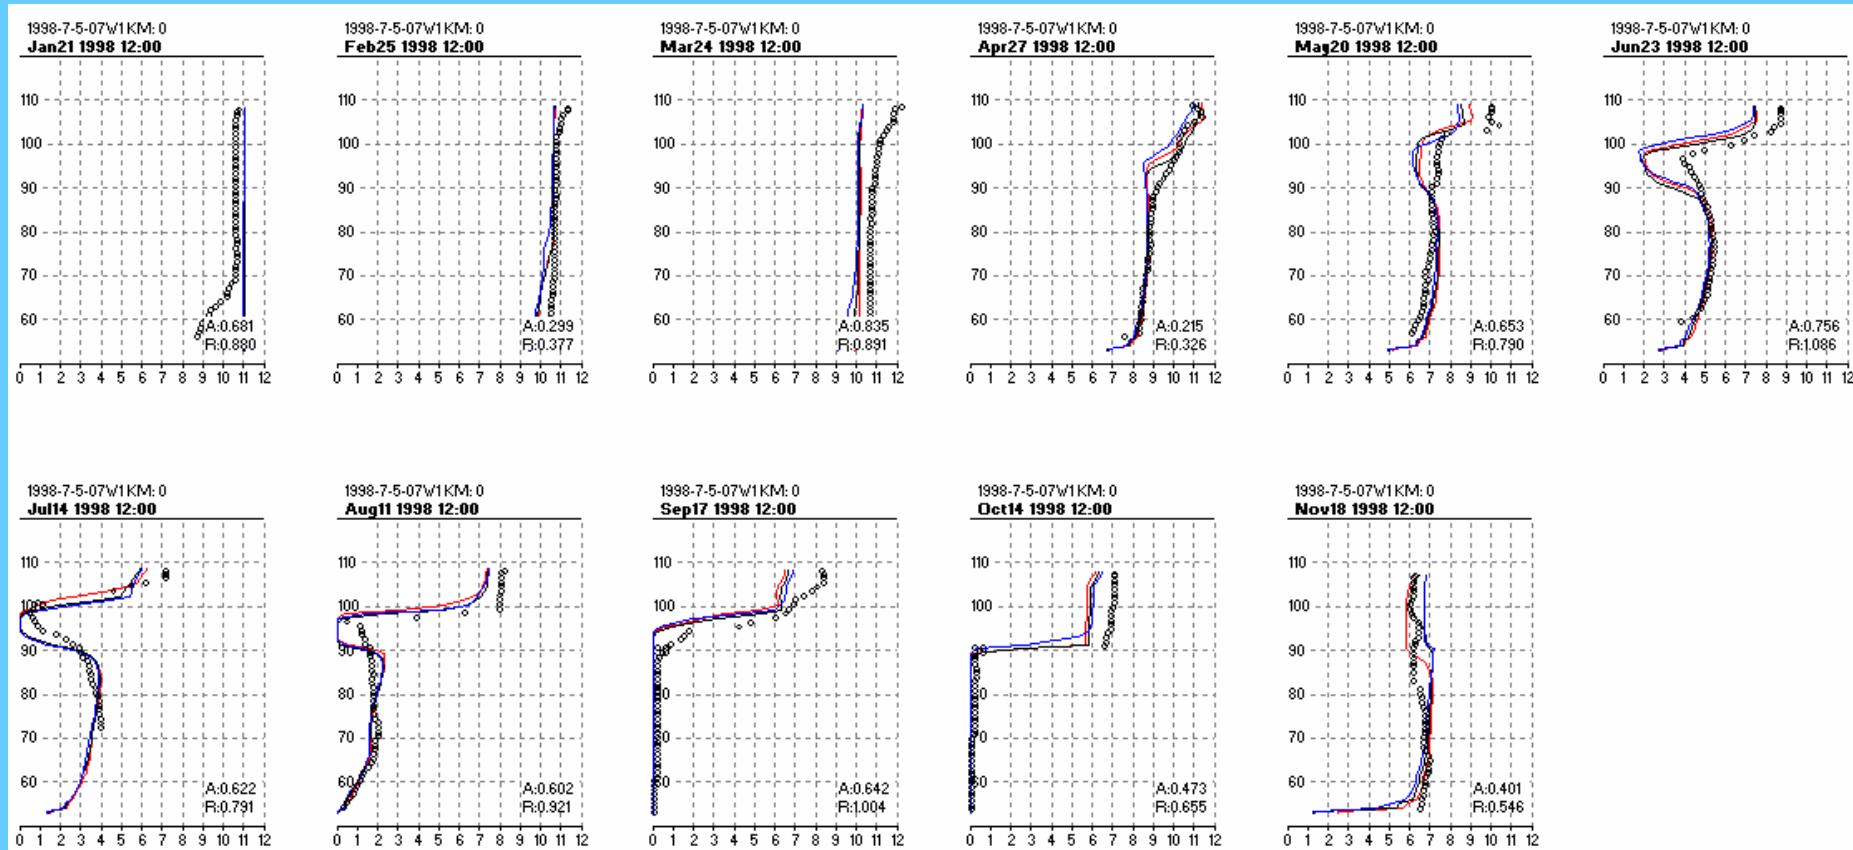

1998 Lake Murray DO Profiles

6 Kilometers Upstream of Dam












Model vs. Data

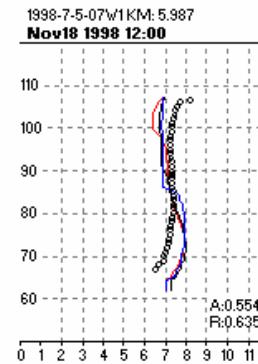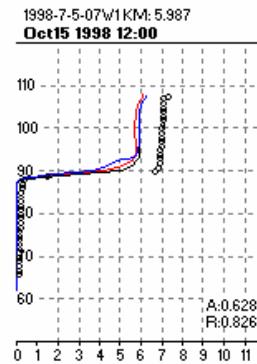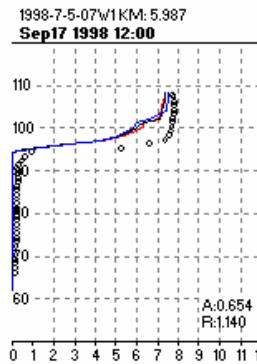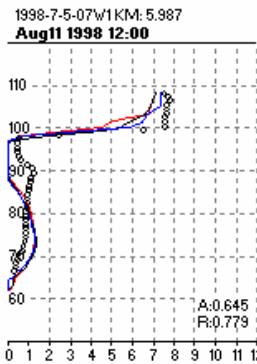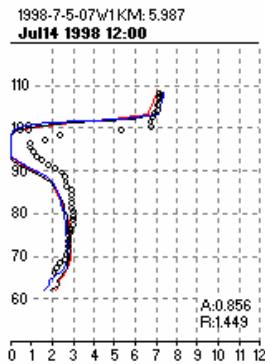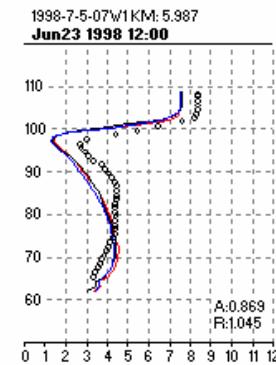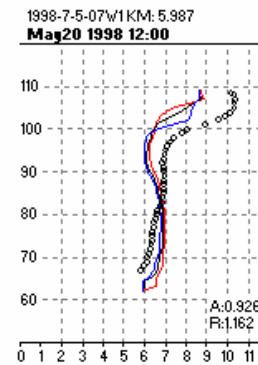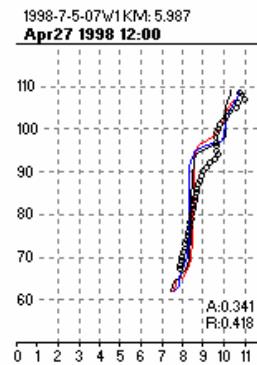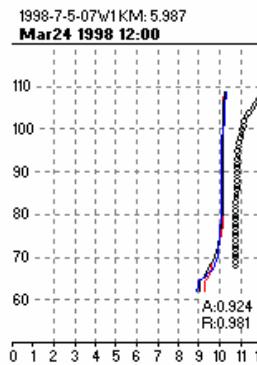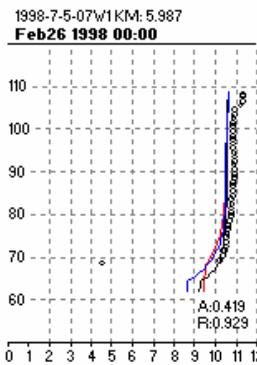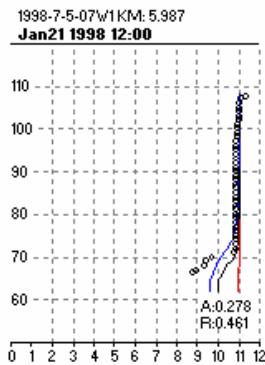

1998 Lake Murray DO Profiles

19 Kilometers Upstream of Dam

Model vs. Data

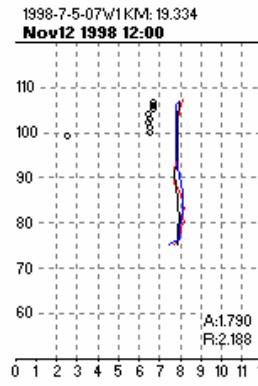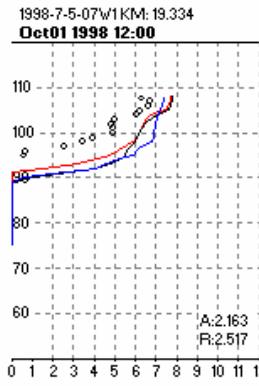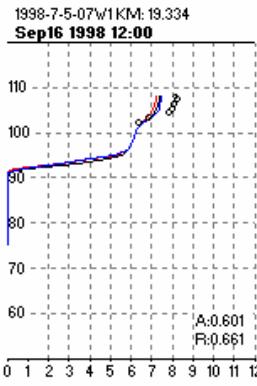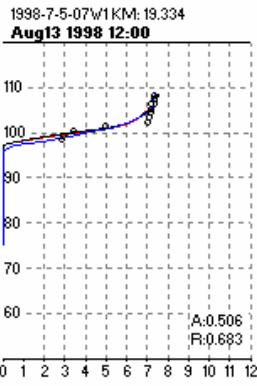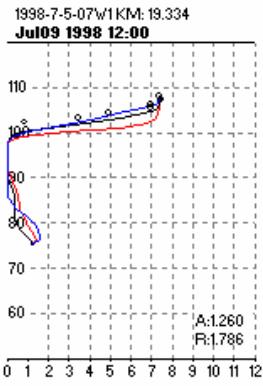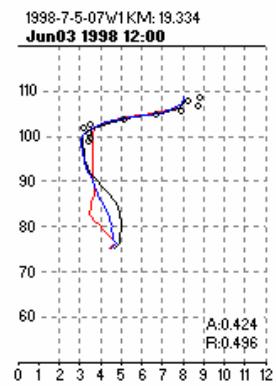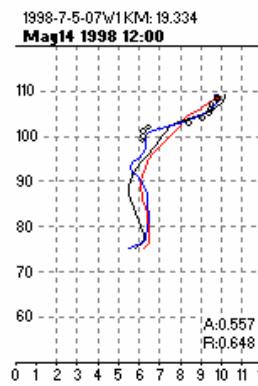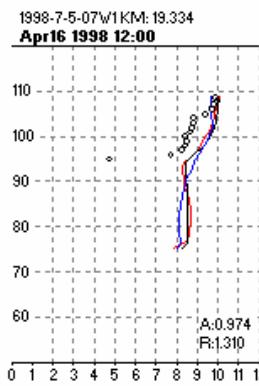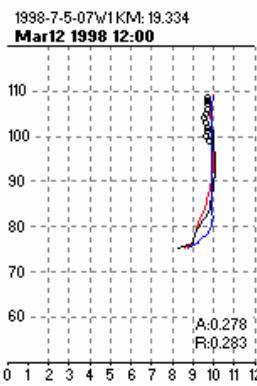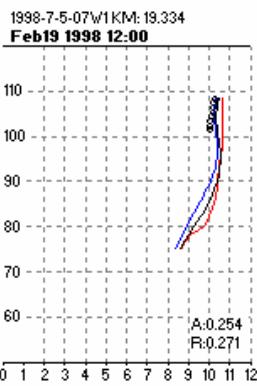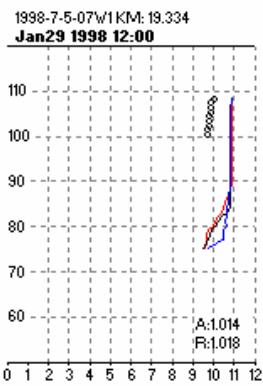

Calibration Statistics for Temperature and DO Profiles

Temperature


Year	Kilometers From Dam								Mean	
	0.0		6.0		19.3		Little Saluda Embayment			
	AME	RMS	AME	RMS	AME	RMS	AME	RMS	AME	RMS
1991	0.55	0.75					1.05	1.27	0.80	1.01
1992	0.81	1.11	0.79	1.18	0.65	0.78	1.45	1.96	0.93	1.26
1996	0.44	0.68	0.52	0.78	0.64	0.90	0.80	1.11	0.60	0.87
1997	0.45	0.67	0.44	0.61	0.70	0.96	1.23	1.60	0.70	0.96
1998	0.56	0.80	0.52	0.71	0.69	0.91	0.83	1.08	0.65	0.88
2000	0.54	0.73	0.58	0.77	0.79	1.02	1.21	1.65	0.78	1.04
2001	0.54	0.72	0.67	0.83	0.79	0.89	1.23	1.53	0.81	0.99
2005	0.53	0.73	0.57	0.70	0.58	0.74	1.03	1.23	0.68	0.85
Mean	0.55	0.77	0.59	0.80	0.69	0.89	1.10	1.43	0.73	0.97

DO

Year	Kilometers From Dam								Mean	
	0.0		6.0		19.3		Little Saluda Embayment			
	AME	RMS	AME	RMS	AME	RMS	AME	RMS	AME	RMS
1991	0.83	1.44					1.51	2.00	1.17	1.72
1992	0.60	0.95	0.67	0.95	0.89	1.20	1.66	2.13	0.95	1.31
1996	0.59	0.95	0.71	1.04	0.58	0.75	0.81	1.08	0.67	0.95
1997	0.89	1.38	0.87	1.27	0.86	1.16	1.86	2.58	1.12	1.60
1998	0.56	0.79	0.65	0.94	0.93	1.35	1.24	1.66	0.84	1.18
2000	0.87	1.22	1.14	1.48	0.99	1.24	1.69	2.17	1.17	1.53
2001	0.70	1.18	0.89	1.38			1.76	2.17	1.12	1.58
2005	0.84	1.53	0.76	1.16	0.94	1.42	1.87	2.37	1.10	1.62
Mean	0.73	1.18	0.81	1.17	0.86	1.19	1.55	2.02	0.99	1.39


Release Temperature

Model vs. Data

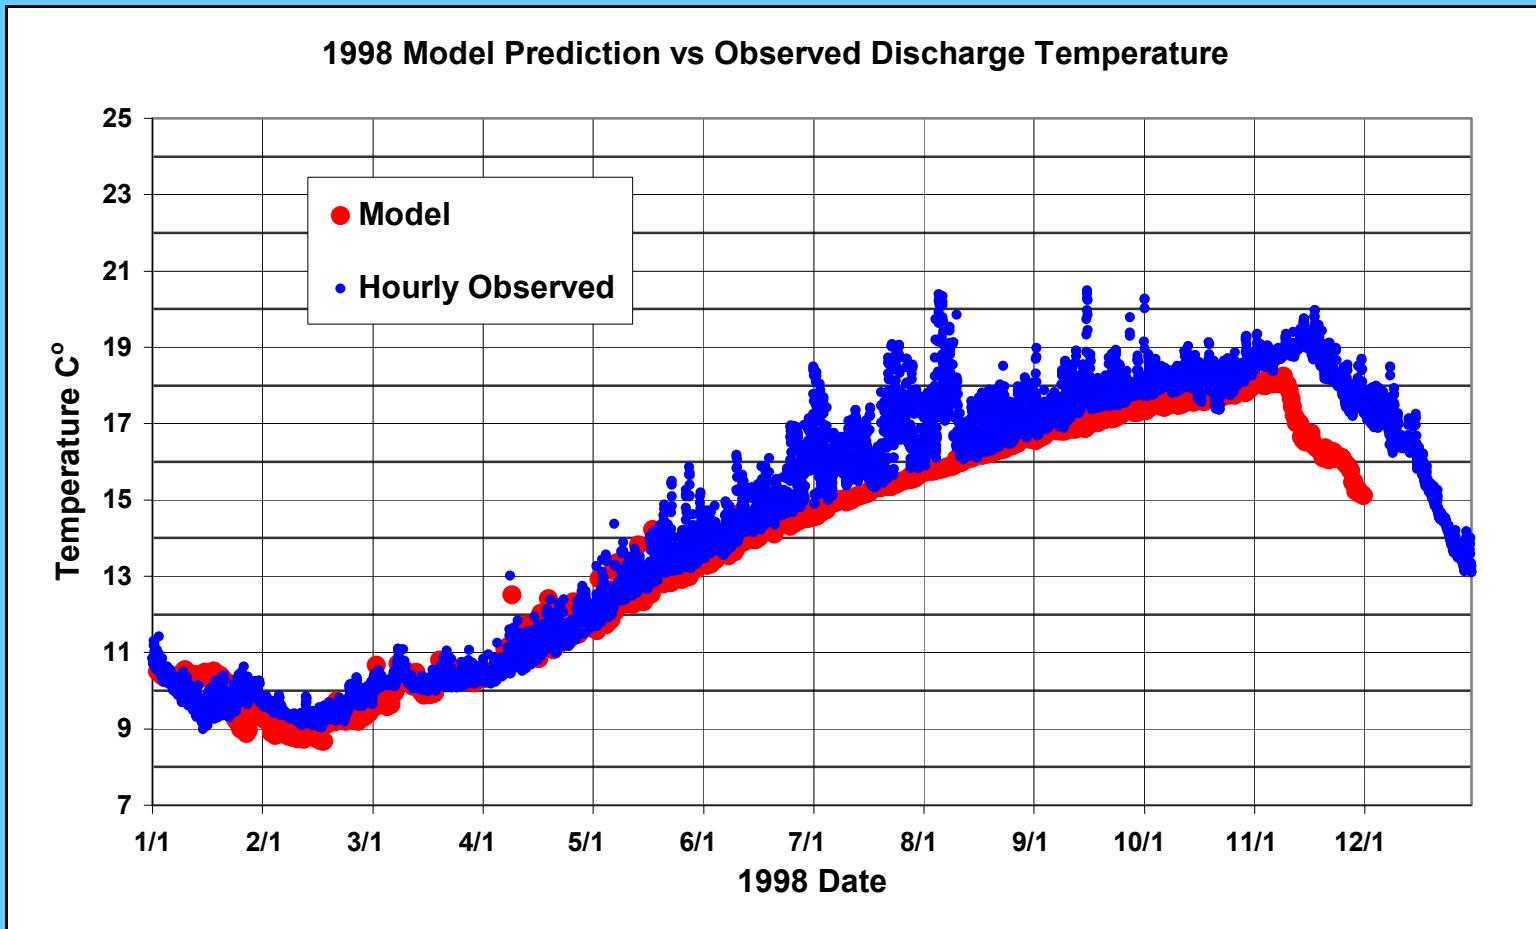


Release DO

Model vs. Data

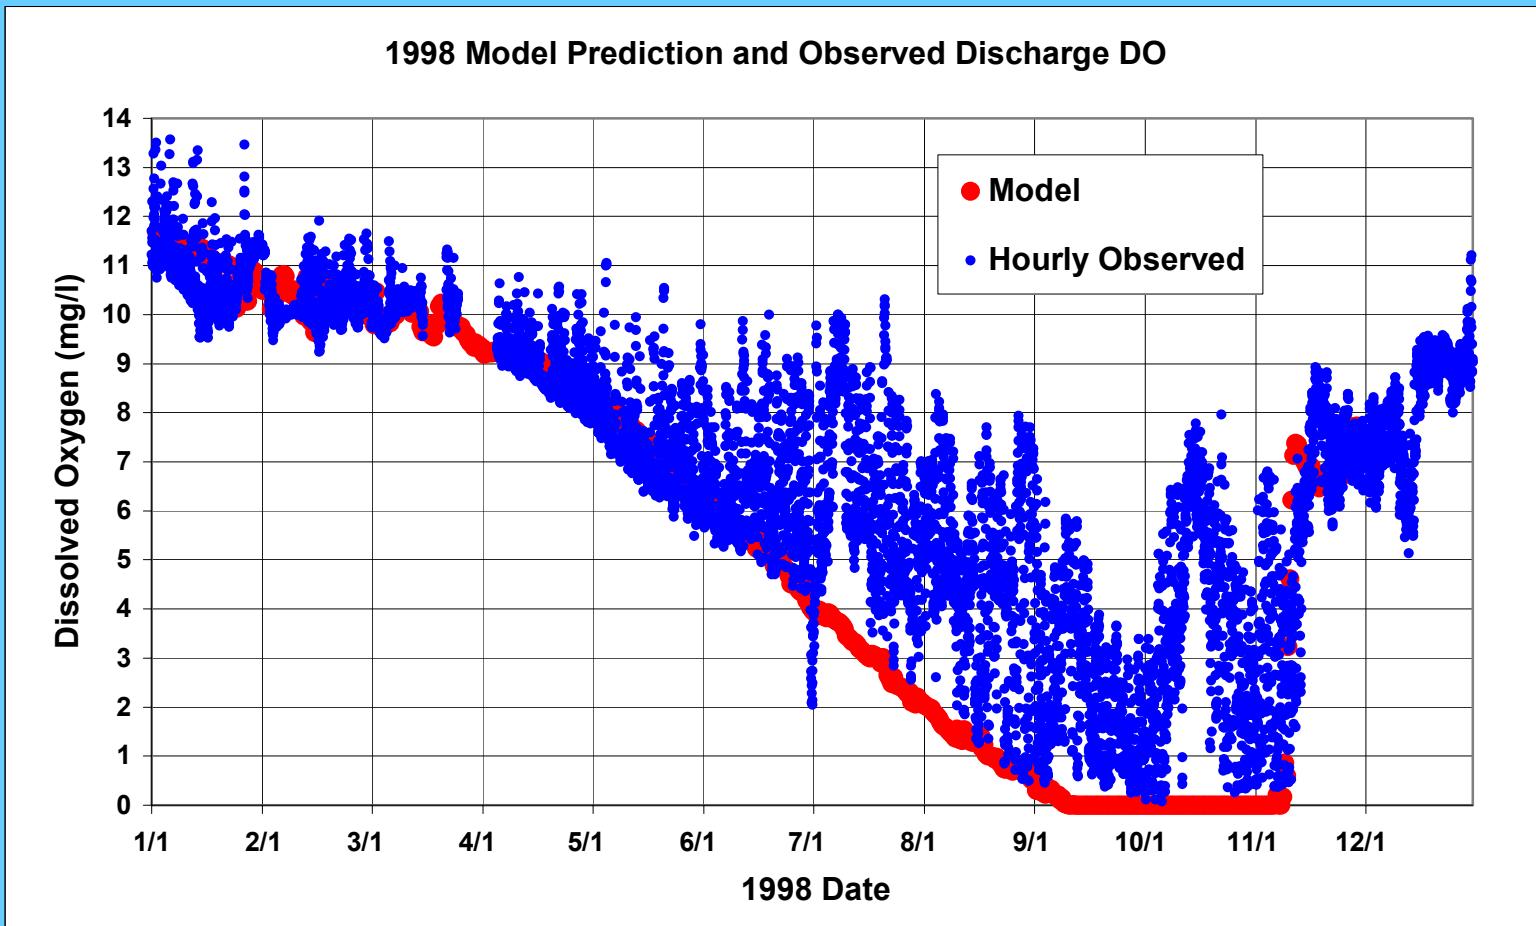


Temperature in Front of Unit 5

Model vs. Data

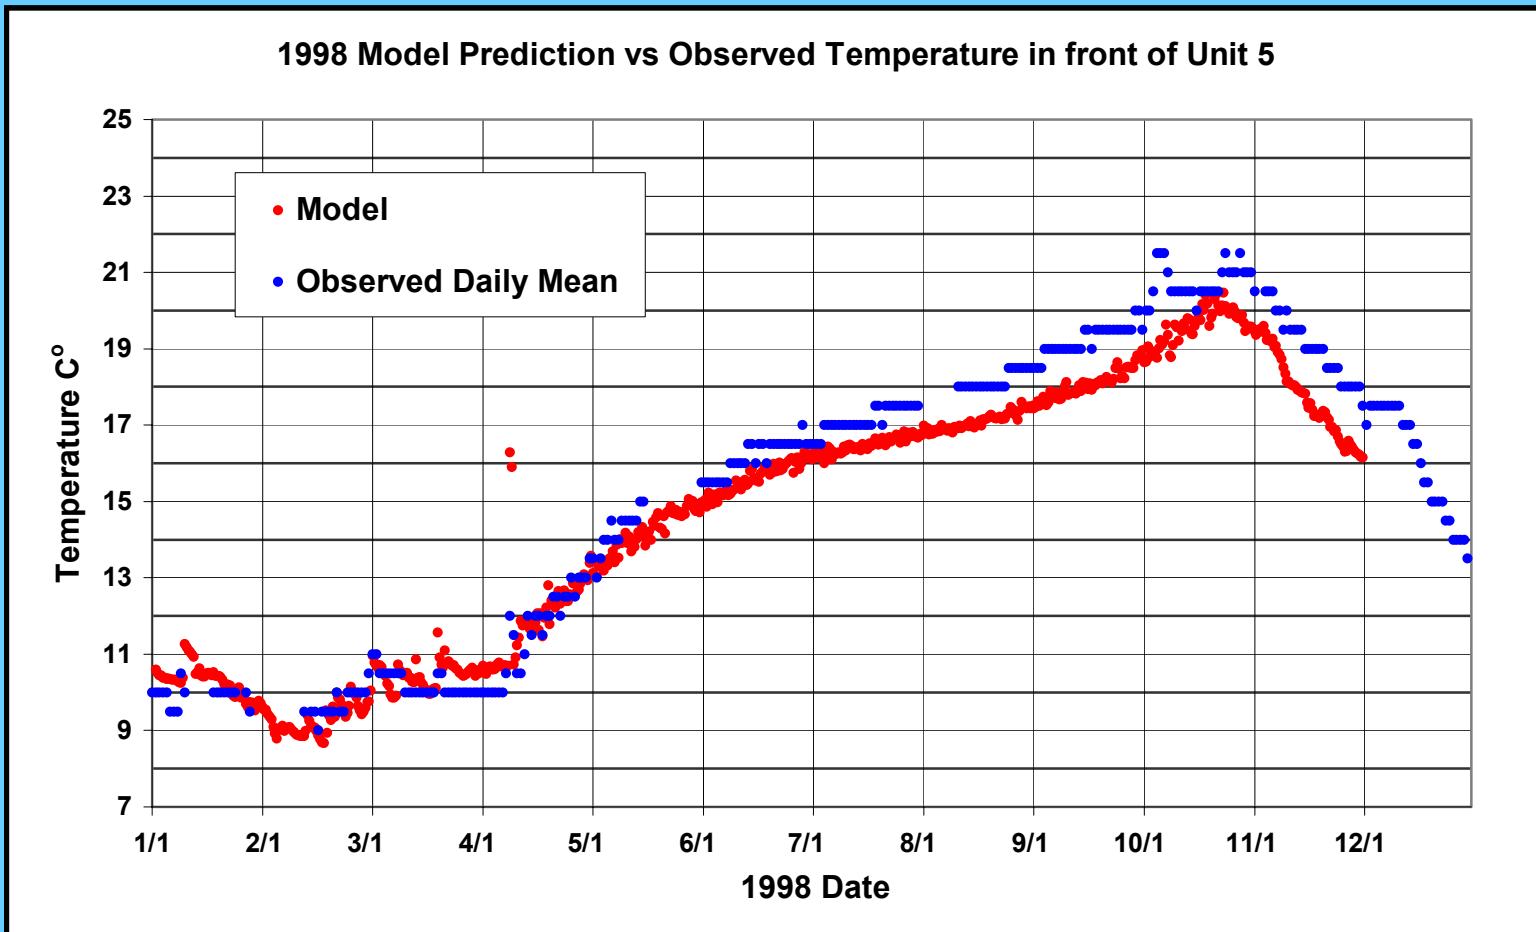


DO in Front of Unit 5

Model vs. Data

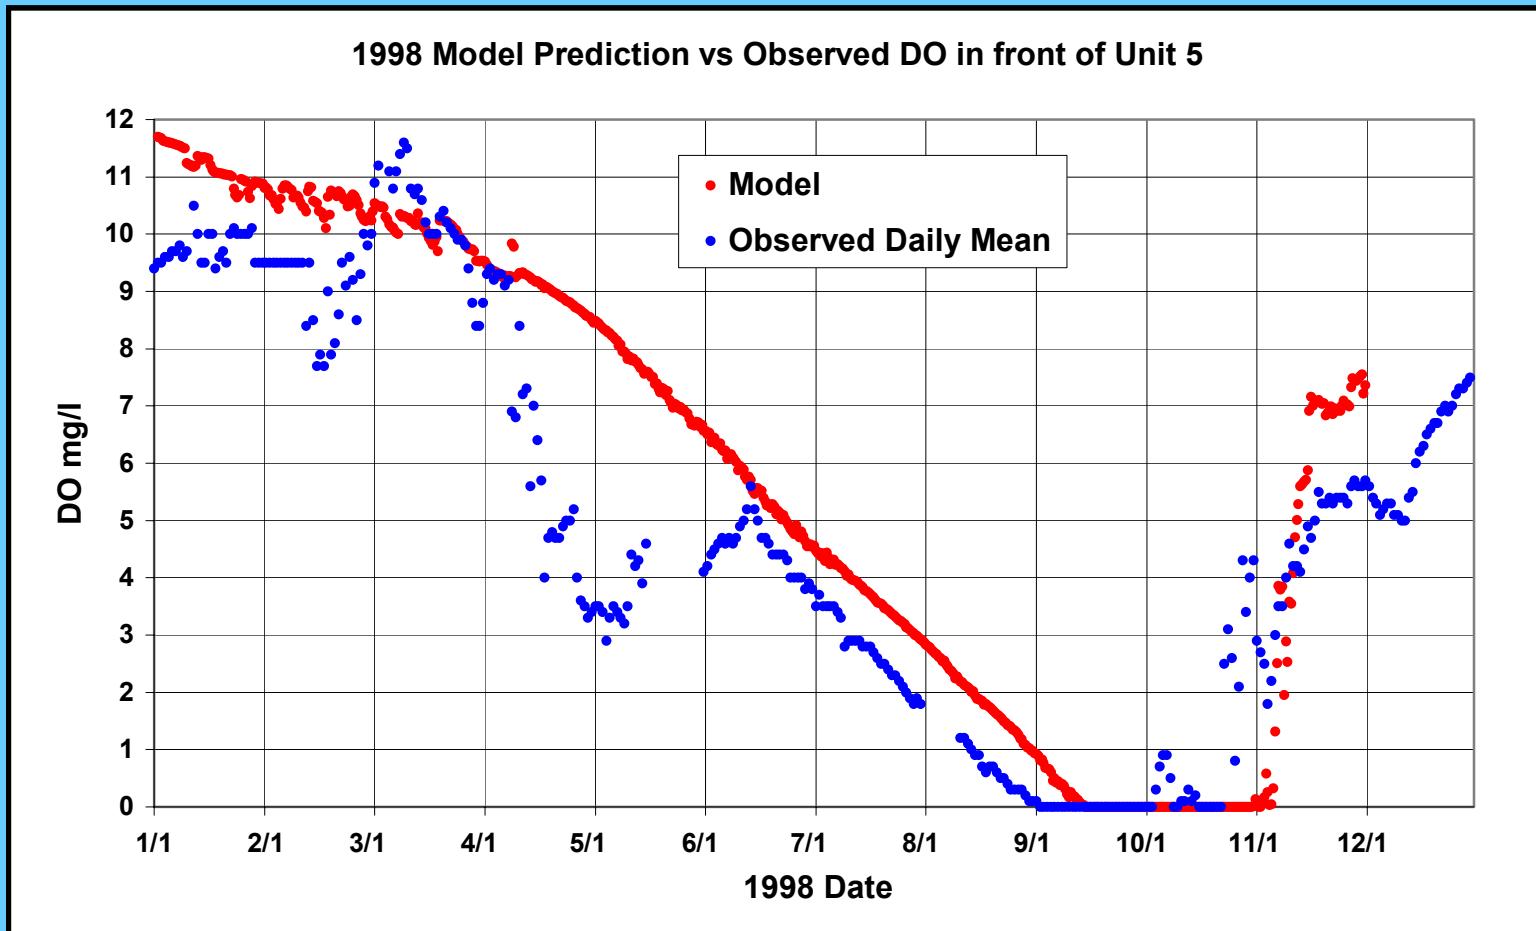


Temperature at the Surface Model vs. Data

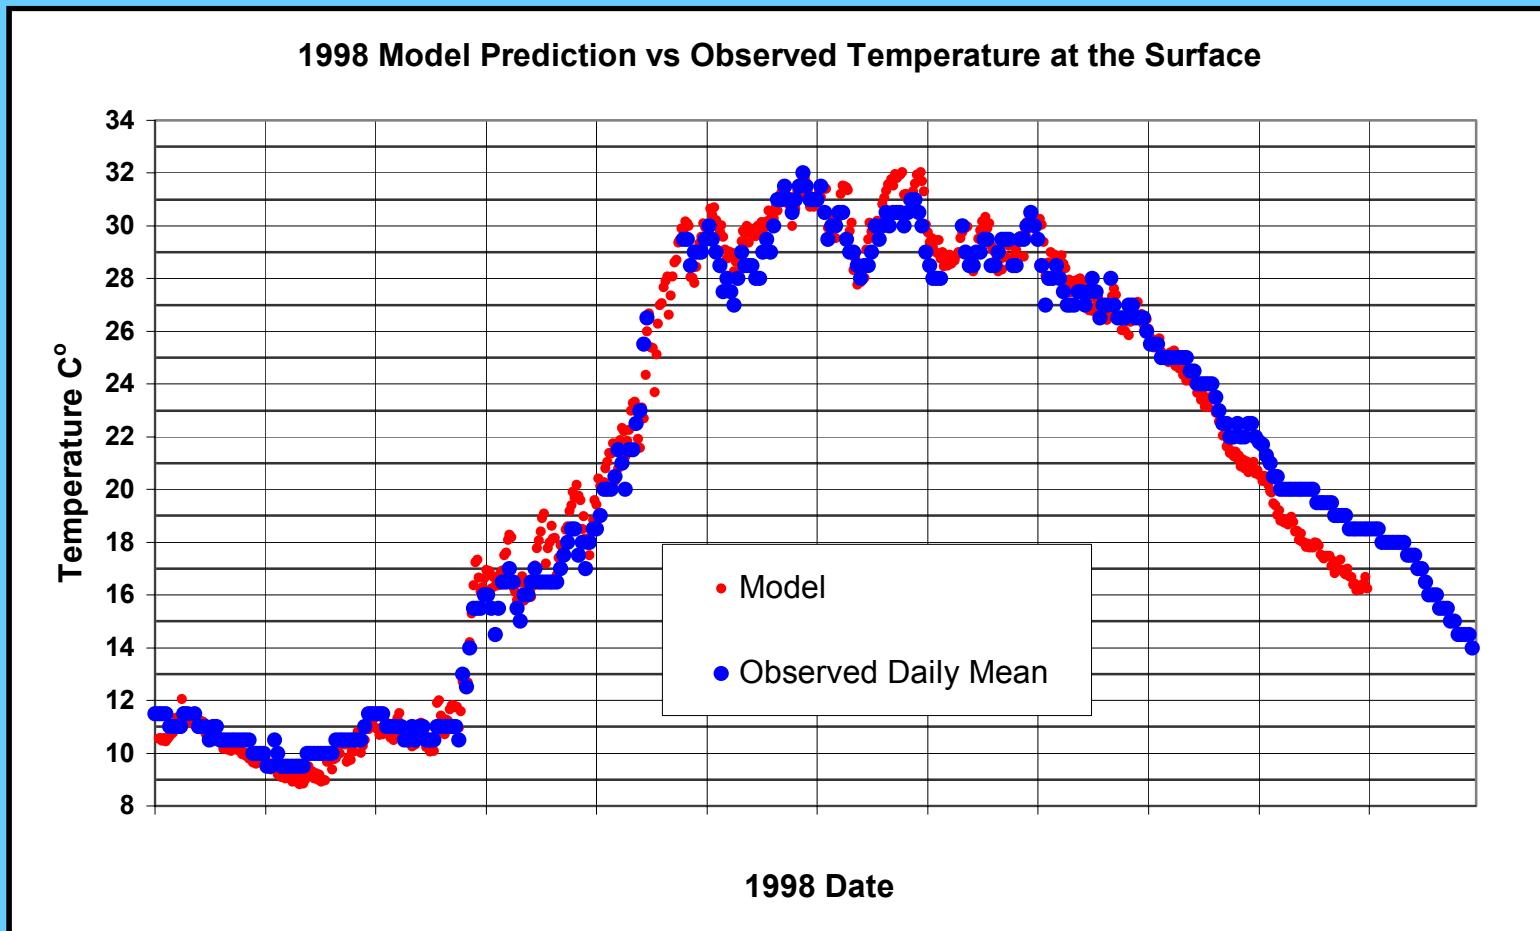

DO at the Surface

Model vs. Data

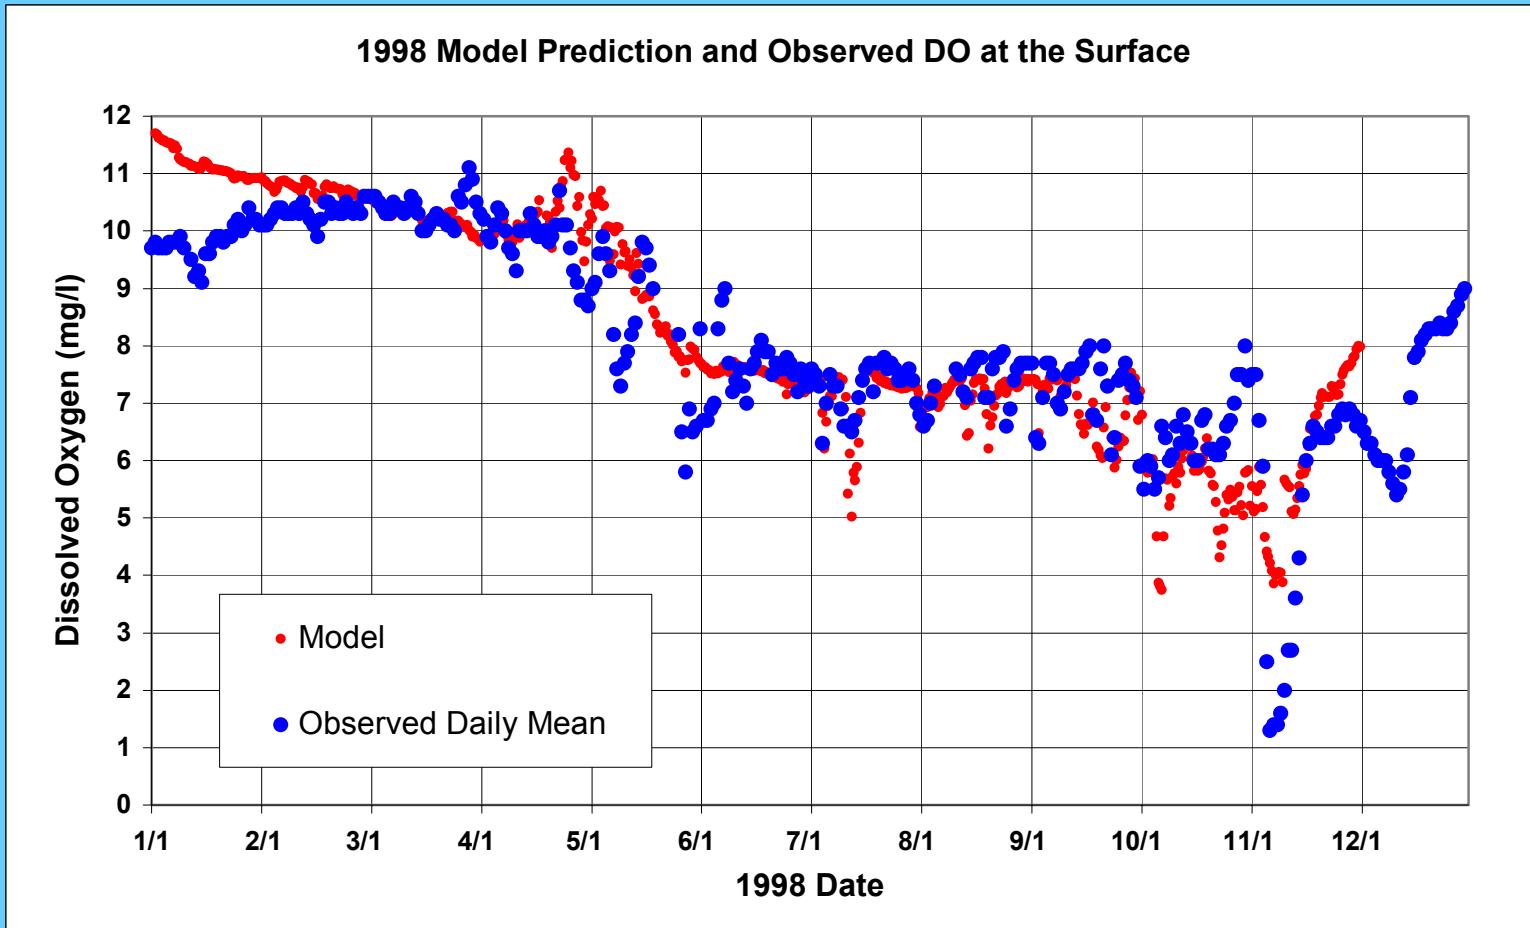


1998 - Other Water Quality Constituents


Forebay Surface

Model vs. Data


Chlor a in Lake Murray Forebay

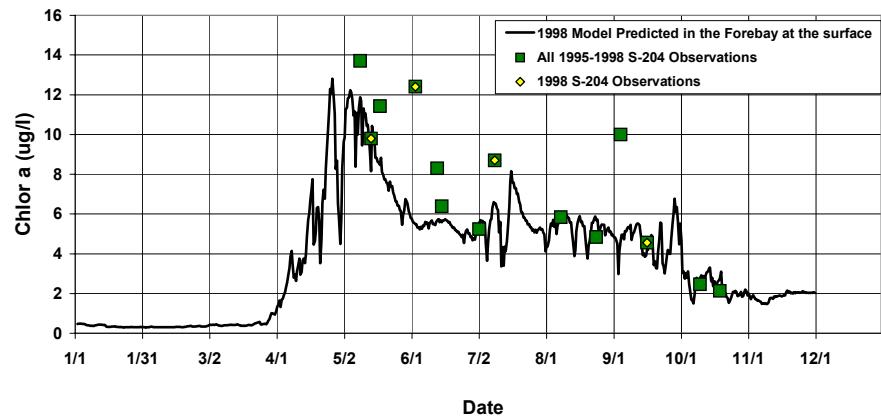


Nitrate in Lake Murray Forebay

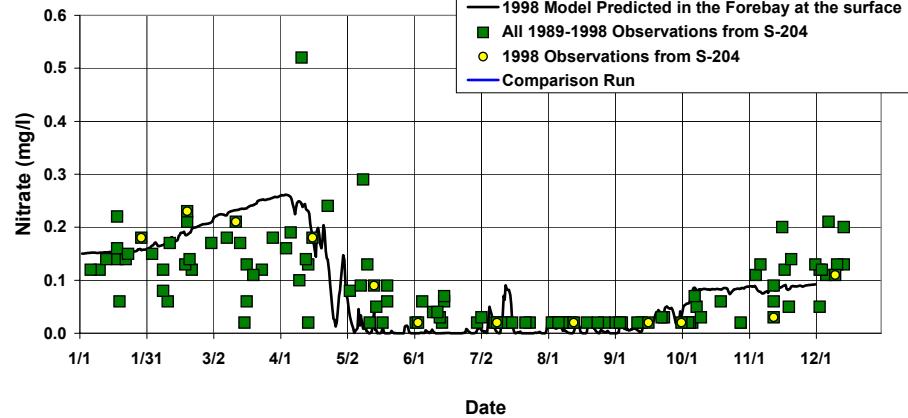

Total Phosphorus in Lake Murray Forebay




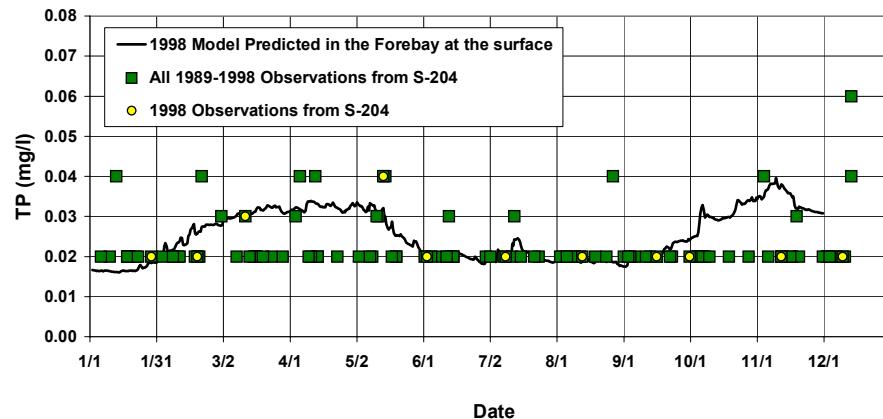


pH in Lake Murray Forebay

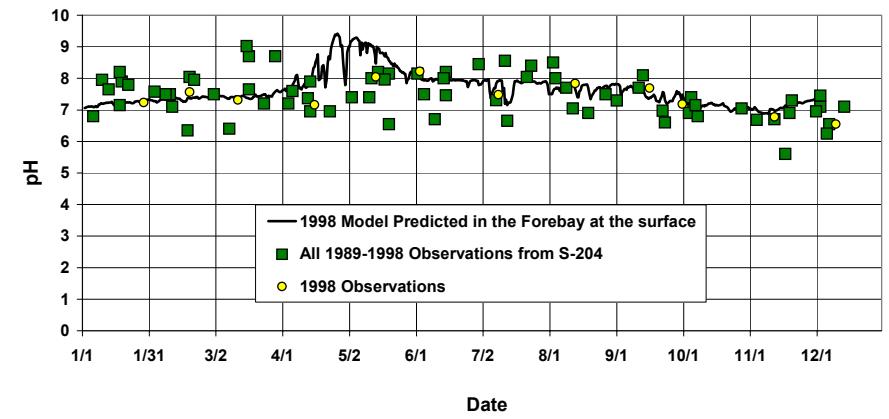

1998 - Other Water Quality Constituents

Model vs. Data

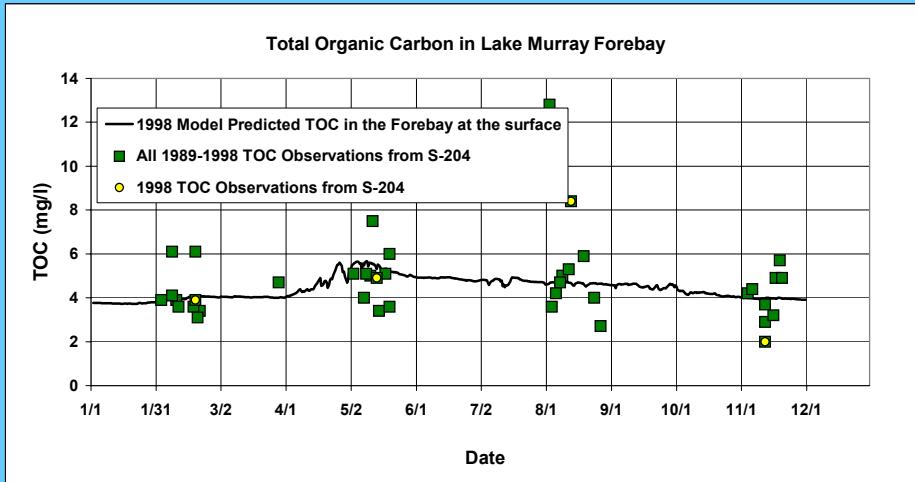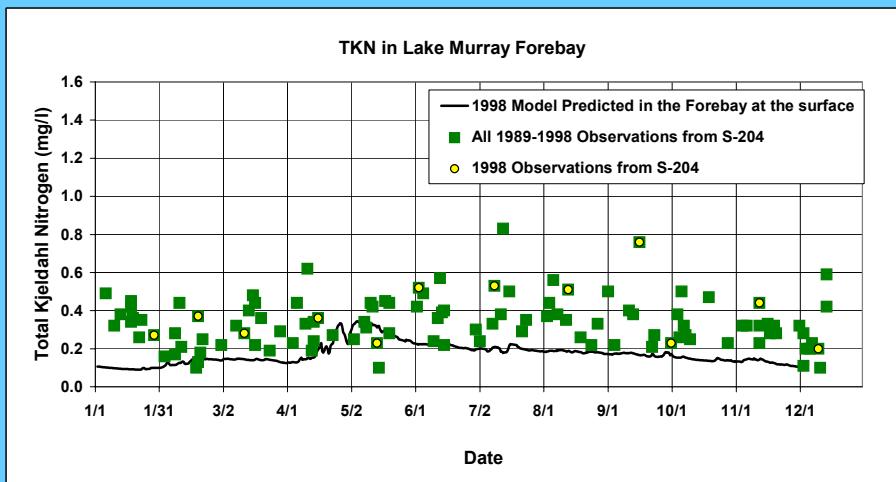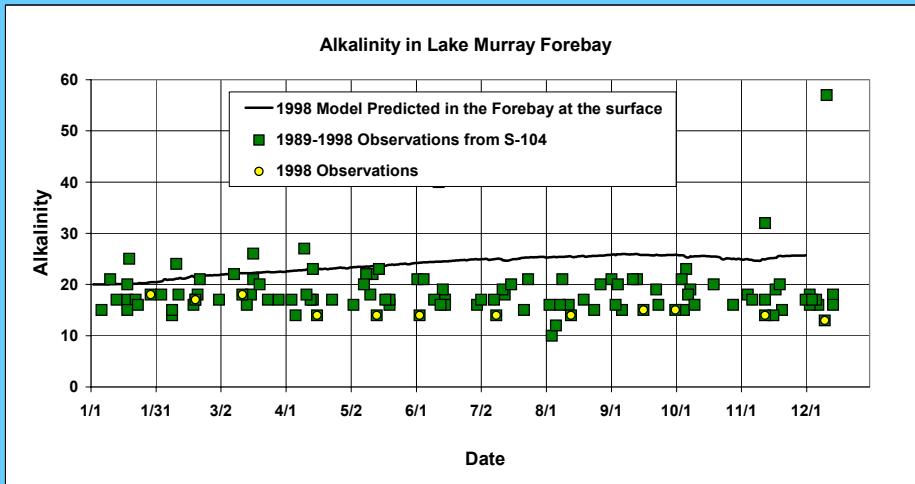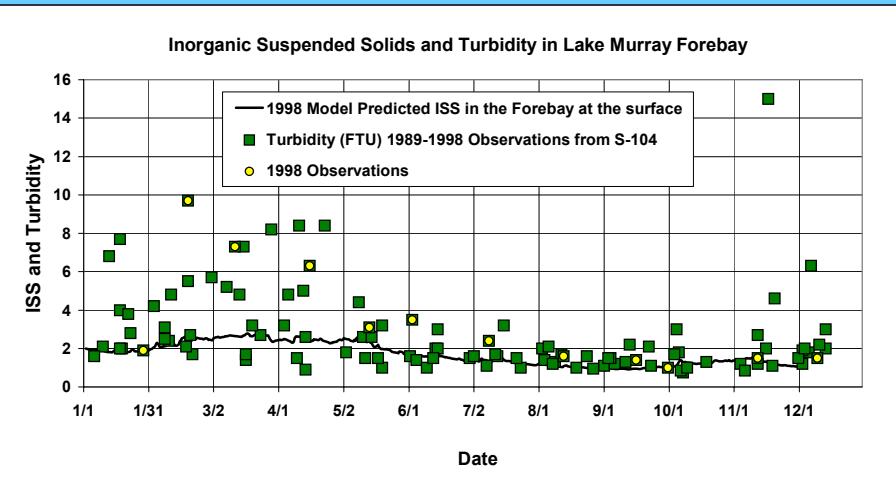

Evaluation of Raised Pool Levels

Scenarios Considered:

- 354(Jan1) to 358(May1⇒Sept1) to 354(Dec 31)
- 350(Jan1) to 358(May1⇒Sept1) to 350(Dec 31)





Assumptions:

- Assumed 500 cfs for minimum release
- Assumed reserve generation averaged 3hr every two weeks at 18,000 cfs
- Balance of releases were assumed to be used to supplement system demand





Approach:

- The above scenarios were developed by KA using daily average flows using HEC-ResSim
- CE-QUAL-W2 was run using daily average flows and release flows were adjusted so that target pool levels were attained
- Using the daily average flows that were adjusted using the CE-QUAL-W2 model the hourly flows for each day were developed using the assumptions above





1991 Surface Elevation, Volume of Striper Habitat and Discharge Temperature and DO

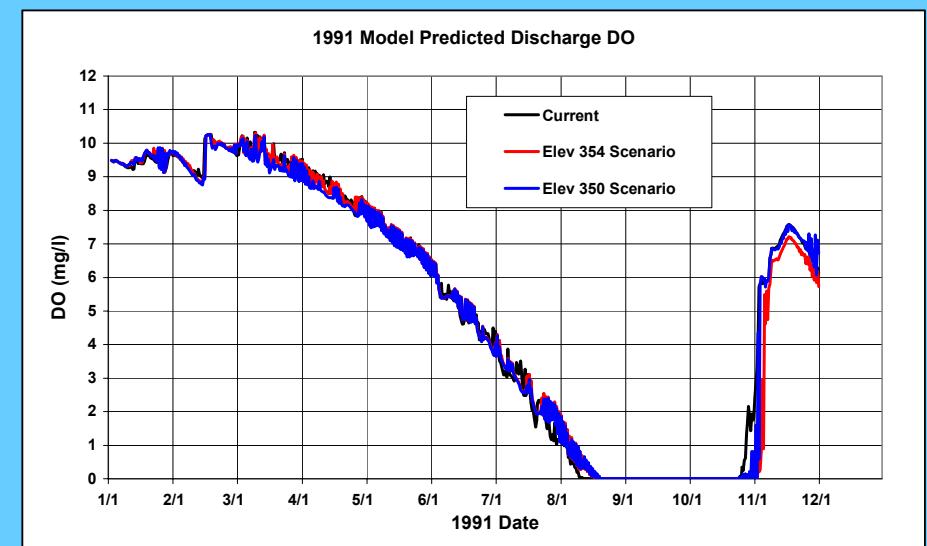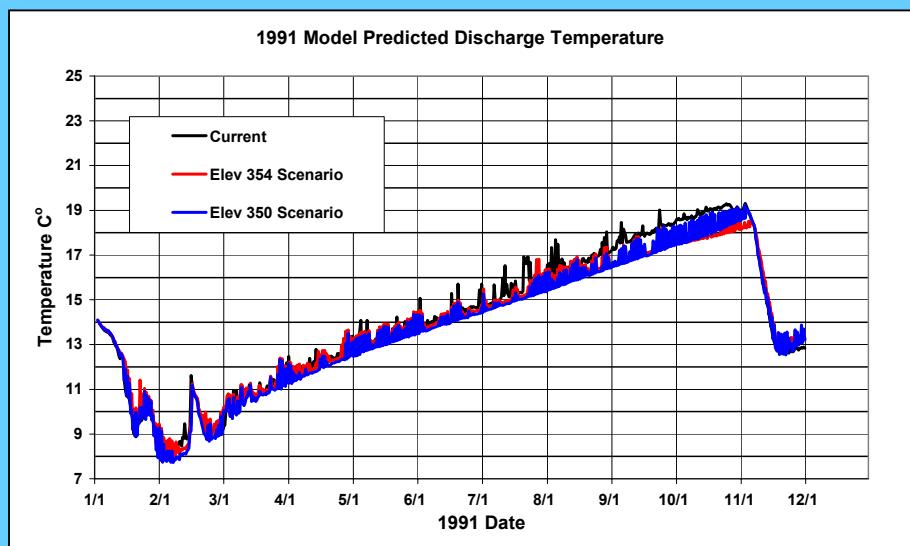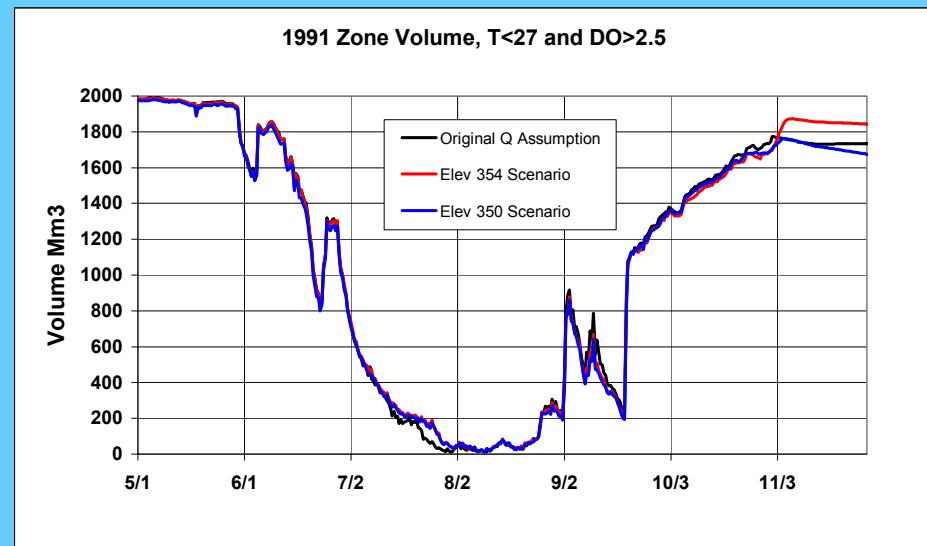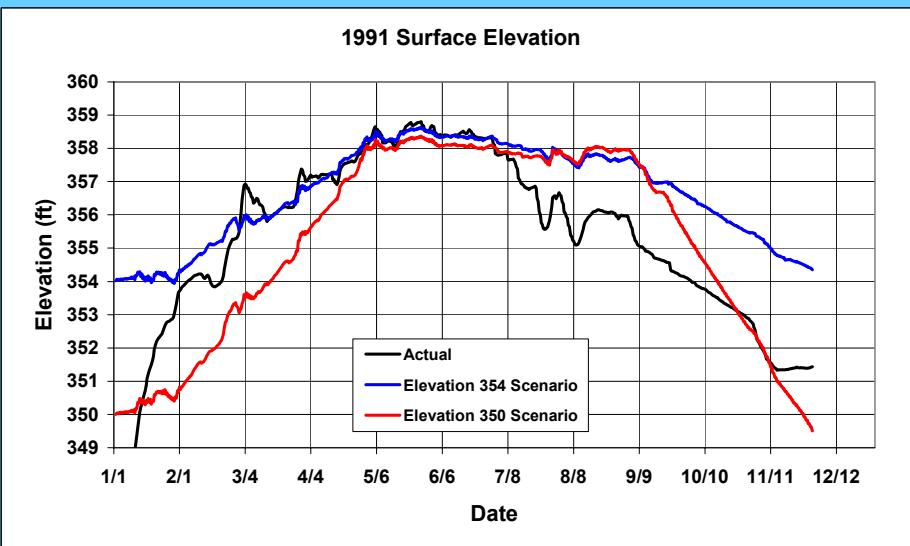


1992 Surface Elevation, Volume of Striper Habitat and Discharge Temperature and DO

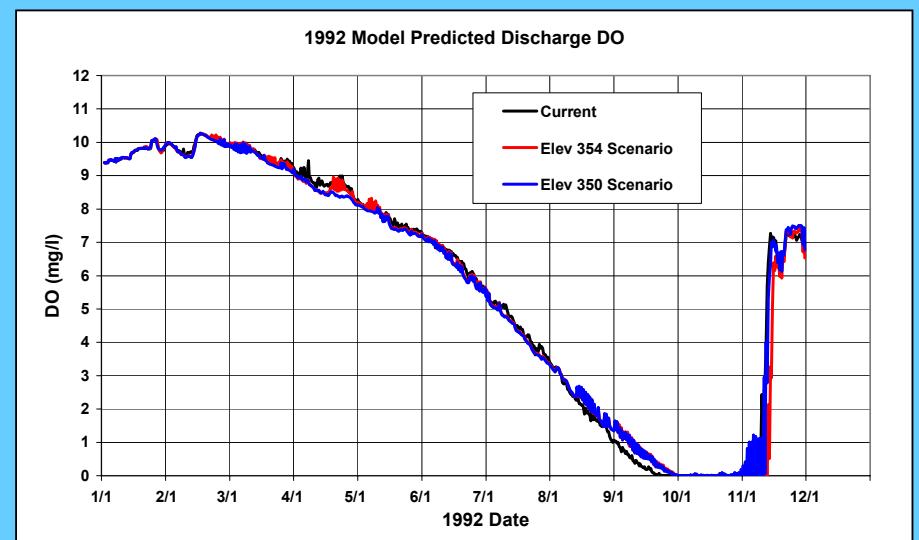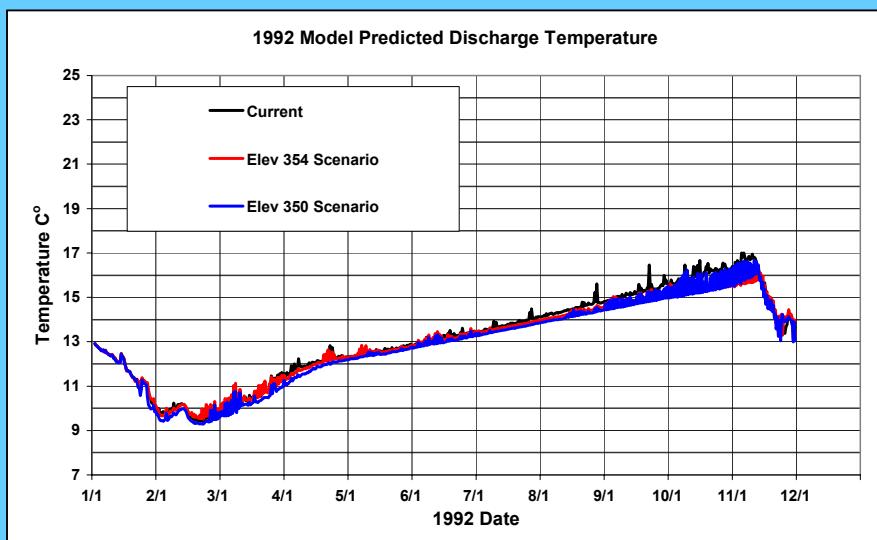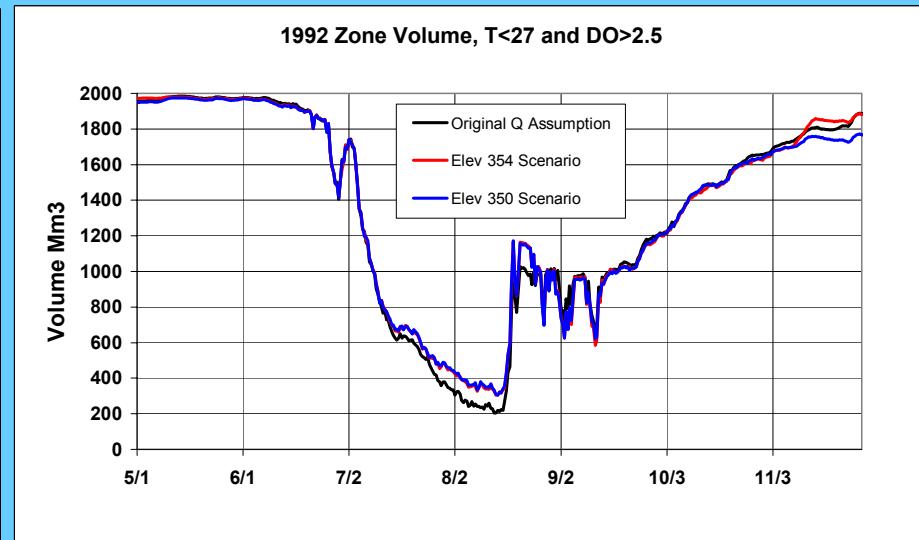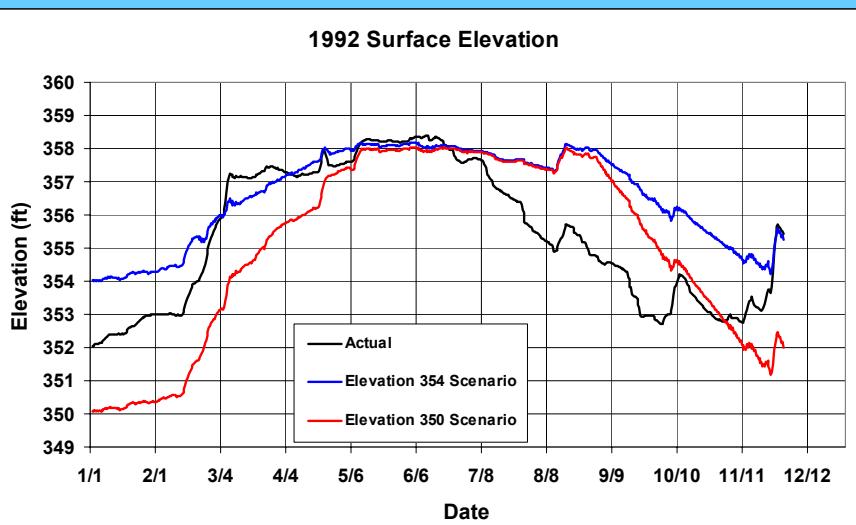





1996 Surface Elevation, Volume of Striper Habitat and Discharge Temperature and DO

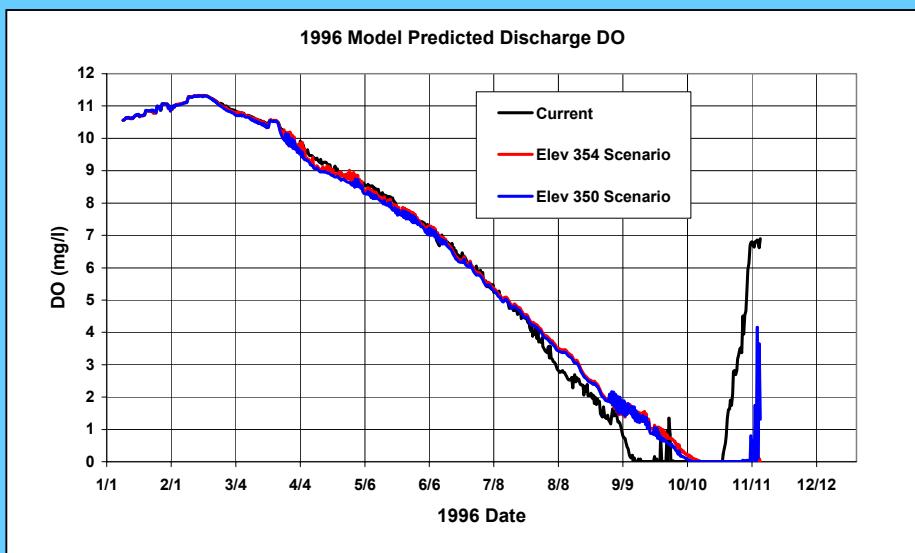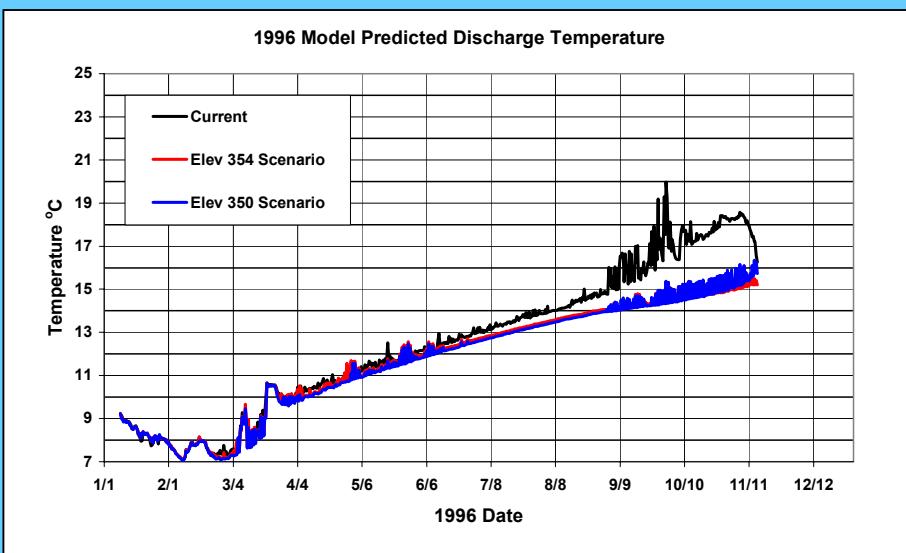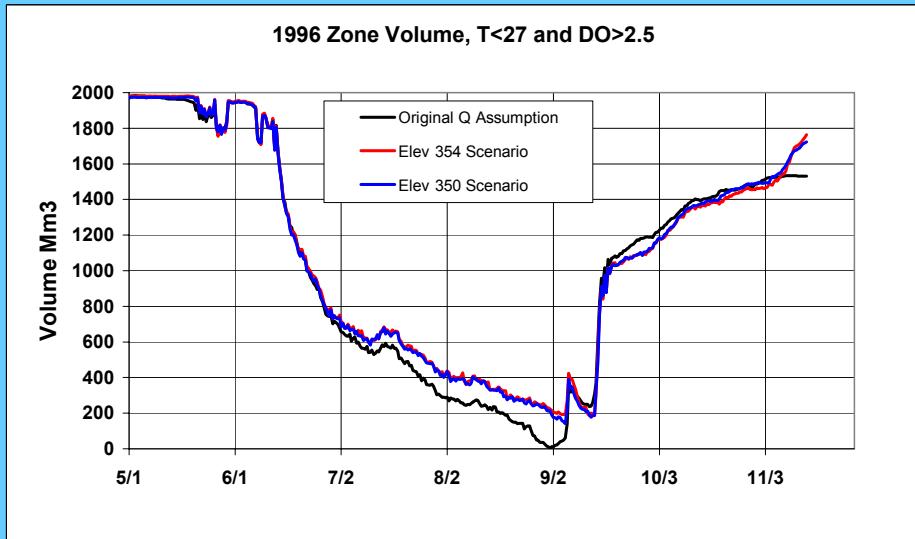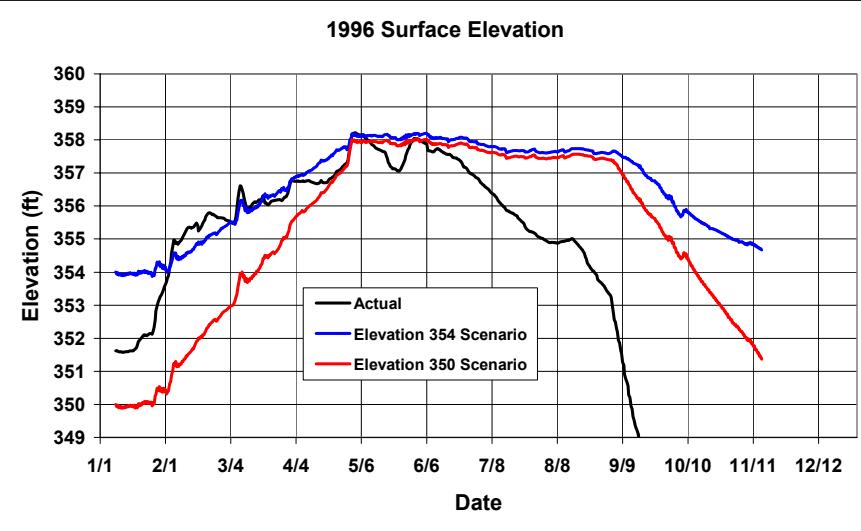





1997 Surface Elevation, Volume of Striper Habitat and Discharge Temperature and DO

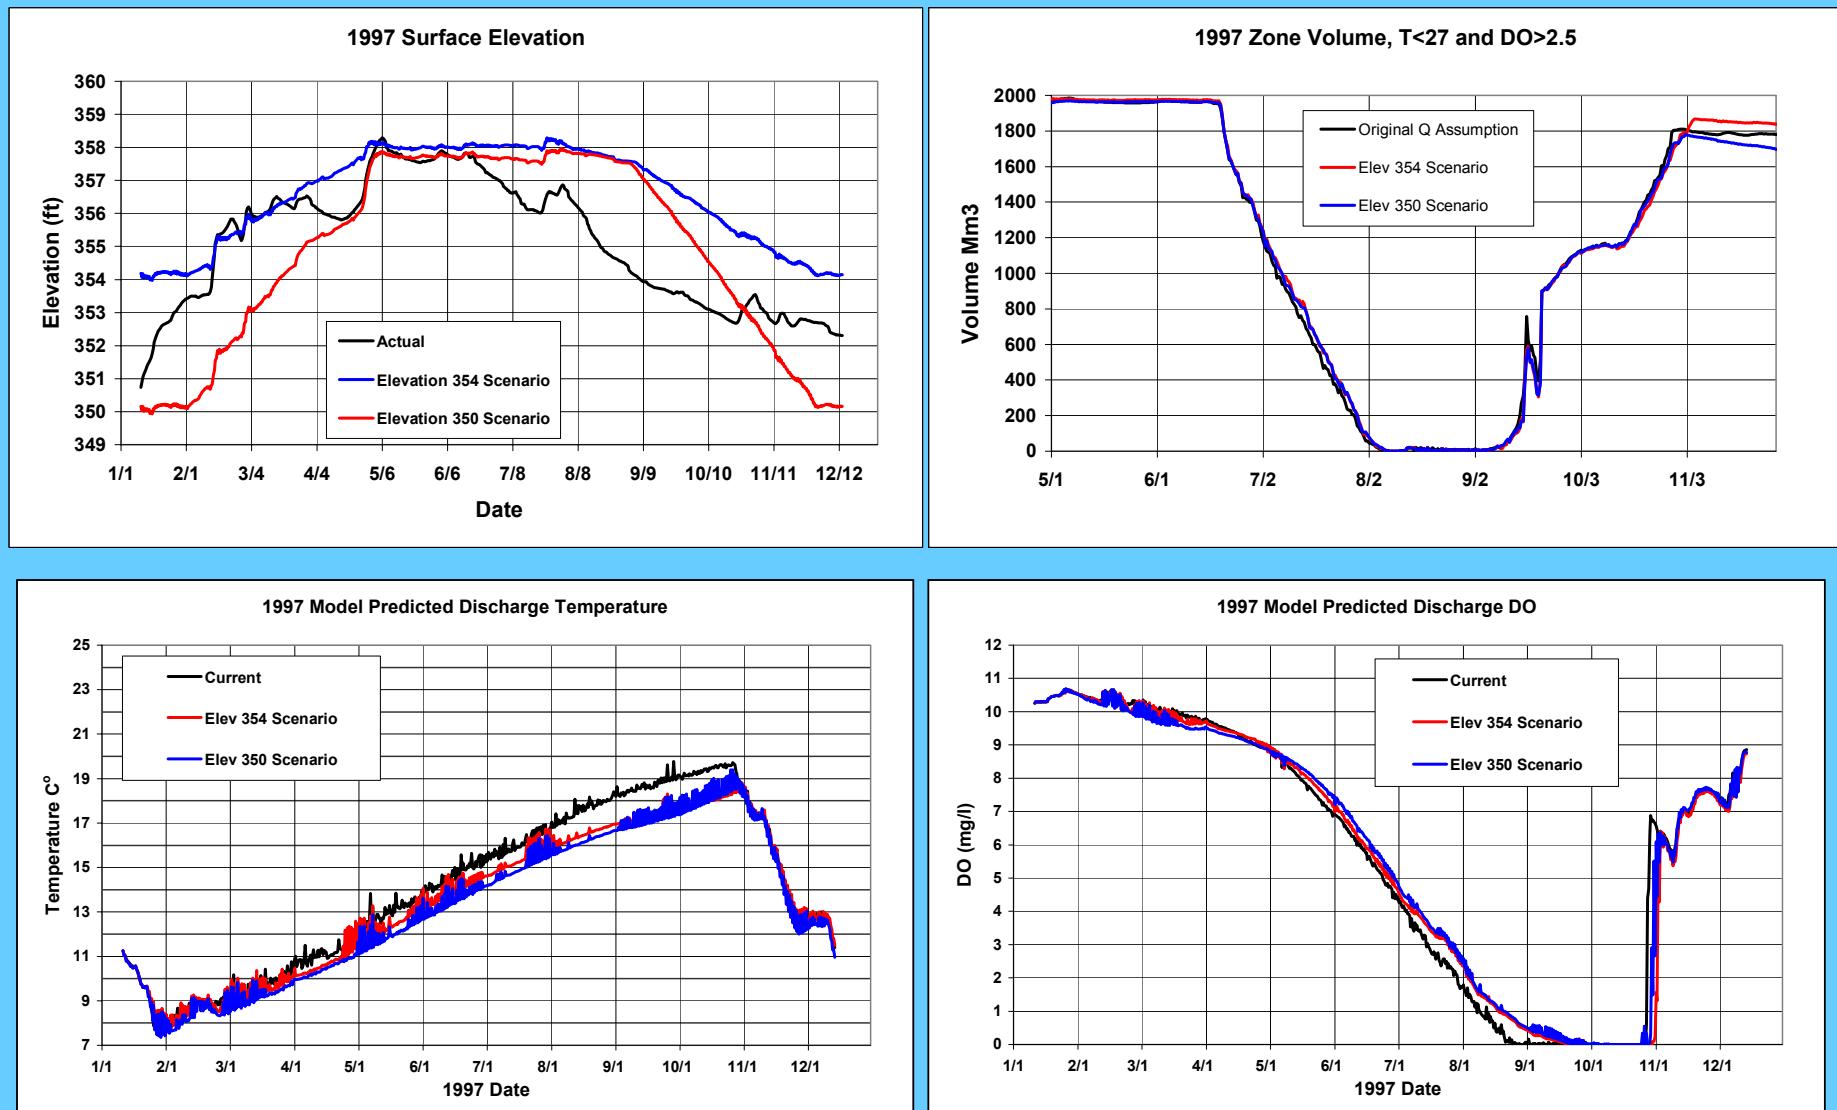





1998 Surface Elevation, Volume of Striper Habitat and Discharge Temperature and DO

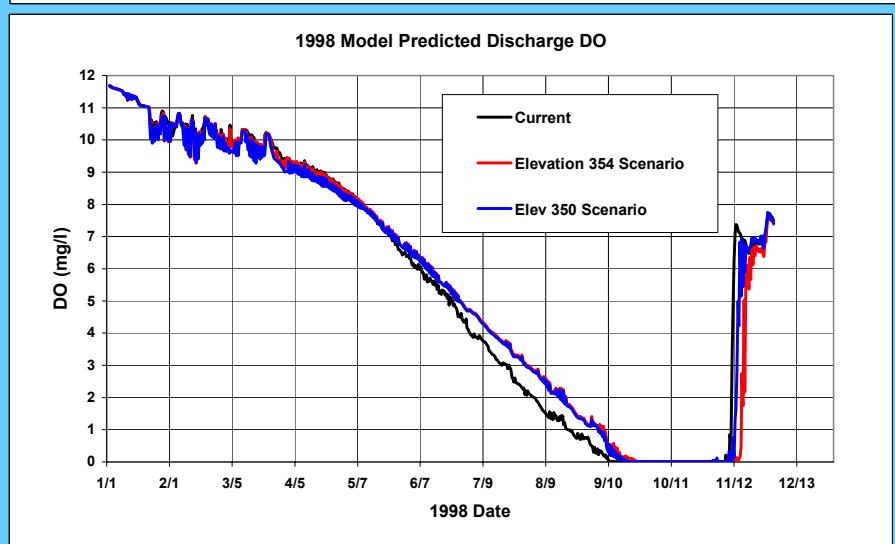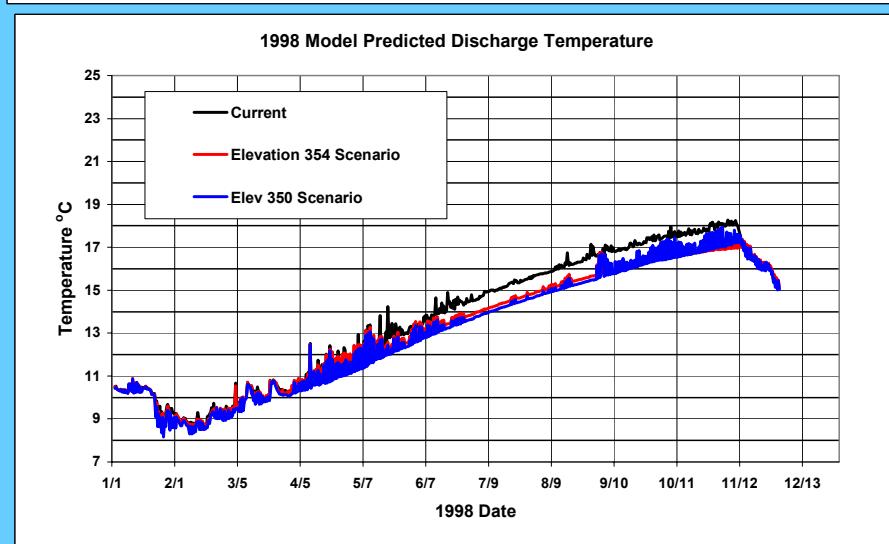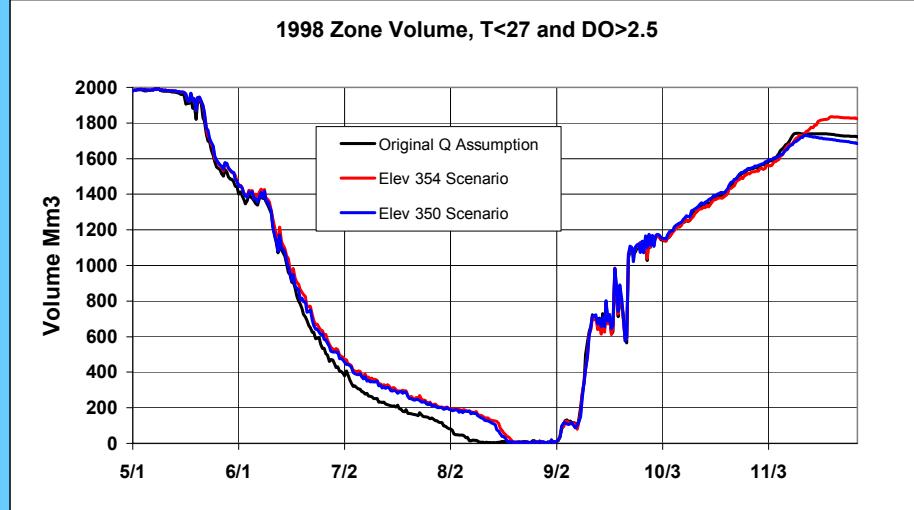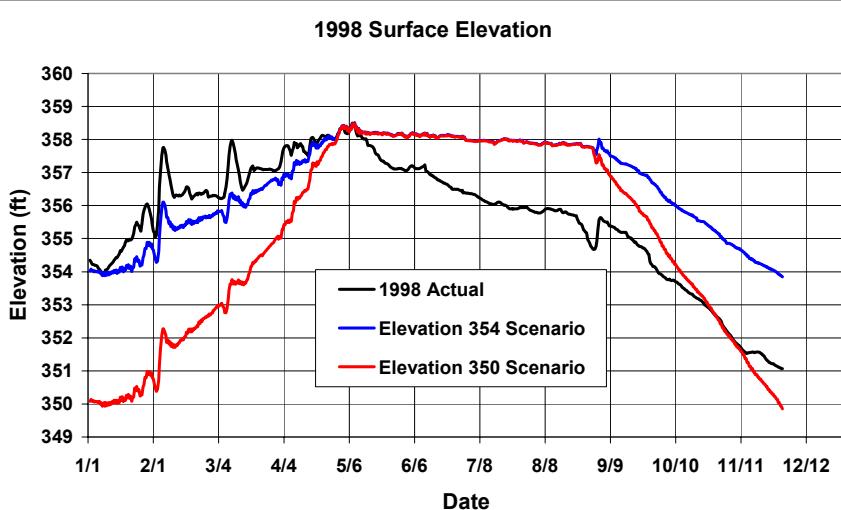





2000 Surface Elevation, Volume of Striper Habitat and Discharge Temperature and DO

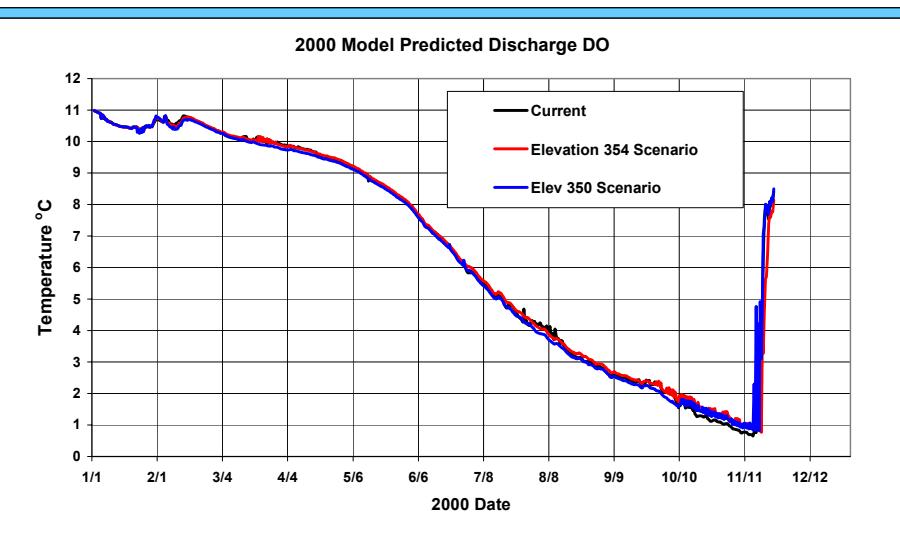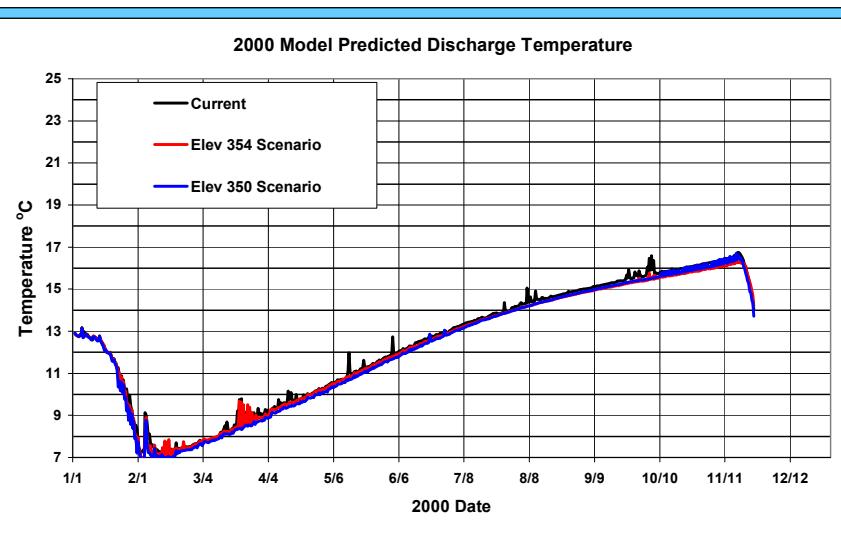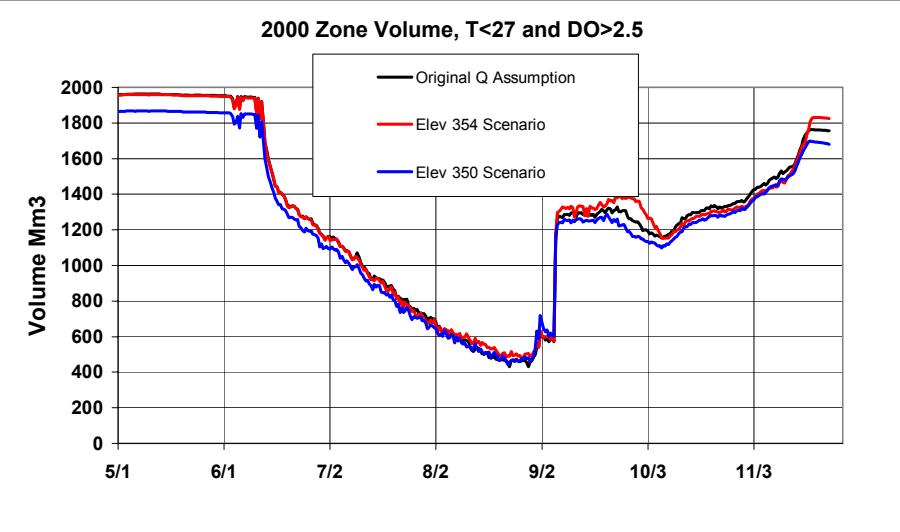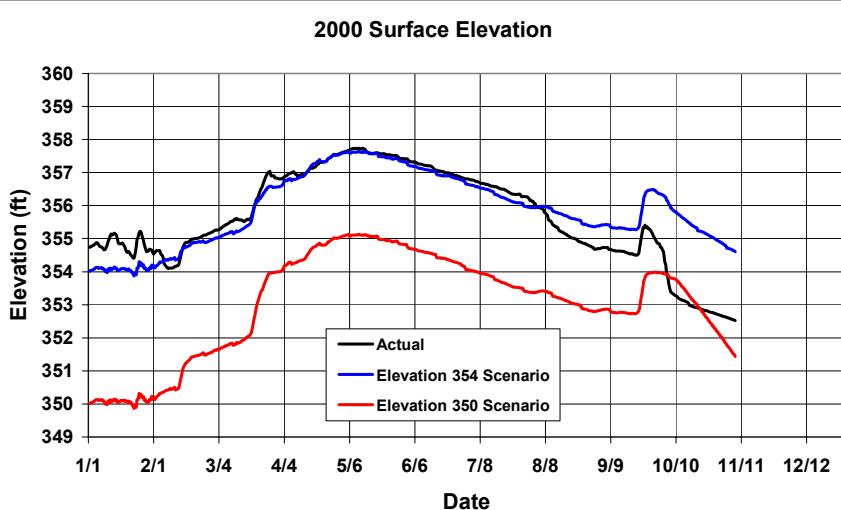




2001 Surface Elevation, Volume of Striper Habitat and Discharge Temperature and DO

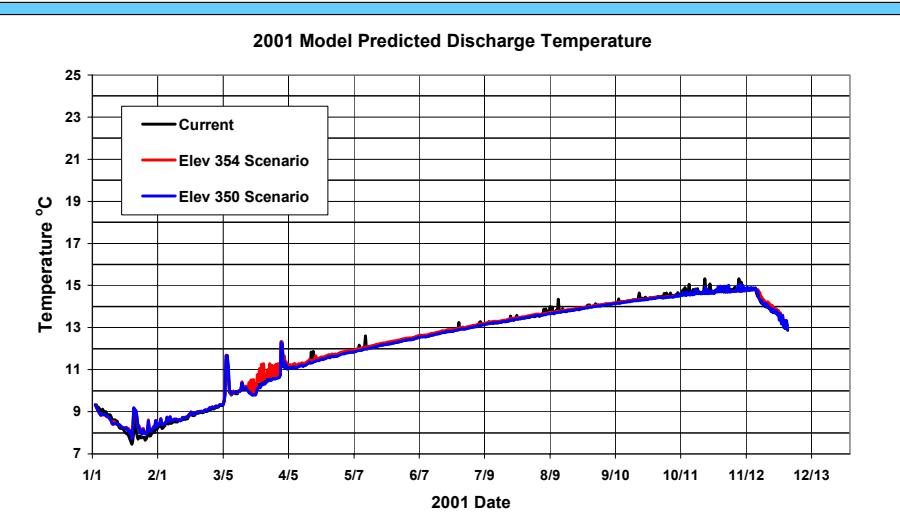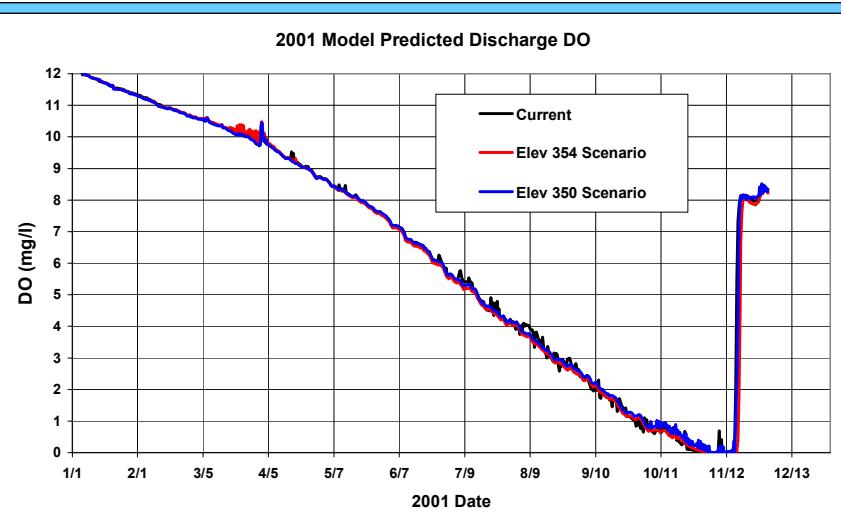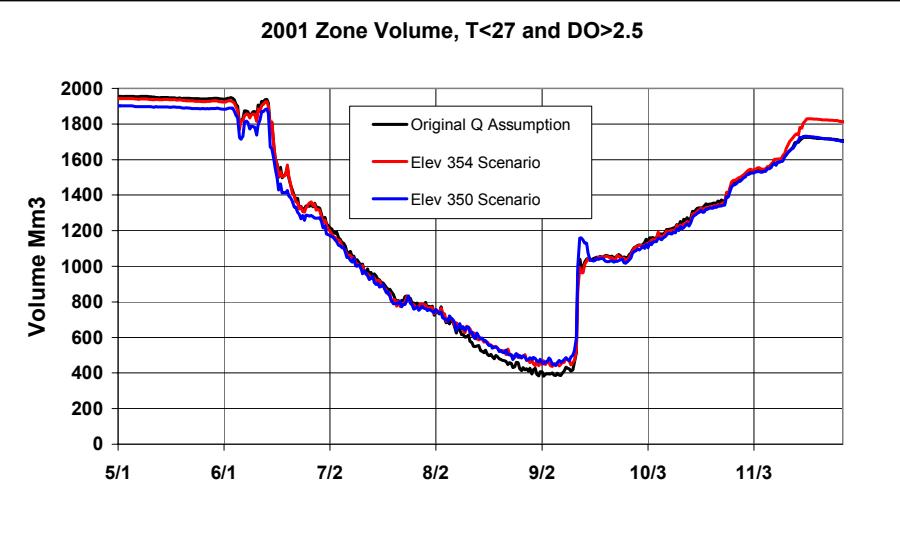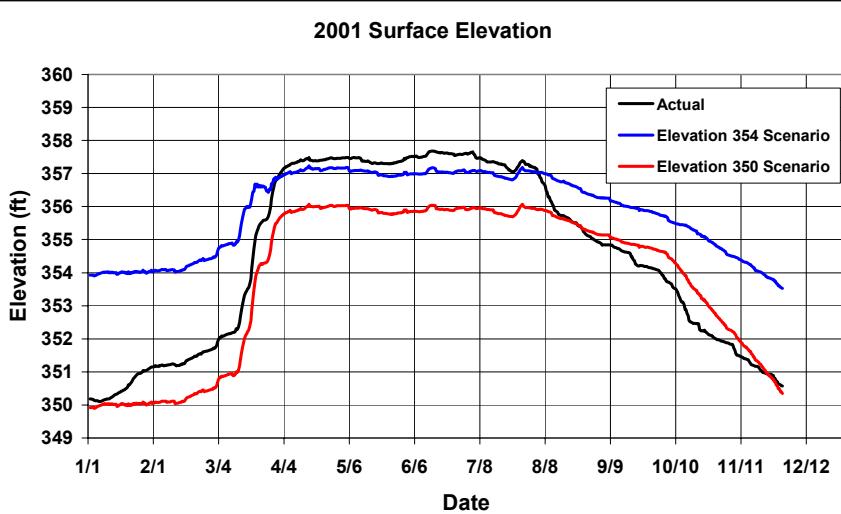




2005 Surface Elevation, Volume of Striper Habitat and Discharge Temperature and DO

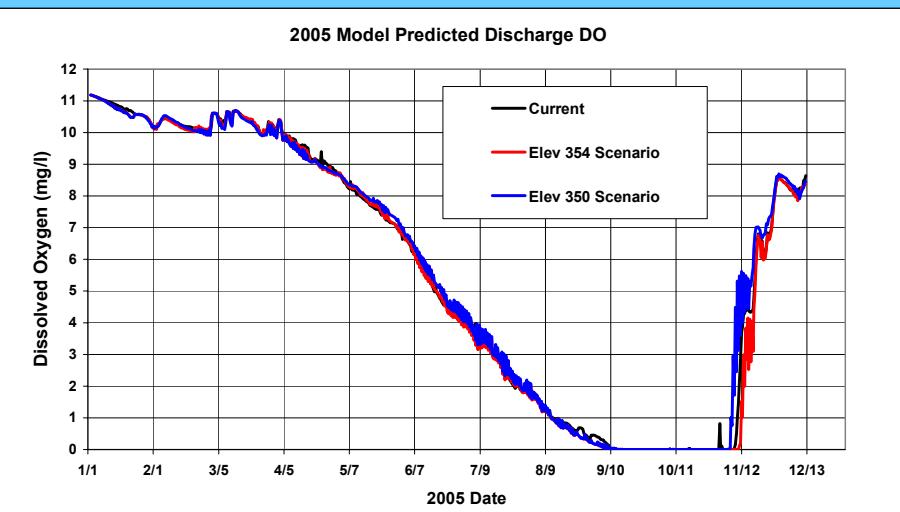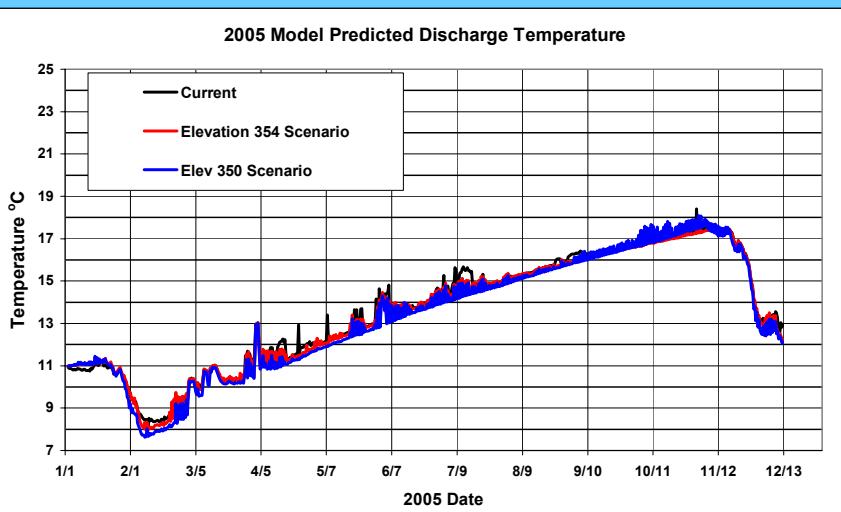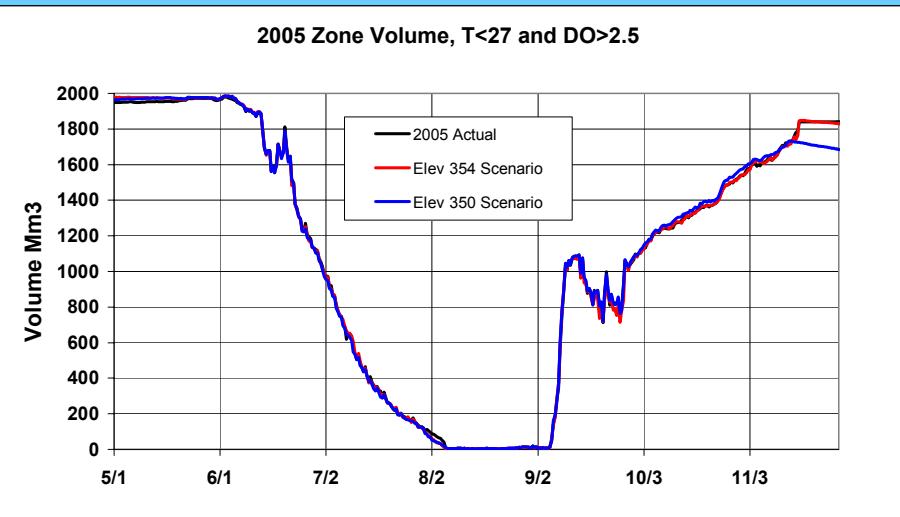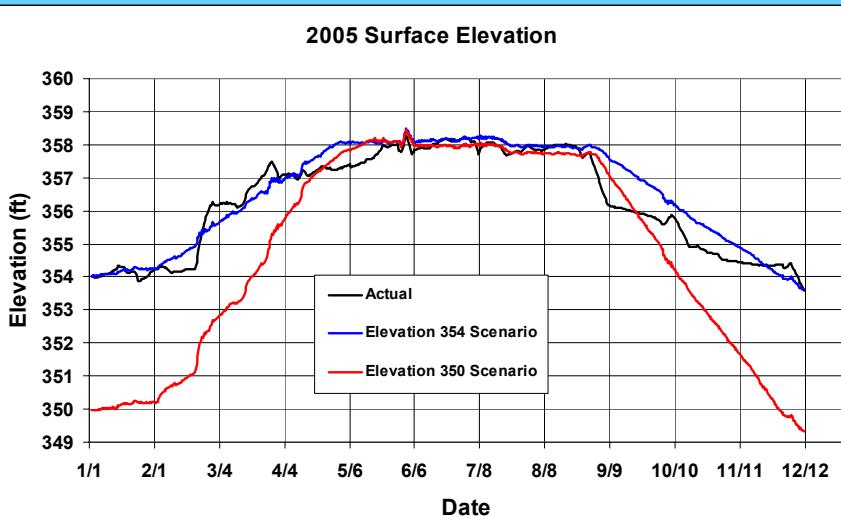




1991 Pool Level Management and Unit 5 on First

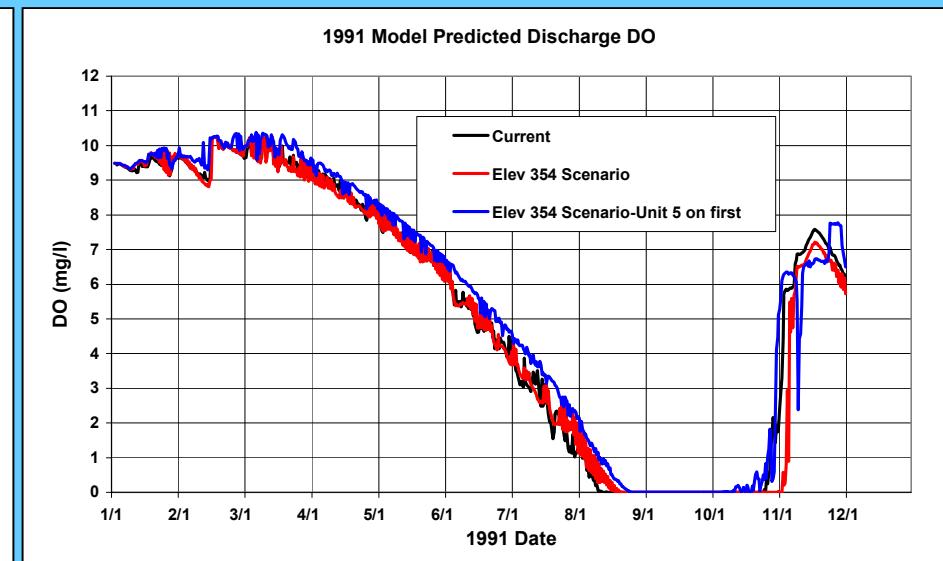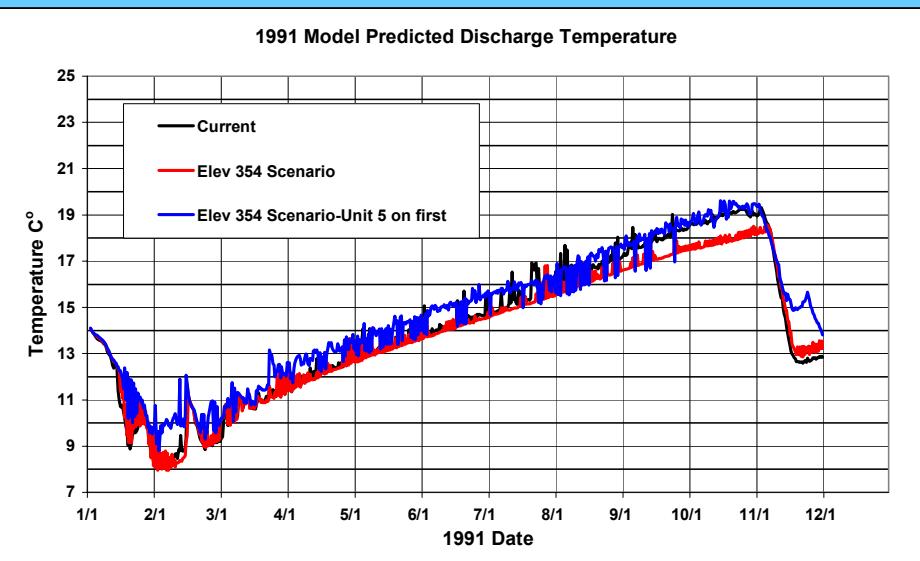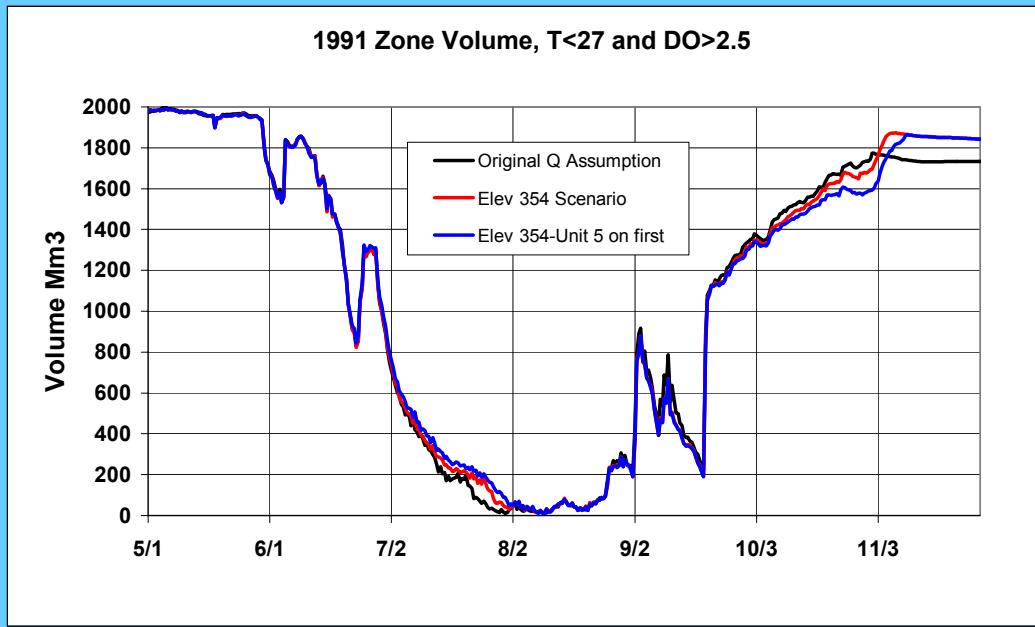




1992 Pool Level Management and Unit 5 on First

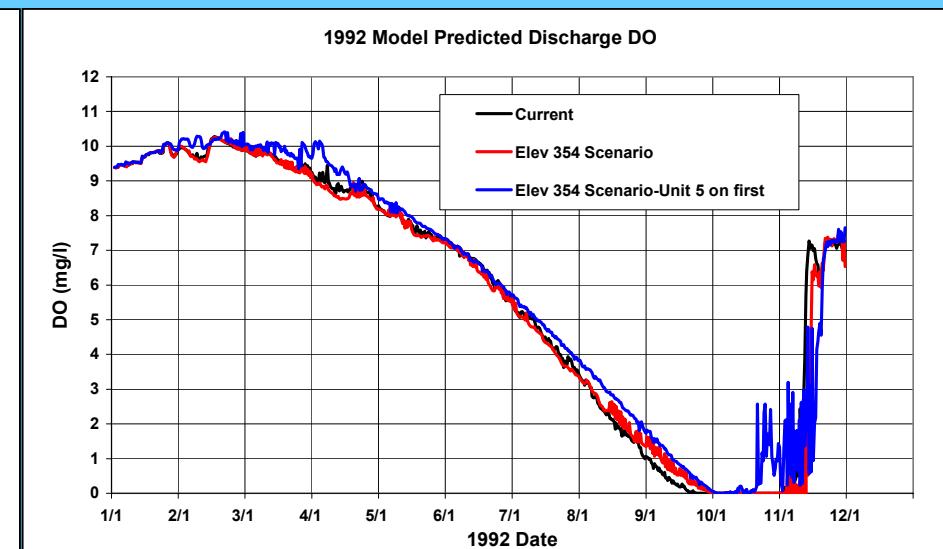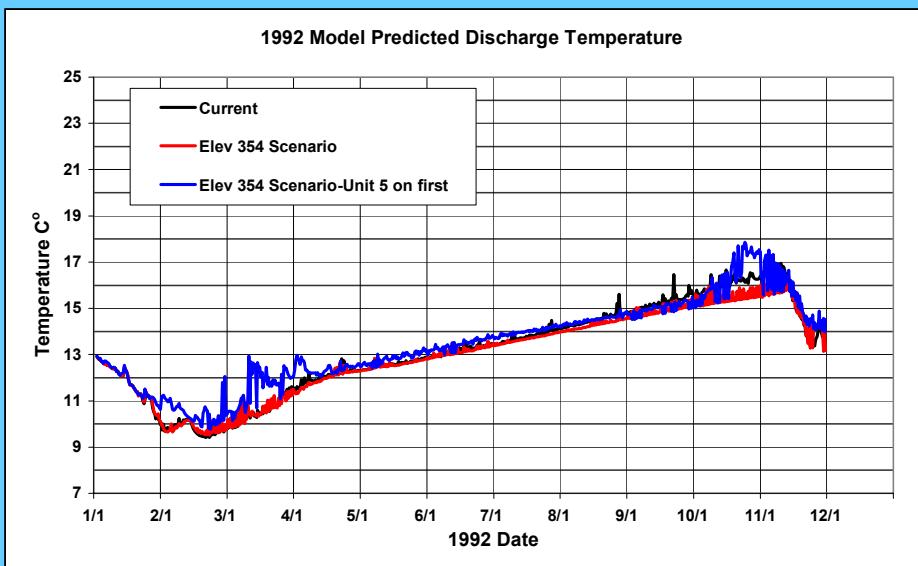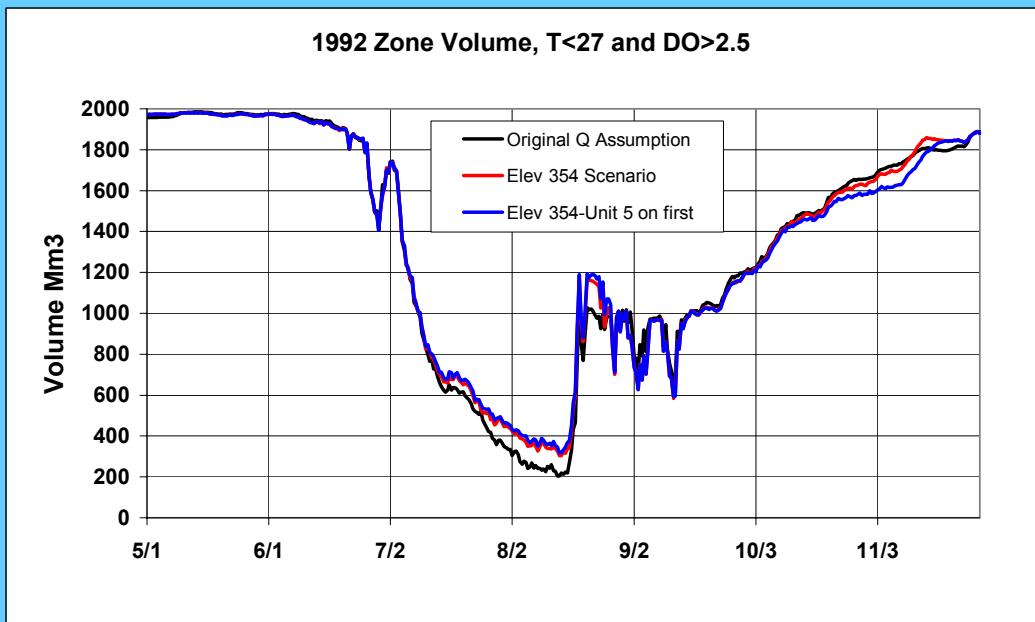




1996 Pool Level Management and Unit 5 on First

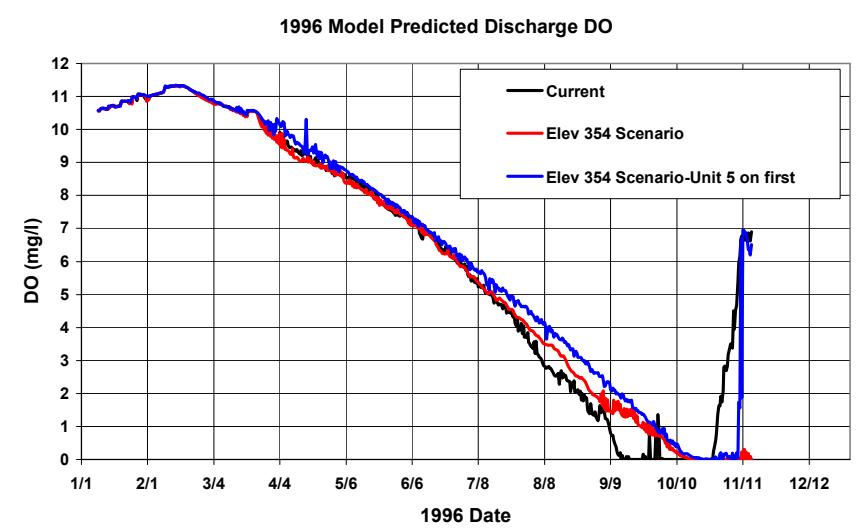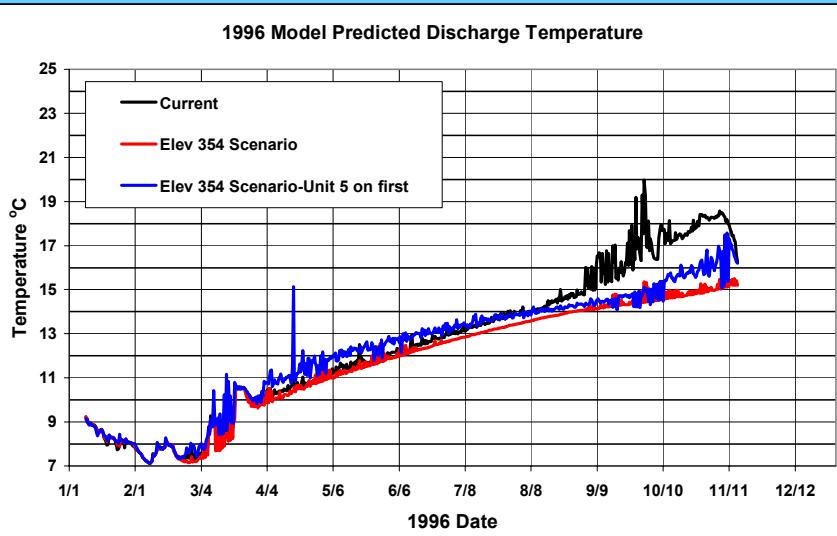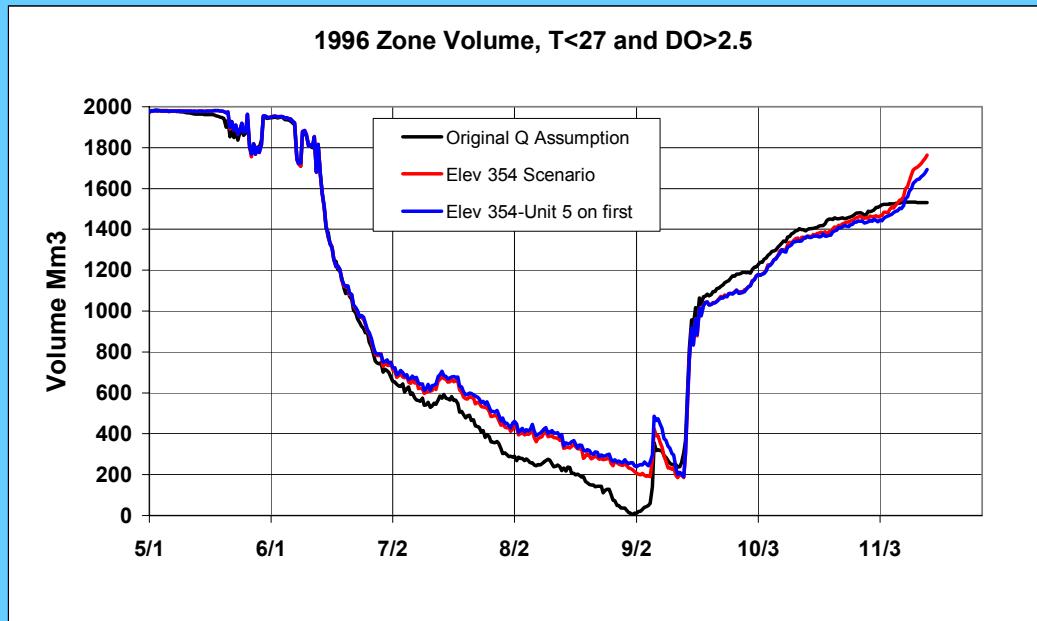




1997 Pool Level Management and Unit 5 on First

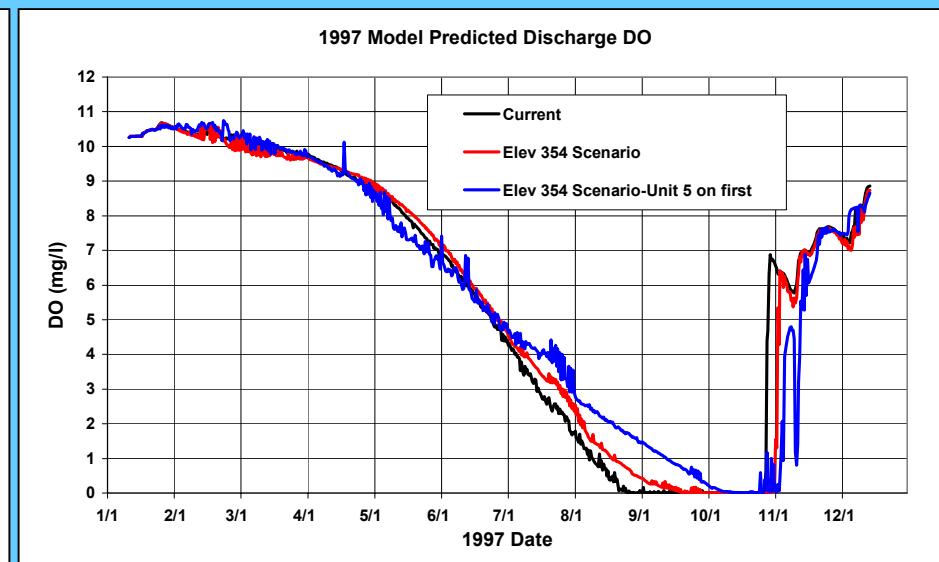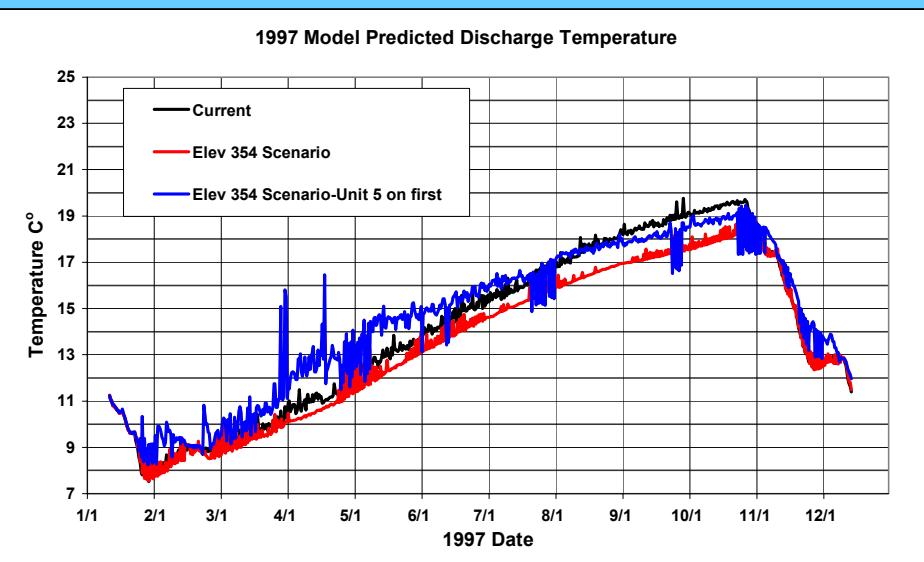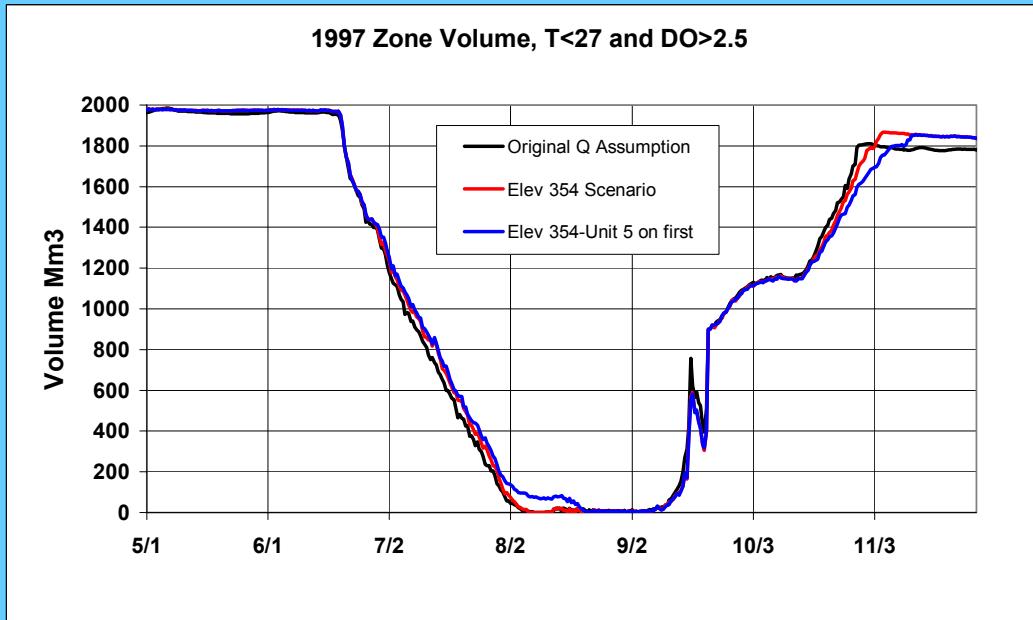




1998 Pool Level Management and Unit 5 on First

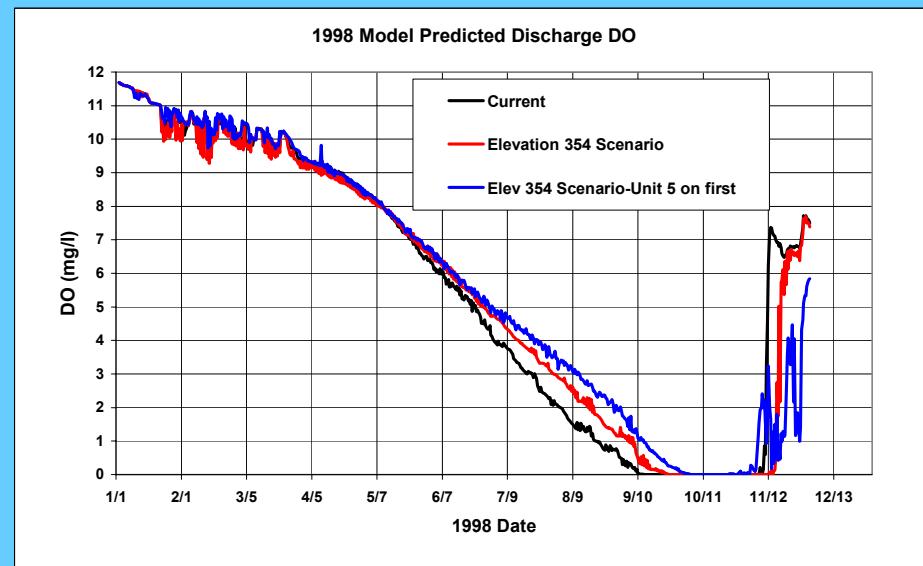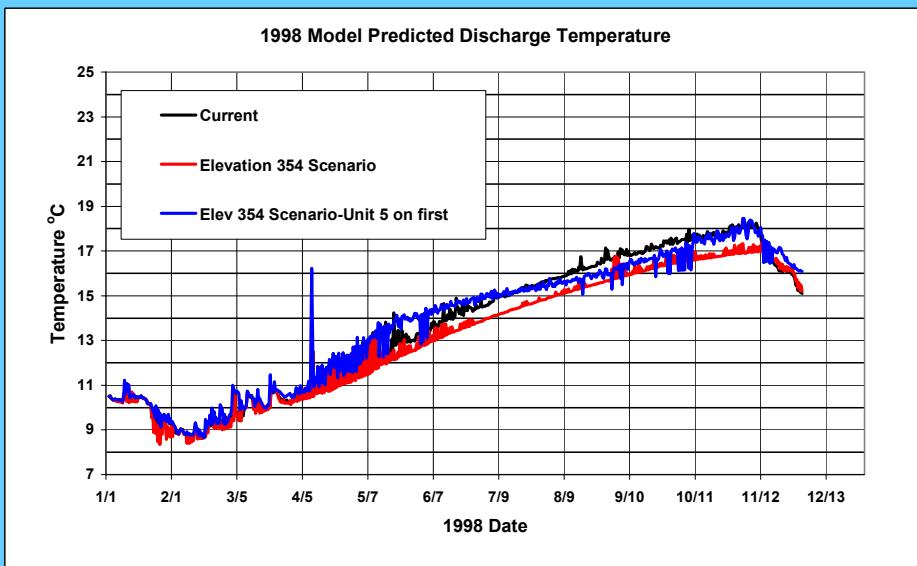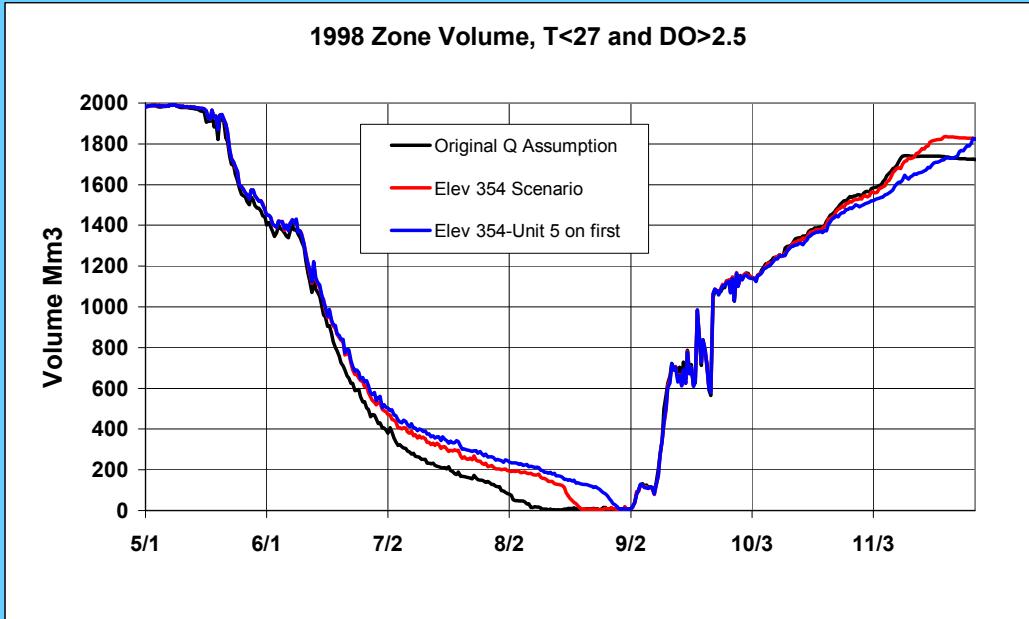




2000 Pool Level Management and Unit 5 on First

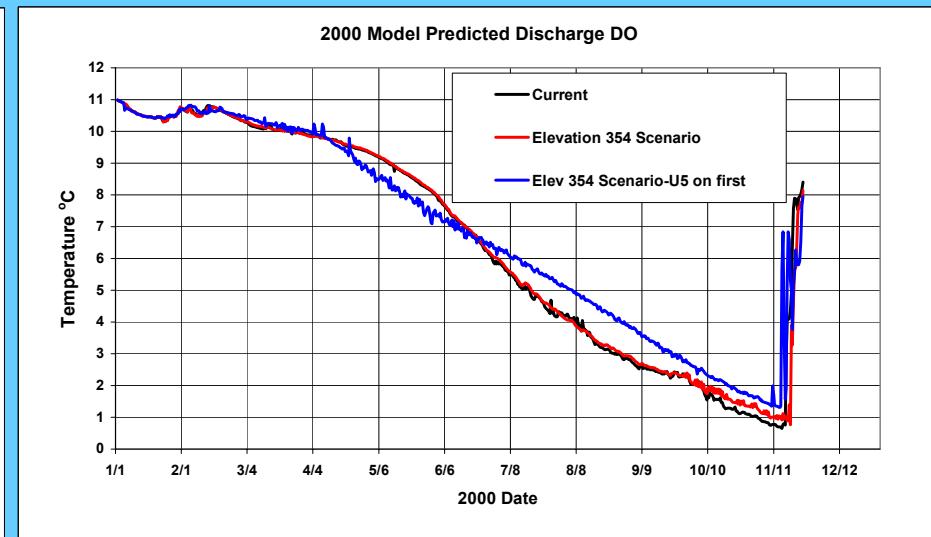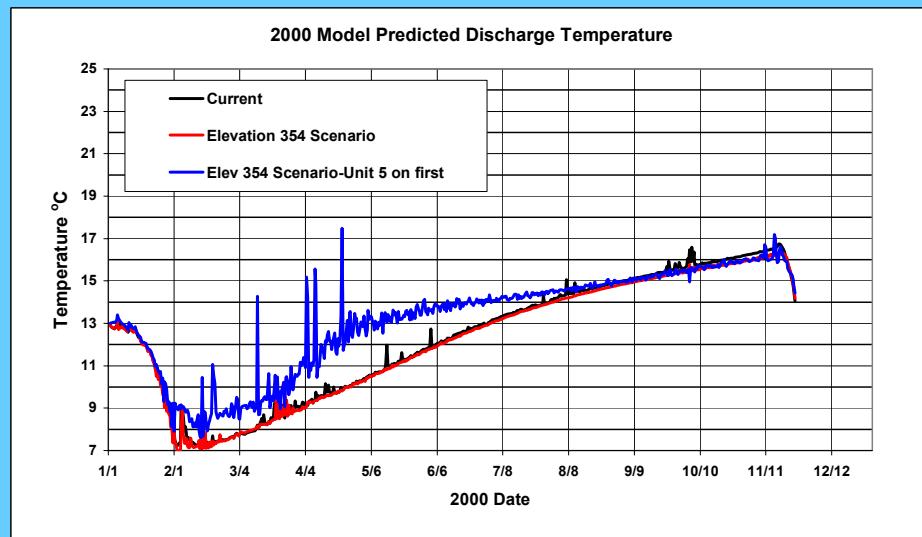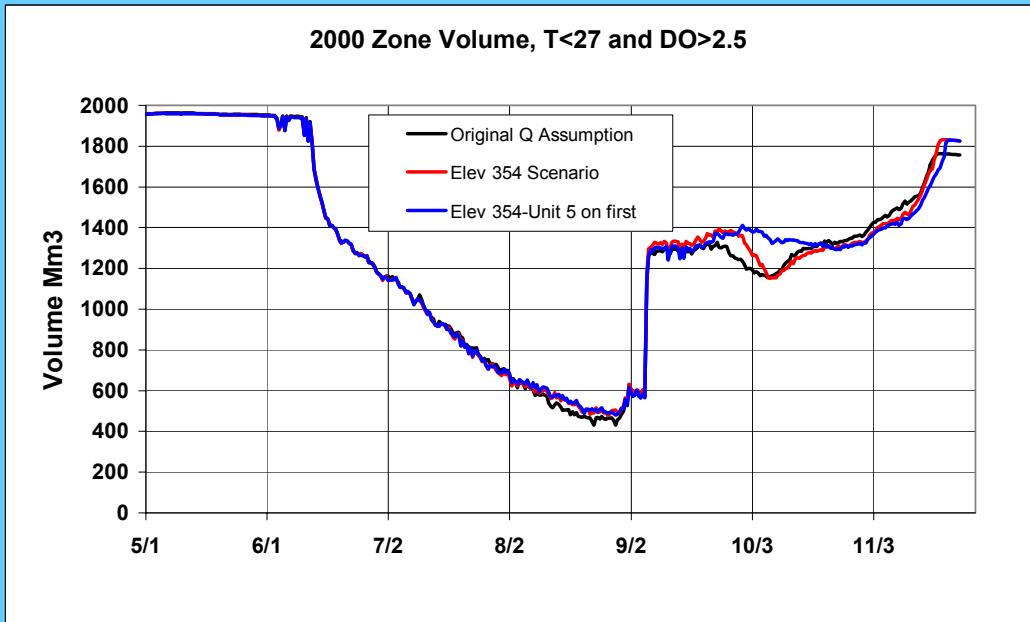

2001 Pool Level Management and Unit 5 on First

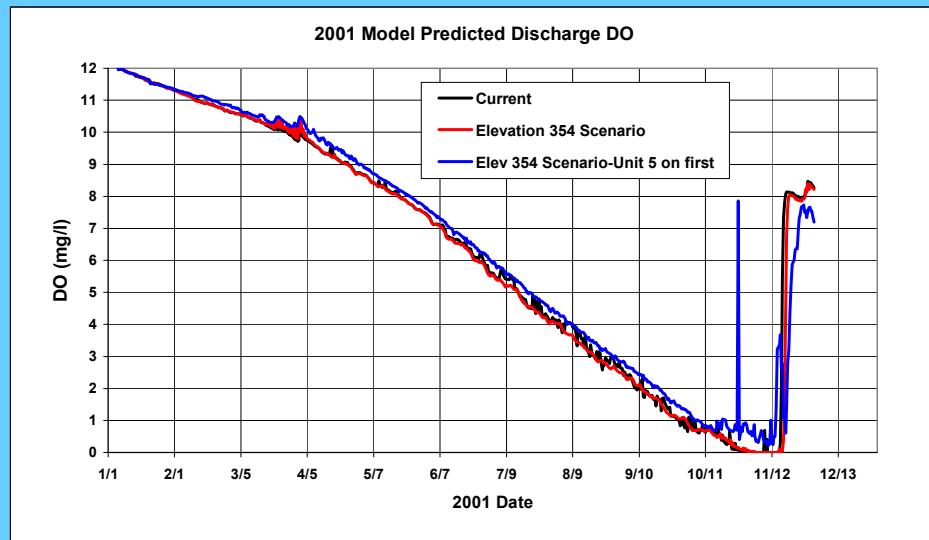
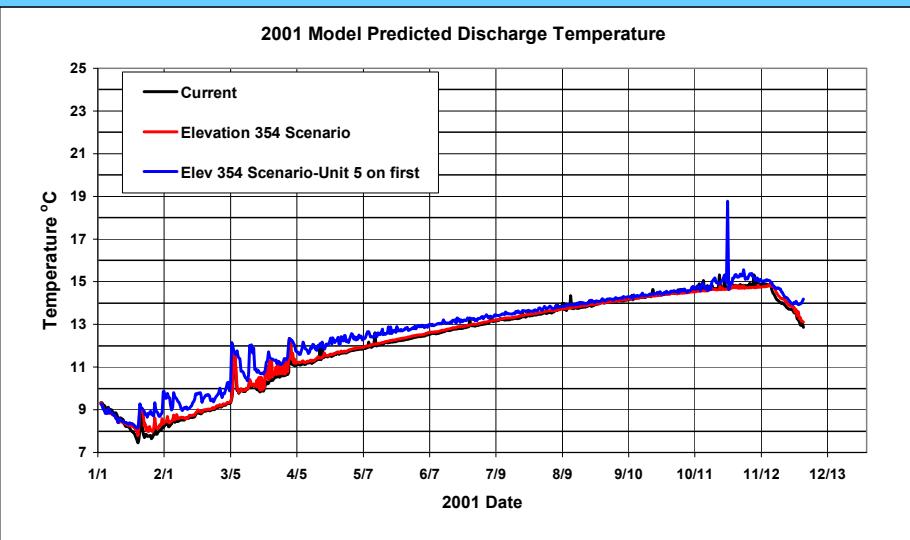
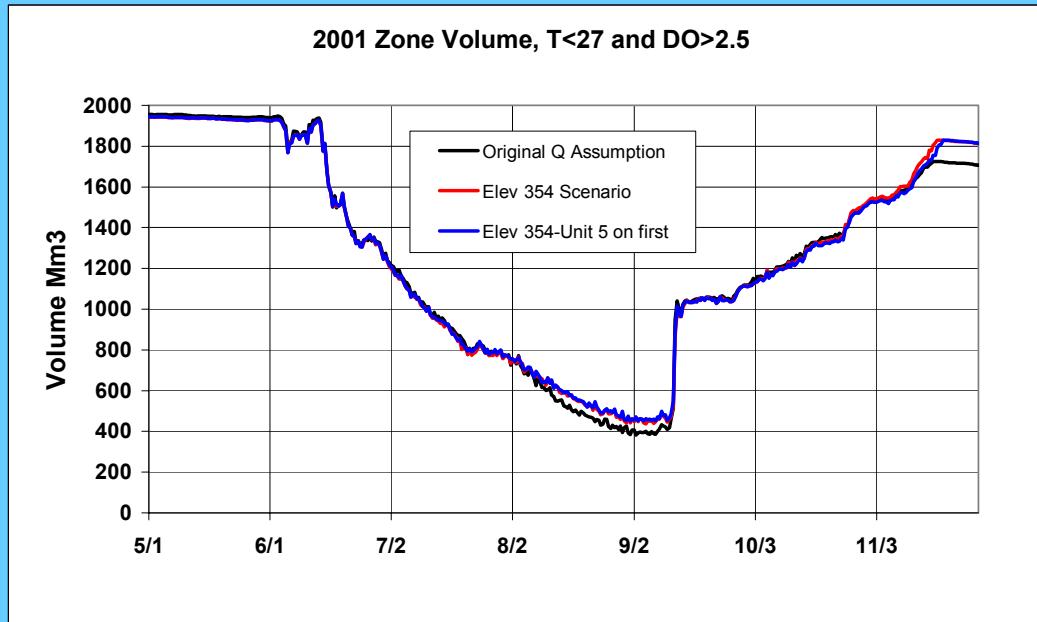


2005 Pool Level Management and Unit 5 on First

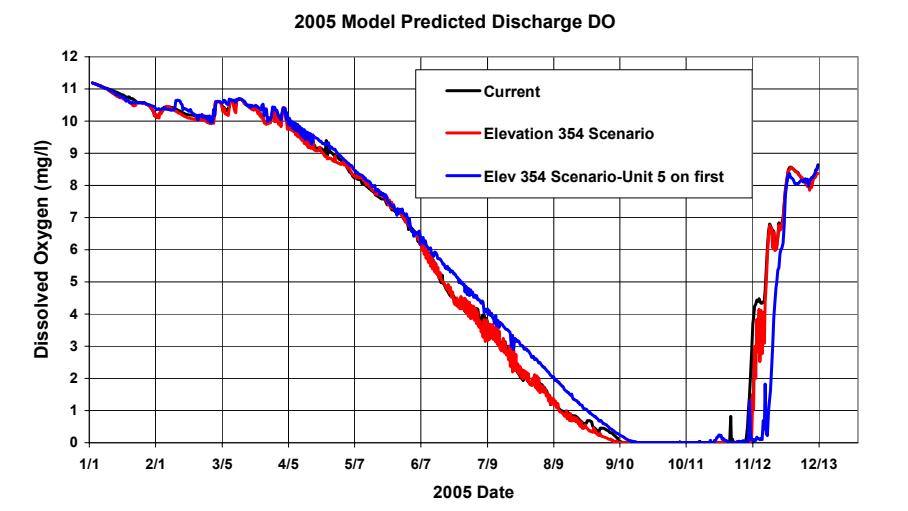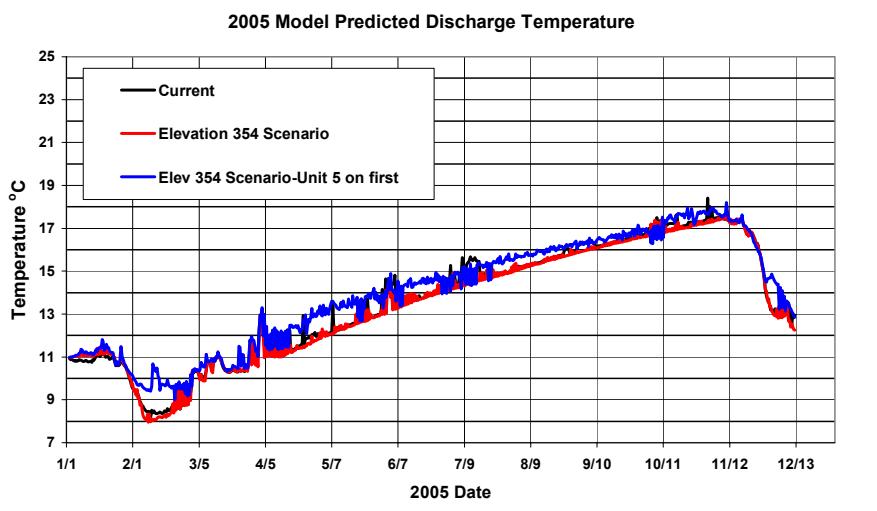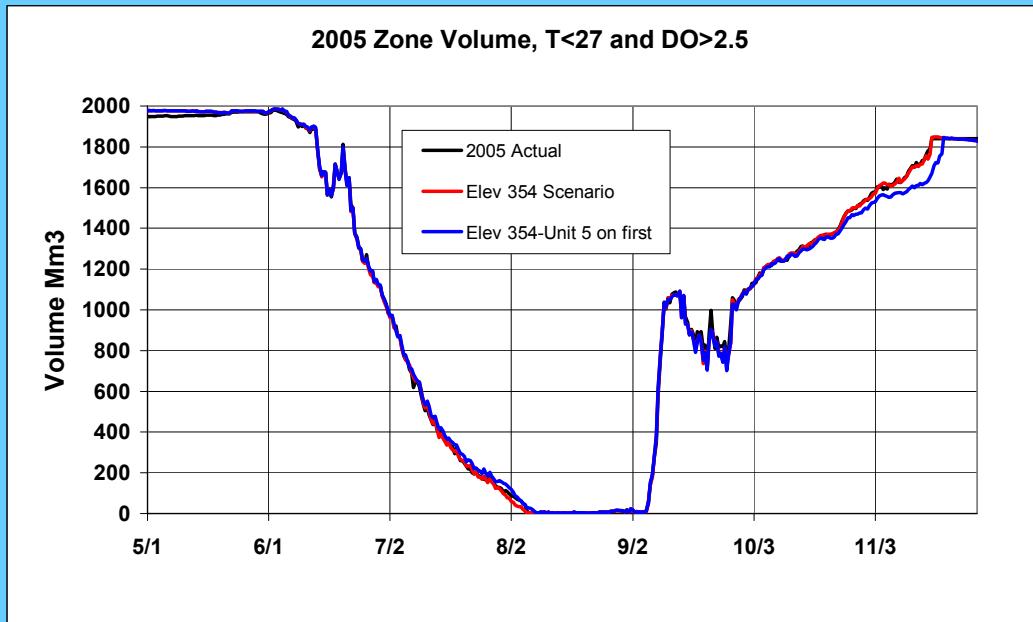

1998 Pool Level Management and Unit 5 on First Until September

When the Bottom Units are used for the first 12,800 cfs

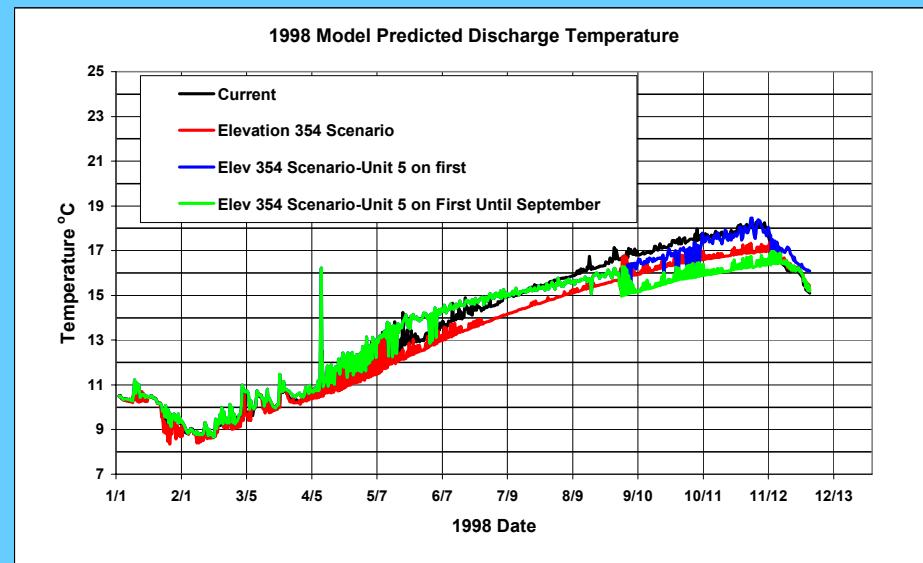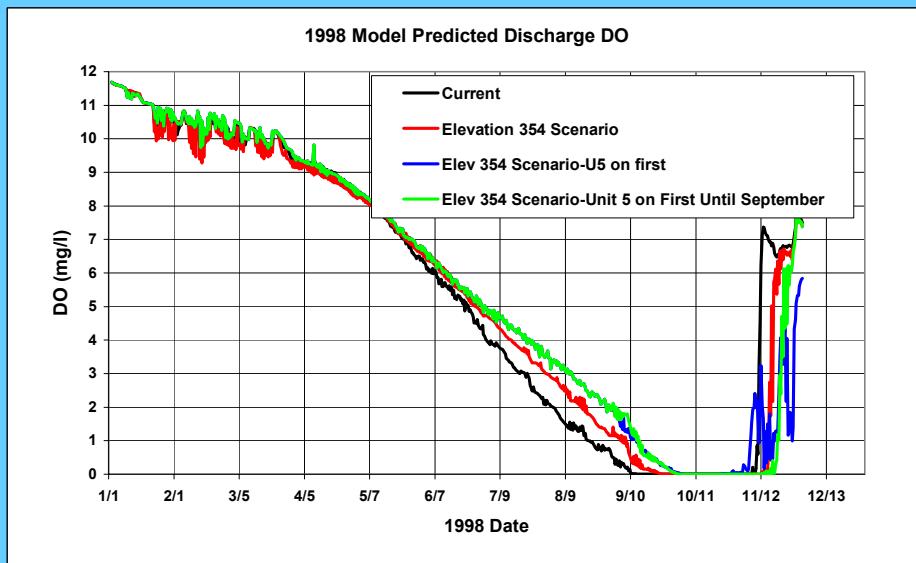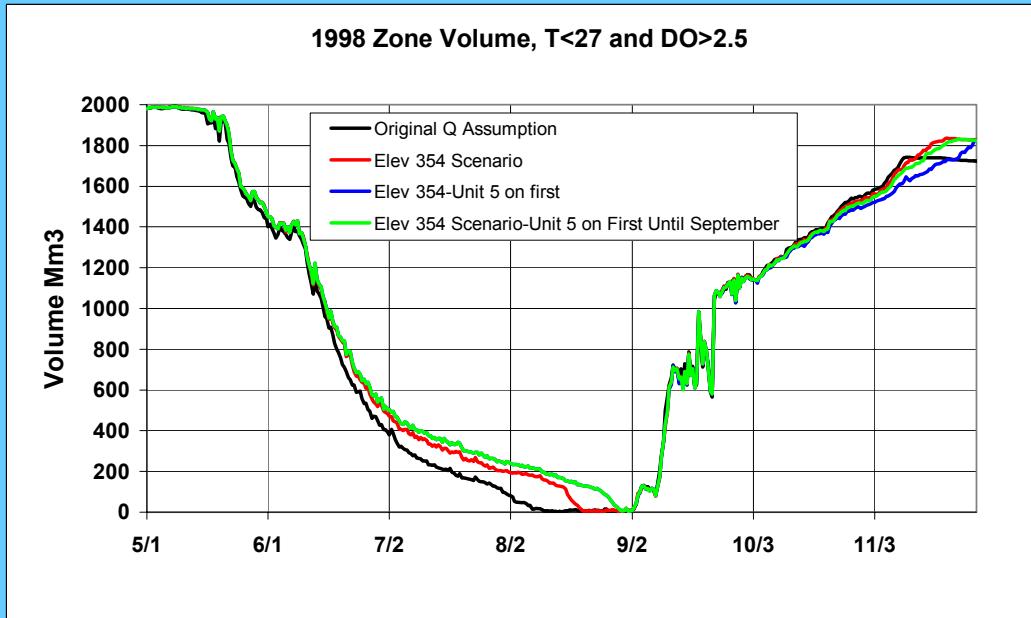

Conclusions

- Unit 5 preferential operations can improve striped bass habitat in some years.
- Maintaining the summer pool level at 358 increases striped bass habitat in some years.
- The combination of Unit 5 preferential operations and maintaining the summer pool level at 358 can further increase striped bass habitat in some years. It can also improve water quality in the releases.
- When the discharge temperature from Unit 5 reaches 15° C, the minimum flow should be released through a bottom unit.
- Unit 5 operations after August or September do not effect striped bass habitat.

CE-QUAL-W2 Model Applications to Examine the Effects of Operations on Fish Habitat in Lake Murray

Meeting to Report on Preliminary Results

Andy Sawyer and Jim Ruane, REMI

May 22, 2007

Relicensing Issues Identified by the Water Quality Technical Working Committee

- The causes of striped bass fish kills reported in previous years, especially factors related to Saluda Hydro operations
- The effects of Unit 5 operations on entrainment of blue-back herring
- Determination of operational changes that might increase habitat for striped bass and blue-back herring
- Track any impacts that could occur to the tailwater cold-water fishery due to potential operational changes

Factors Considered in Addressing Relicensing Issues

- Annual flow regimes
- Pool level management
- Unit 5 operations
- In-lake and release water quality
- Habitat for striped bass and blue-back herring
- Water quality, meteorological, and operations data over the period 1990-2005
- Emphasis will be placed on section of reservoir from Blacks Bridge to Saluda Dam

Plan for Using CE-QUAL-W2 to Address the Water Quality TWC Relicensing Issues

1. Analyze water quality, meteorological, flow, and operations data for the period of study
2. Set up CE-QUAL-W2 for the years when major striped bass fish kills occurred as well as other years
3. Run models to identify the causes that apparently contributed to the fish kills
4. Use the models to explore ways to avoid such fish kills in the future, with emphasis on project operations

Preliminary Findings


- High flow, especially during March-August, is the primary cause for fish kills
- Higher flows cause the bottom of the lake to warm which in turn increases the rate of DO depletion
- Meteorological conditions can affect striped bass habitat
- Model results indicate that the temperature and DO range of tolerable striped bass habitat in Lake Murray is approximately:

$$T < 27^{\circ}\text{C} \text{ and } DO > 2.5 \text{ mg/l}$$


- Preferential use of Unit 5 helps preserve colder bottom water and was predicted to improve DO and increase striped bass habitat

Lake Murray Surface Elevation 1990-2005


Years with documented striped bass kills are red

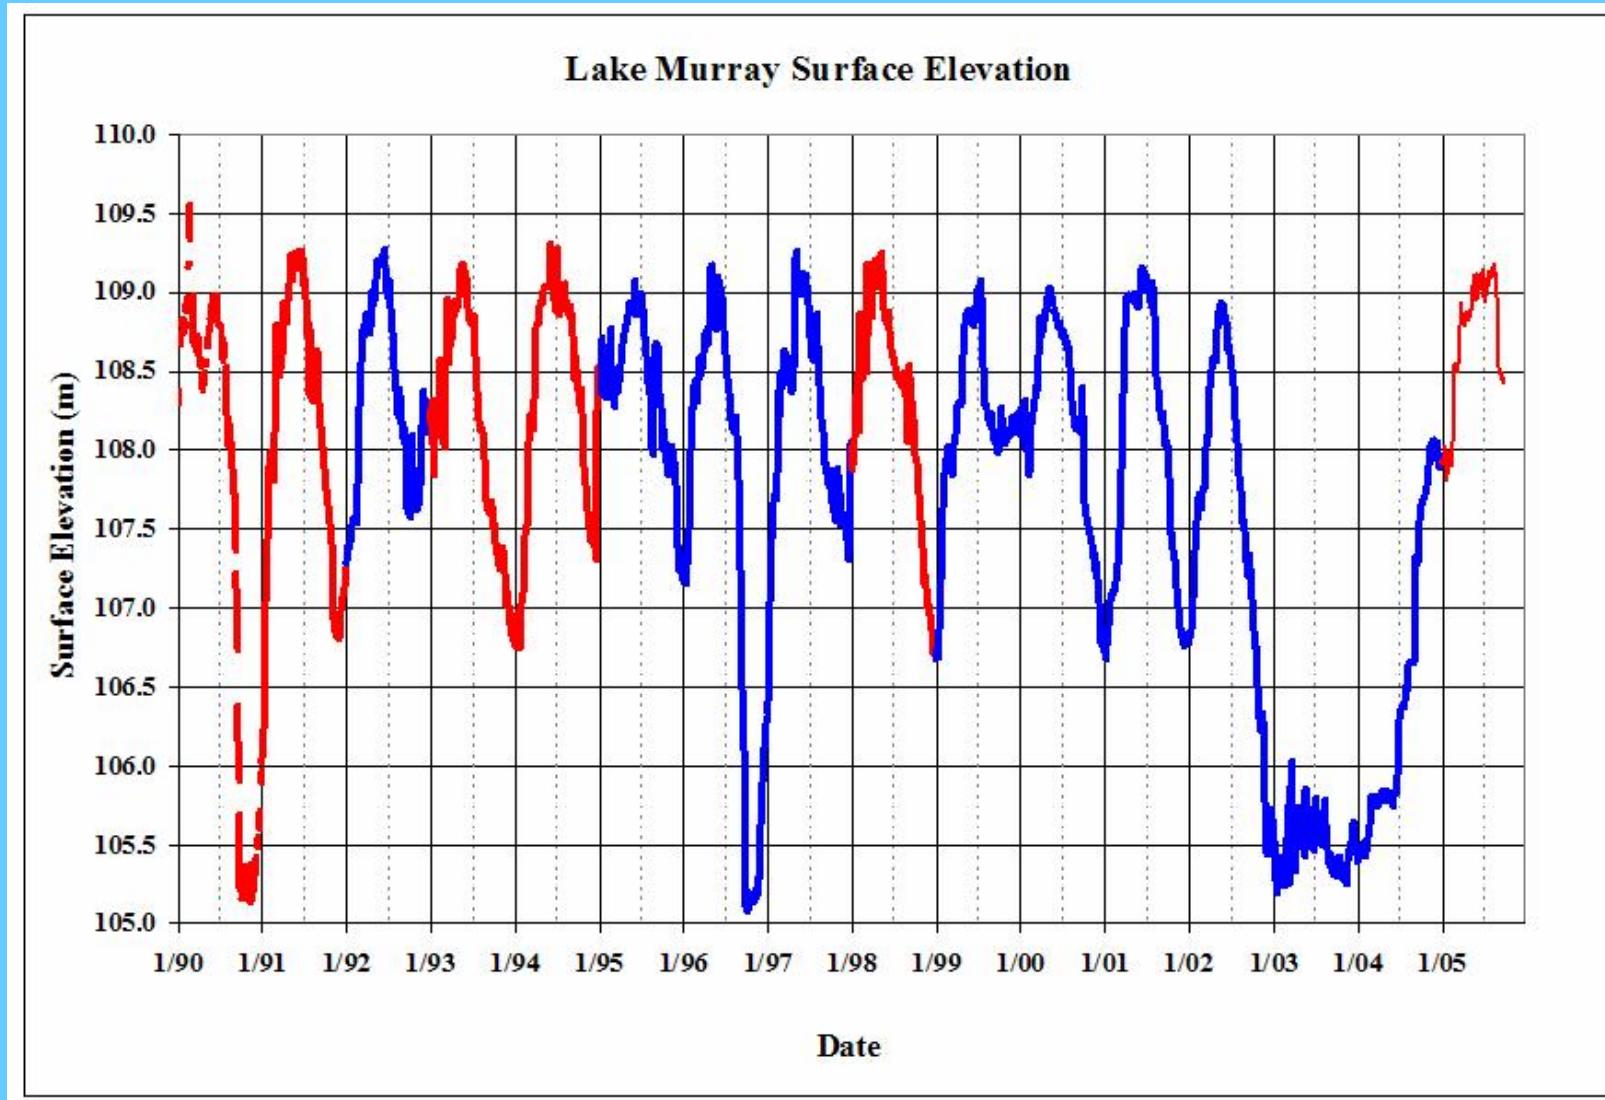

Lake Murray Surface Elevation 1990-2005
Typical Years Only (no special drawdowns)
Years with documented striped bass kills are red

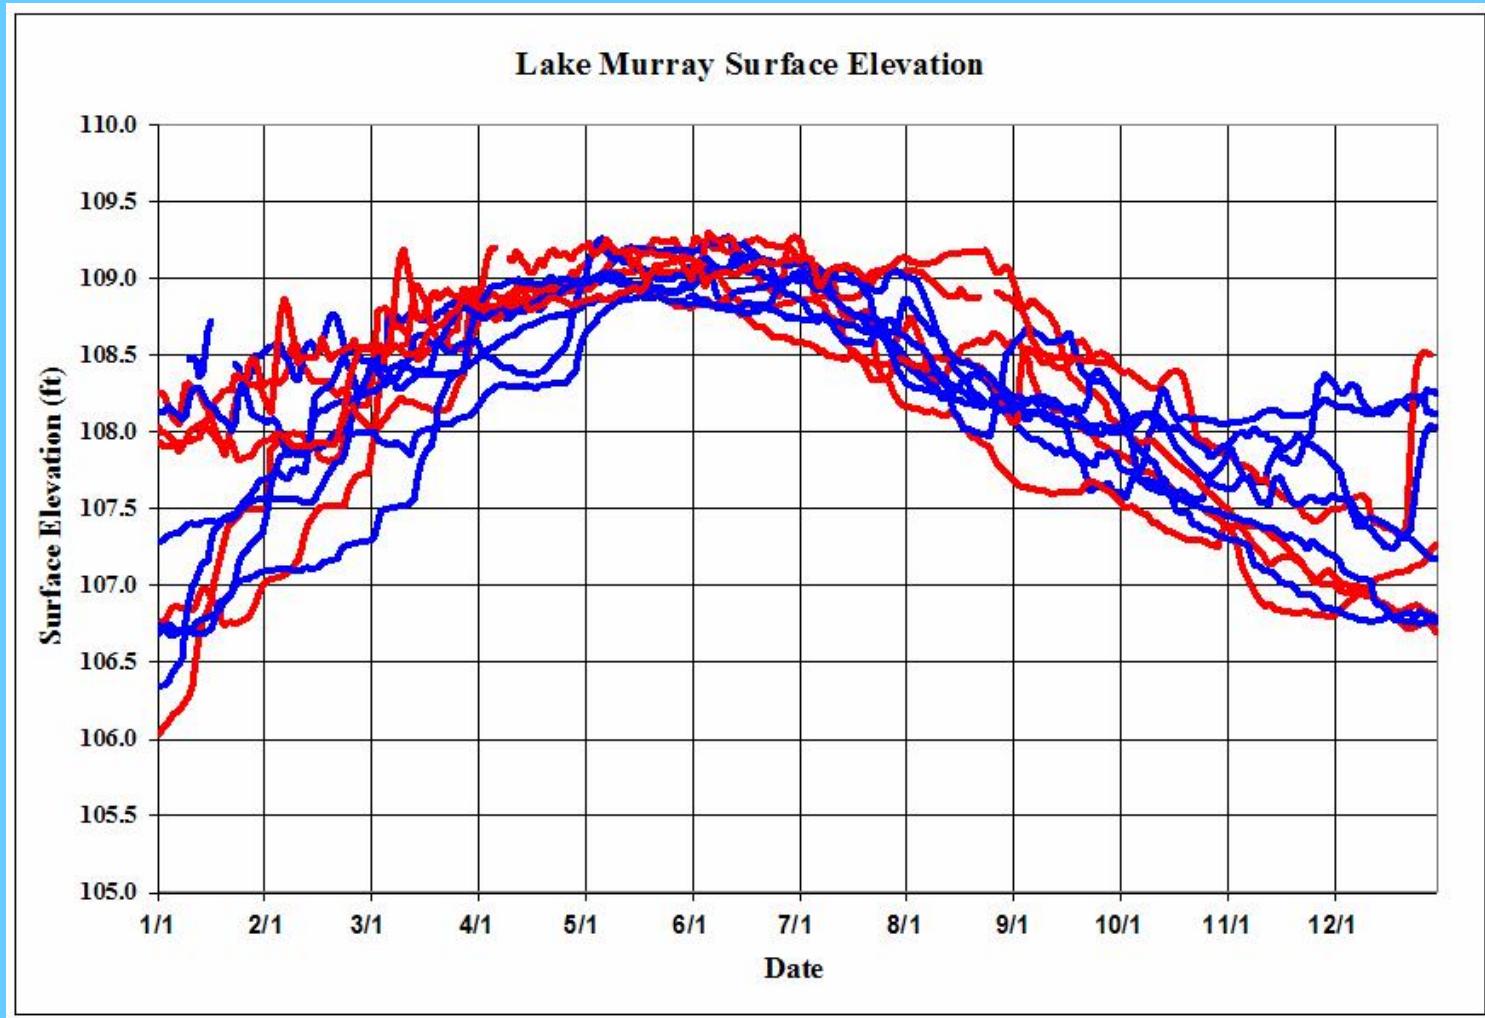


Average Annual Flow – Saluda River at Chappells

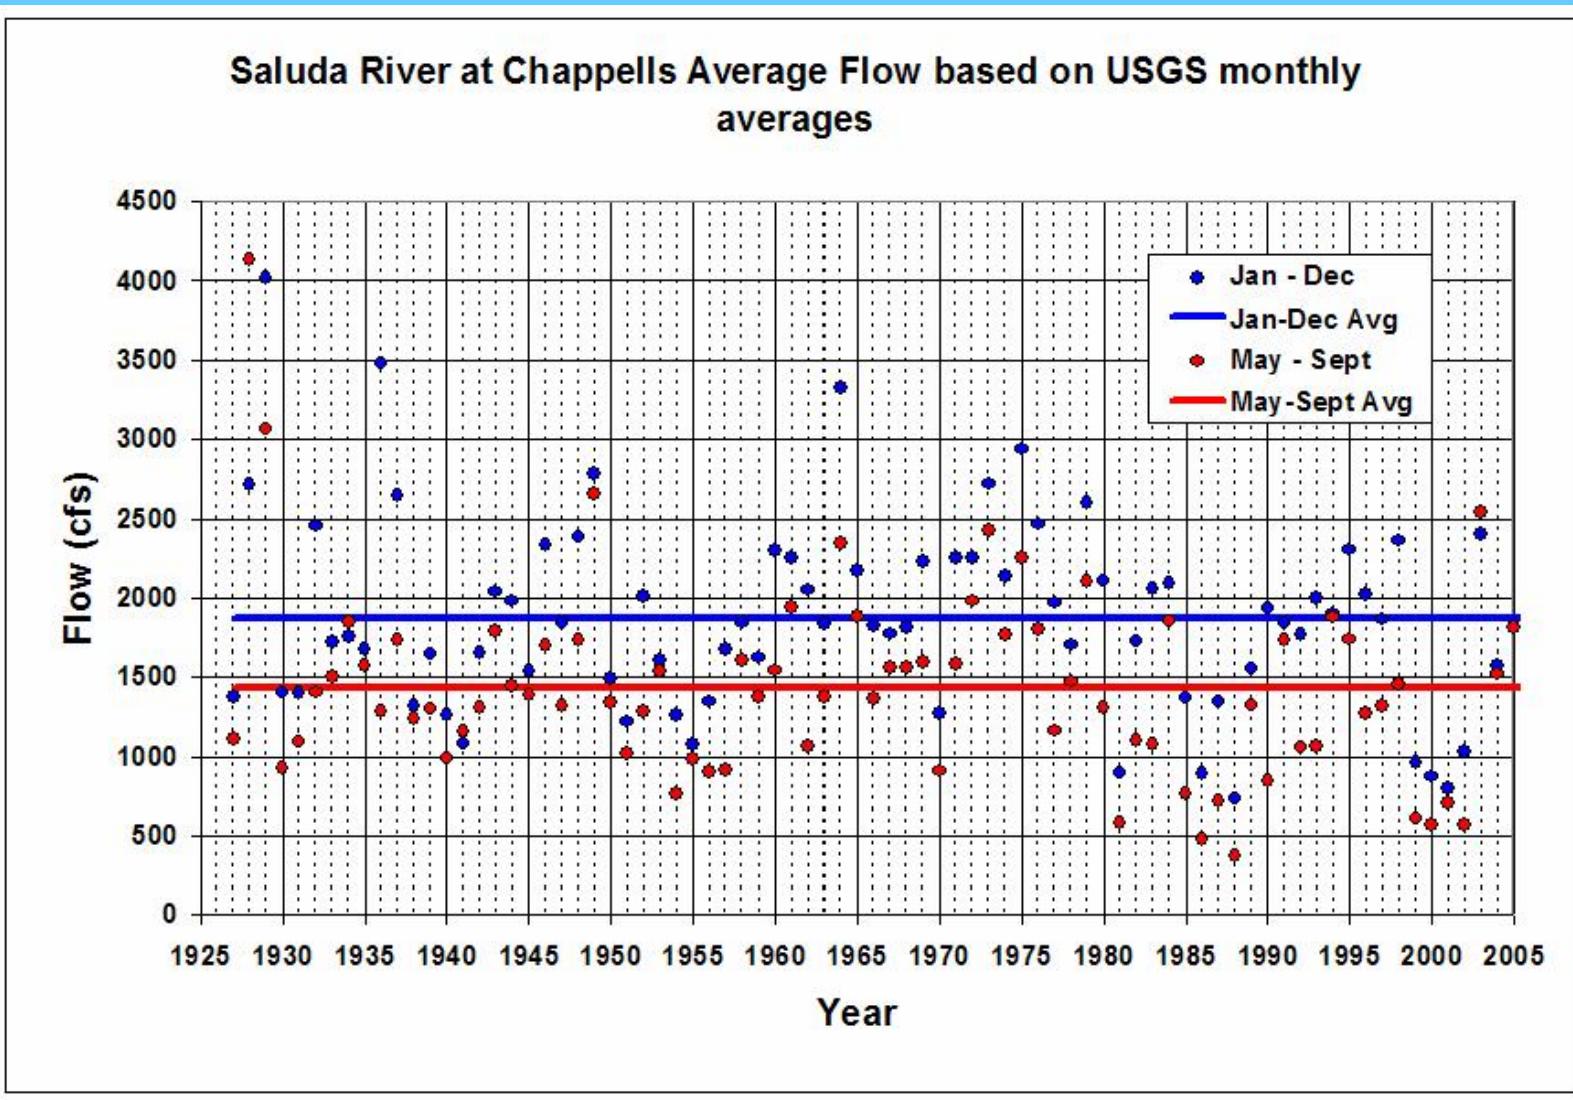


Excel Table with Monthly Average Flow Below Saluda


Flow Frequency – Saluda River Below Lake Murray

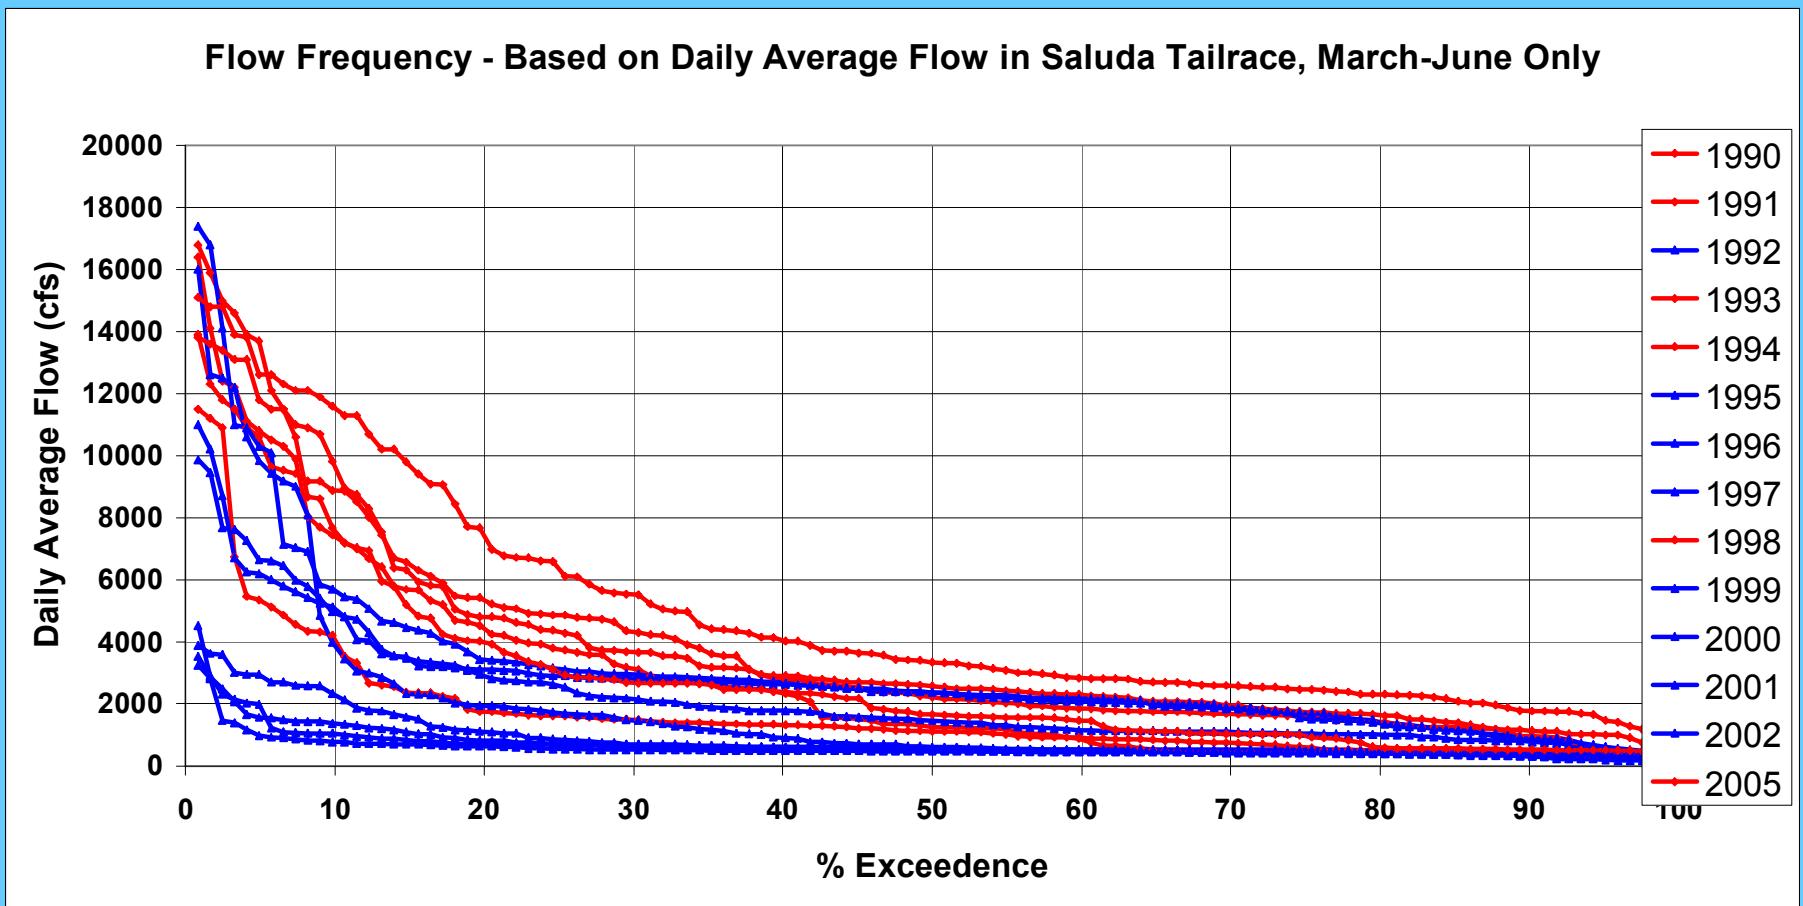



Cumulative Outflow – March-December


Years with documented striped bass kills are red

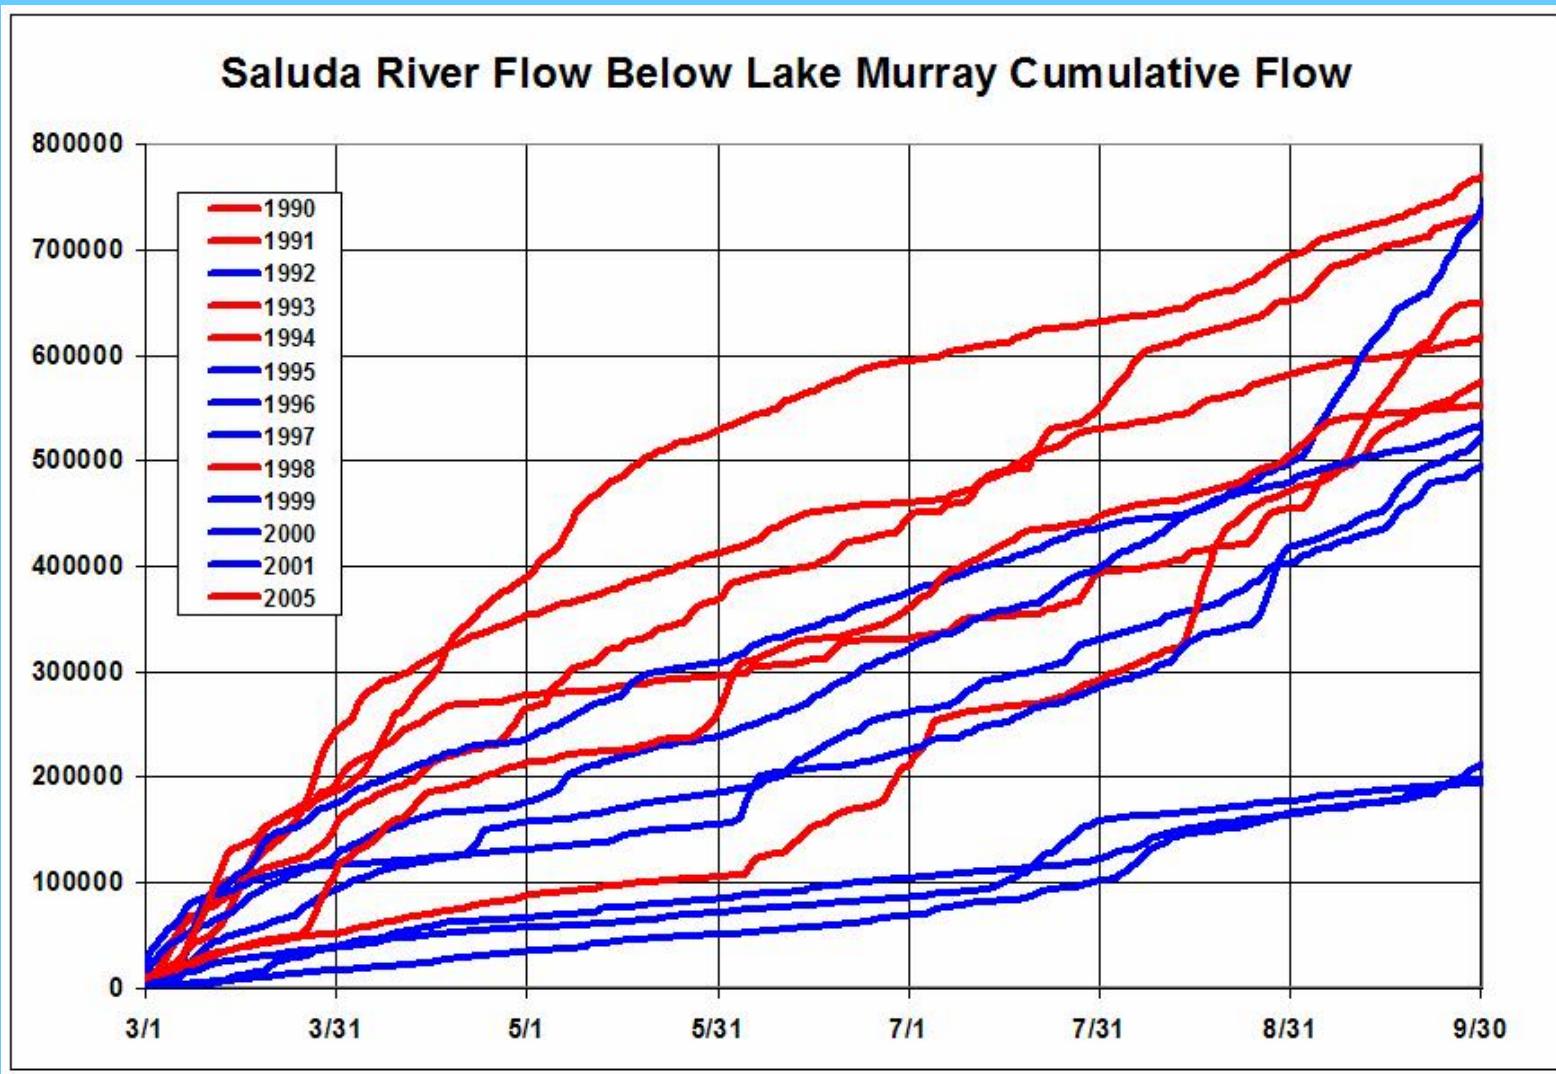


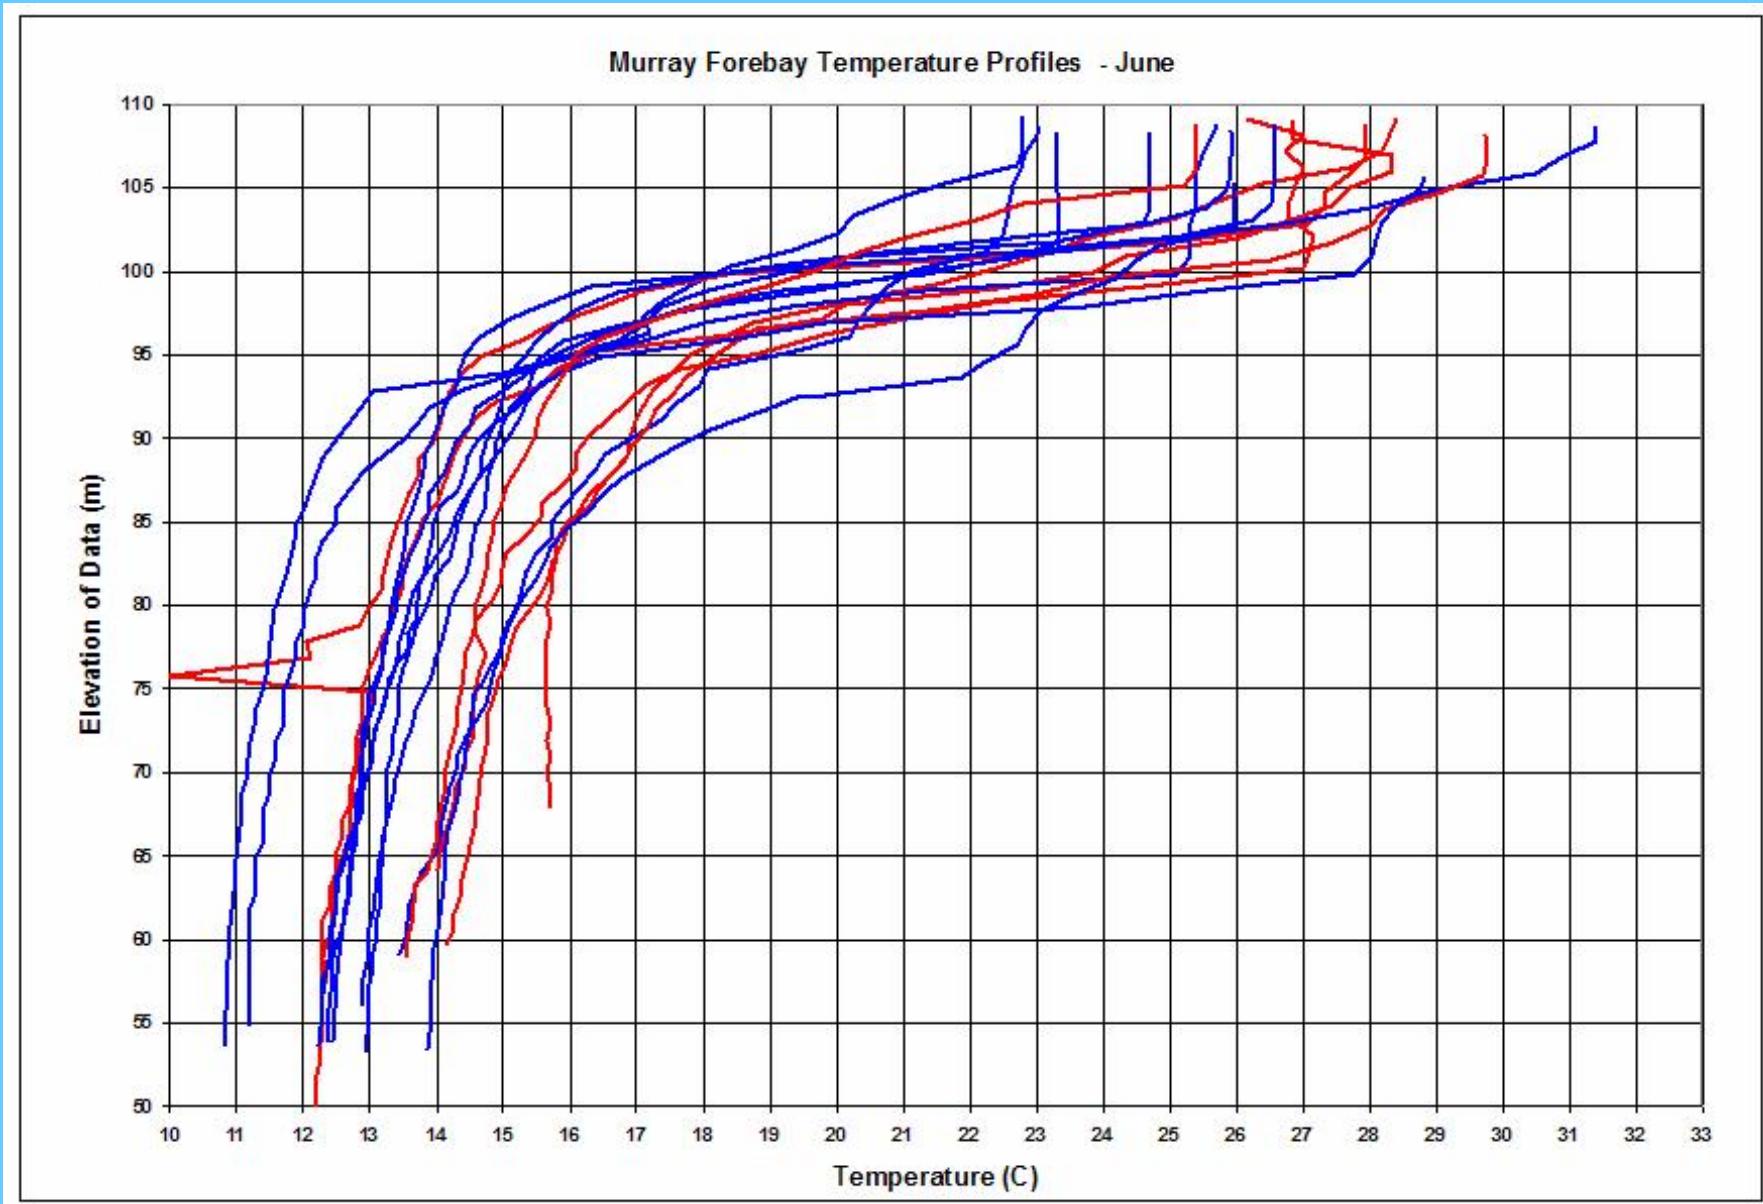


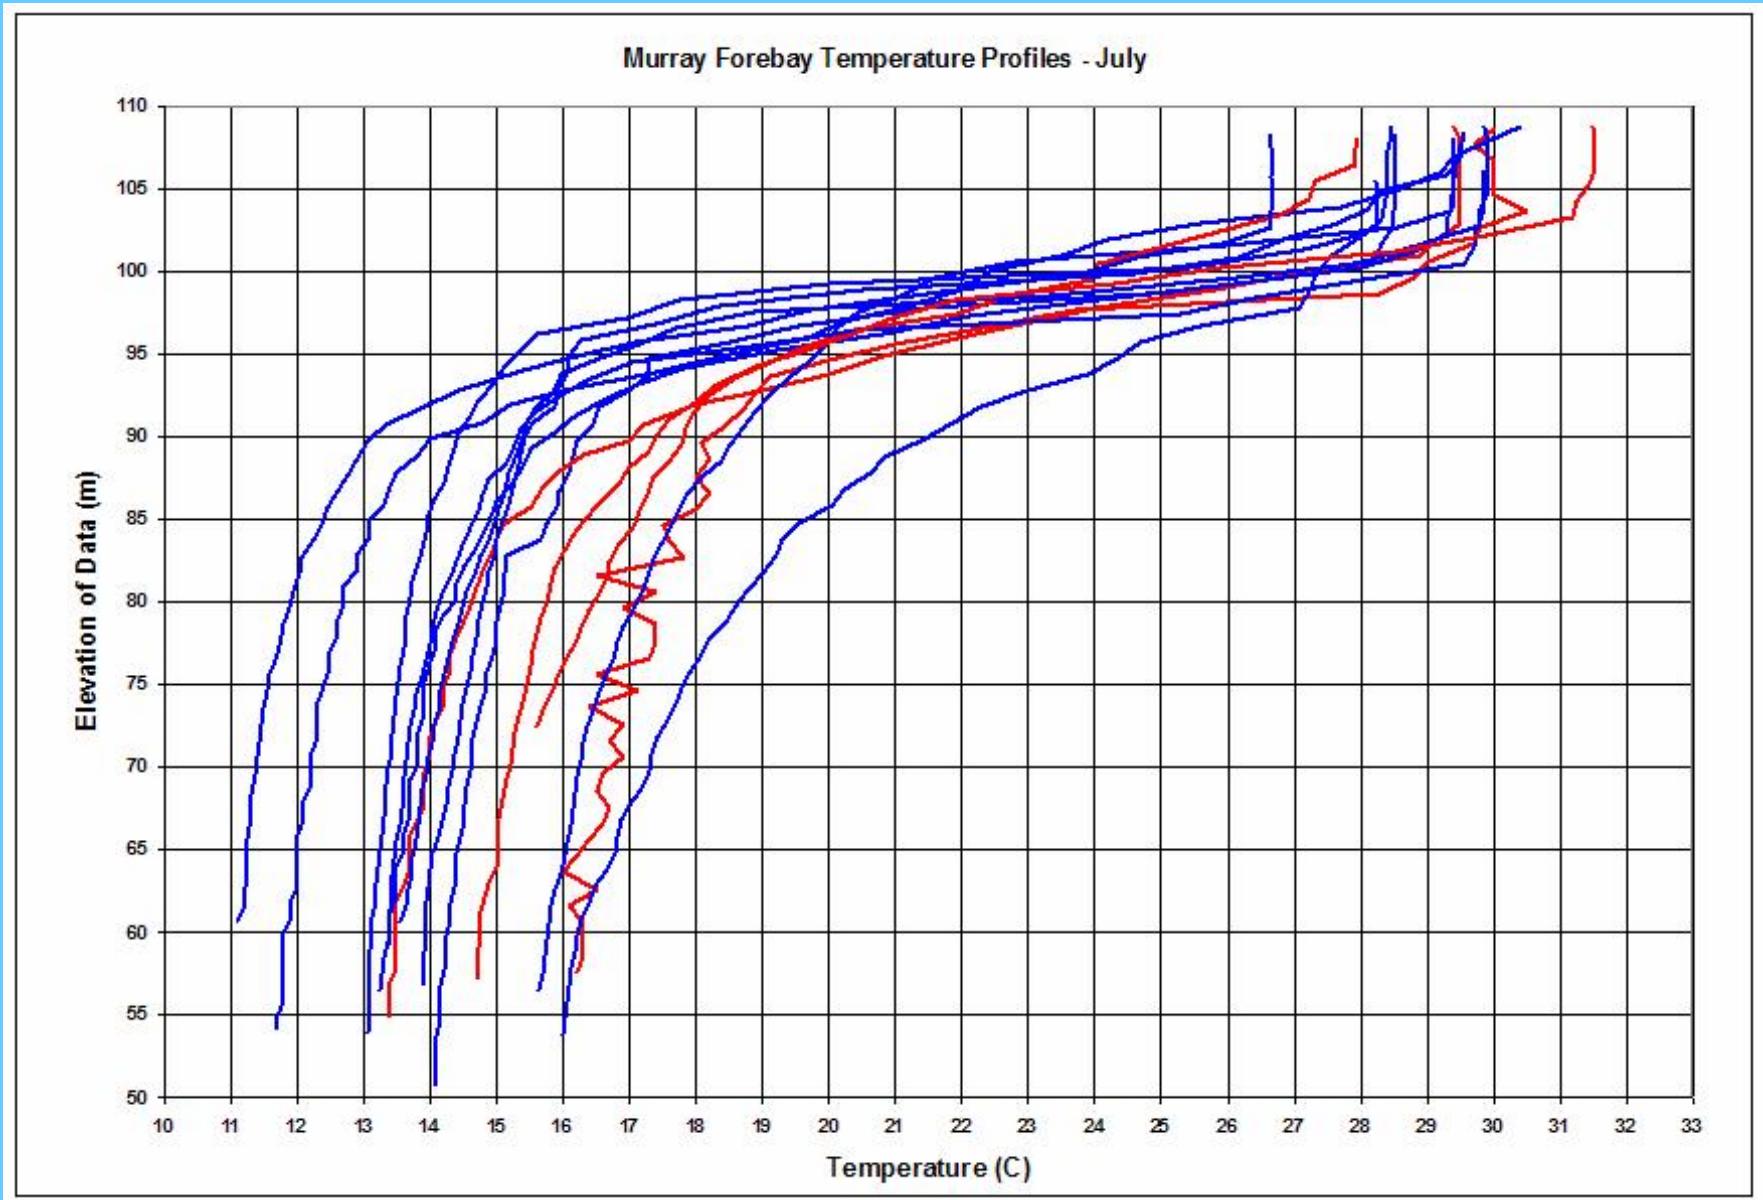


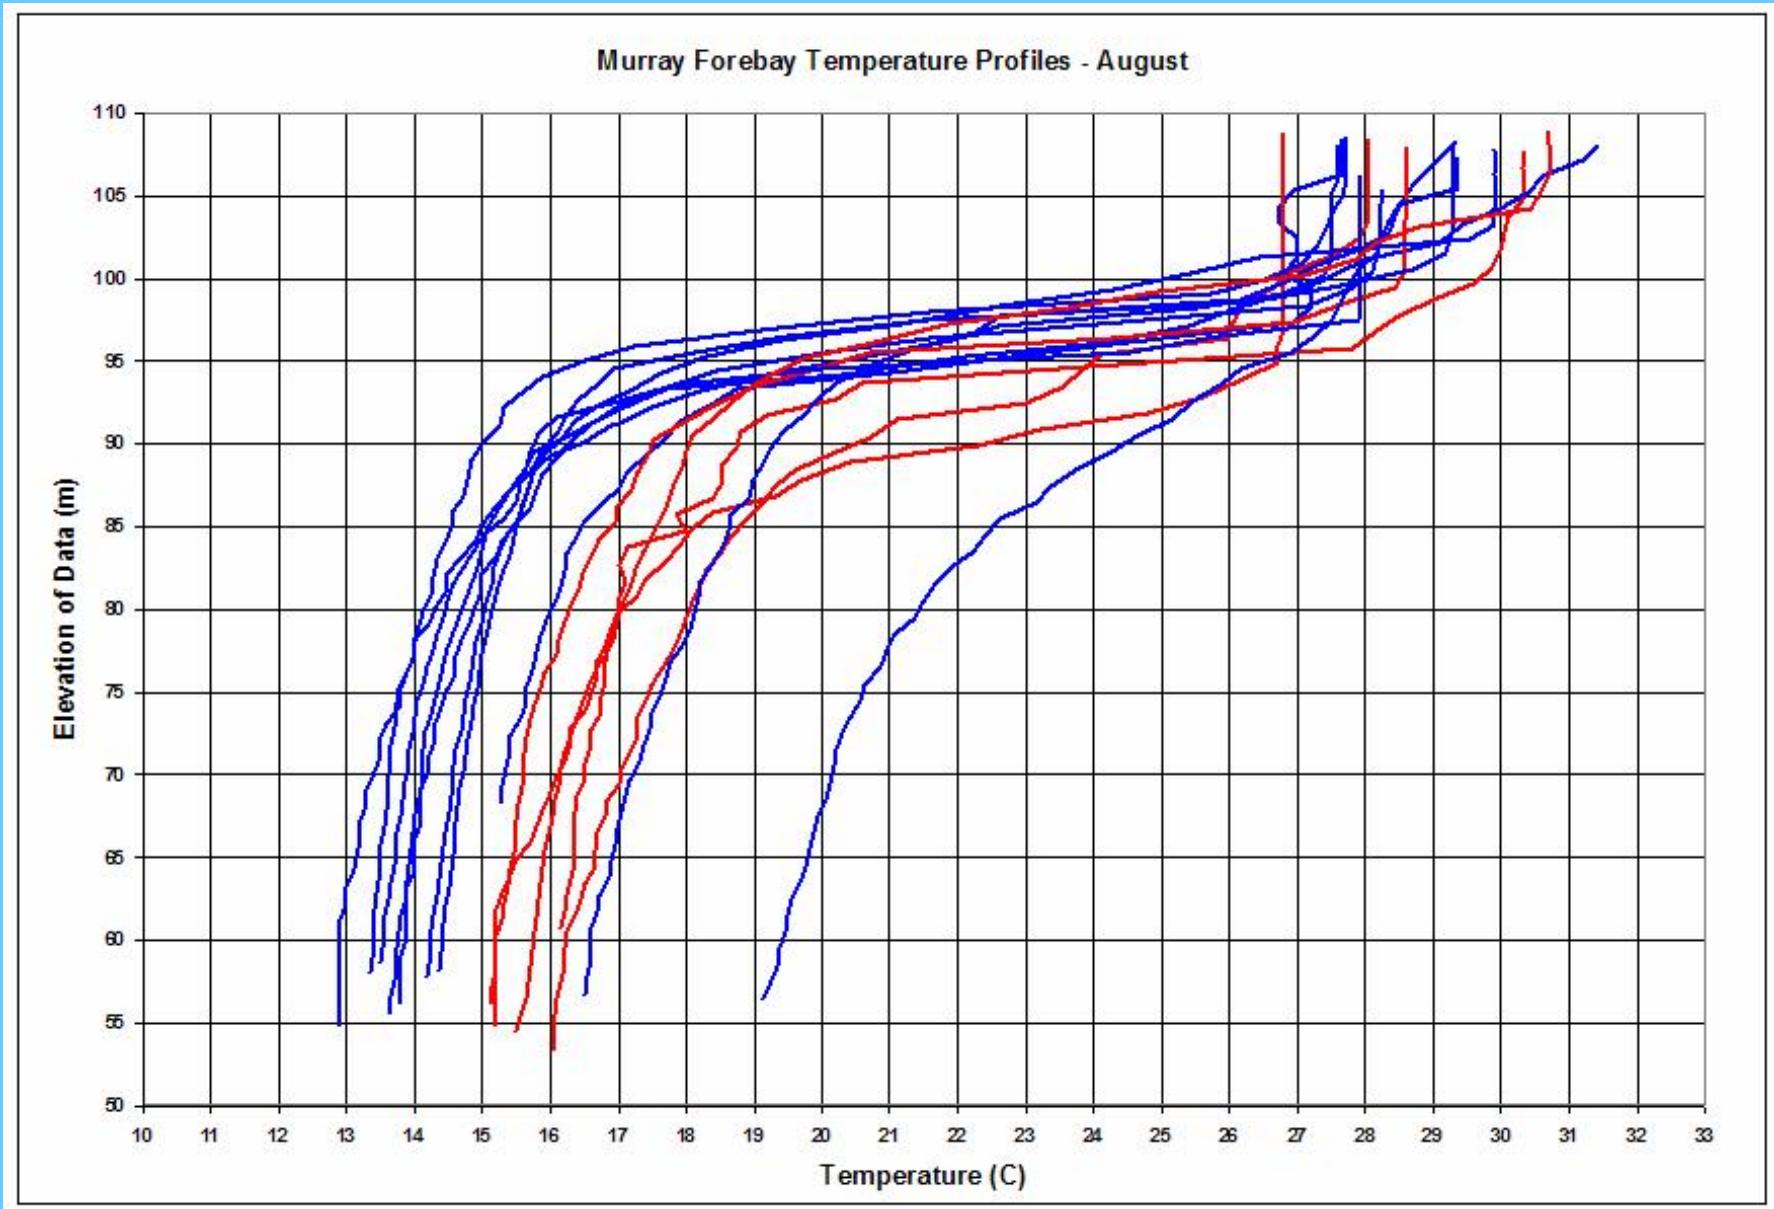


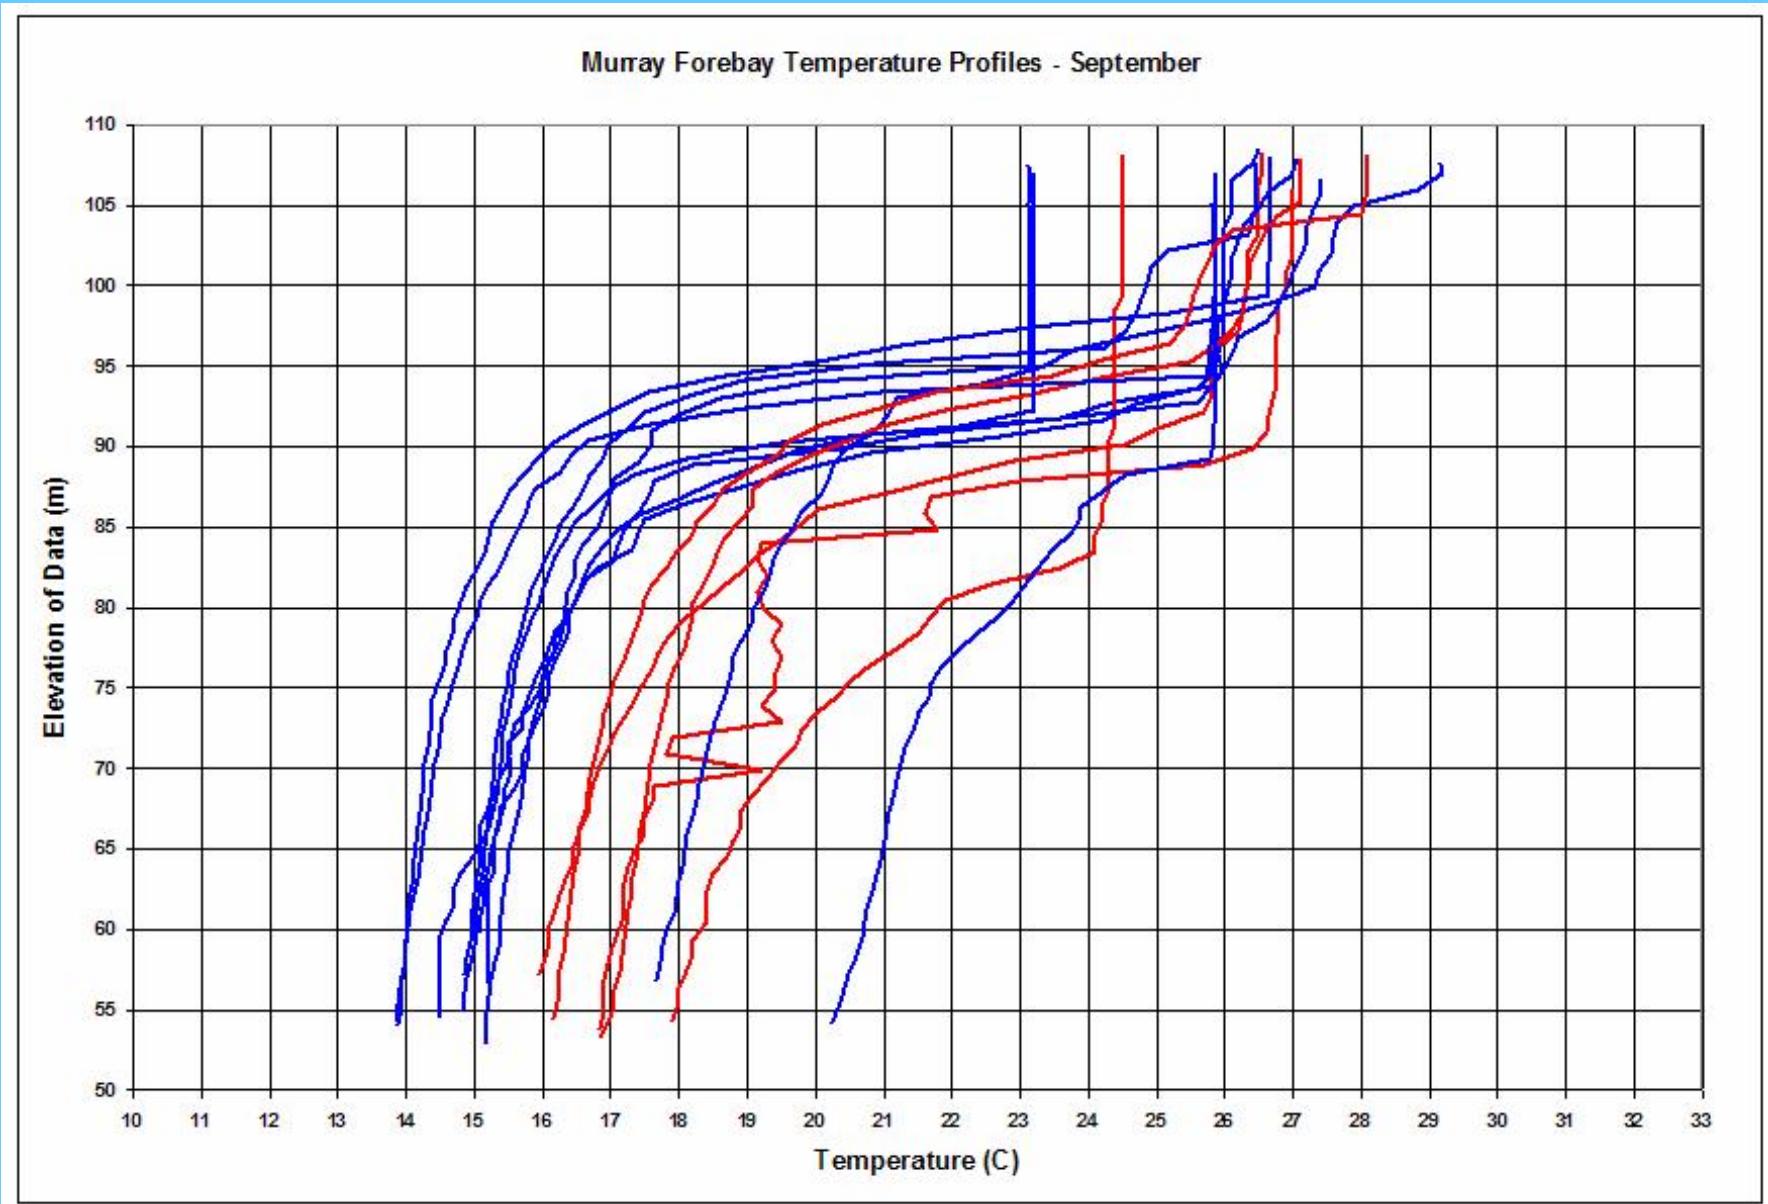

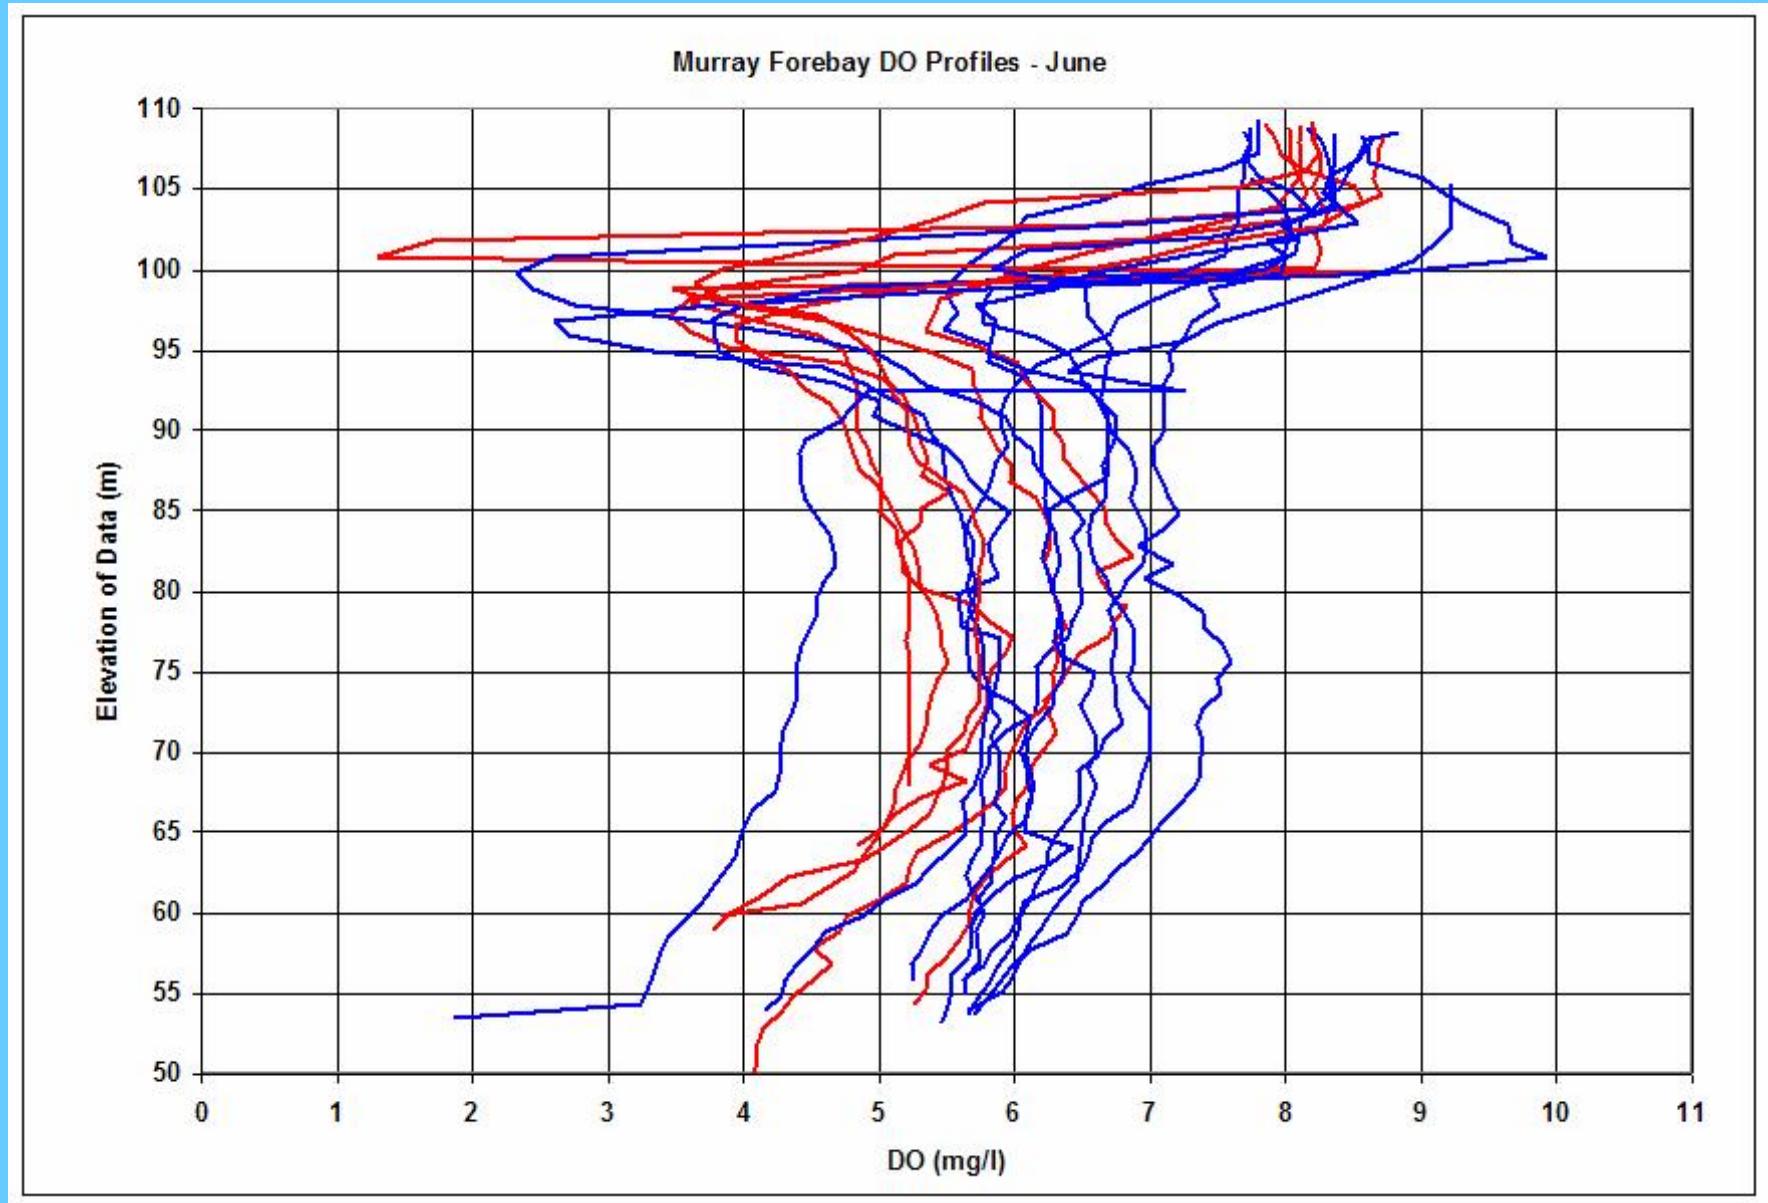

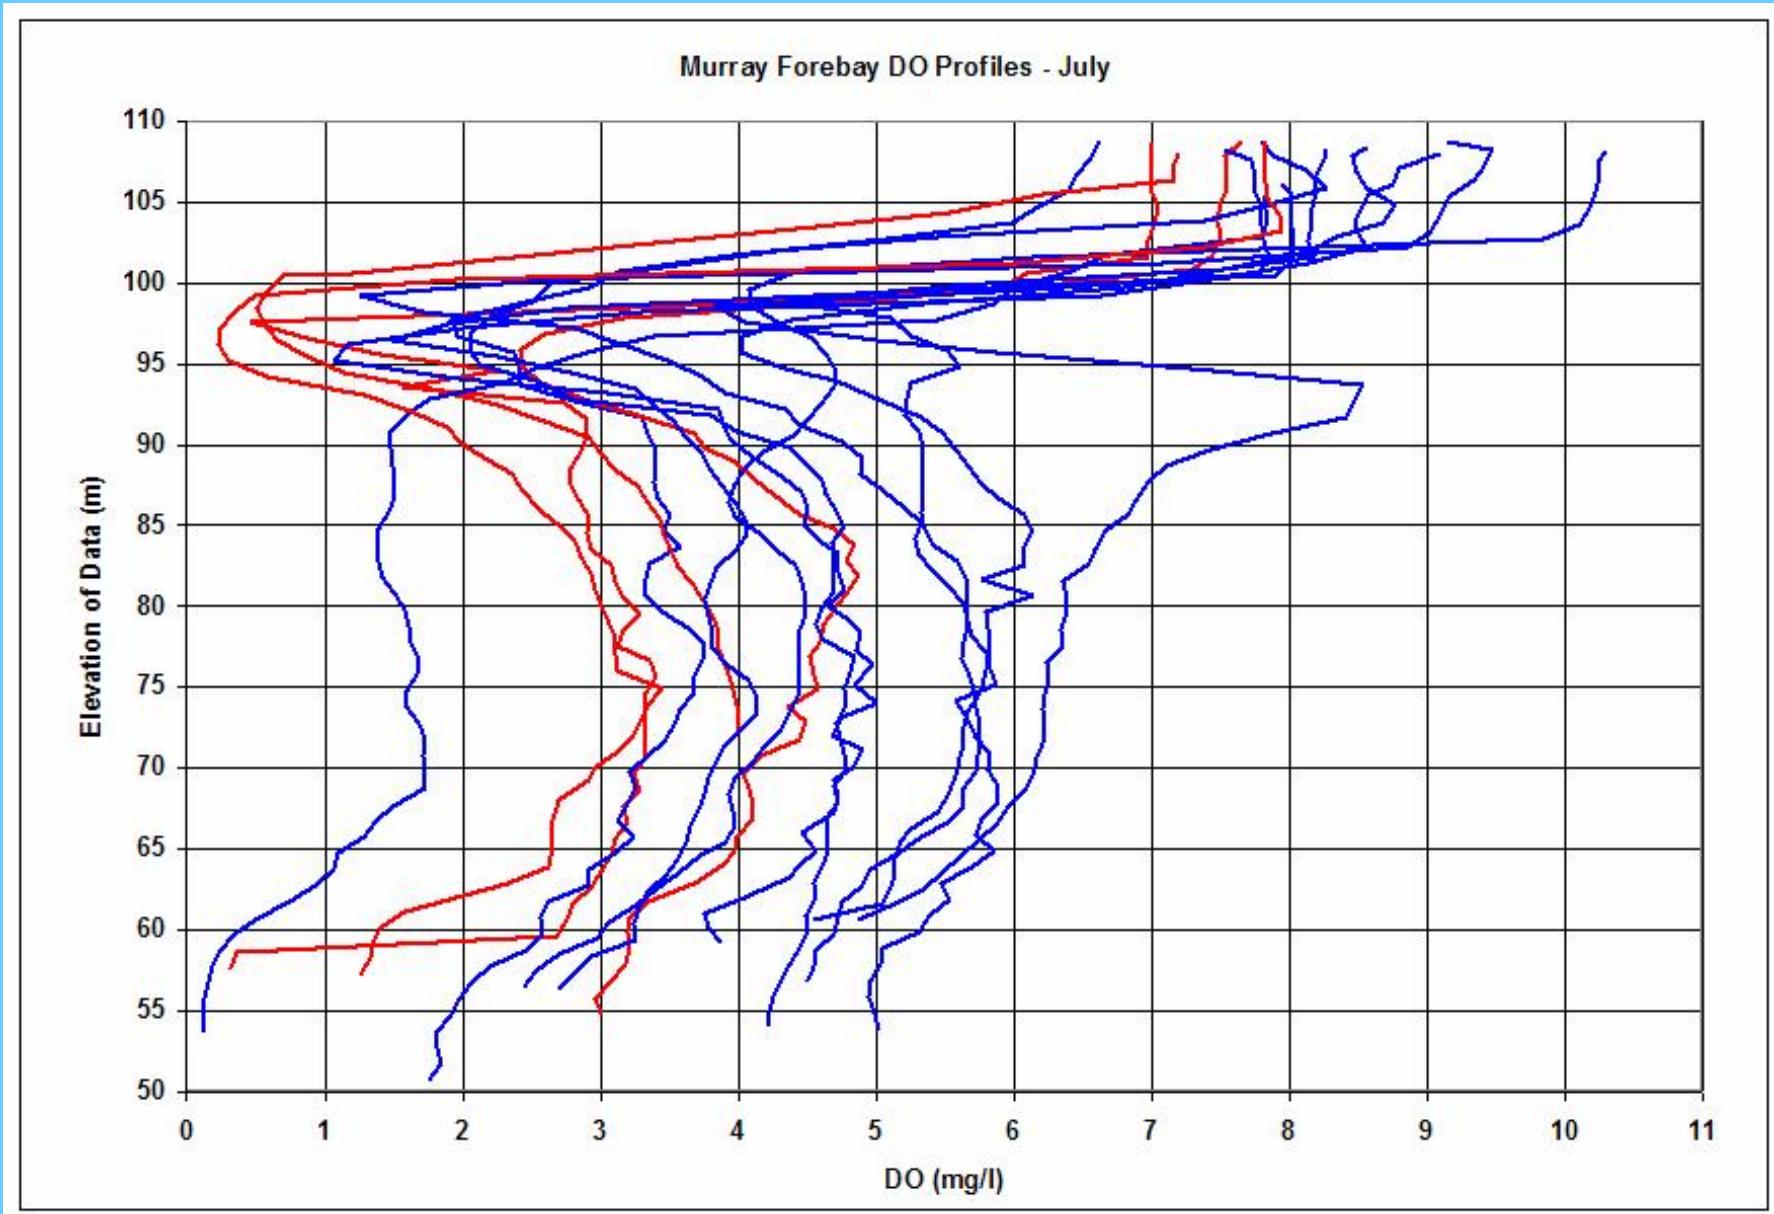


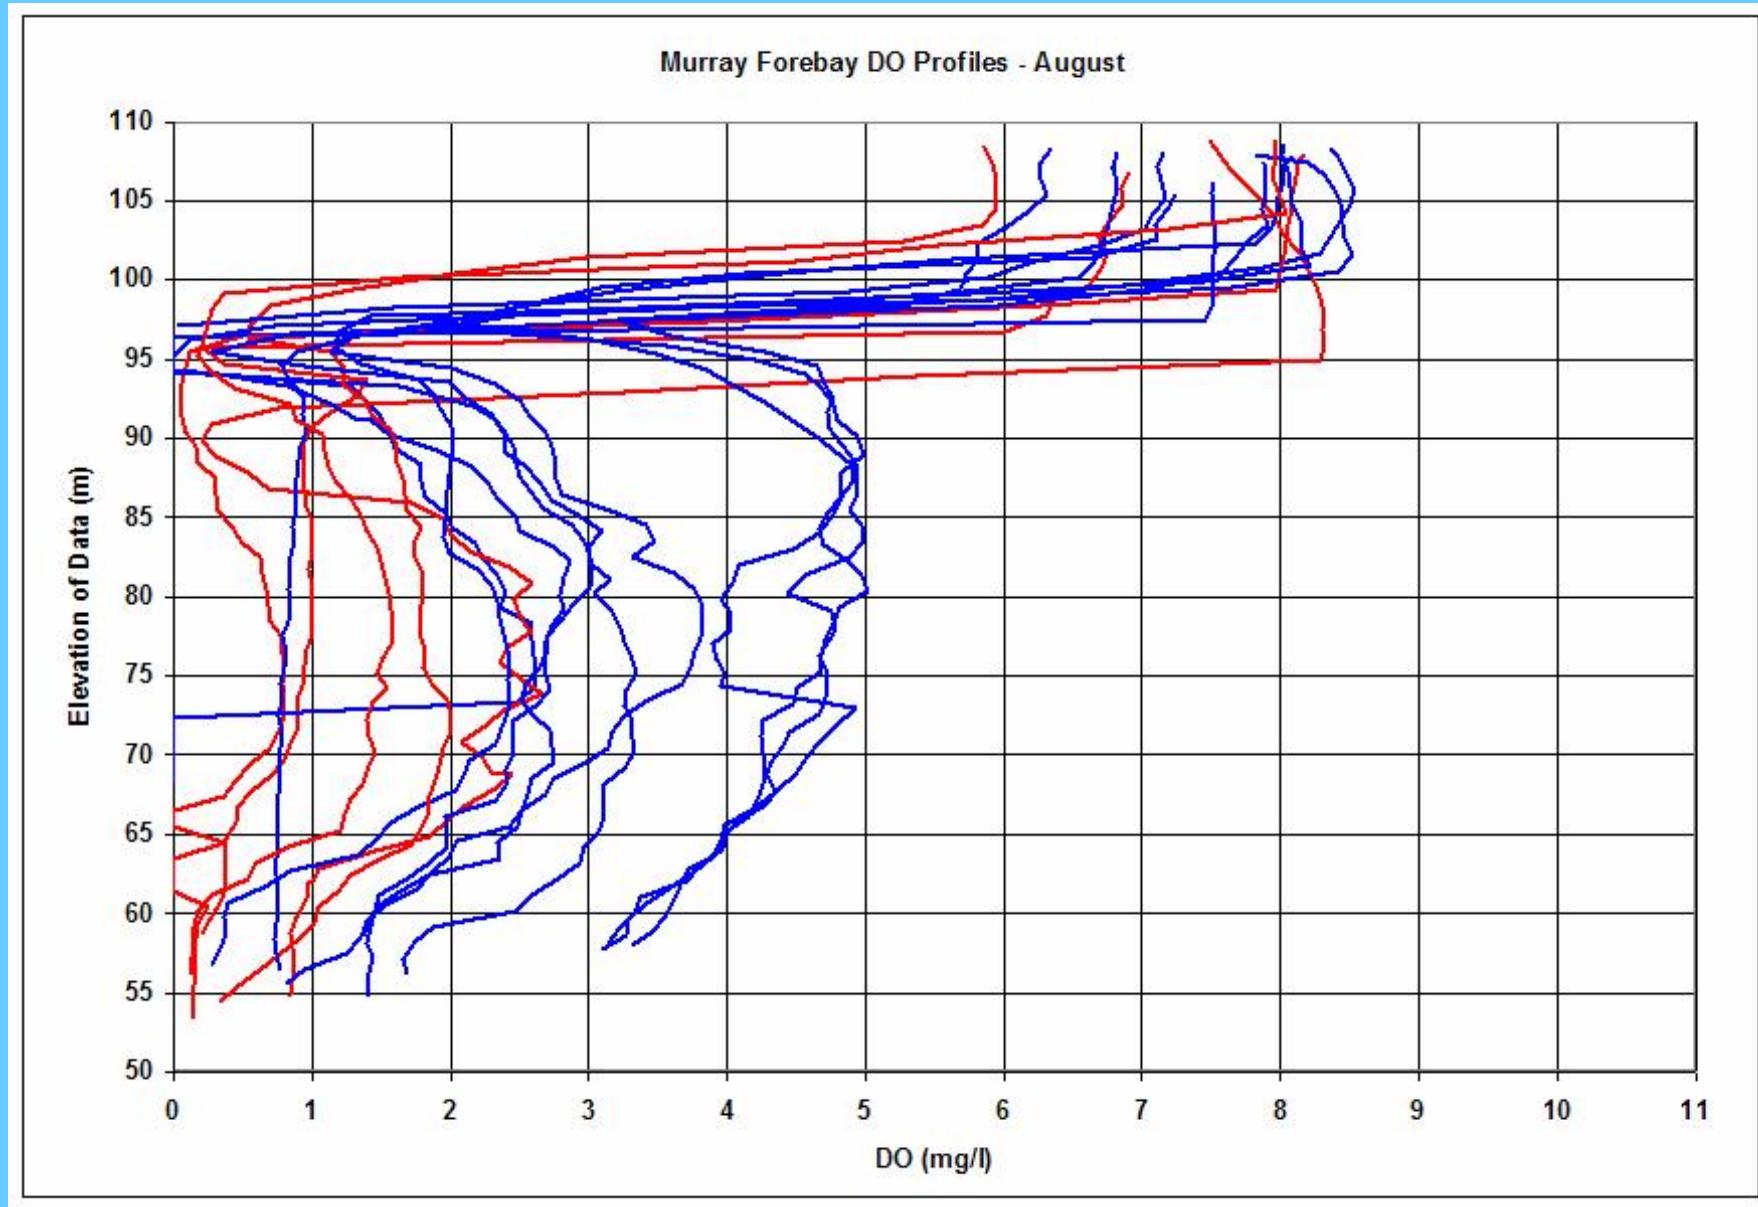

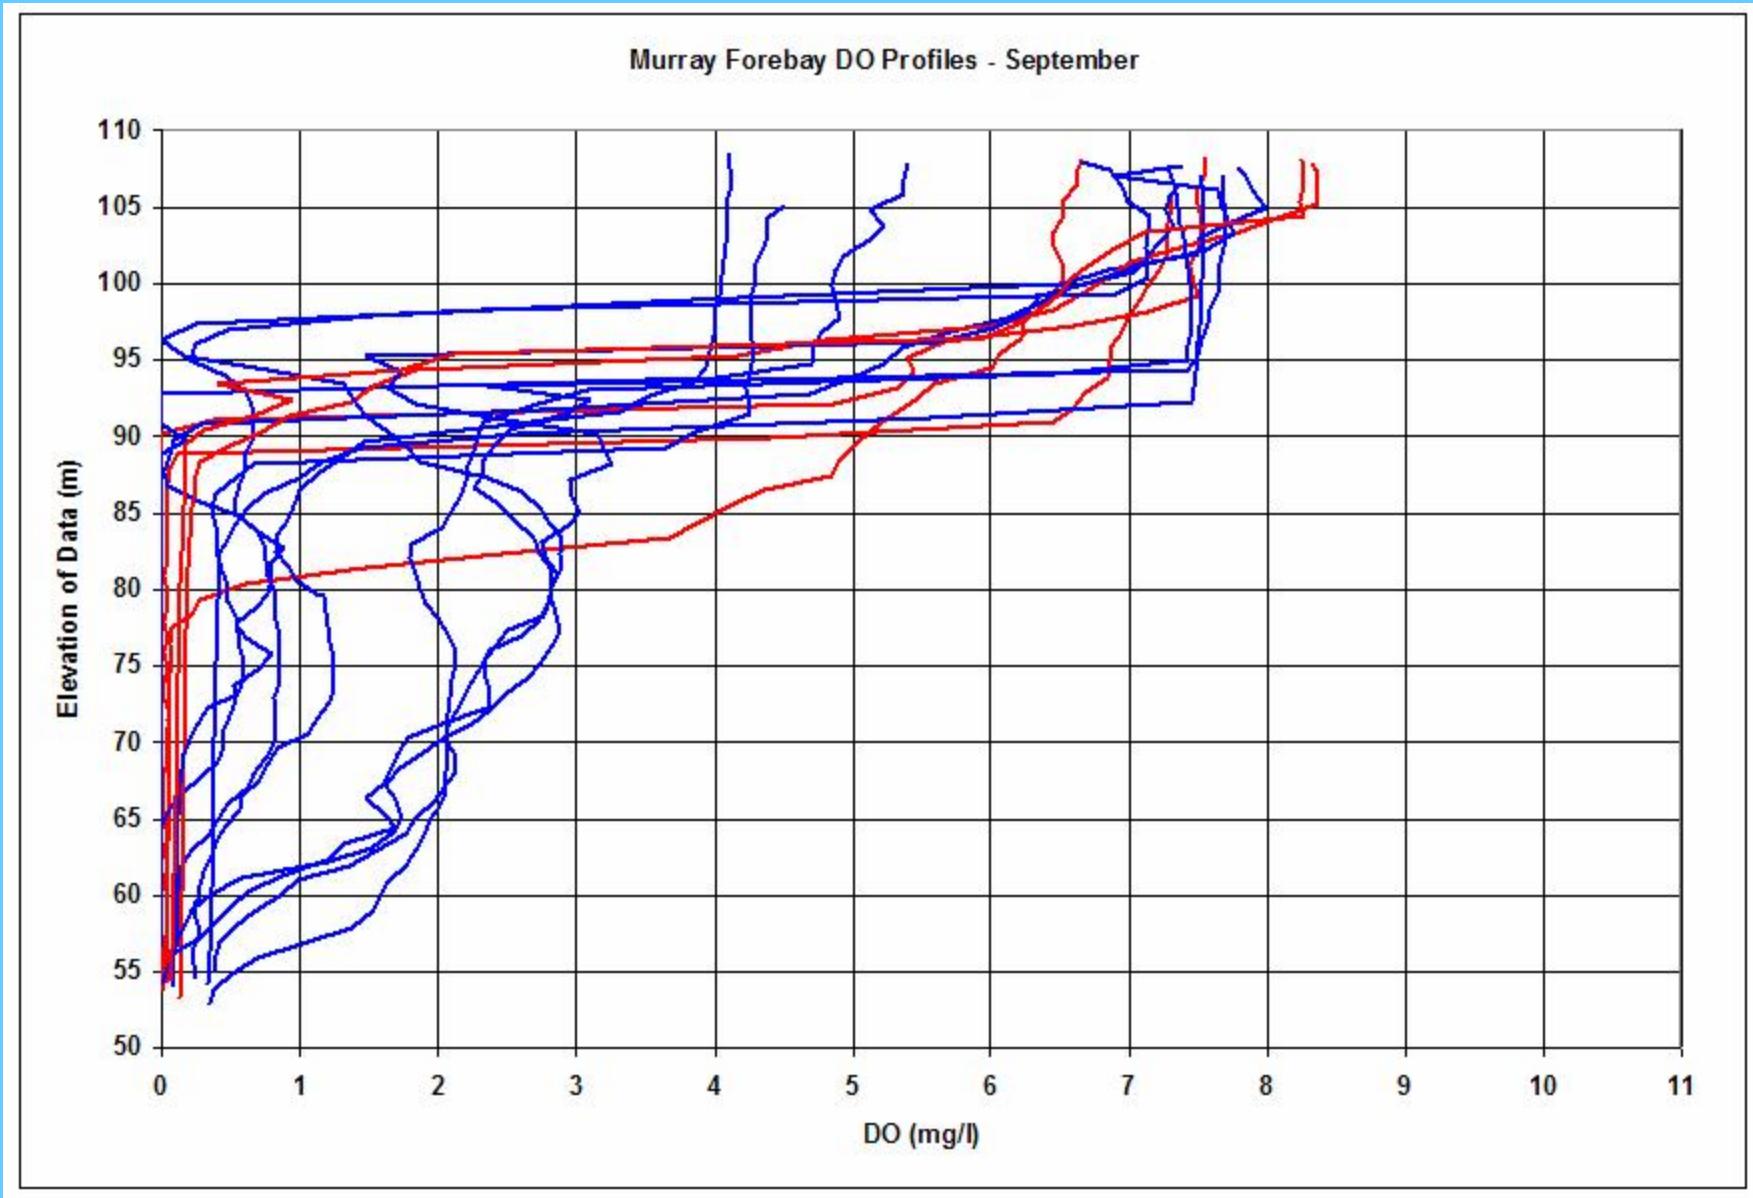


Lake Murray Contour Plots


June 2002 Temperature

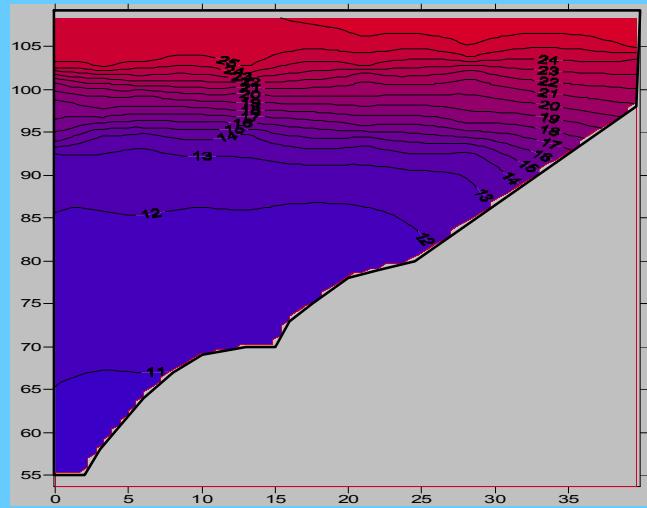


June 2005 Temperature

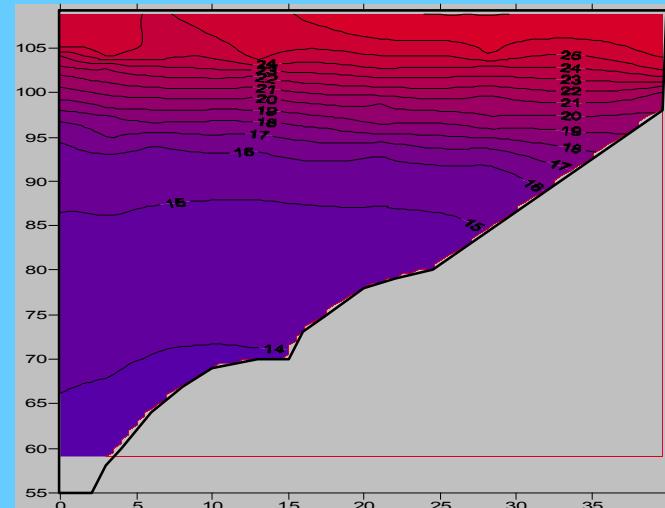

June 2002 DO

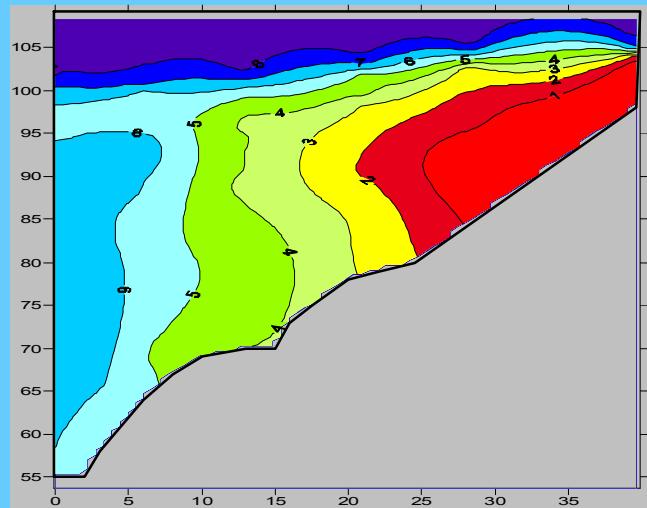


June 2005 DO

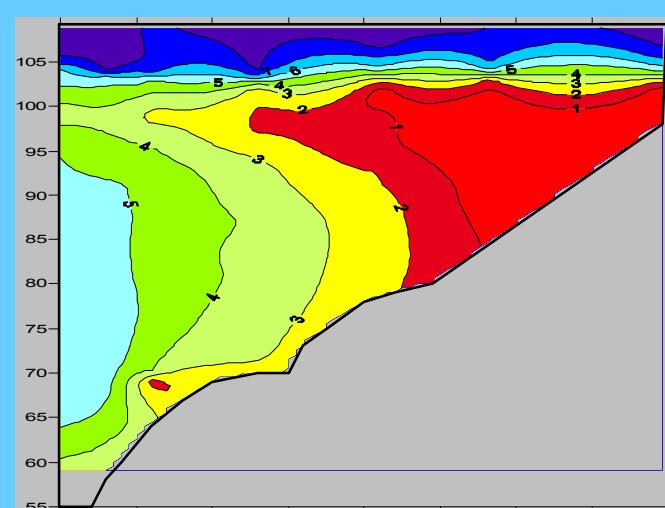


Lake Murray Contour Plots


July 2002 Temperature

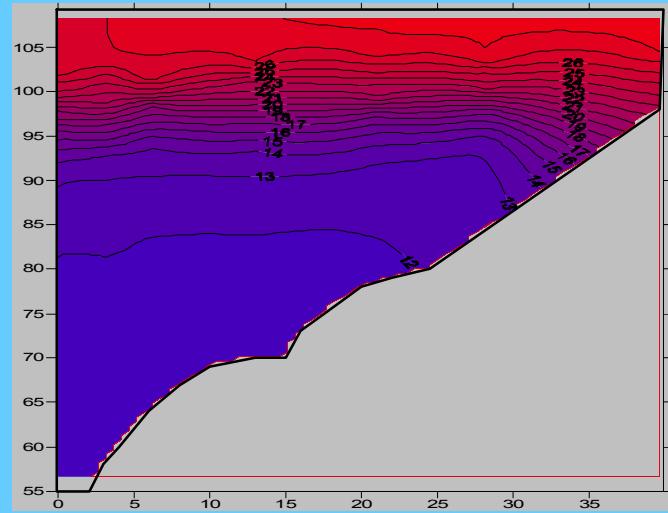


July 2005 Temperature

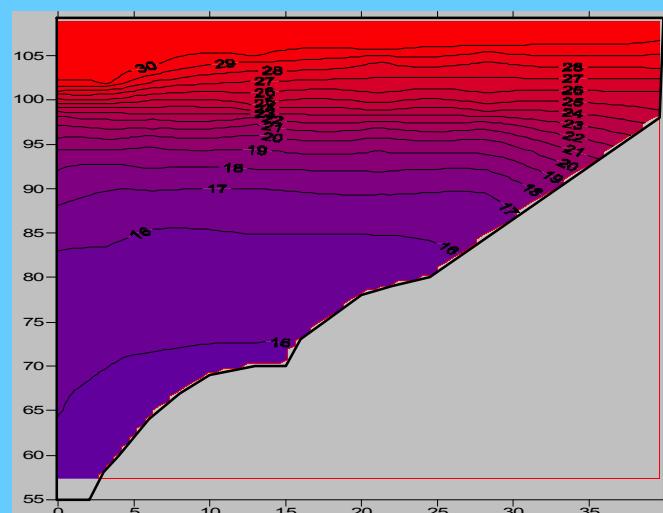

July 2002 DO

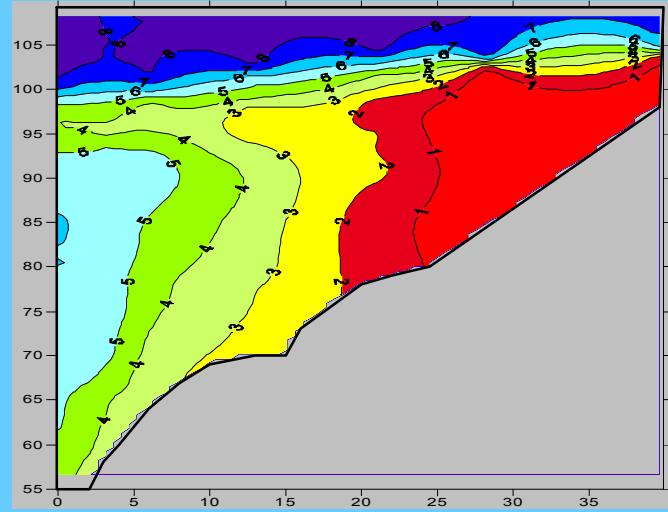


July 2005 DO

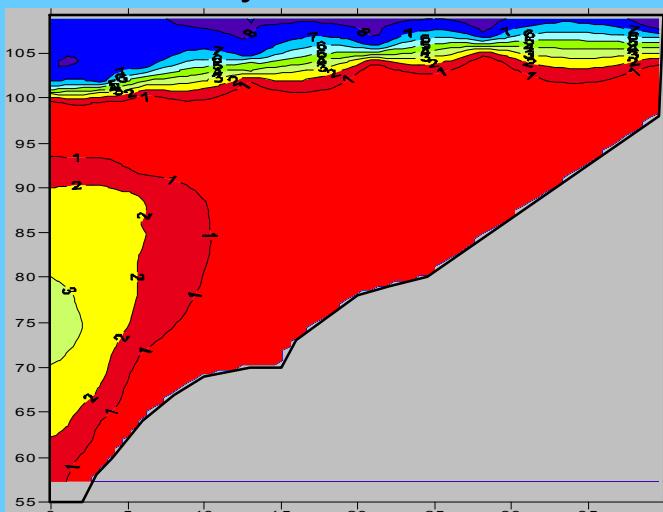


Lake Murray Contour Plots


August 2002 Temperature

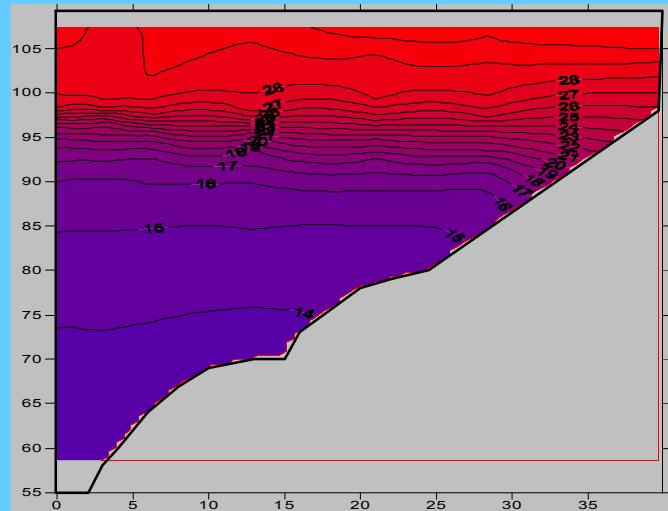


August 2005 Temperature

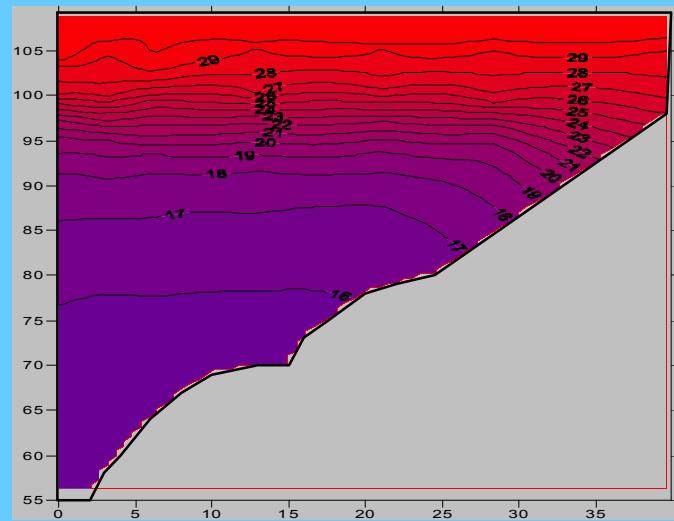

August 2002 DO

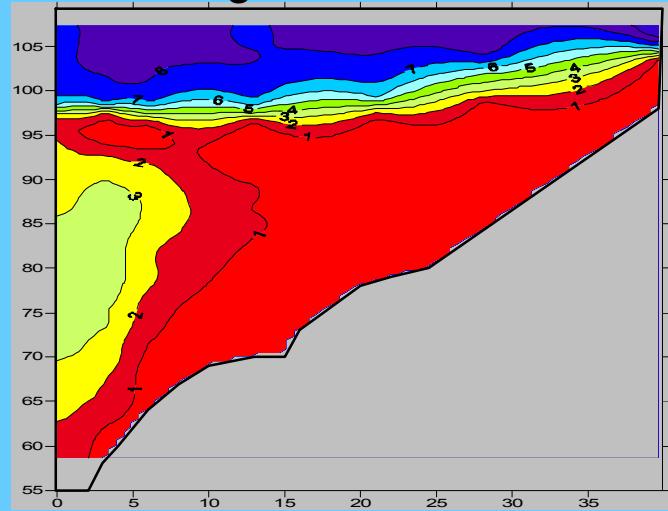


August 2005 DO

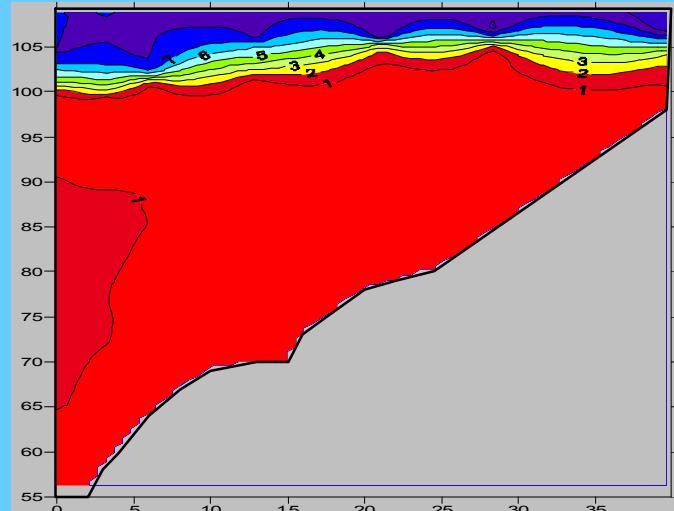


Lake Murray Contour Plots


September 2002 Temperature

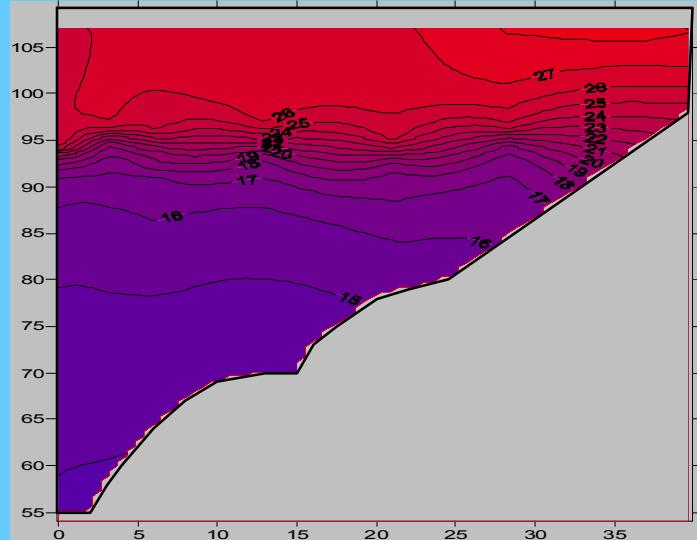


September 2005 Temperature

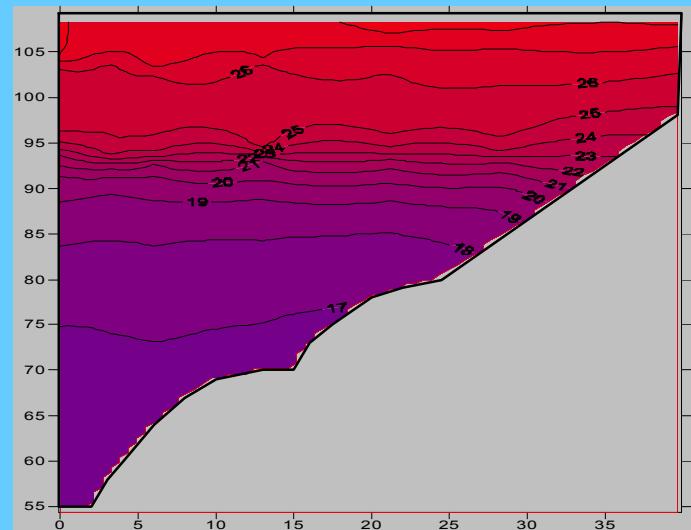

September 2002 DO

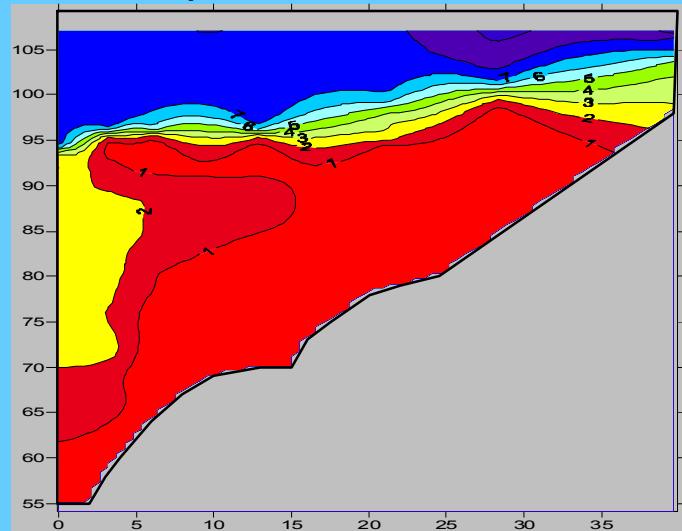

September 2005 DO

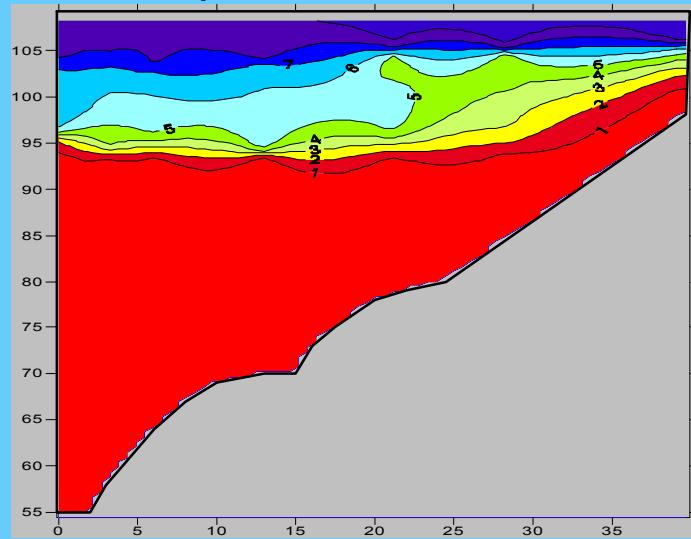


Model Calibration

- Model was originally calibrated to 3 years: 1992, 1996 and 1997
- Model SOD was adjusted in each of the 3 years to improve DO calibration

1996 Lake Murray Temperature Profiles


Forebay

Model vs. Data

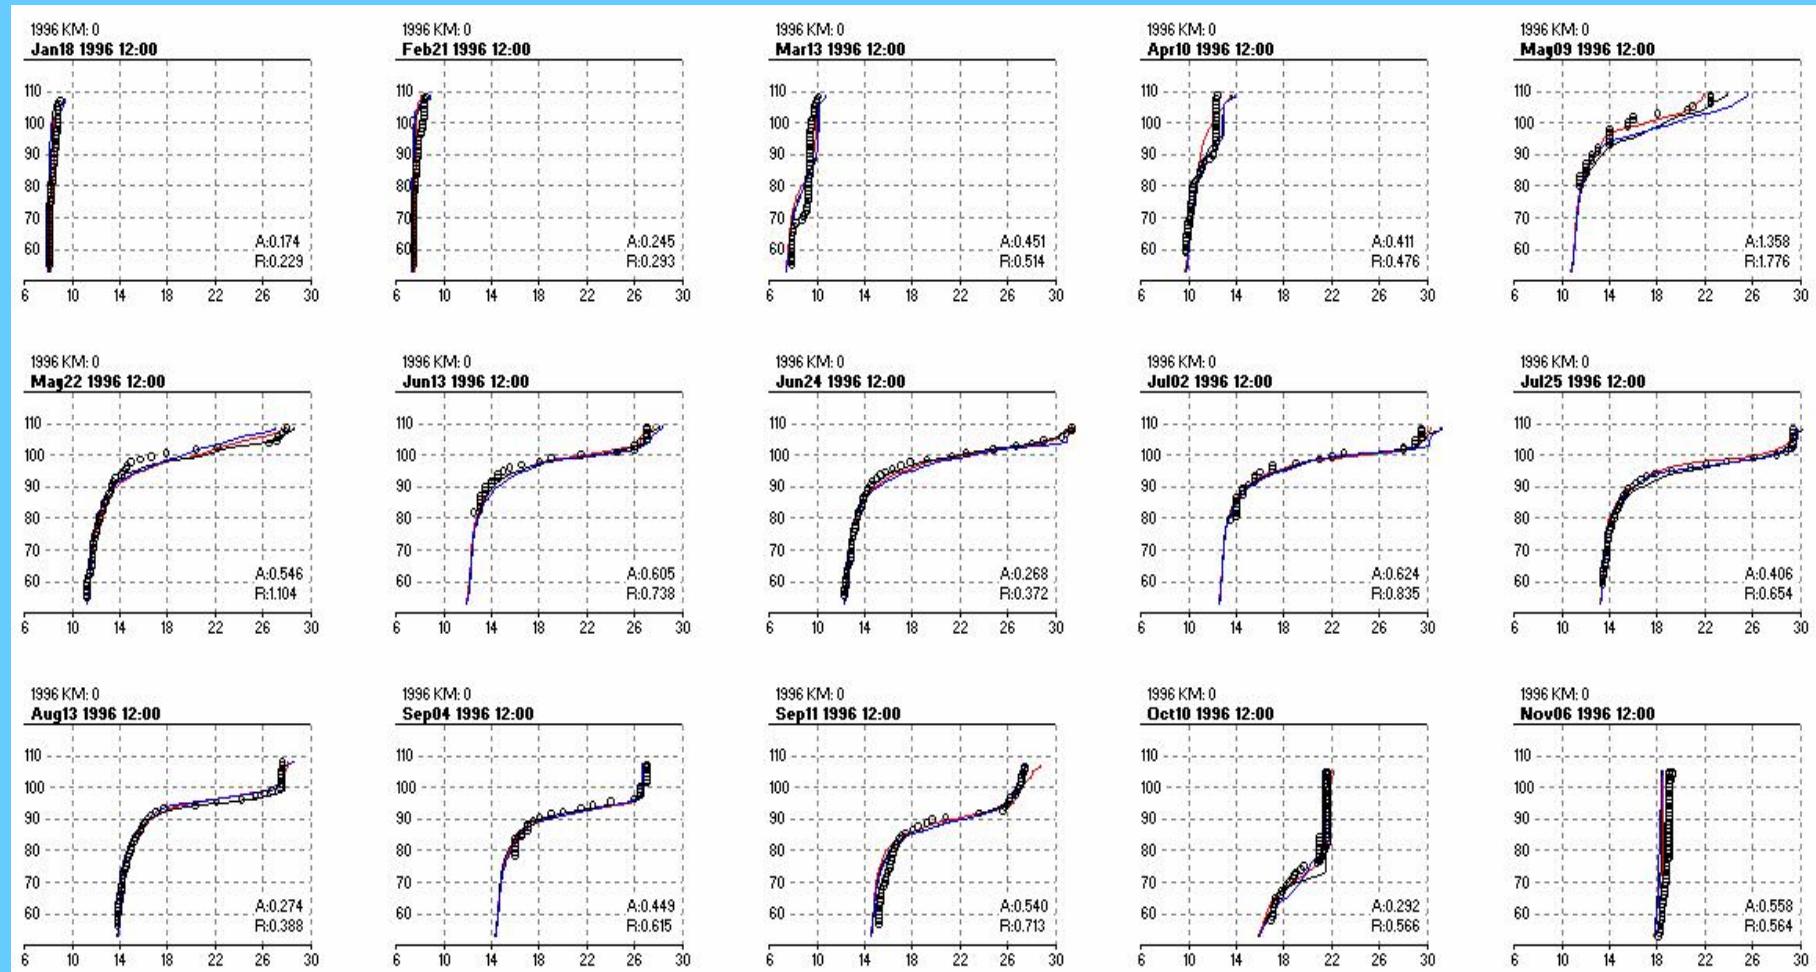

1996 Lake Murray Temperature Profiles 19 Kilometers Upstream of Dam


Model vs. Data

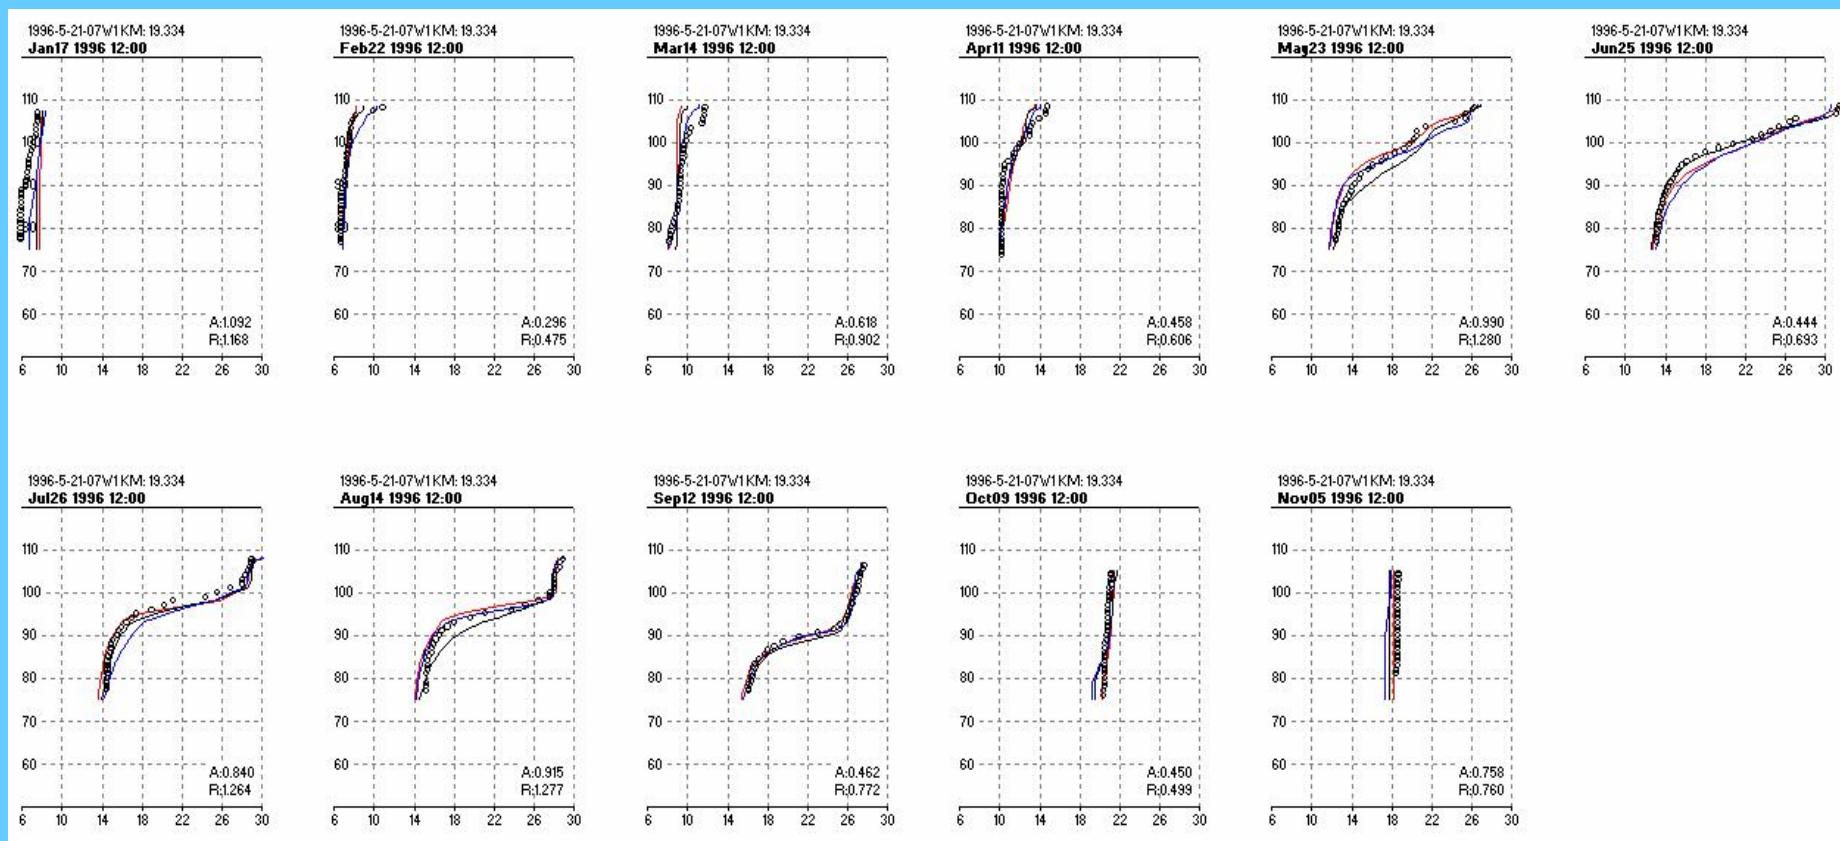

1996 Lake Murray DO Profiles

Forebay


Model vs. Data

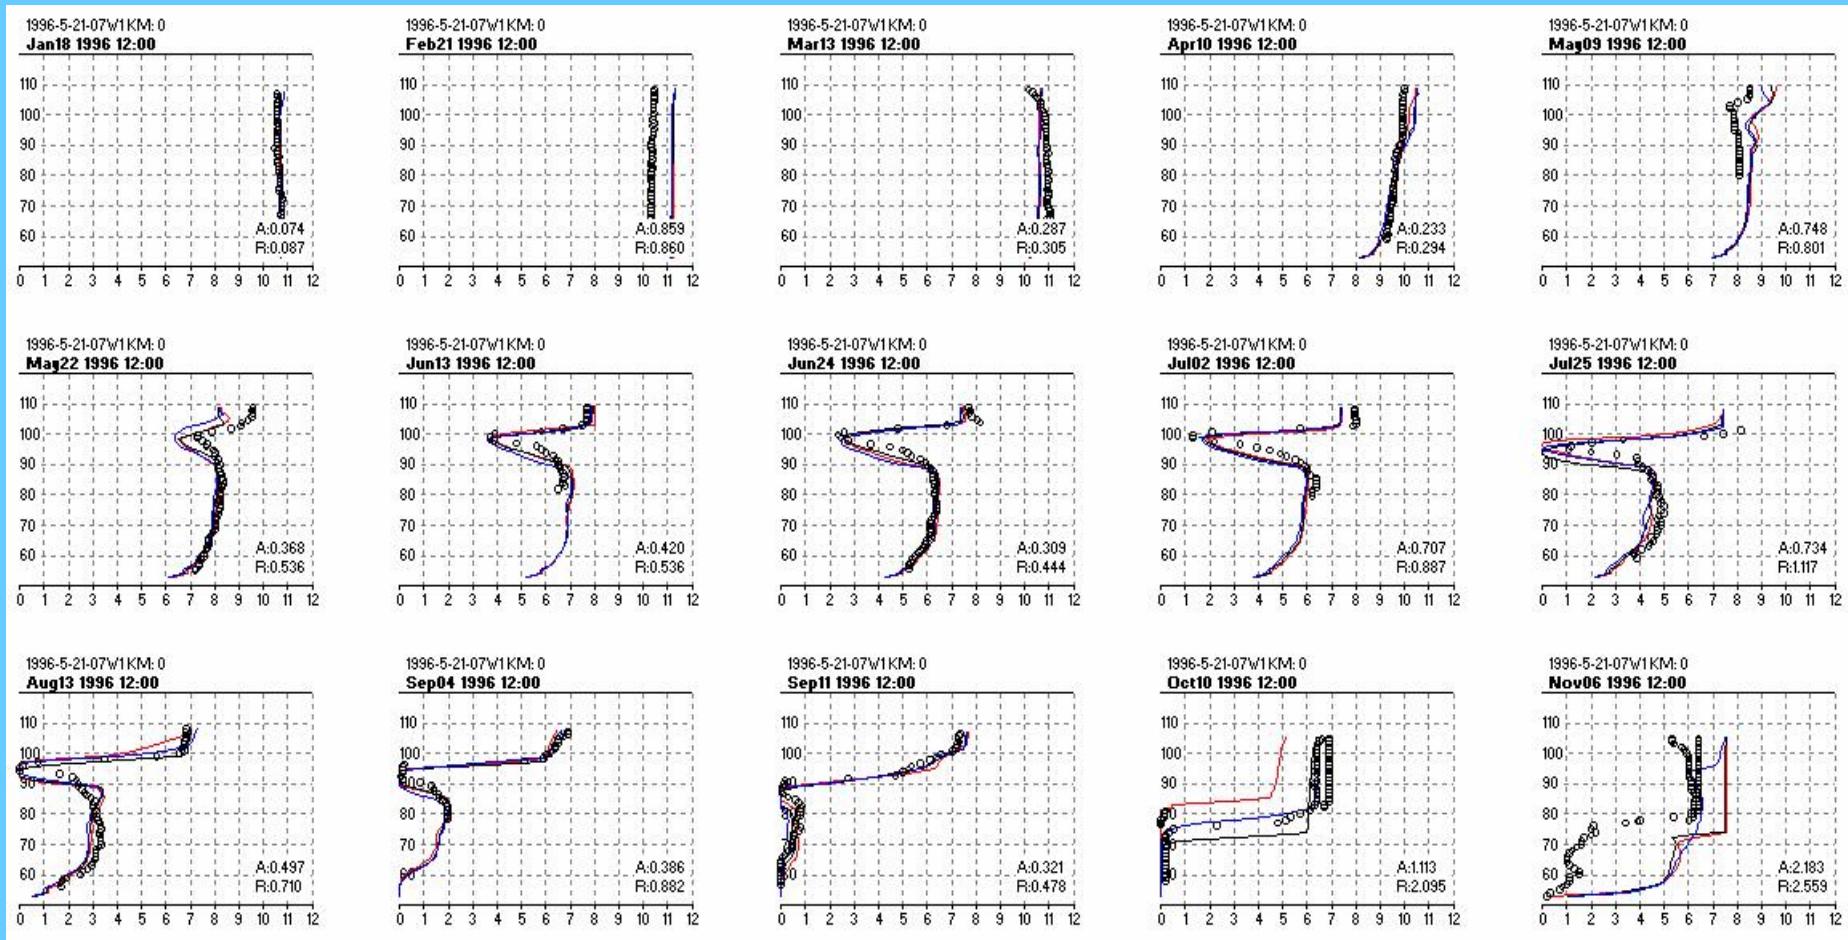

1996 Lake Murray DO Profiles


19 Kilometers Upstream of Dam

Model vs. Data

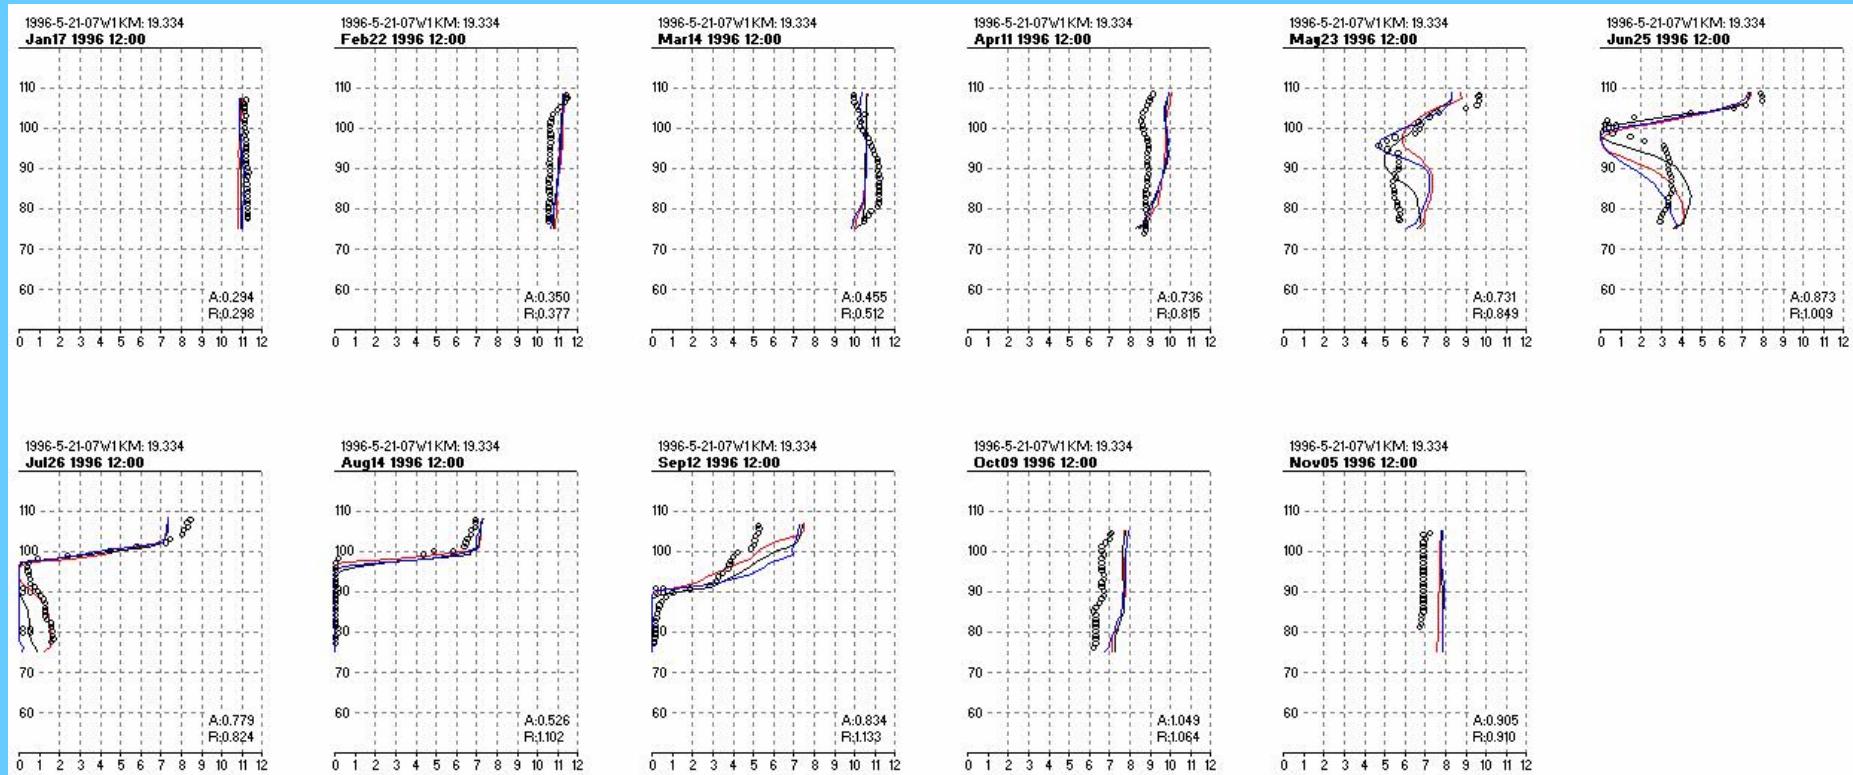


Release Temperature

Model vs. Data

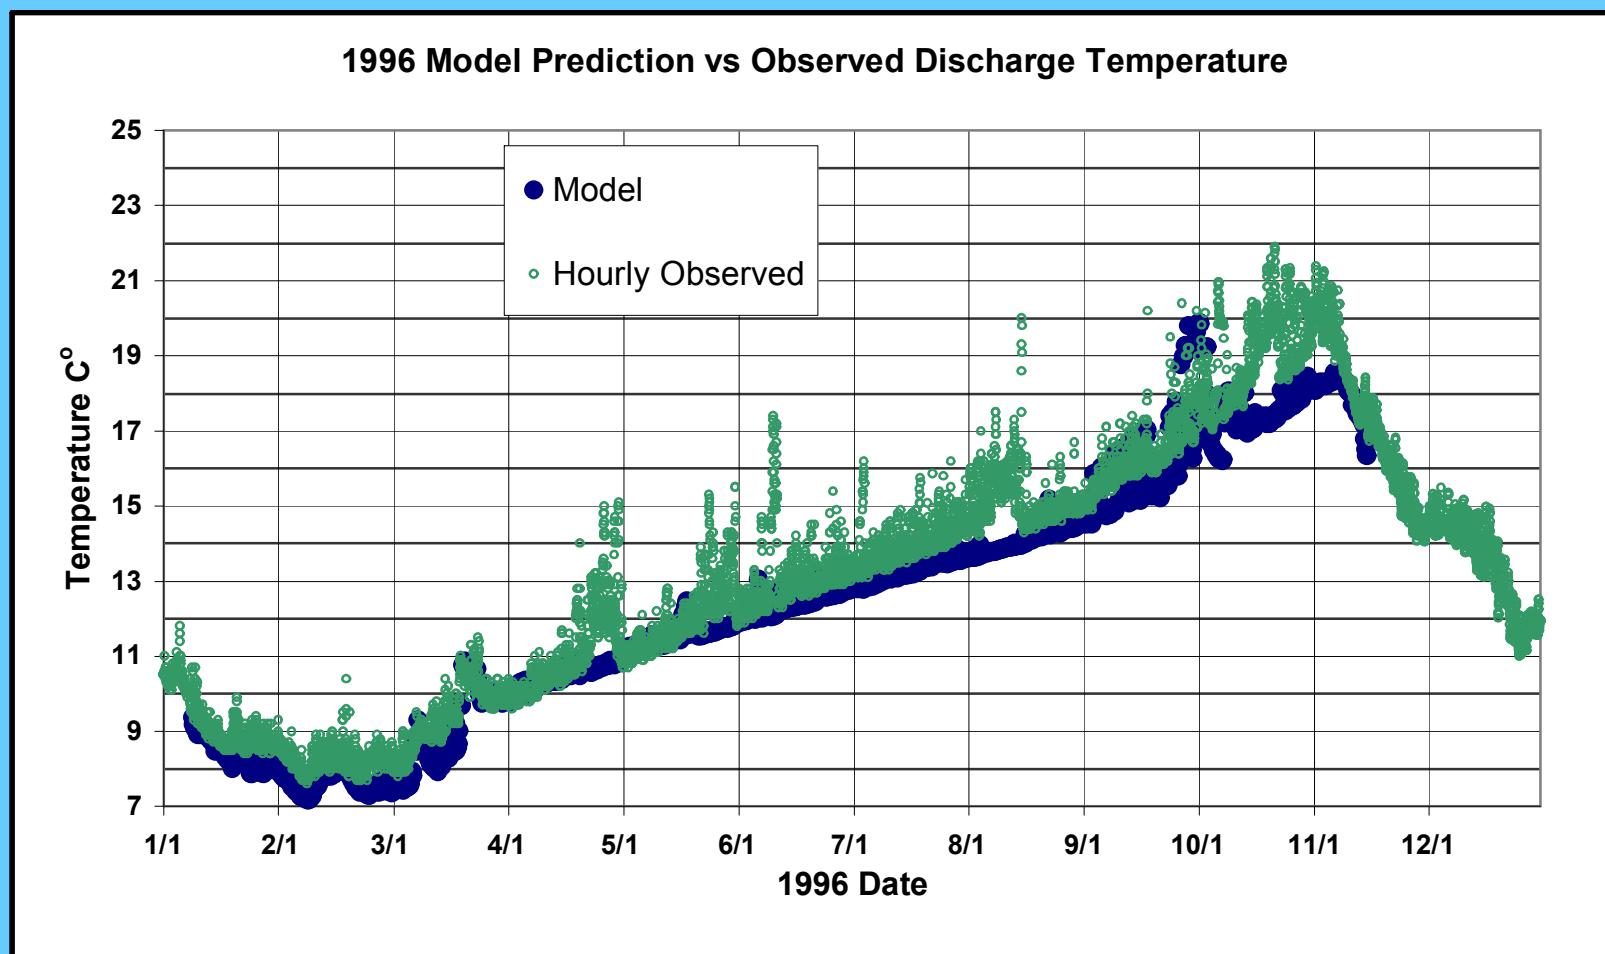


Release DO

Model vs. Data

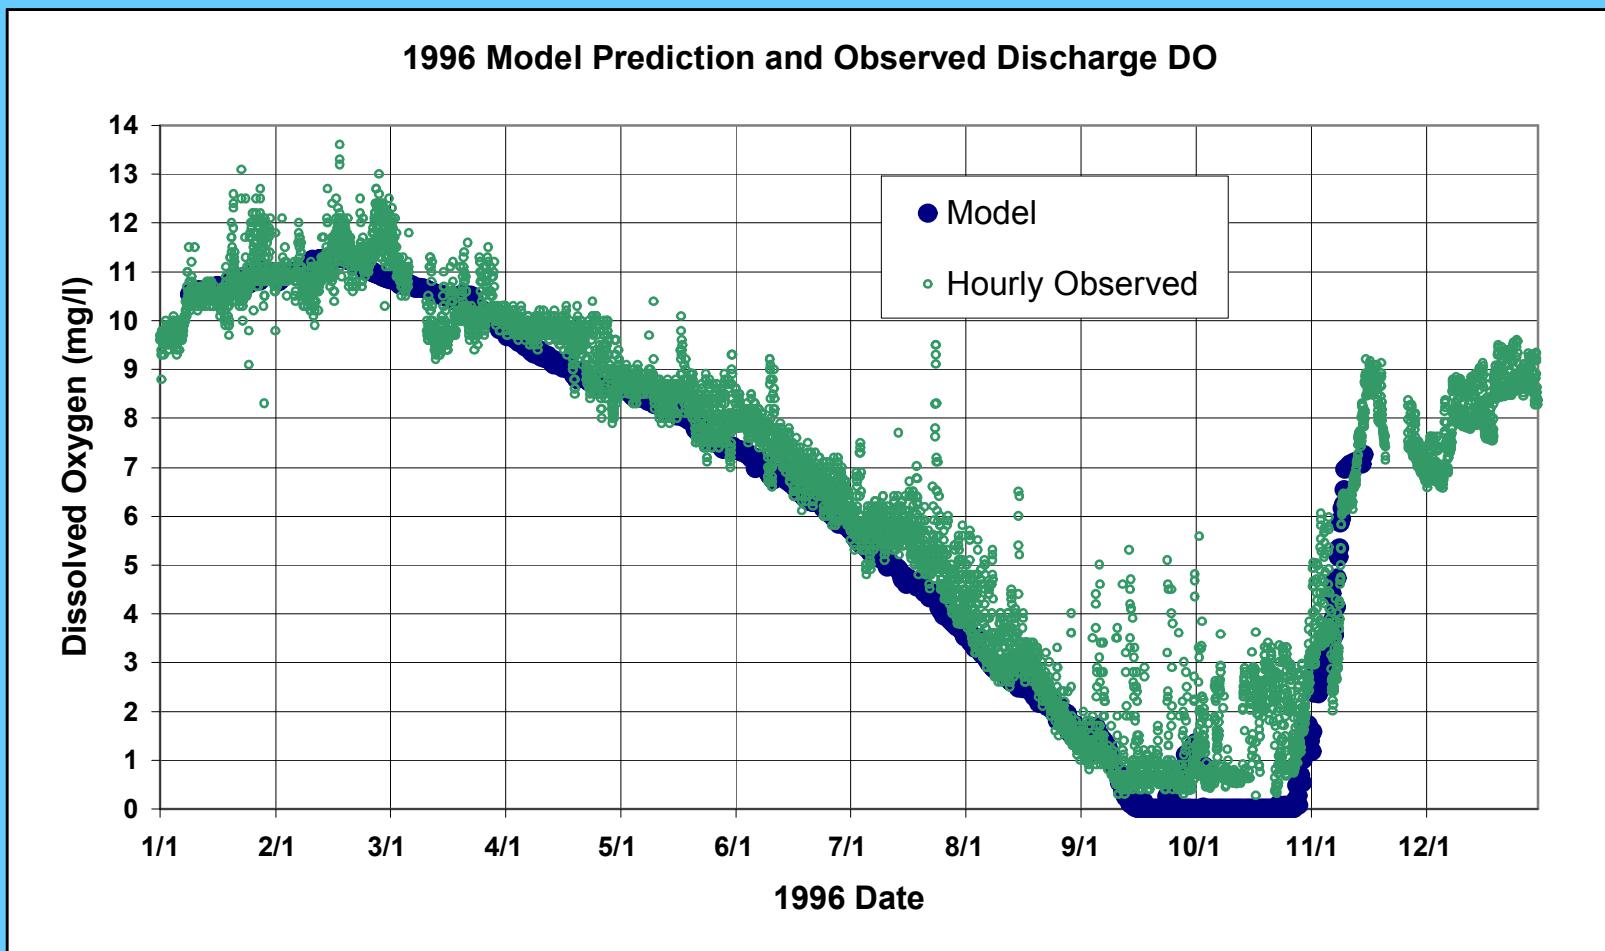


Temperature in Front of Unit 5

Model vs. Data

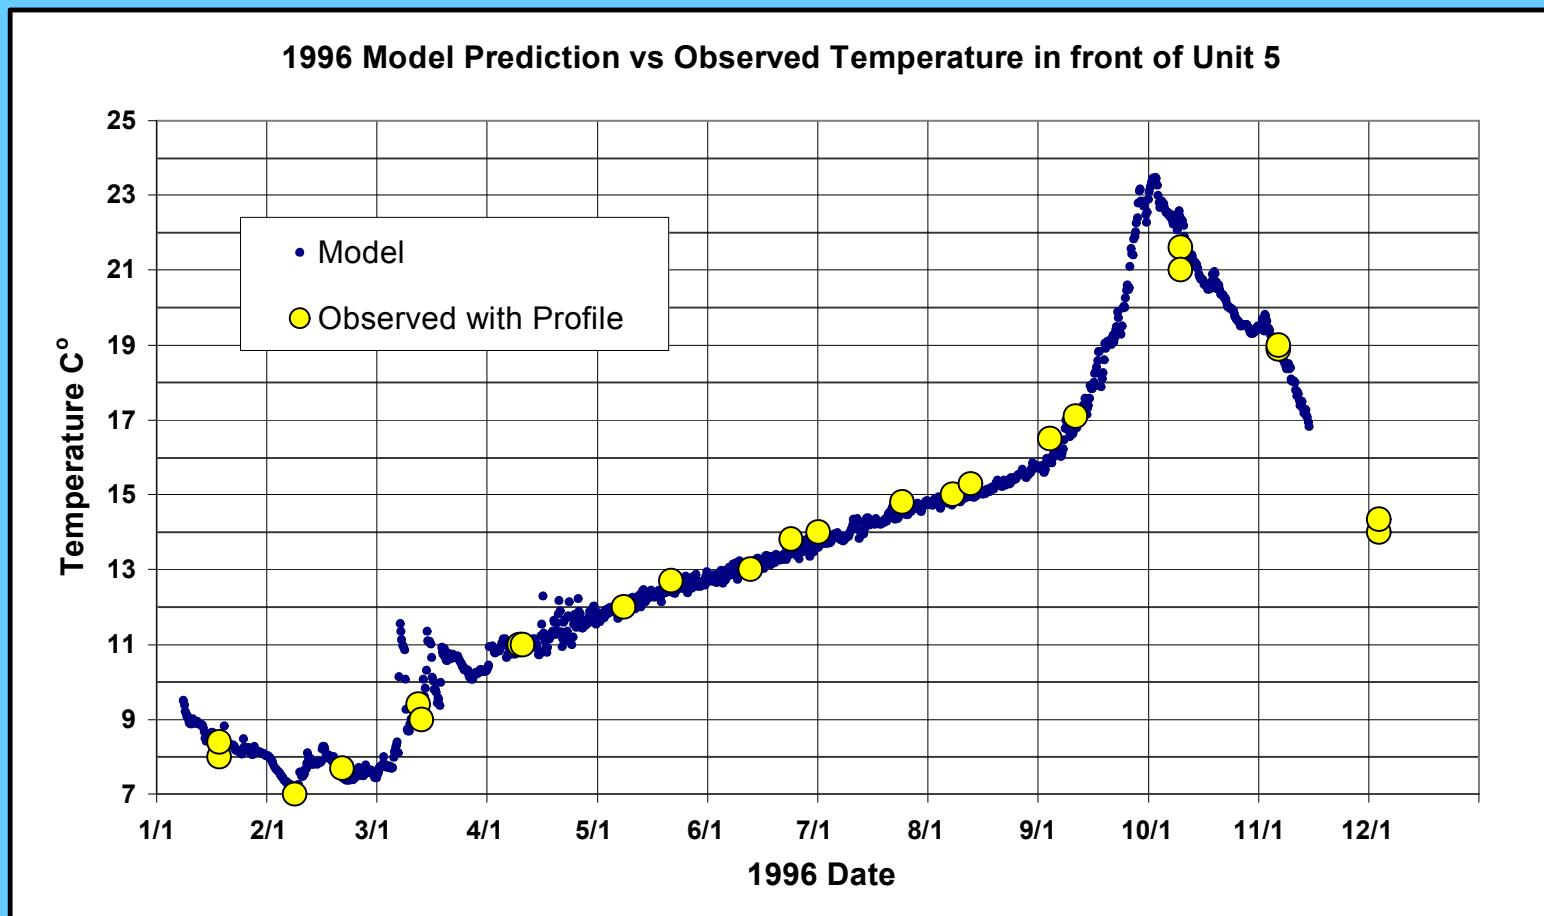


DO in Front of Unit 5





Model vs. Data

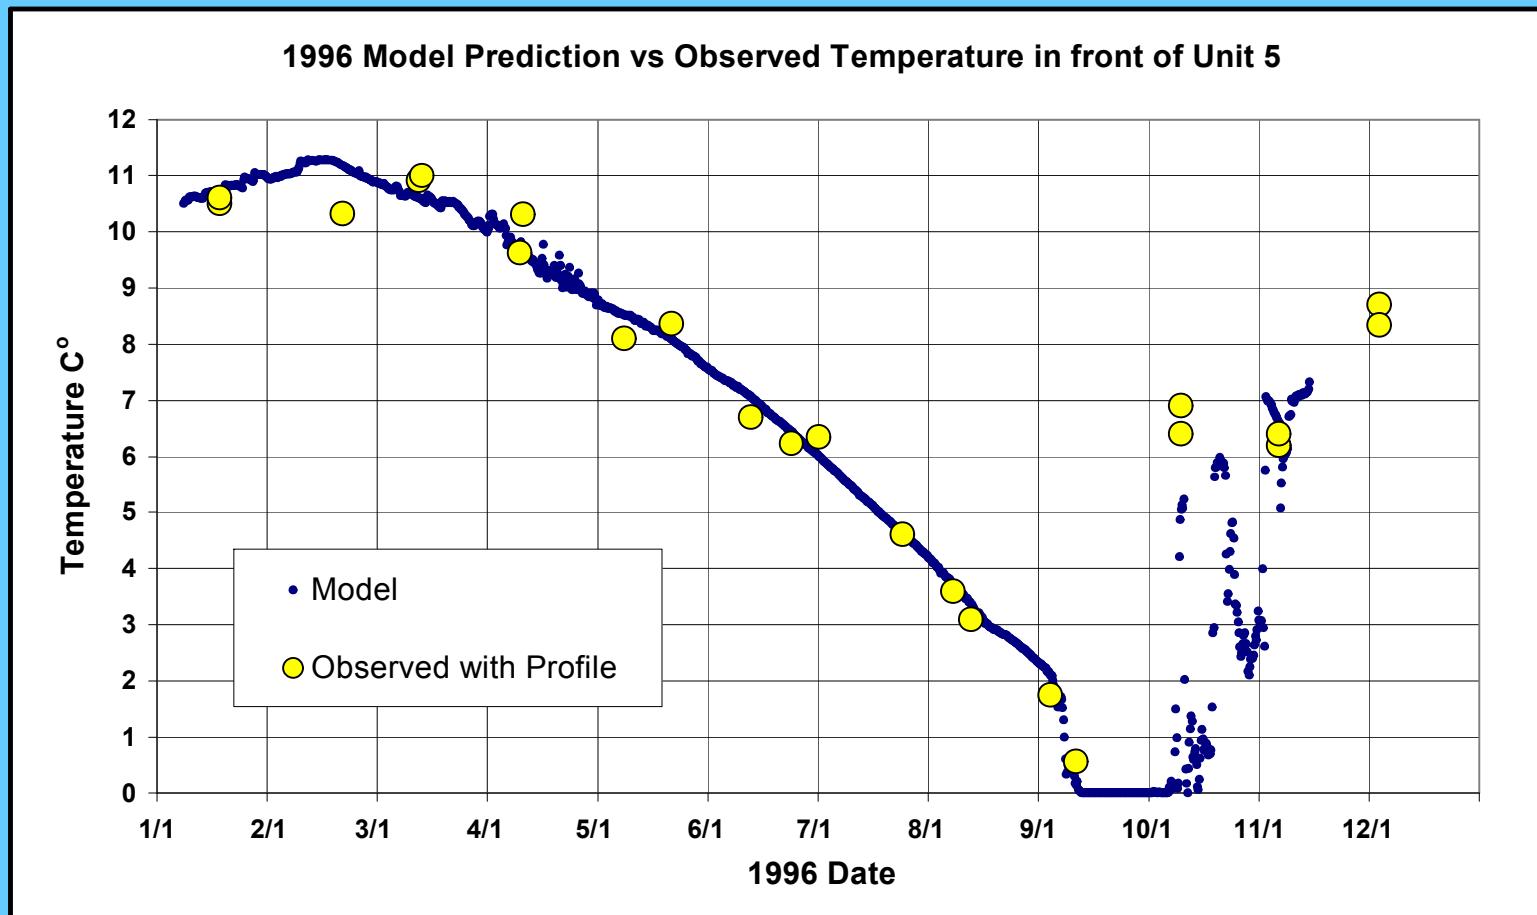

Striped Bass Habitat in Lake Murray

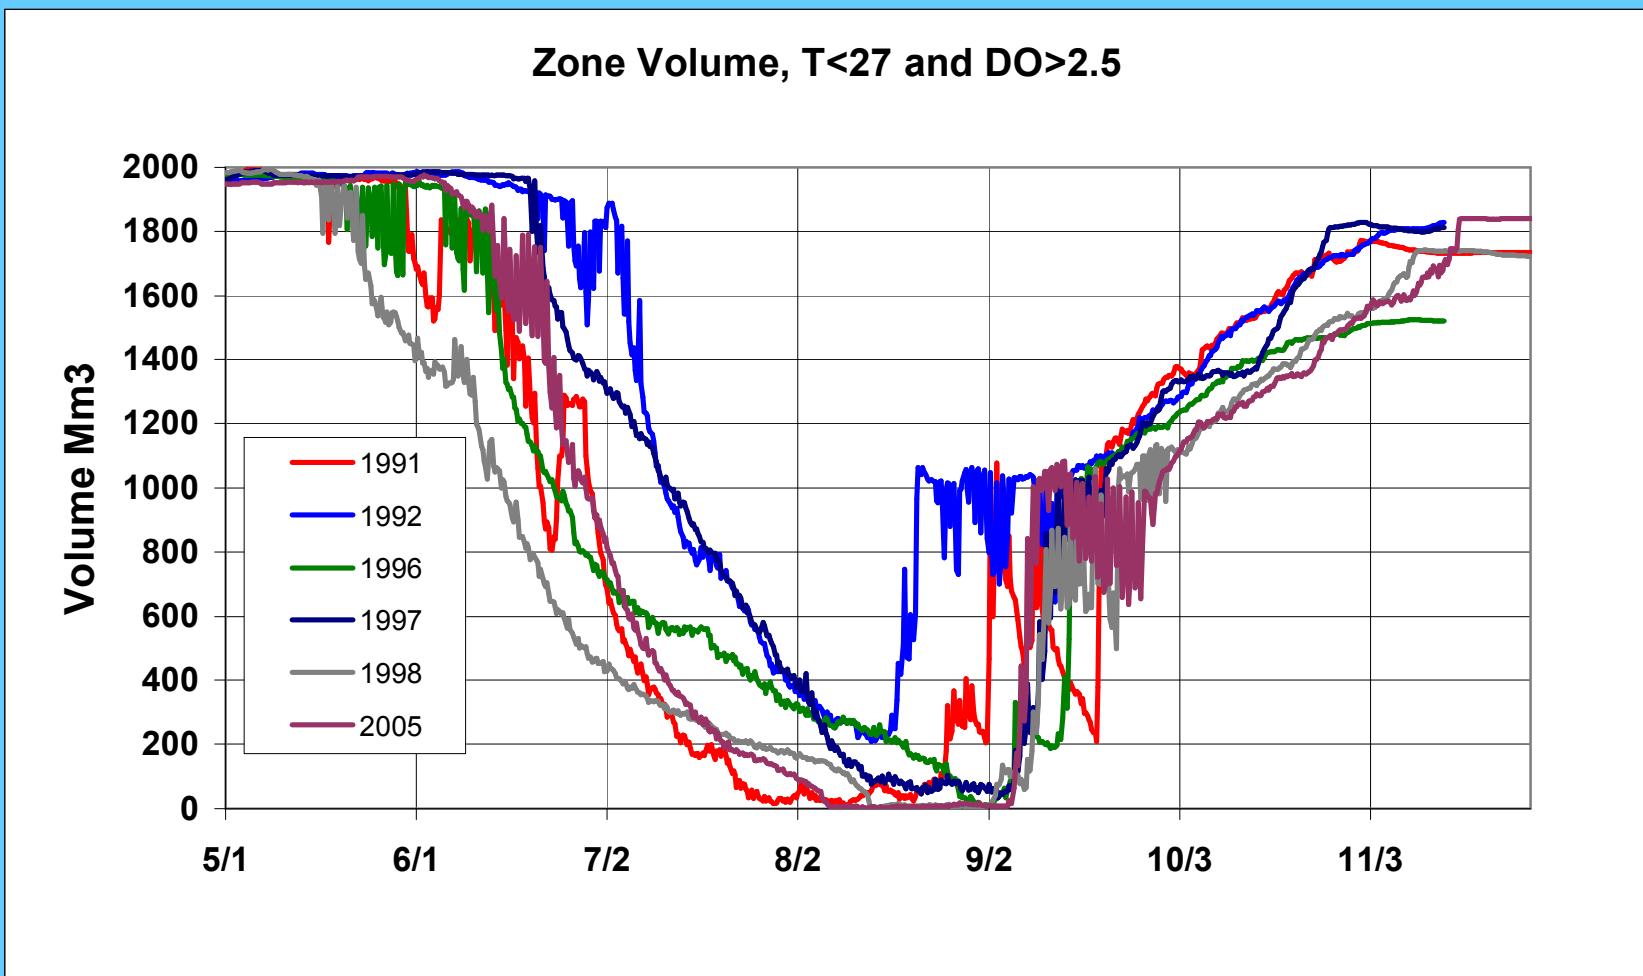

DO Animation with Striped Bass Habitat Highlighted

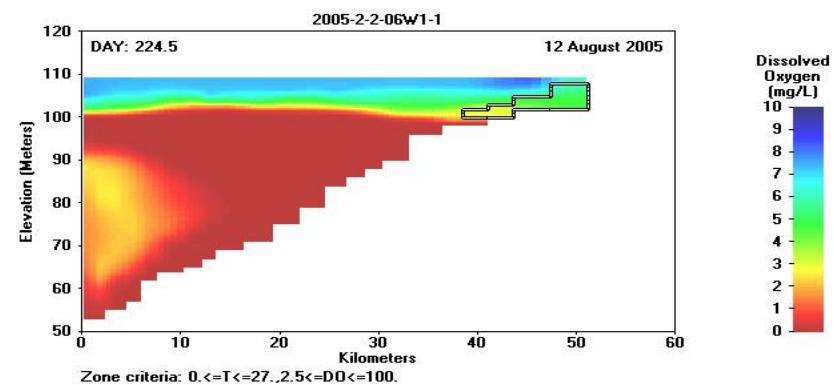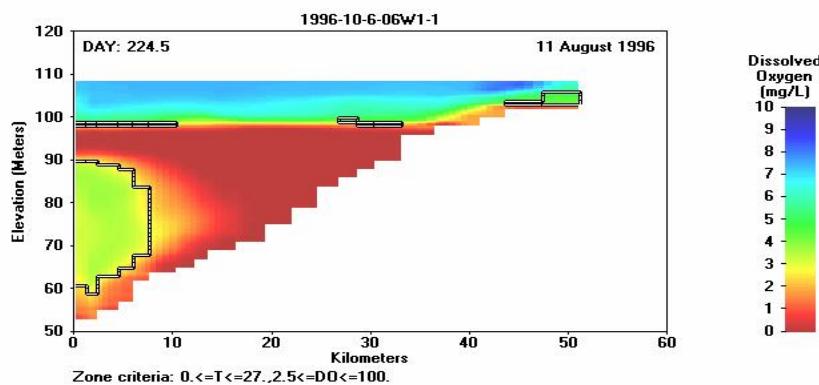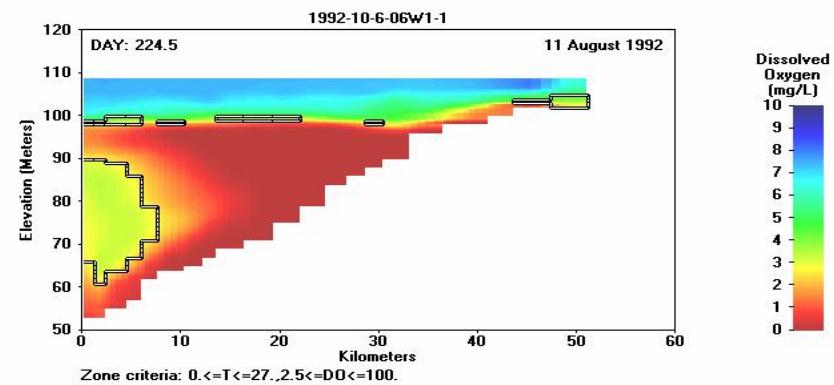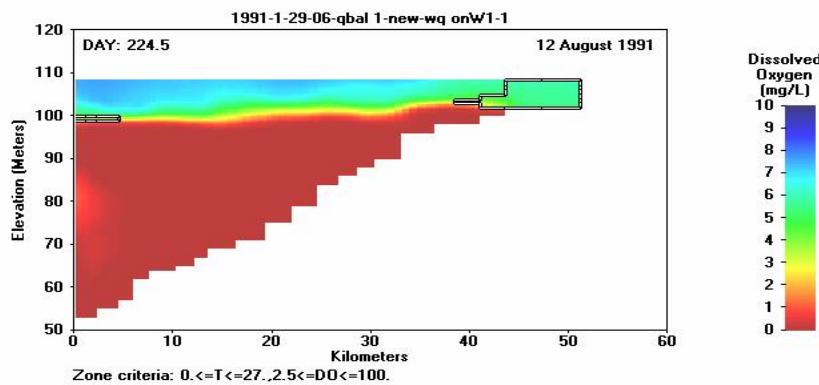

Sensitivity to Operations

- Original outflow assumption for all modeled years:
 - Units 1, 2 and 4 – $Q < 9,600$ cfs
 - Unit 5 – $9,600 < Q < 15,600$ cfs
 - Unit 3 – $Q > 15,600$ cfs
- When Unit 5 is operated first ($Q < 6,000$ cfs), cooler bottom water is conserved and availability of striped bass habitat improves

Evaluation of Raised Pool Levels

Scenarios Considered:

- 354(Jan1) to 358(May1⇒Sept1) to 354(Dec 31)
- 350(Jan1) to 358(May1⇒Sept1) to 350(Dec 31)





Assumptions:

- Assumed 500 cfs for minimum release
- Assumed reserve generation averaged 3hr every two weeks at 18,000 cfs
- Balance of releases were assumed to be used to supplement system demand

Approach:

- The above scenarios were developed by KA using daily average flows using HEC-ResSim
- CE-QUAL-W2 was run using daily average flows and release flows were adjusted so that target pool levels were attained
- Using the daily average flows that were adjusted using the CE-QUAL-W2 model the hourly flows for each day were developed using the assumptions above


Comparison of Original Flow Assumption and Alternative Unit 5 Operation Scenarios

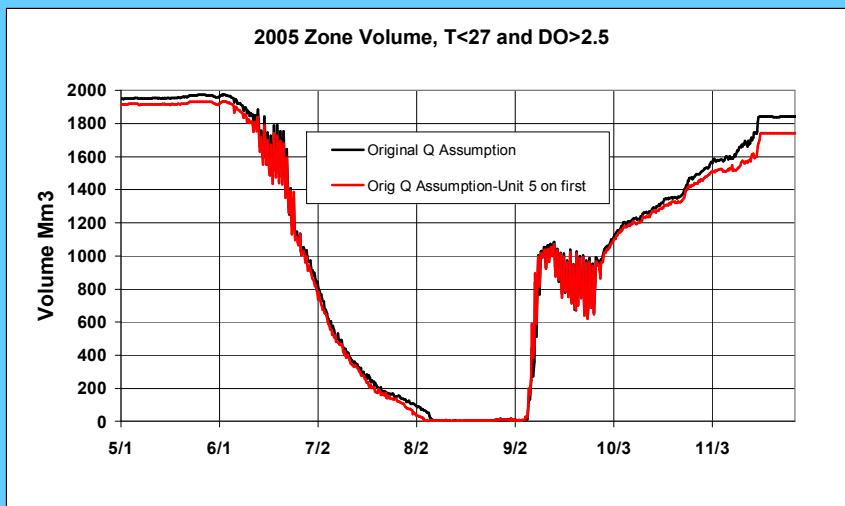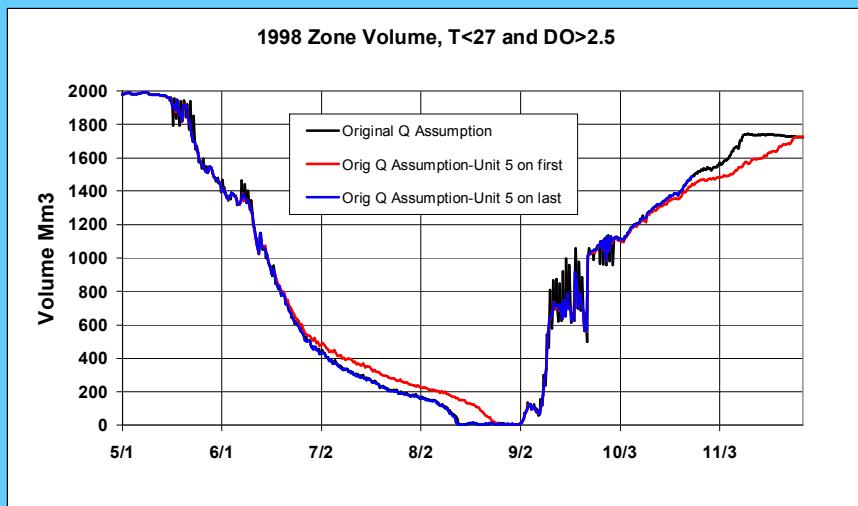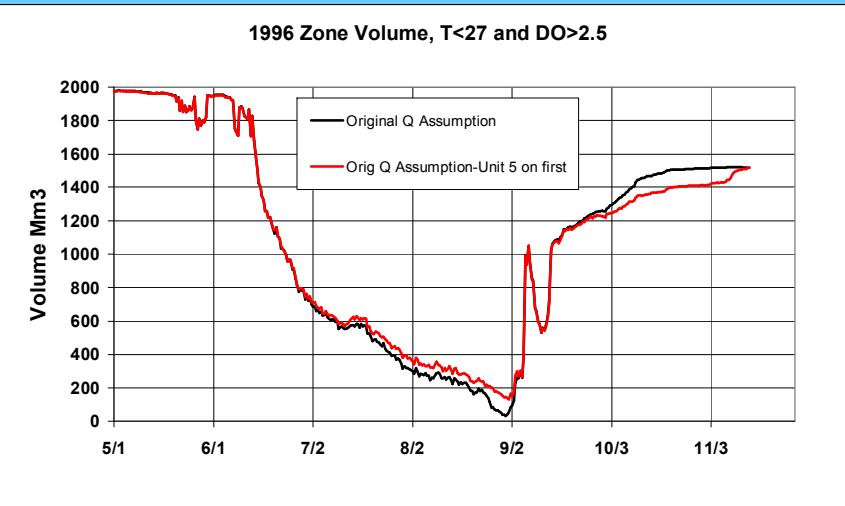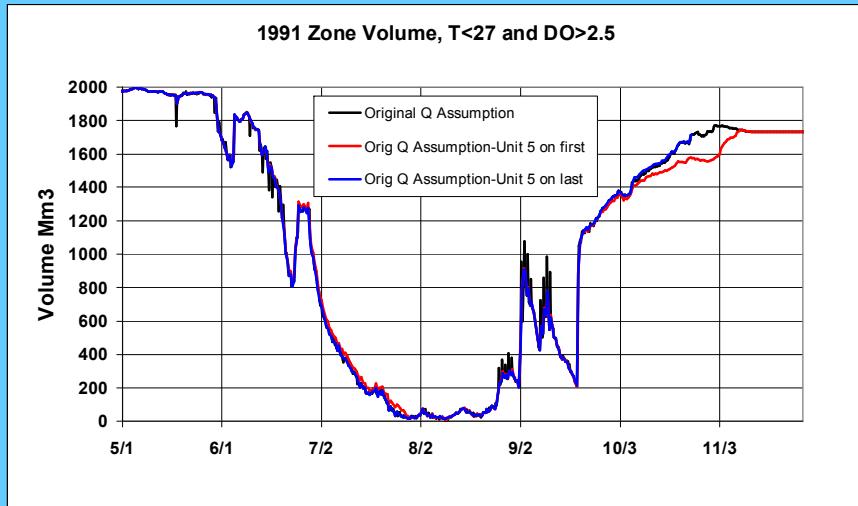


1998 Animation

Comparison of Original Flow Assumption and Unit 5 on First Scenario


Tailrace Temperature - Comparison of Original Flow Assumption and Unit 5 on First Scenario

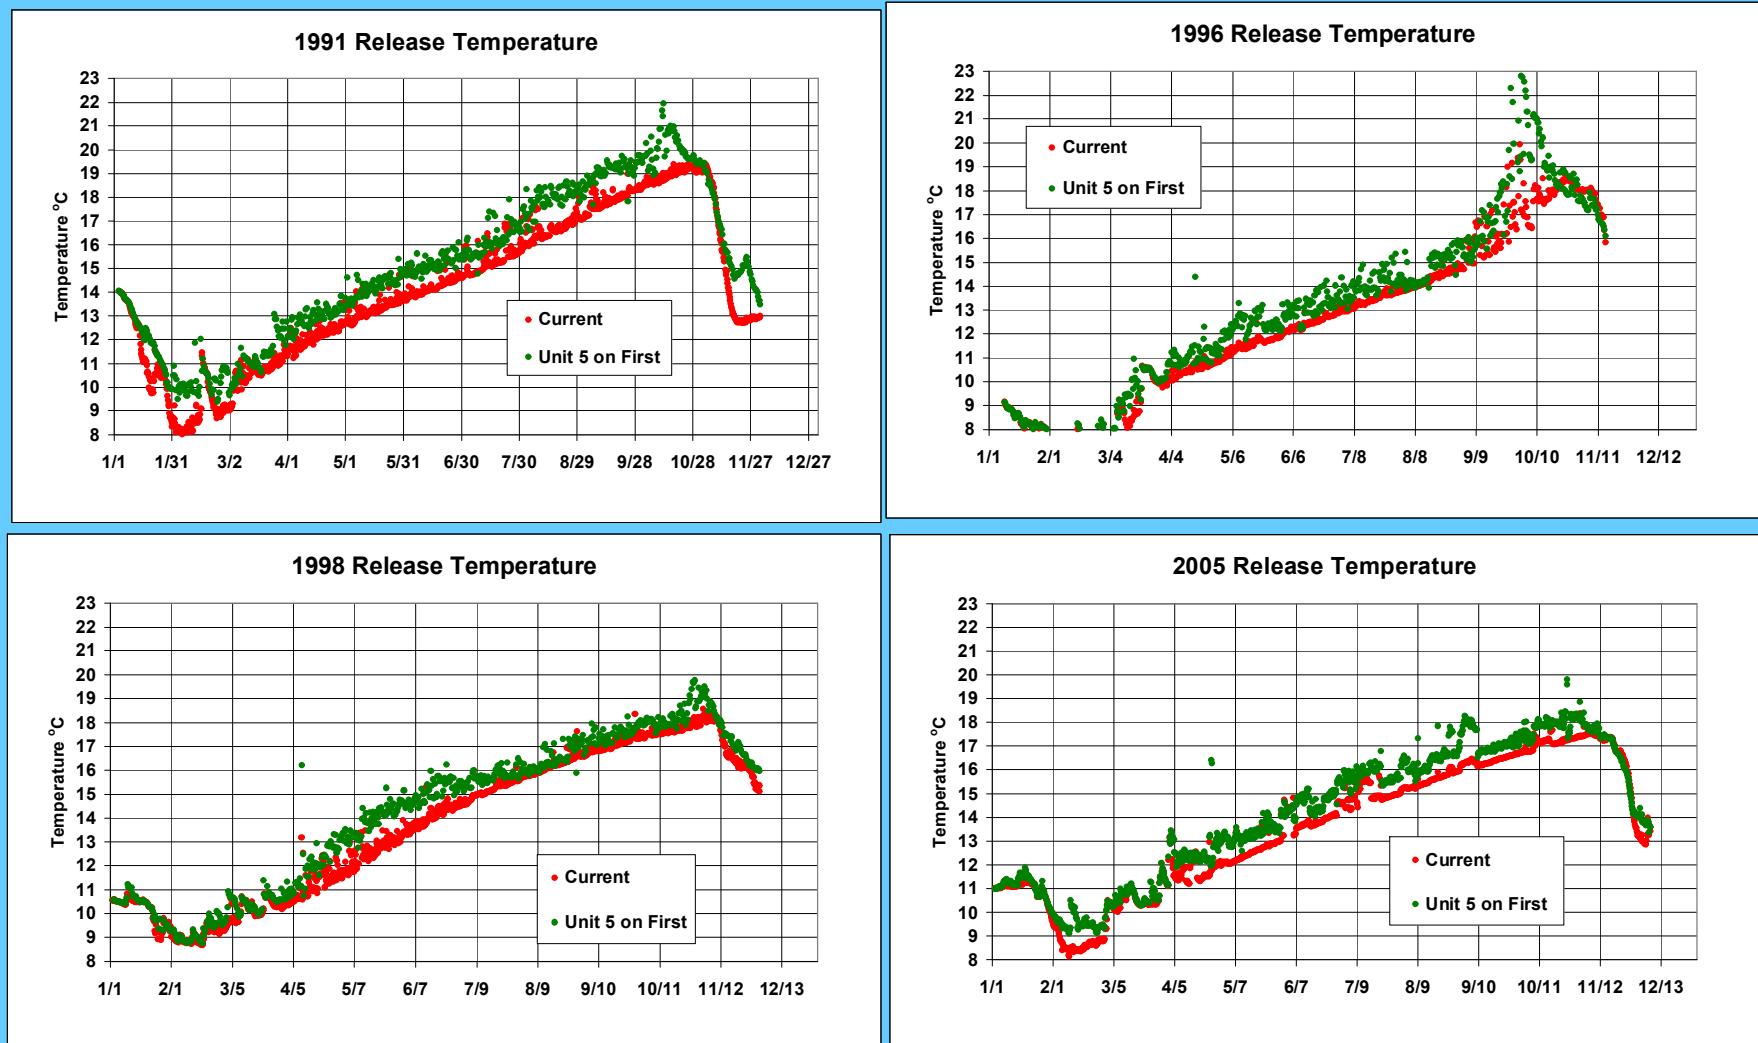

Tailrace DO - Comparison of Original Flow Assumption and Unit 5 on First Scenario

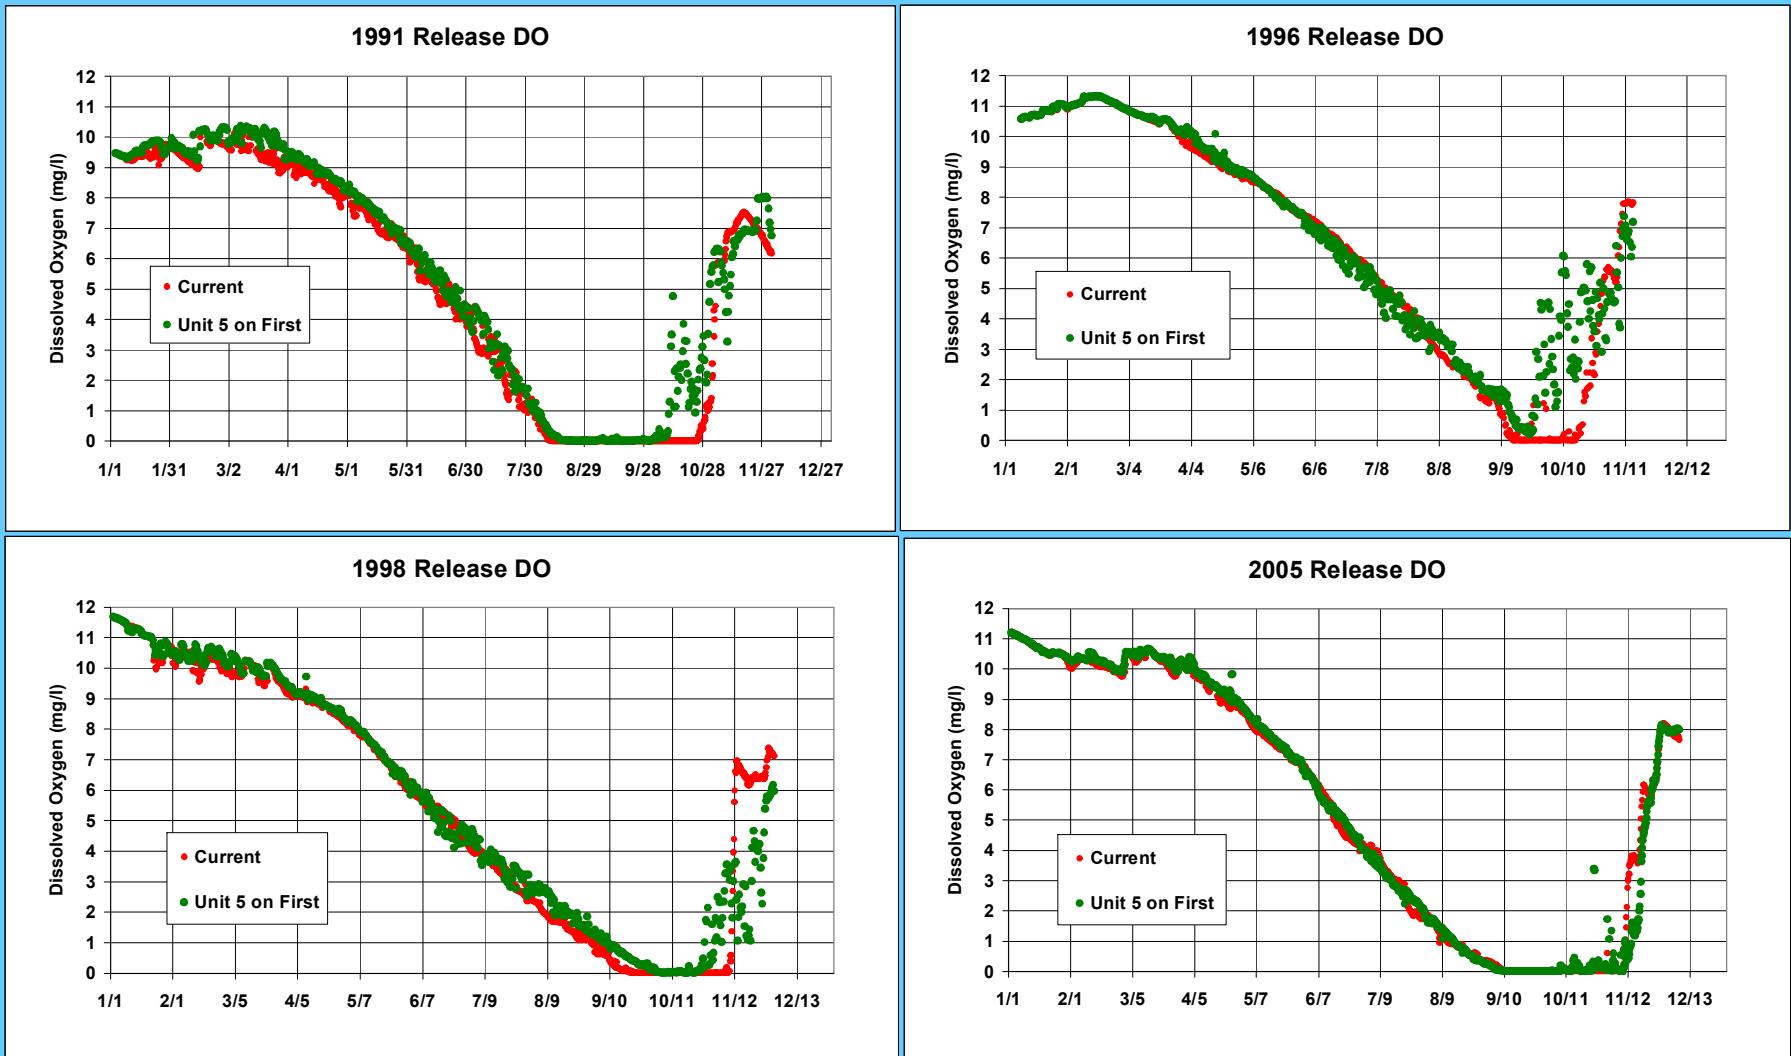


Forebay Temperature Profiles – Comparison of Original Flow Assumption and Unit 5 on First Scenario

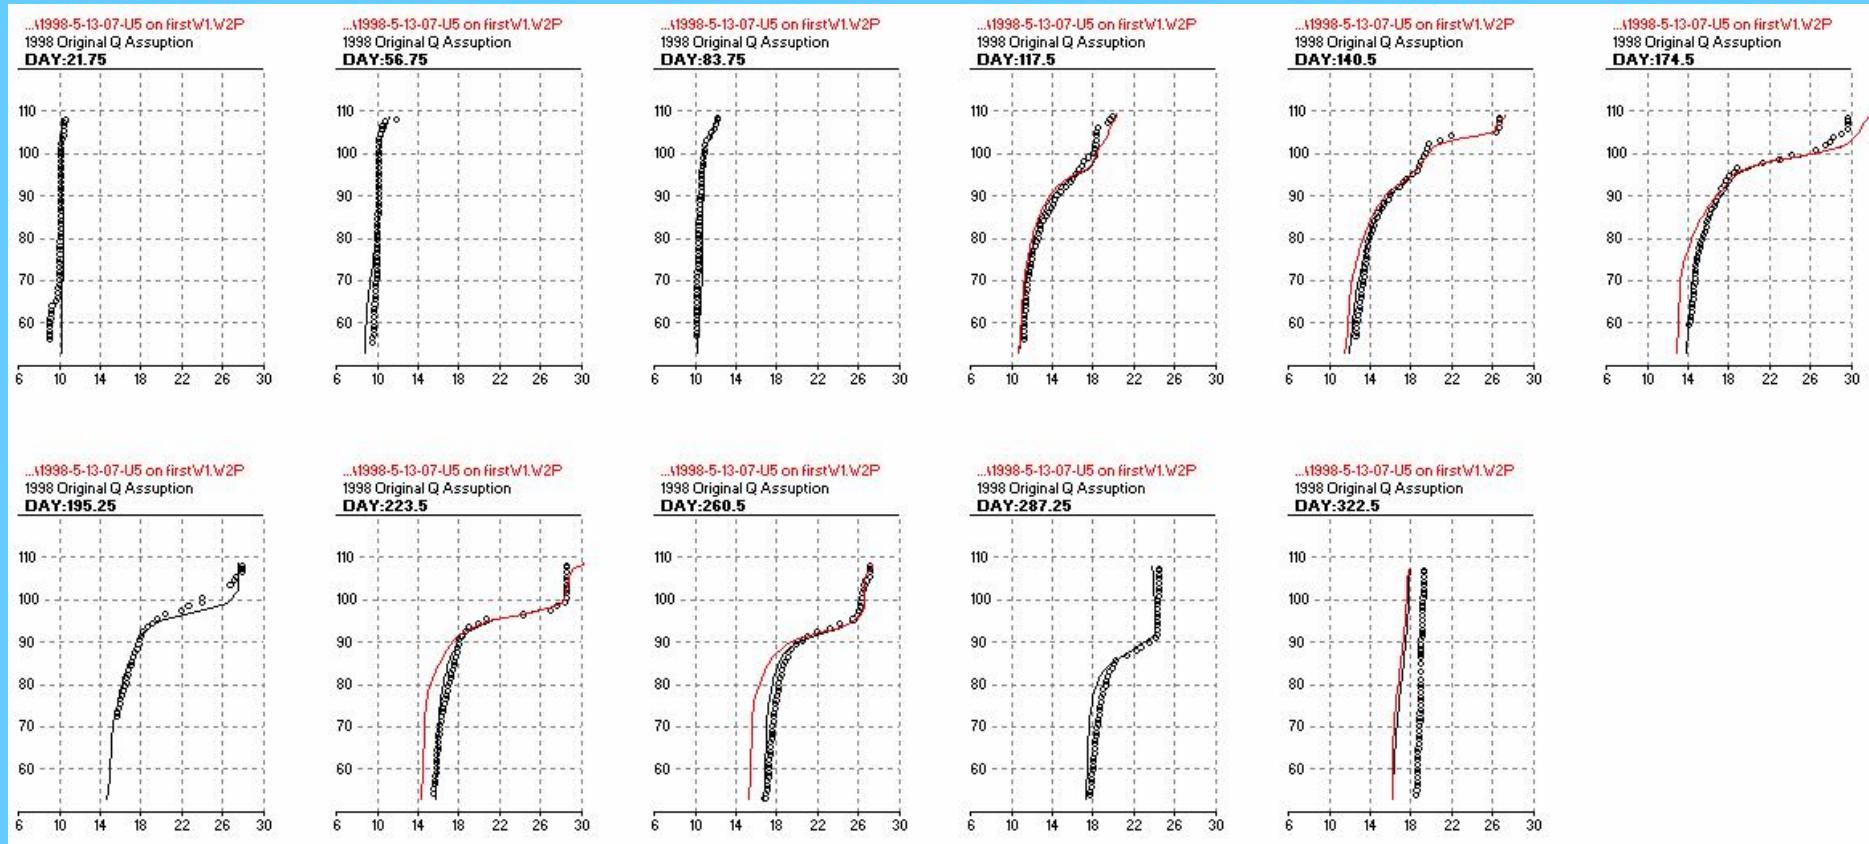


Temperature at the Intake to Unit 5

Comparison of Original Flow Assumption and Unit 5 on First Scenario


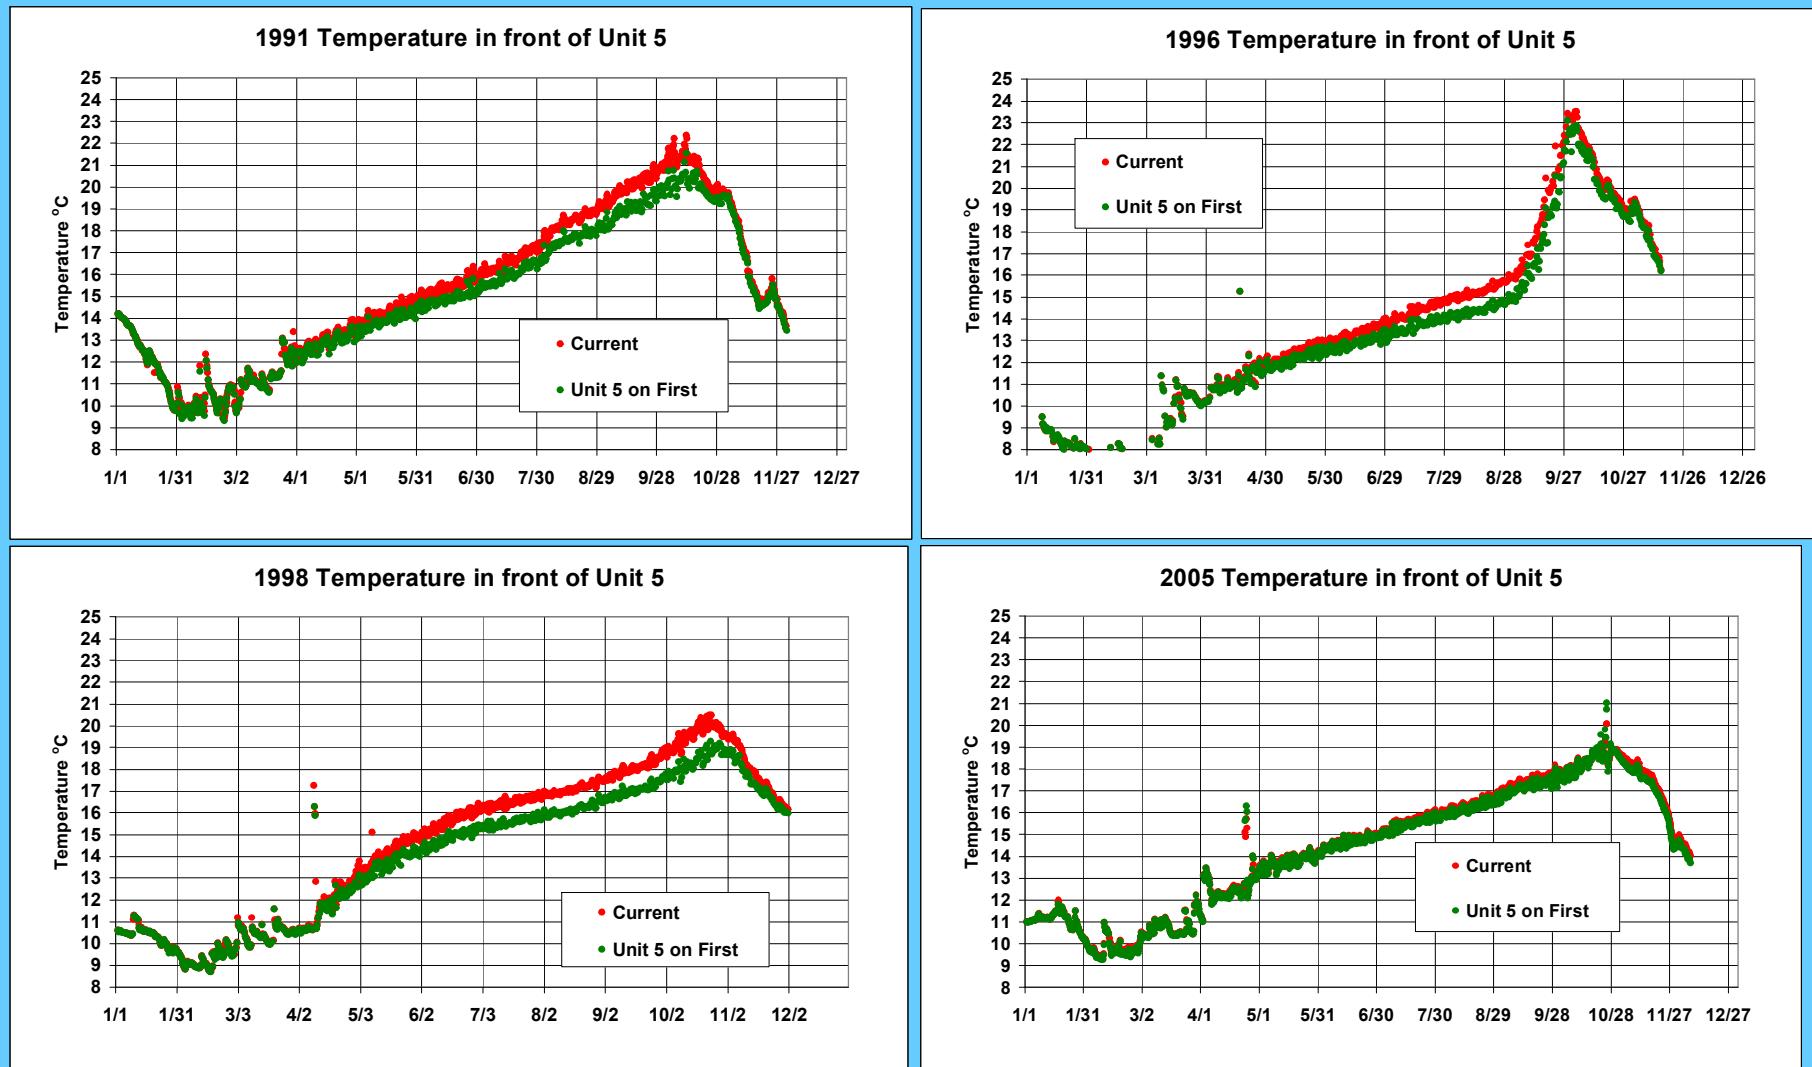


DO at the Intake to Unit 5



Comparison of Original Flow Assumption and Unit 5 on First Scenario

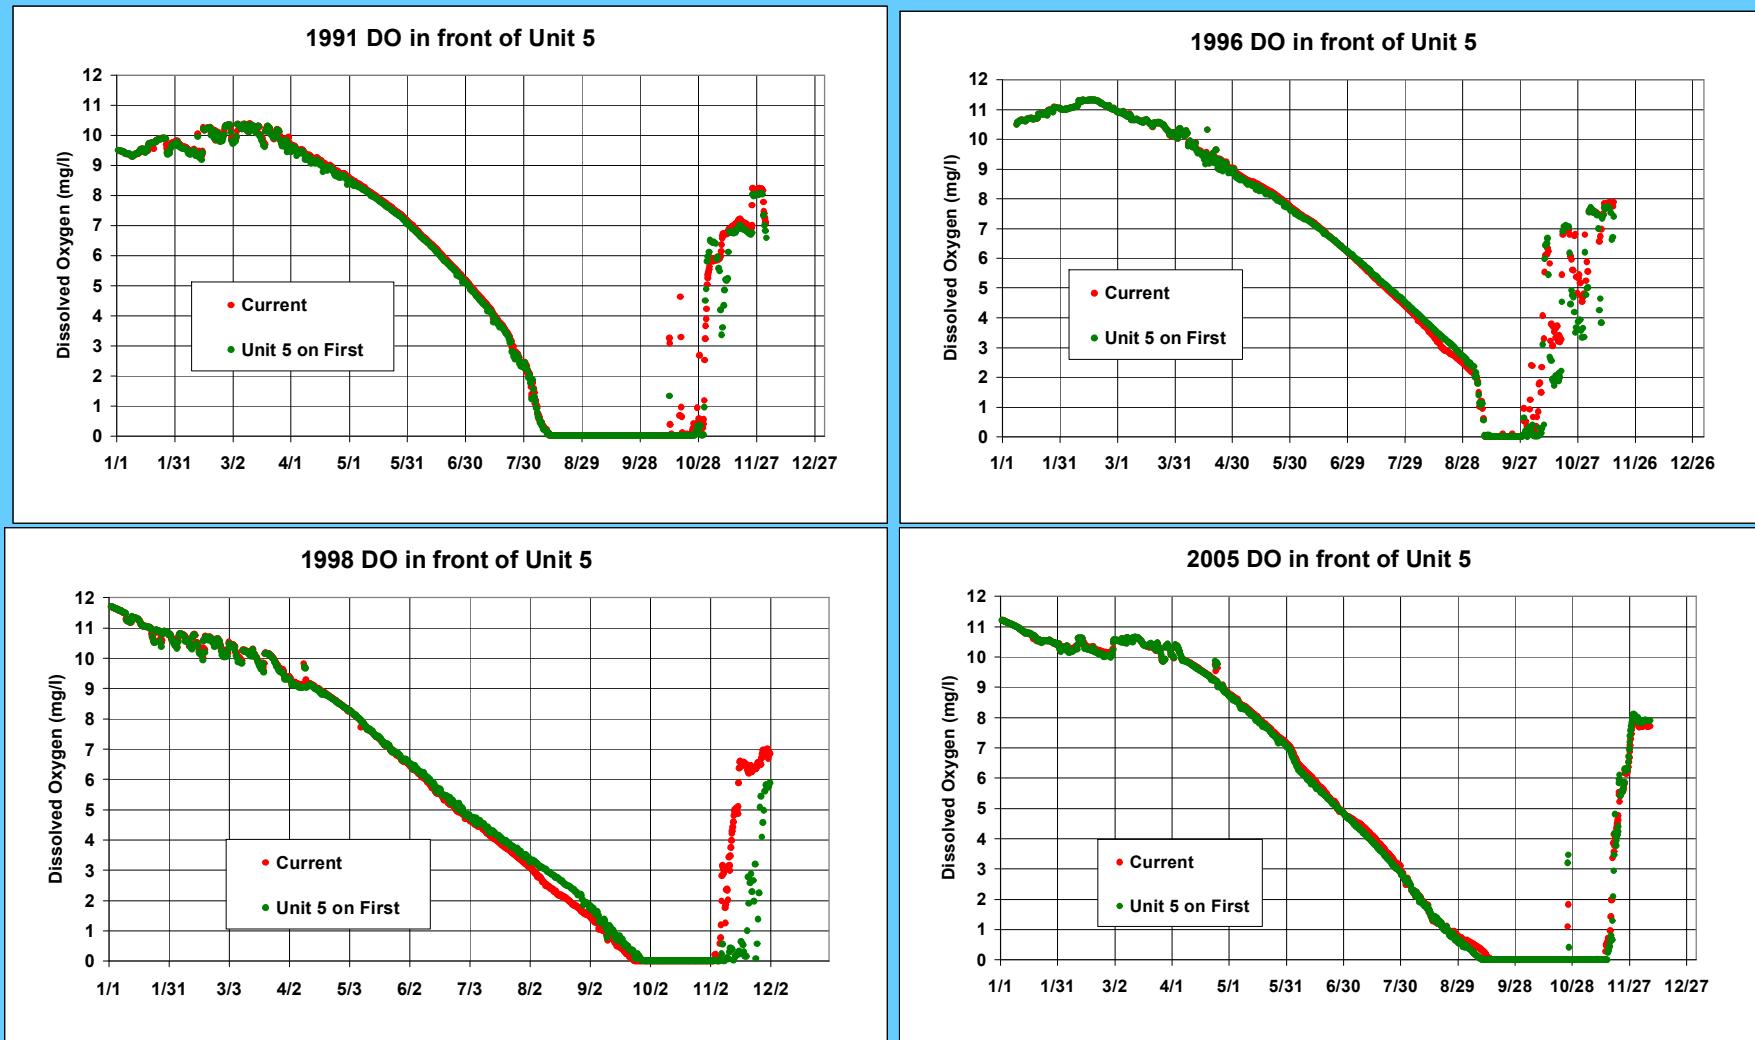



1991 Pool Level Management

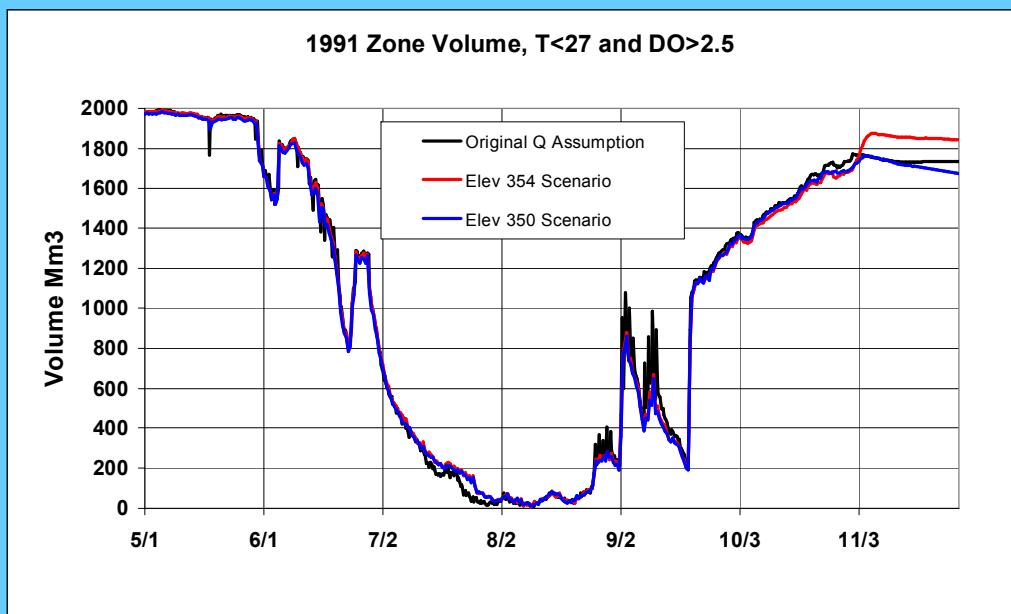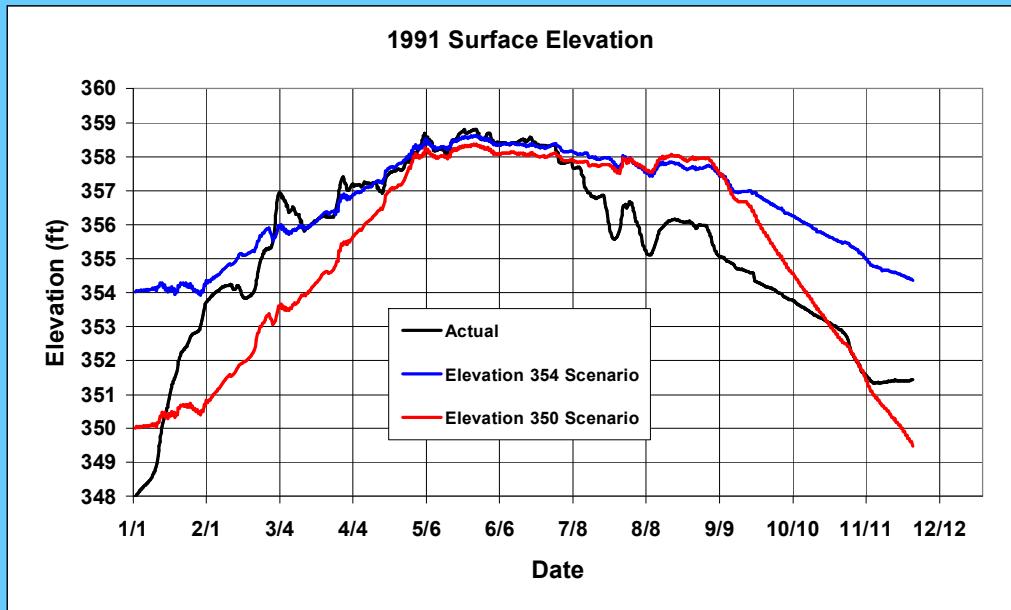



1996 Pool Level Management

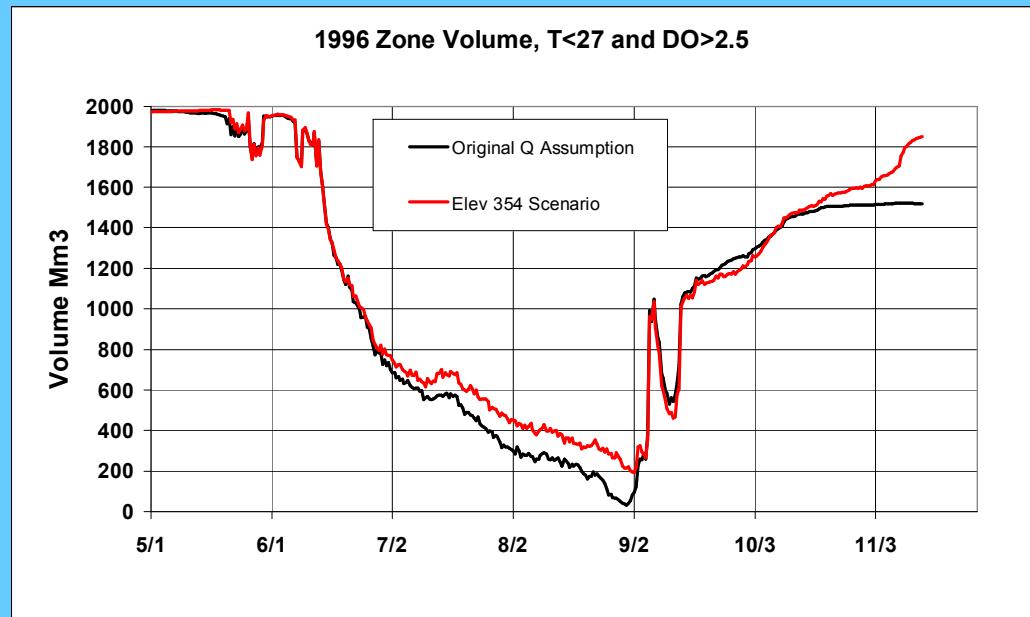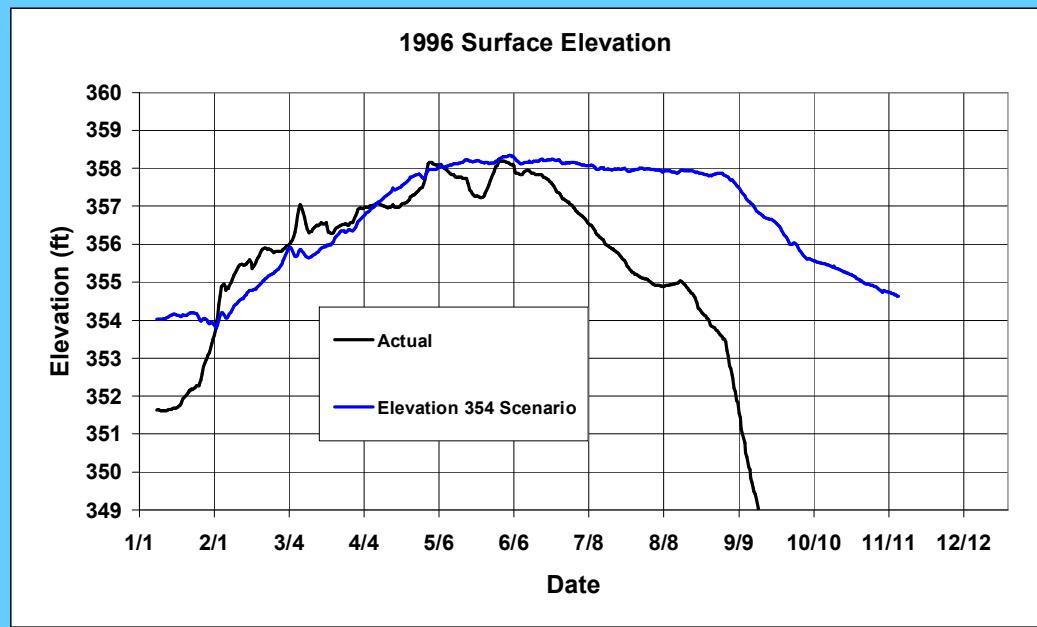

1998 Pool Level Management



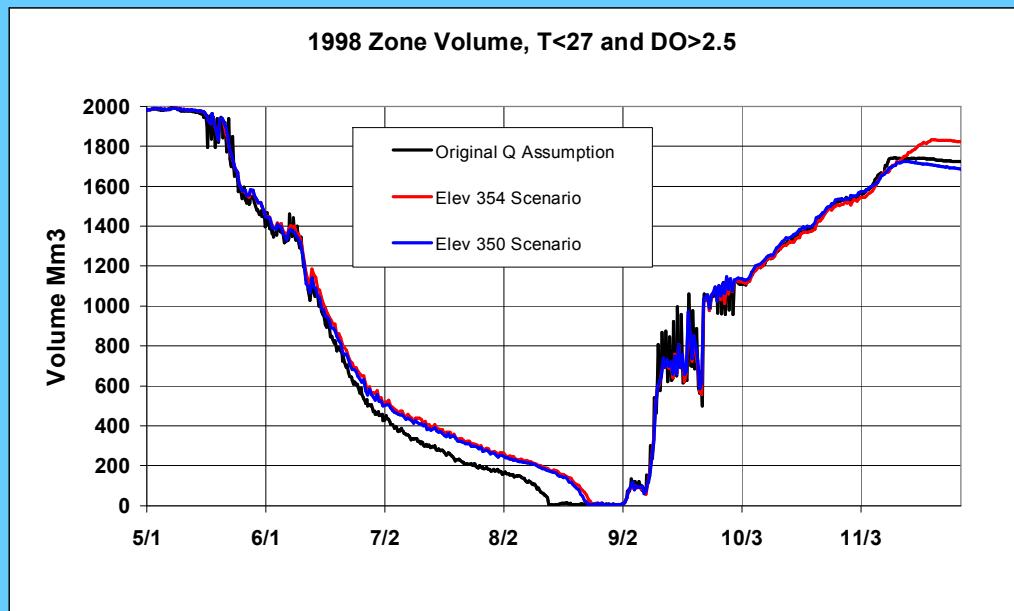
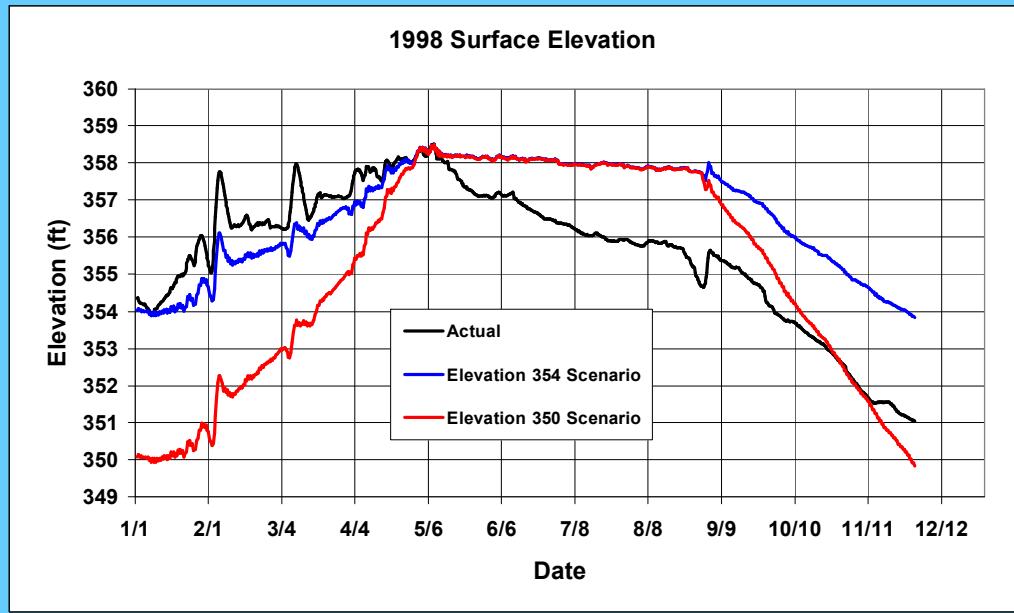


2005 Pool Level Management

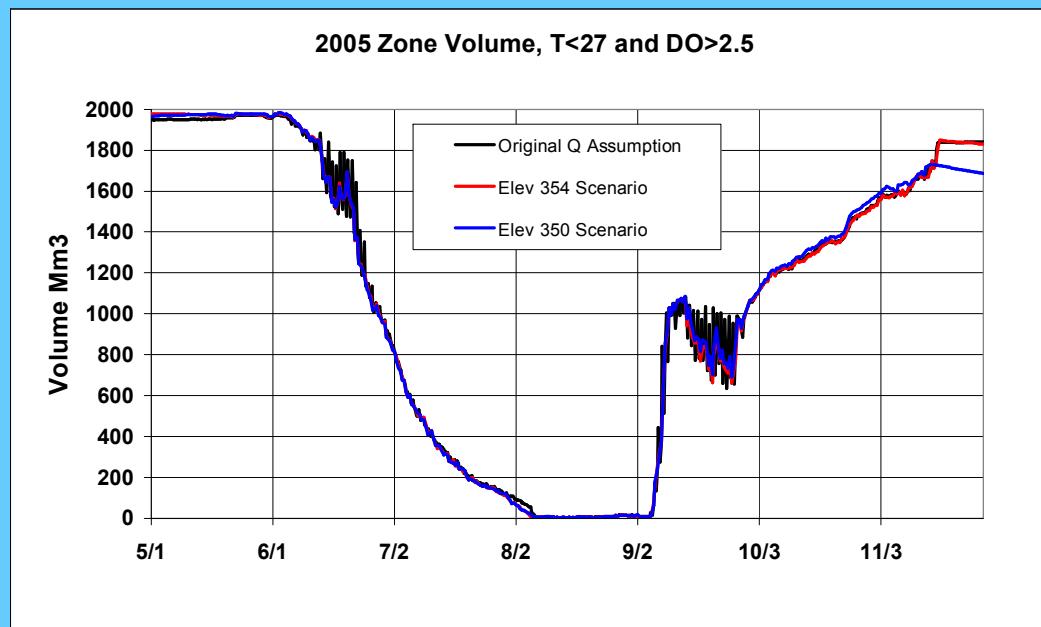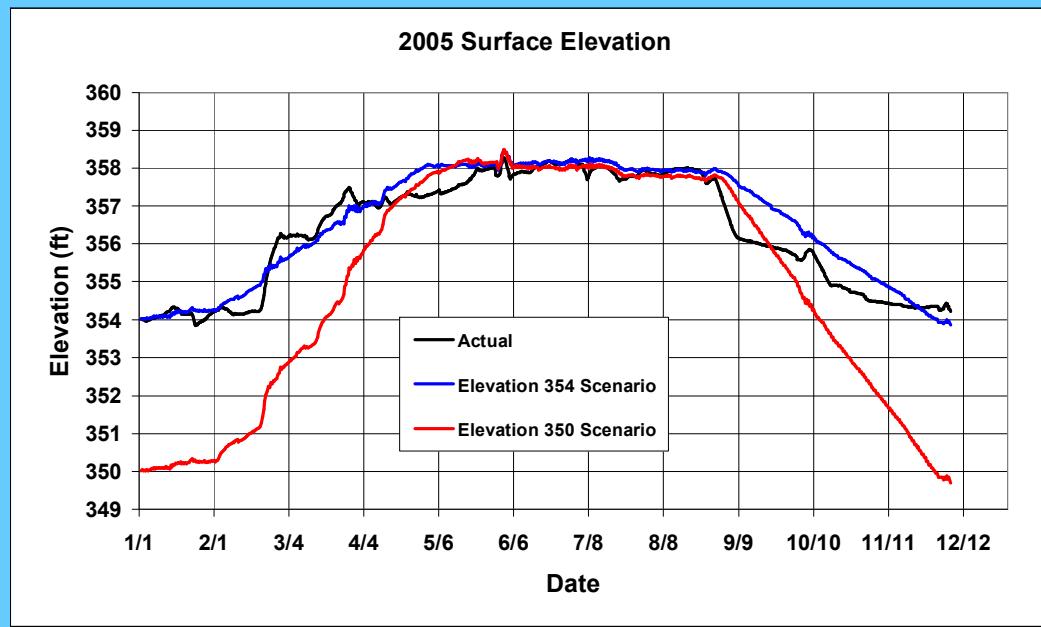


Excel Plots

Temperature and DO at the Intake to Unit 5 with Pool Level Management

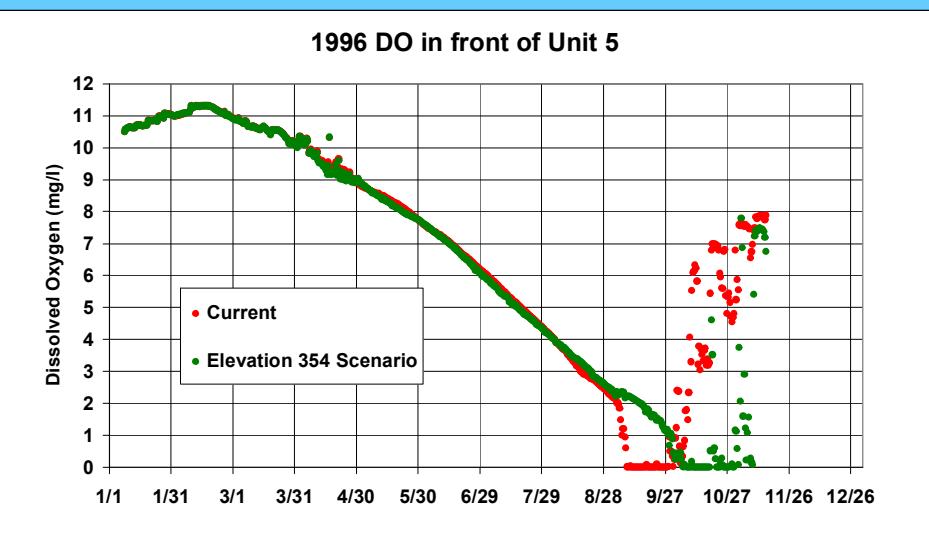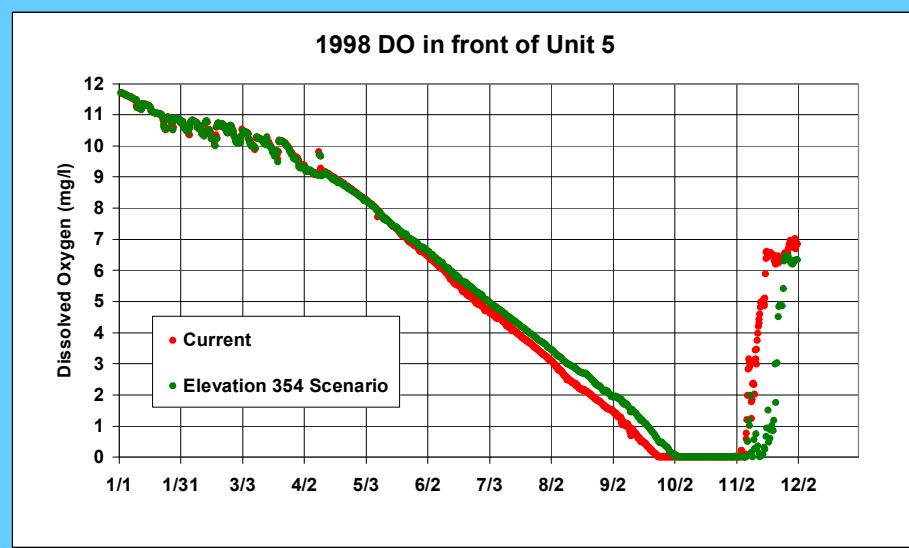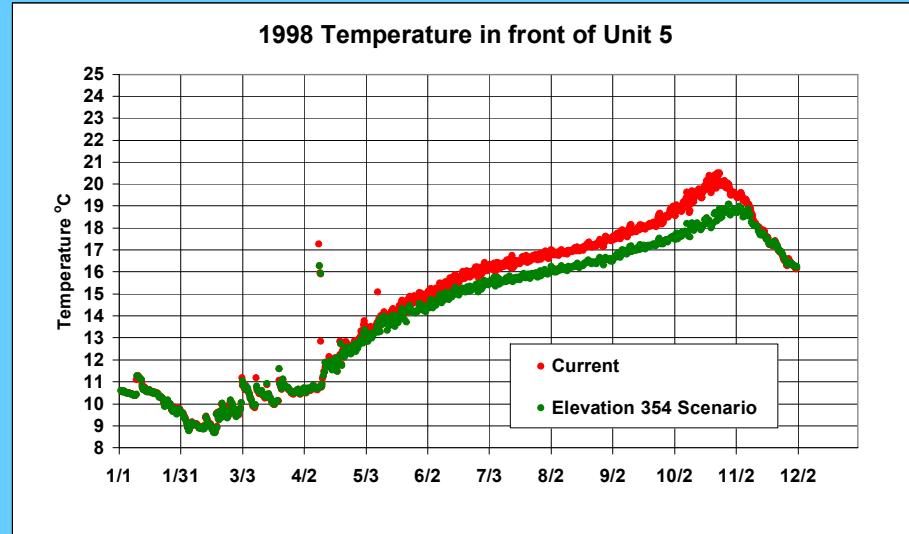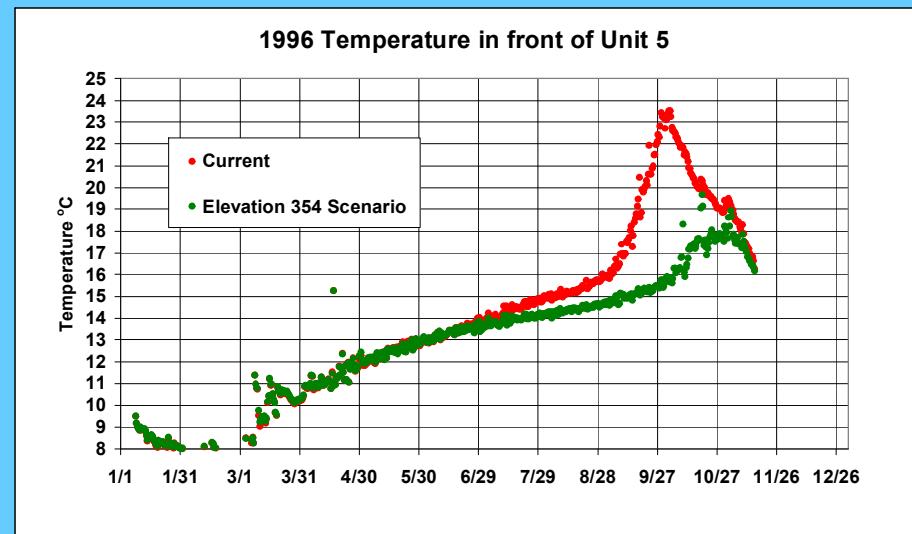

Comparison of Current Phosphorus Load and Reduced Phosphorus Scenario

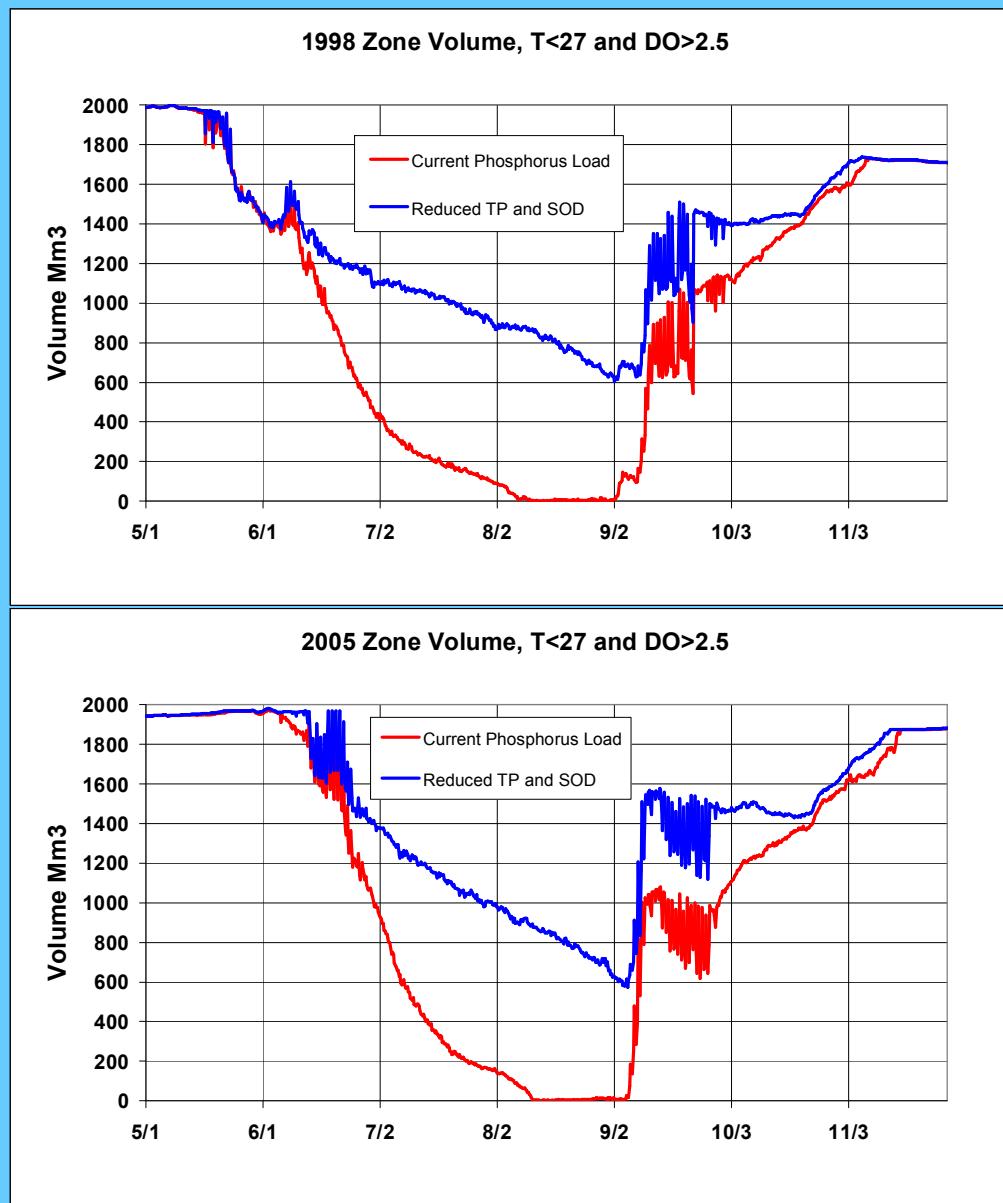

Preliminary Conclusions

- Nutrients are the single dominant factor that can enhance striped bass habitat
- Flow is a dominant factor, but cannot be controlled to avoid fish kills
- Met conditions can be a periodic factor that alleviates otherwise dominant factors like flow
- Striped bass habitat conditions can be improved in some years by maintaining high summer pool levels (~ elev. 358 ft)
- Unit 5 preferential operations can improve striped bass habitat in some years


Next Steps

1. For selected years, finalize assessment (i.e., assess changes in releases) of operating guide for U5 preference for “first on, last off” operation using the hourly releases
2. For selected years, finalize assessment of maintaining summer pool levels at 358
3. For selected years, finalize assessment of the combination of maintaining summer pool levels at 358 with U5 preference for “first on, last off” operation using the hourly releases
4. Analyze additional years, especially a low flow year
5. Assess effects of minimum winter pool level, including effects on Little Saluda embayment, increased SOD, internal nutrient cycling, aquatic plants, sedimentation in coves,


Lower Saluda and Congaree Rivers Temperature Study: Update

Water Quality Technical Working
Committee Meeting


March 26, 2007

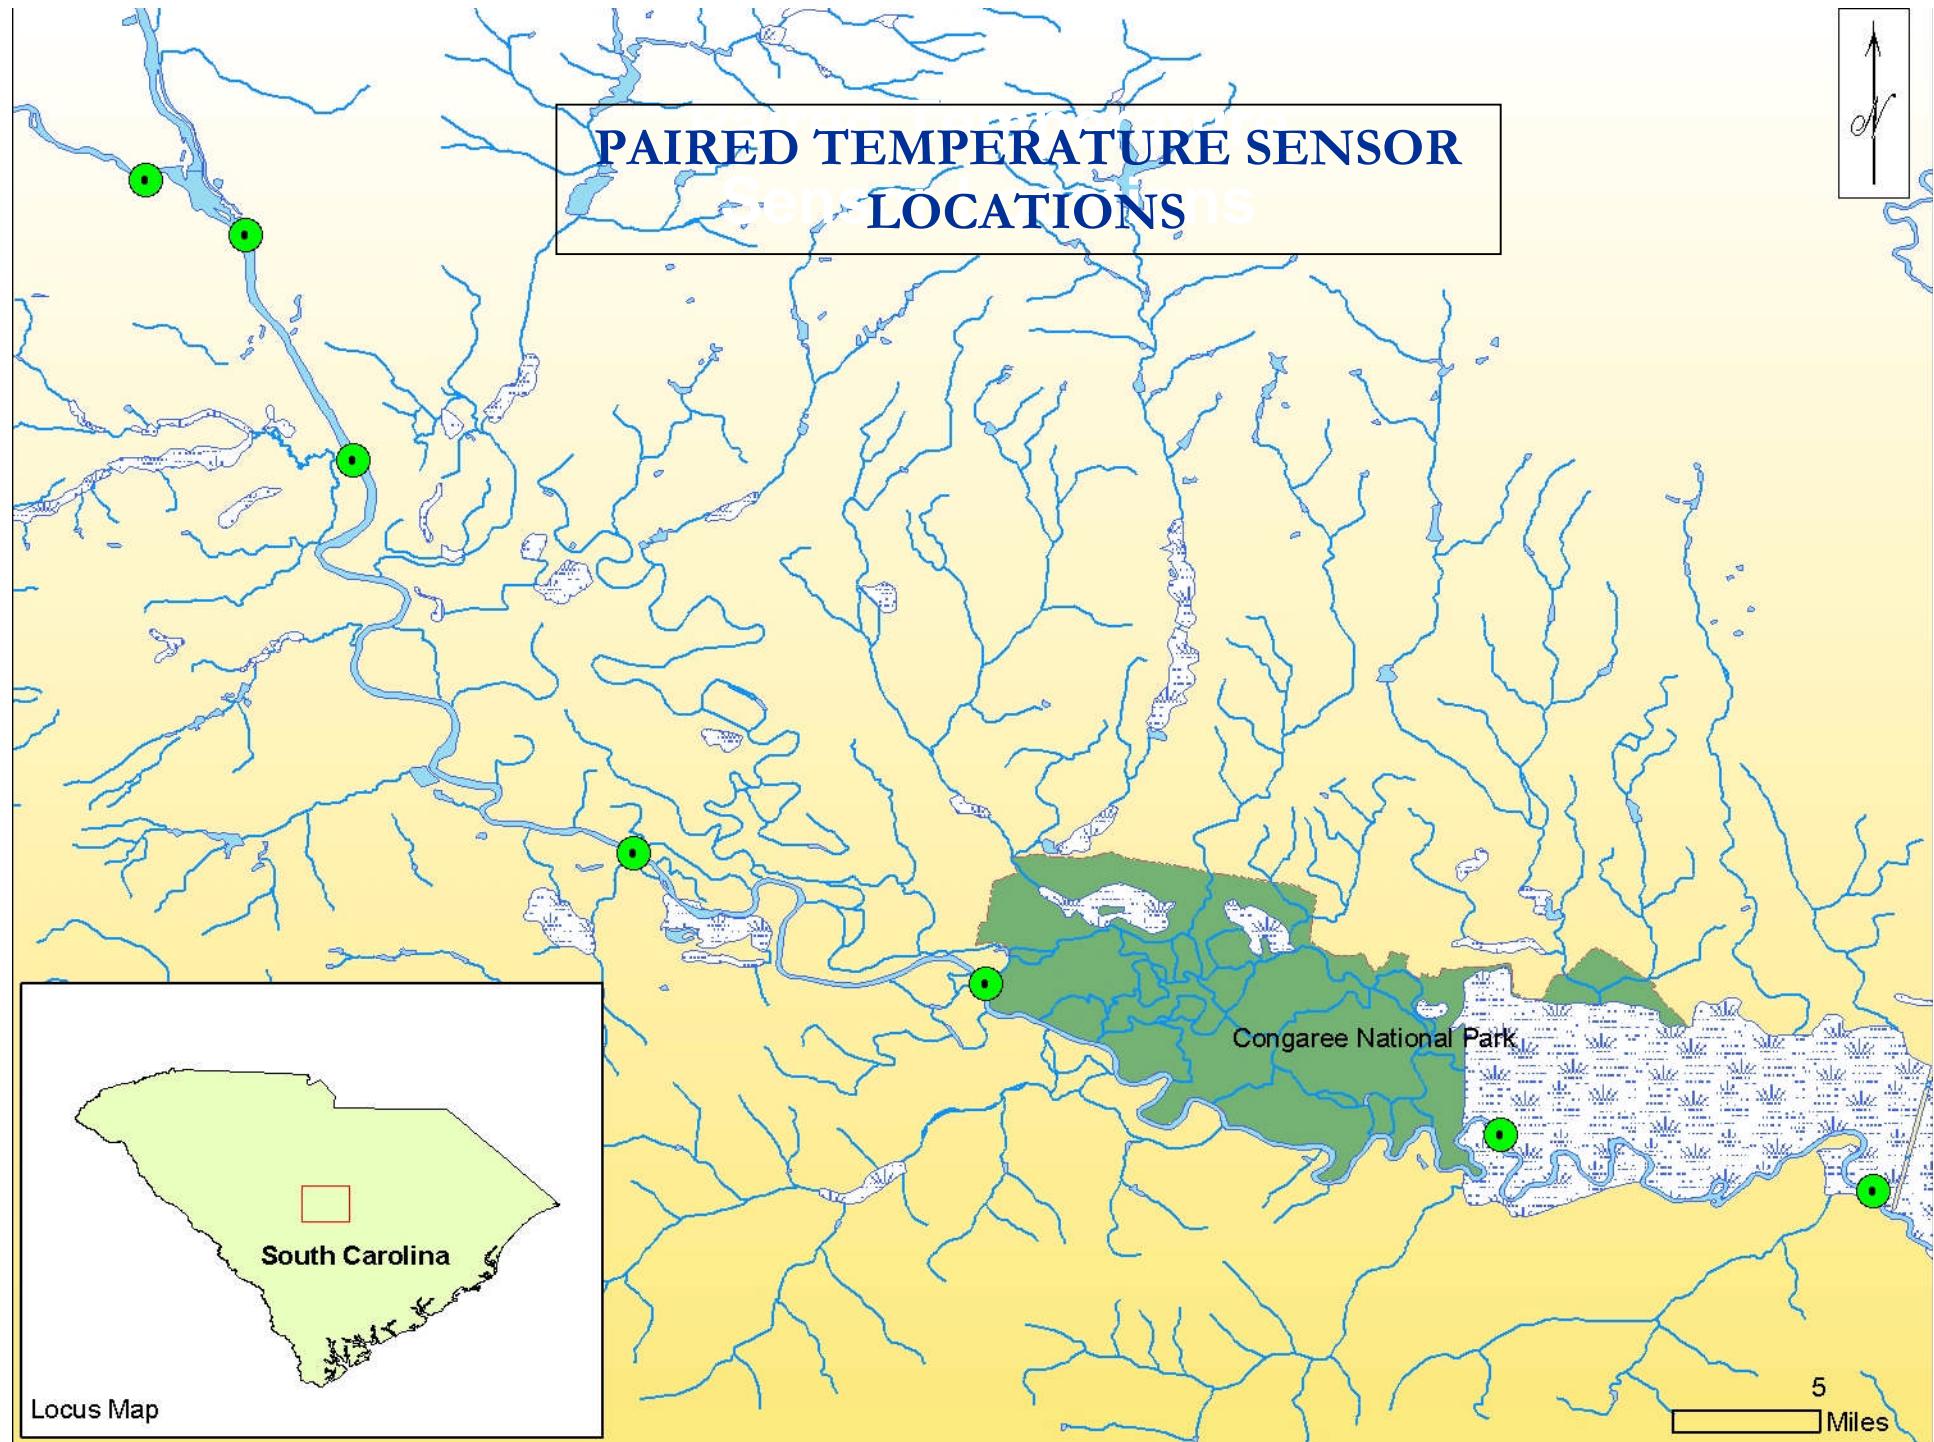


Lower Saluda River at Riverbanks Zoo

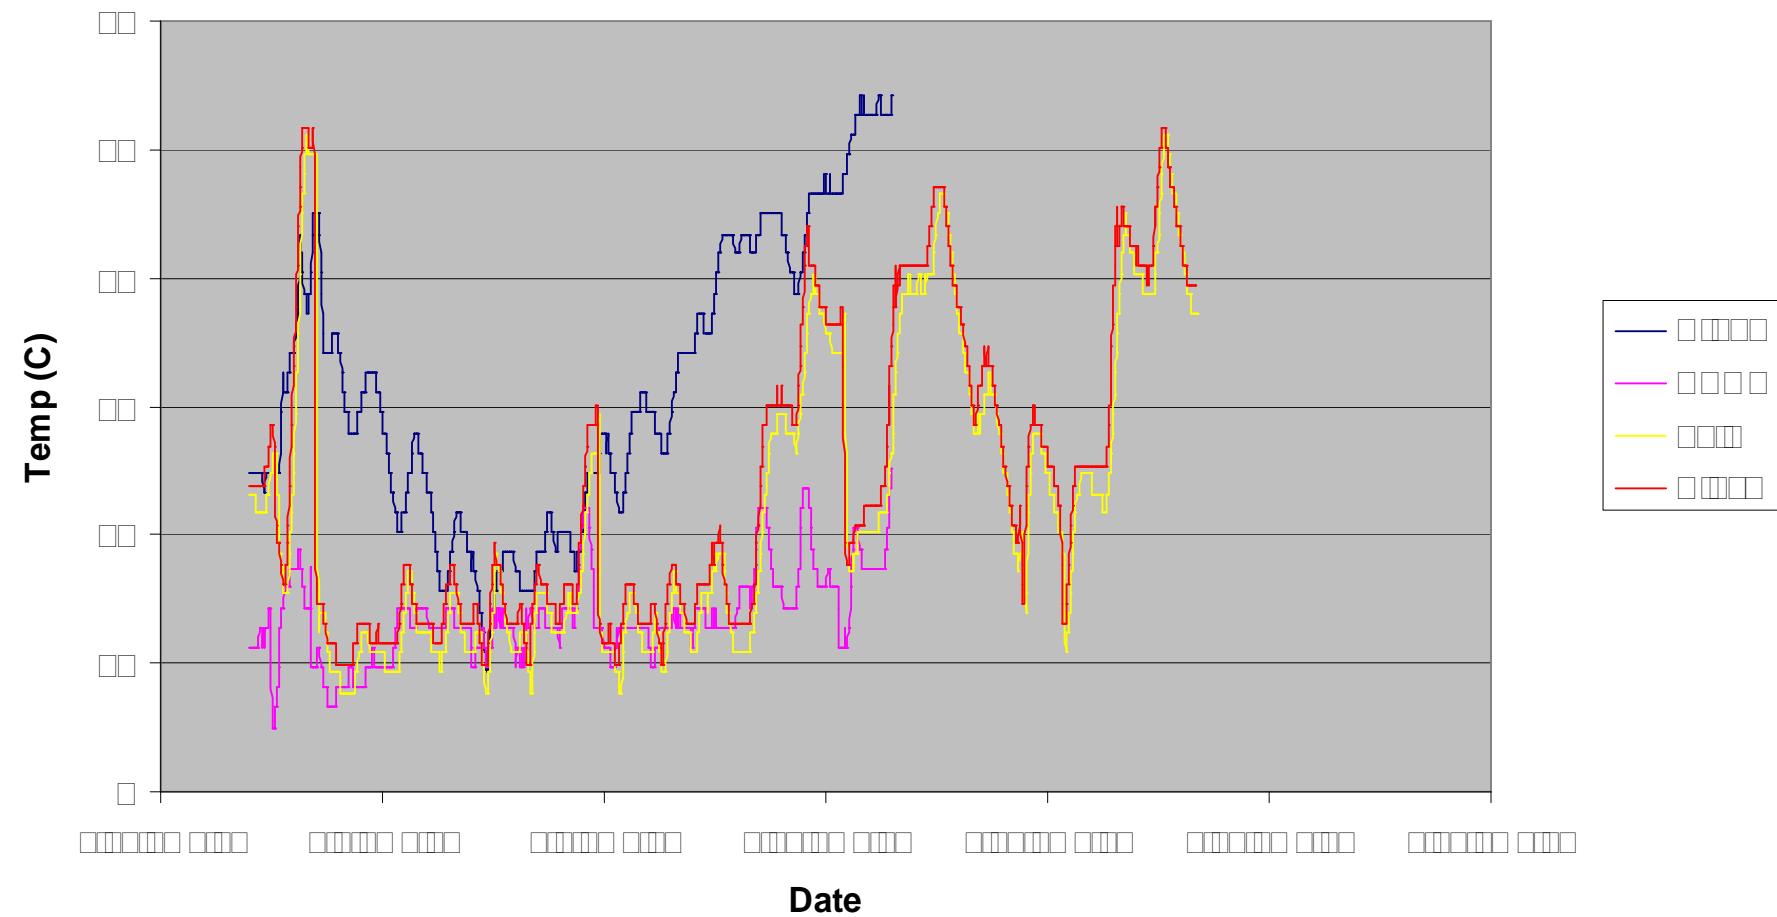


Congaree River at Gervais Street

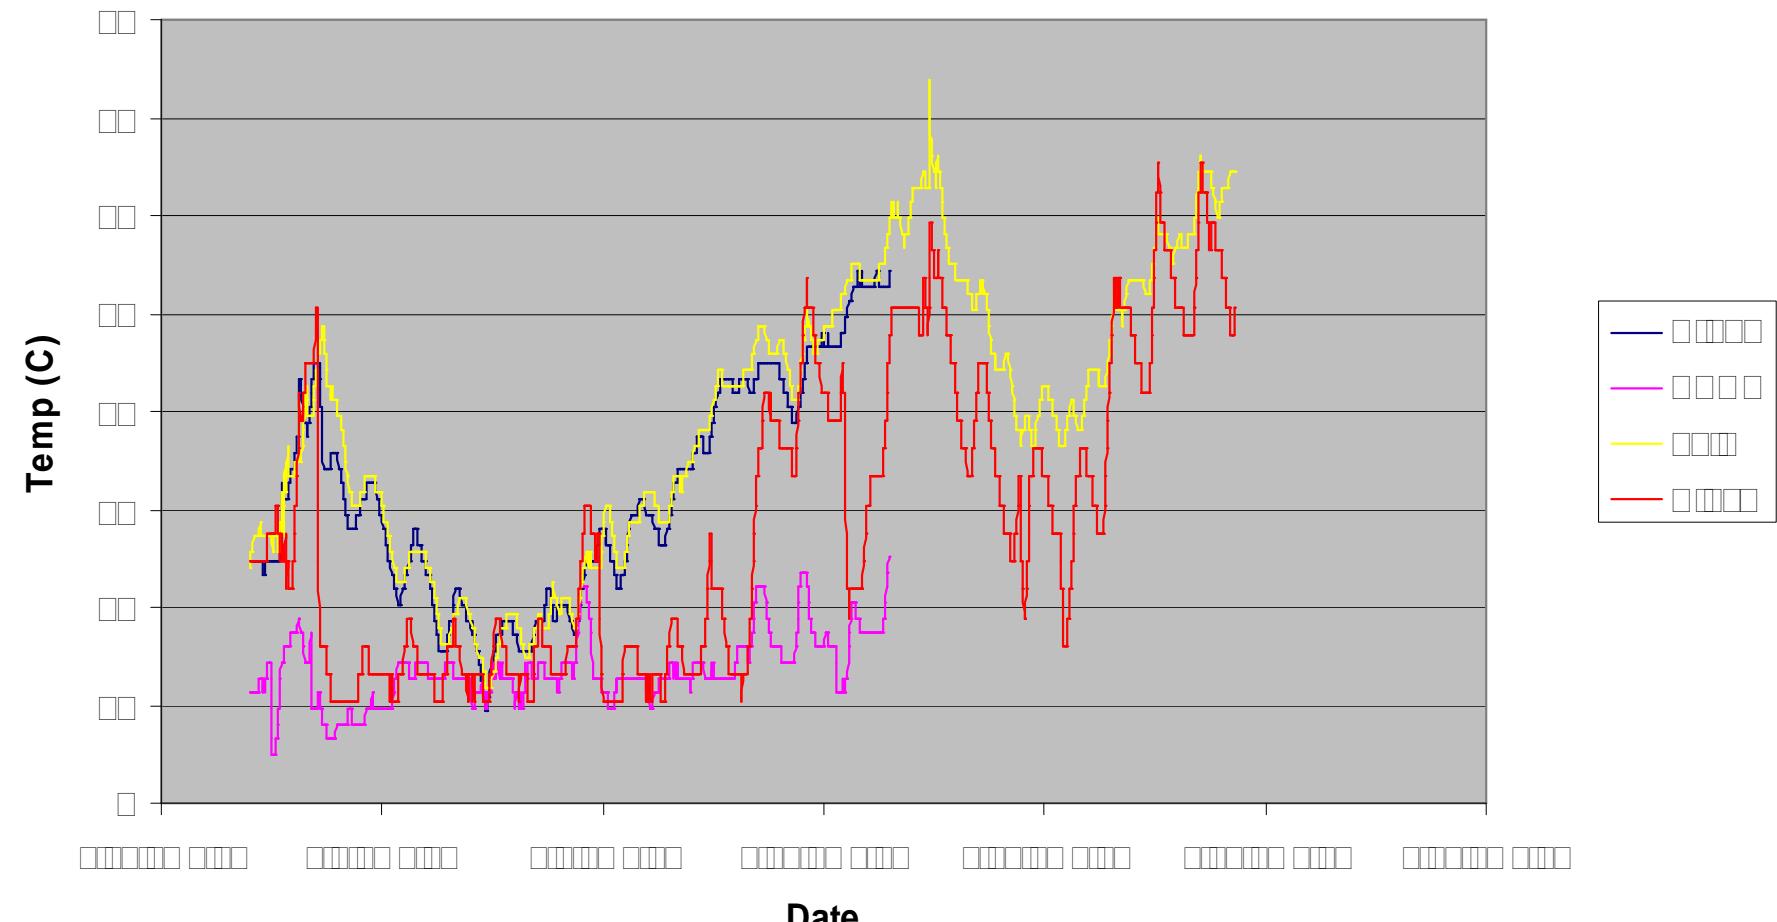

Congaree River at I-77

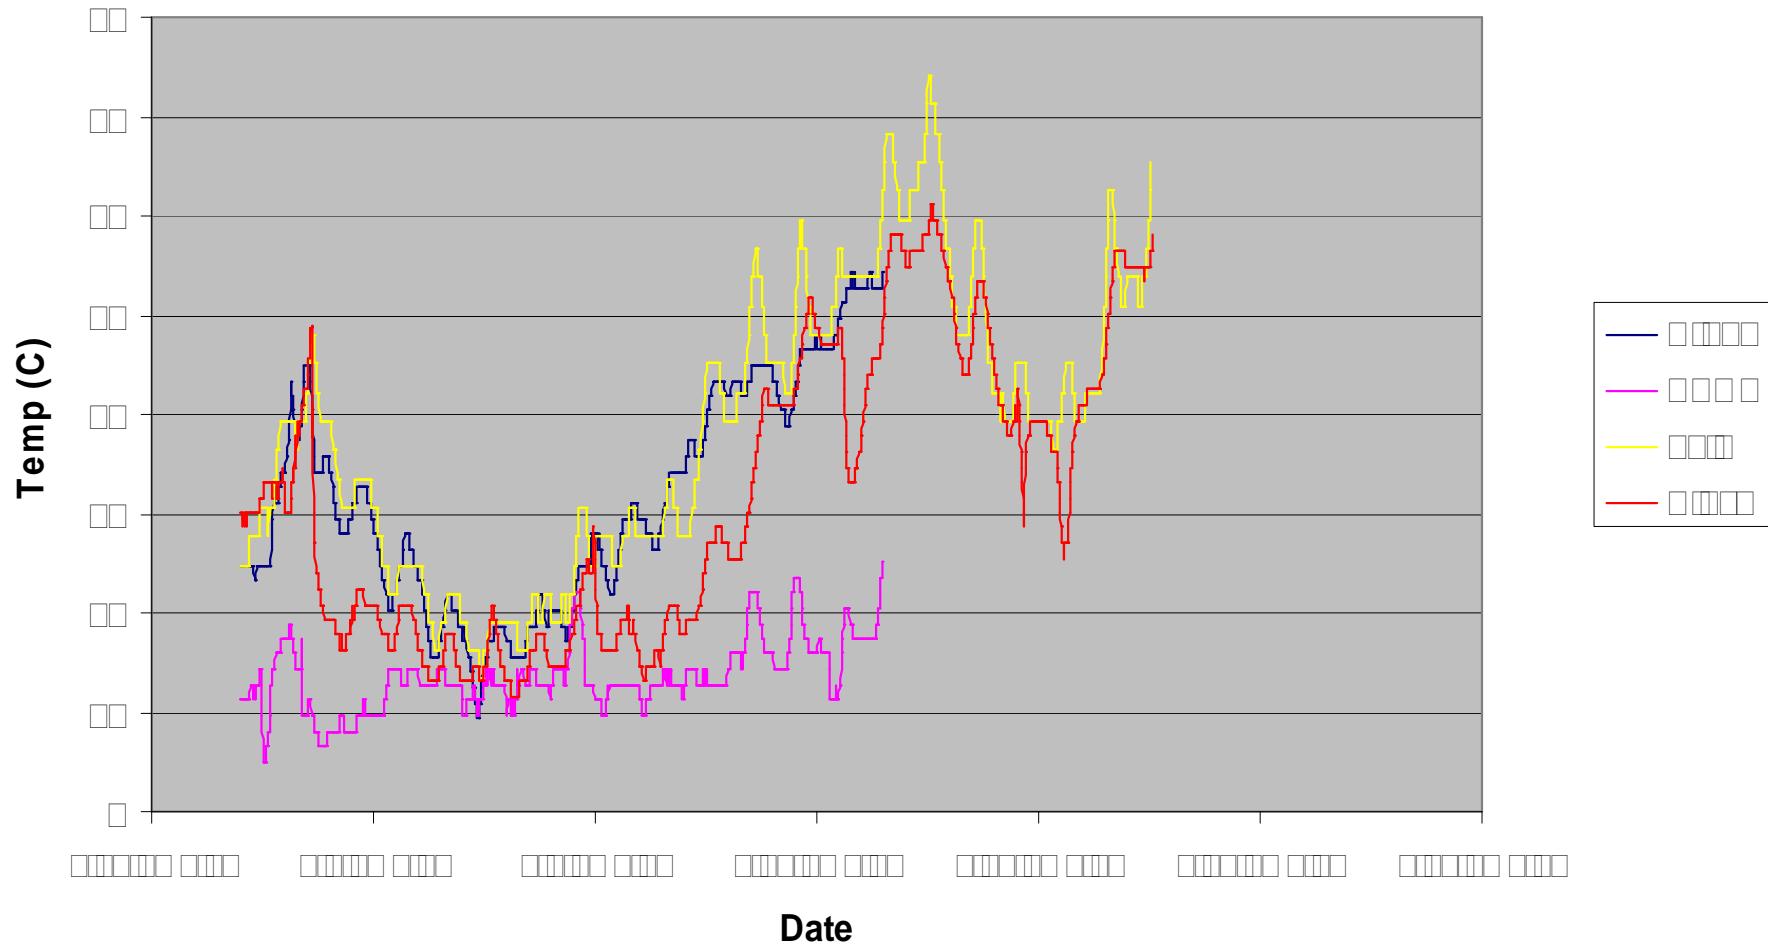

Congaree National Park

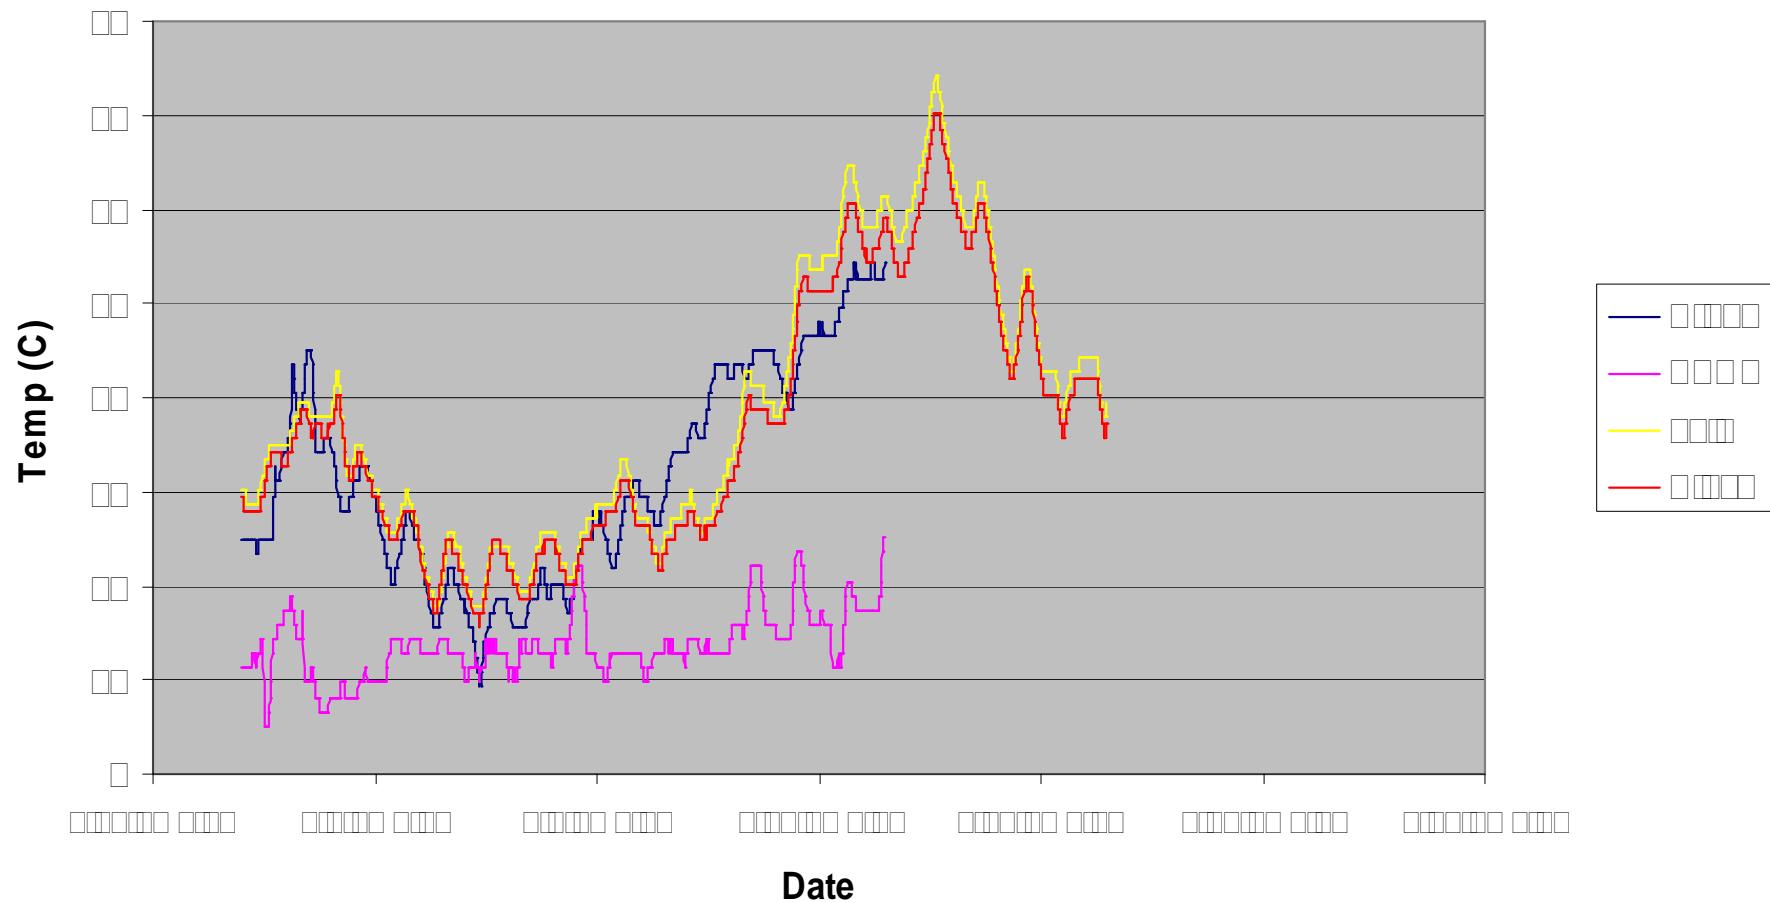

Conclusions

- Congaree and Broad diverge from Saluda in early April
- Cross-sectional temperatures vary below confluence
- To date, data suggests that influence extends at least to I-77 Bridge

Challenges

- Vandalism / Theft
- Breakoffs (corrosion / snags / high flows)
- Inaccessibility of instruments due to high flows

Future Needs


- Gather additional data through October 2007
- Evaluate temperature impacts under varying flow conditions (i.e. varying inflows/operations, normal precipitation)
- Appropriate statistical analysis methods
 - missing values
 - How to deal with errors (i.e. due disturbance of probe, etc.)

Update on Analyses of Factors Contributing to Historical Fish Kills in Lake Murray

Andy Sawyer and Jim Ruane, REMI


November 13, 2006

Lake Murray Surface Elevation 1990-2005

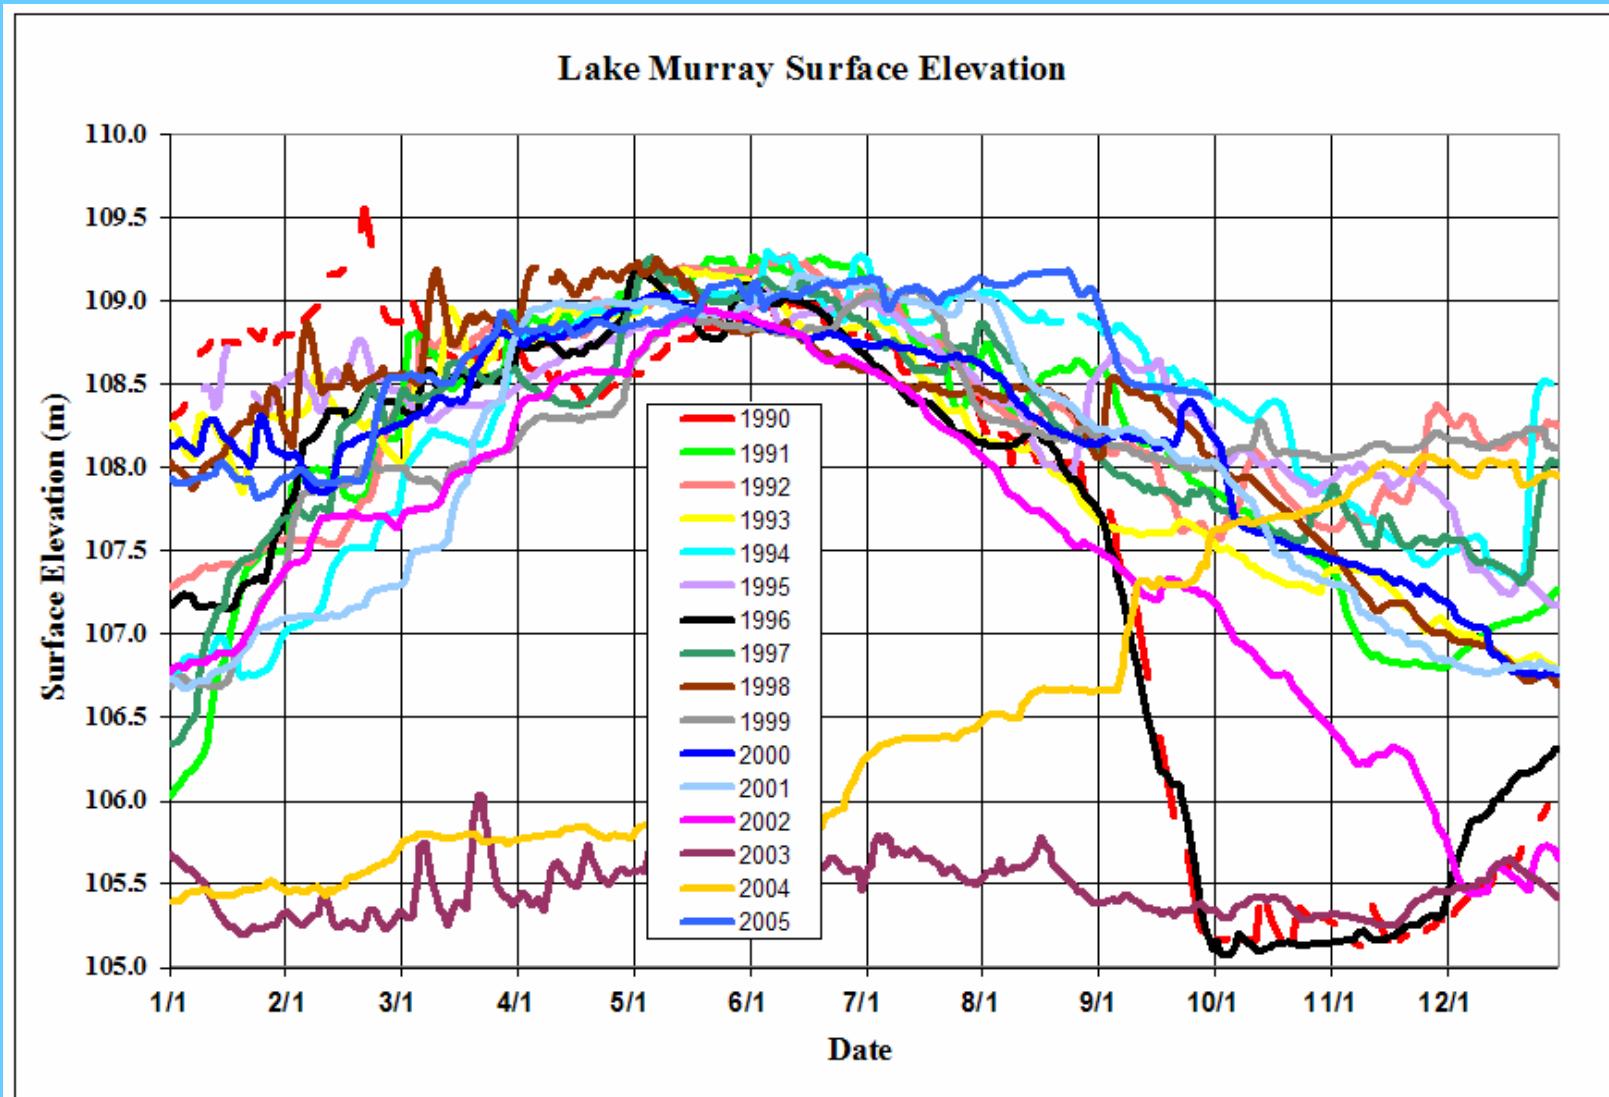

Lake Murray Surface Elevation 1990-2005


Years with documented striped bass kills are red

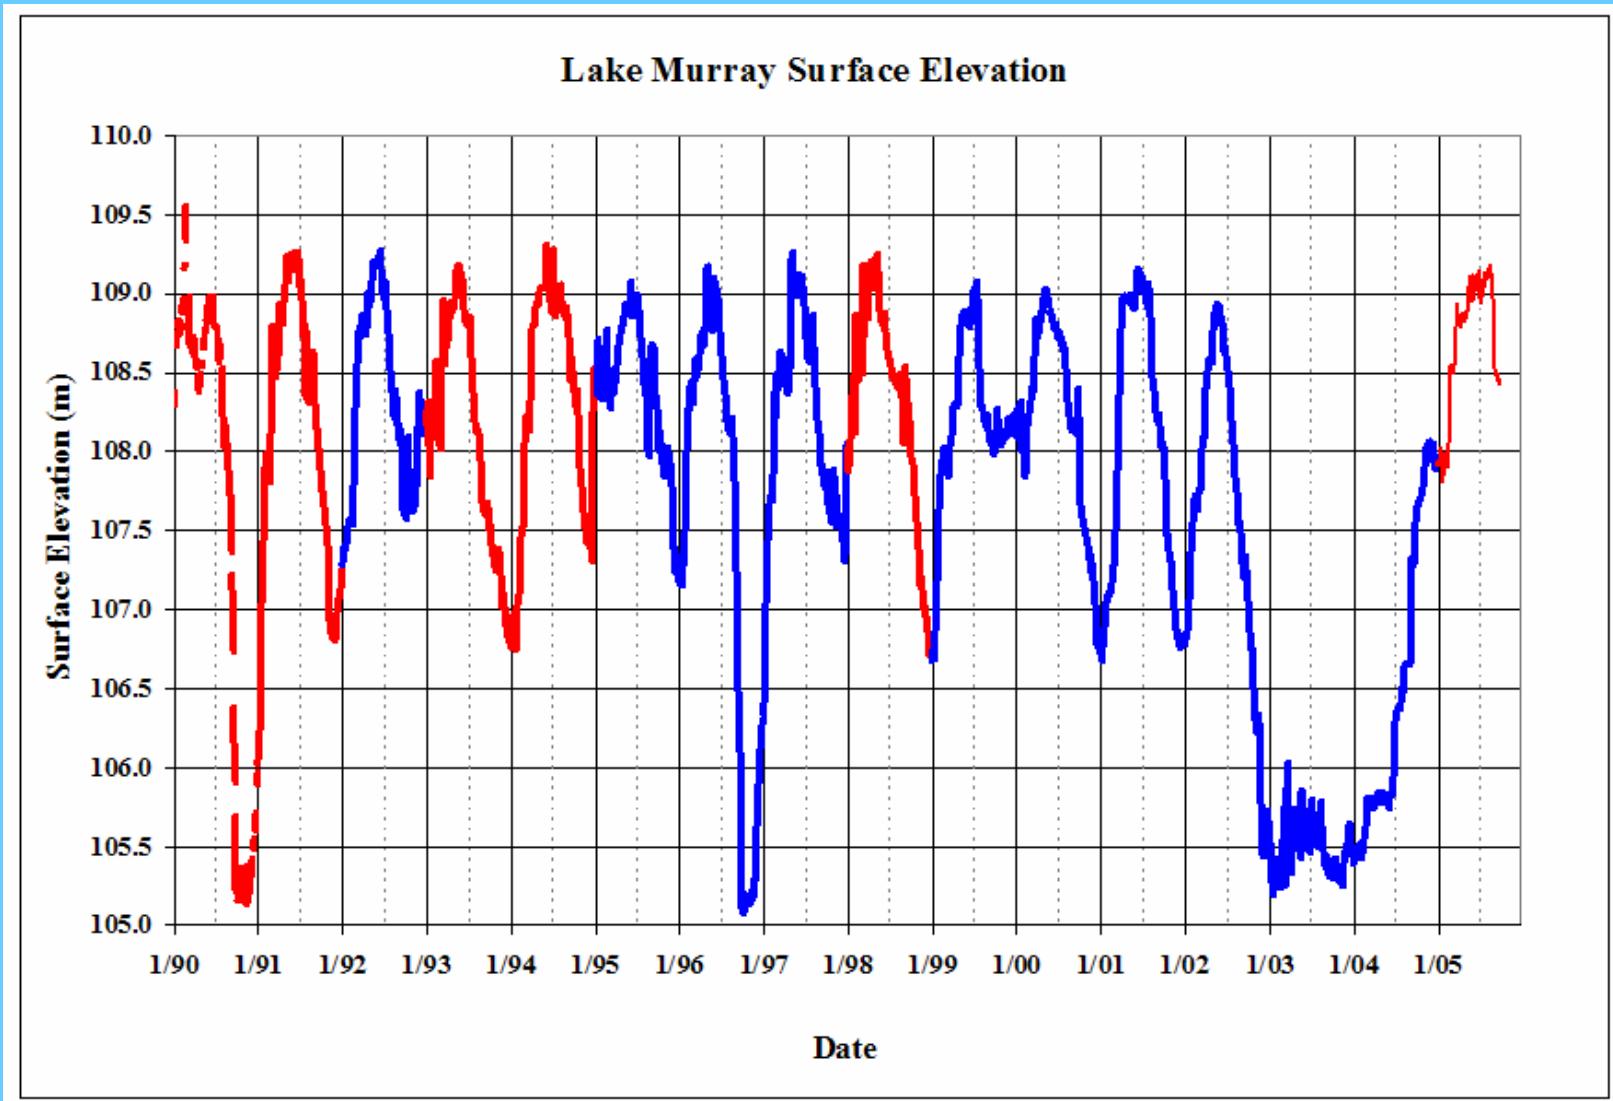


Lake Murray Surface Elevation 1990-2005

Typical Years Only (no special drawdowns)


Years with documented striped bass kills are red

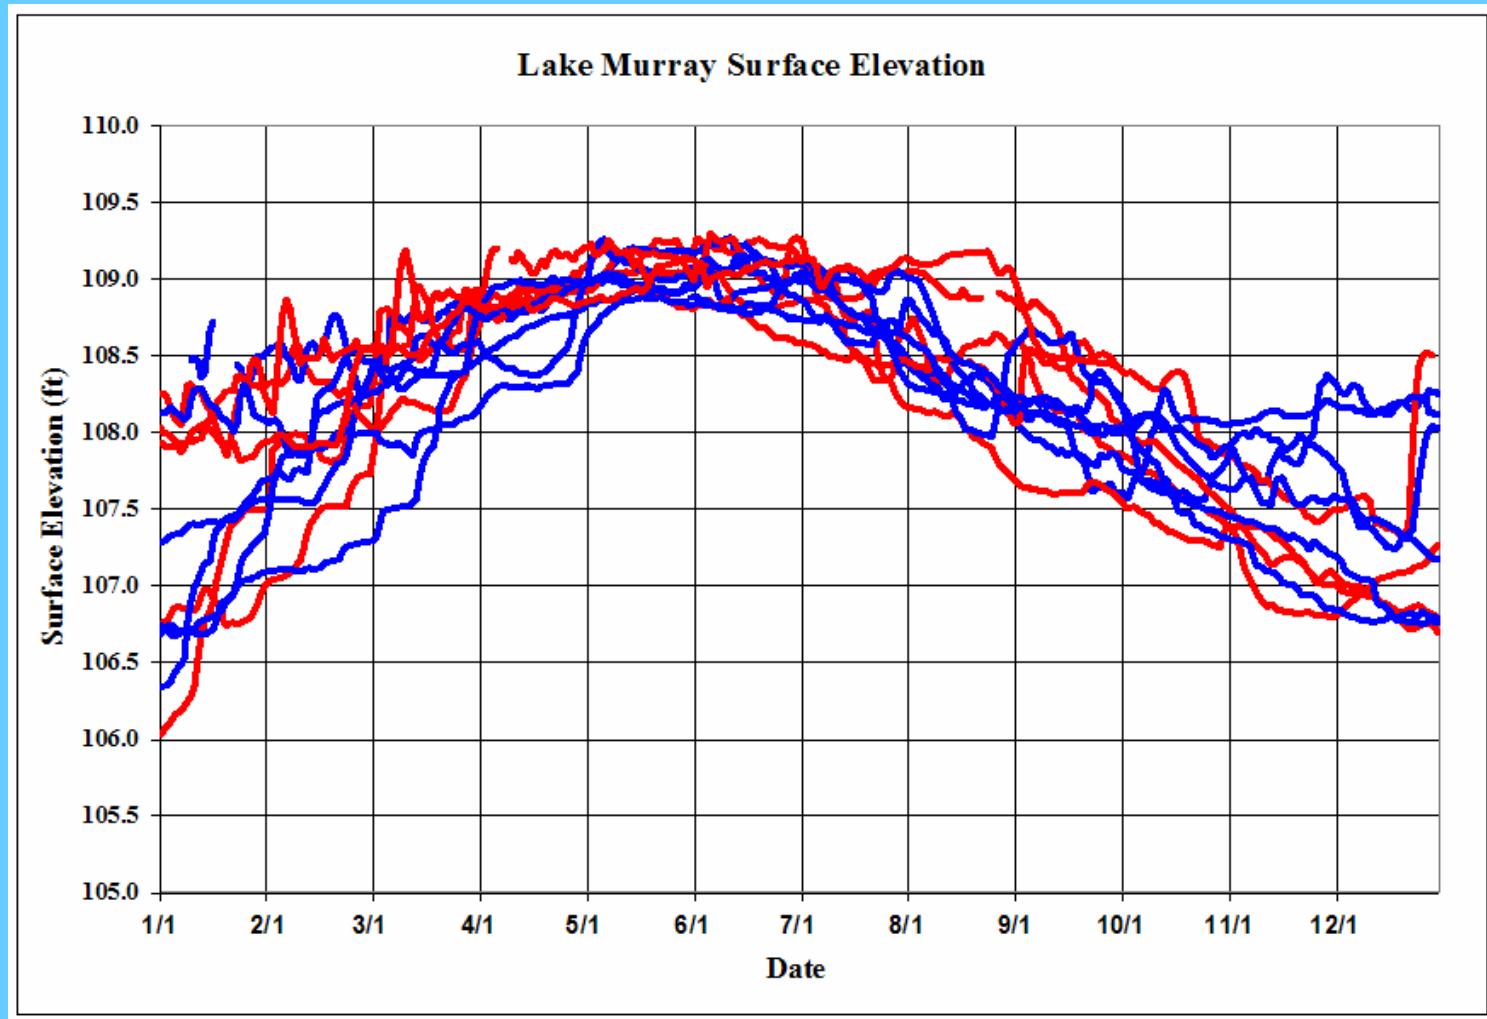


Average Annual Flow – Saluda River at Chappells

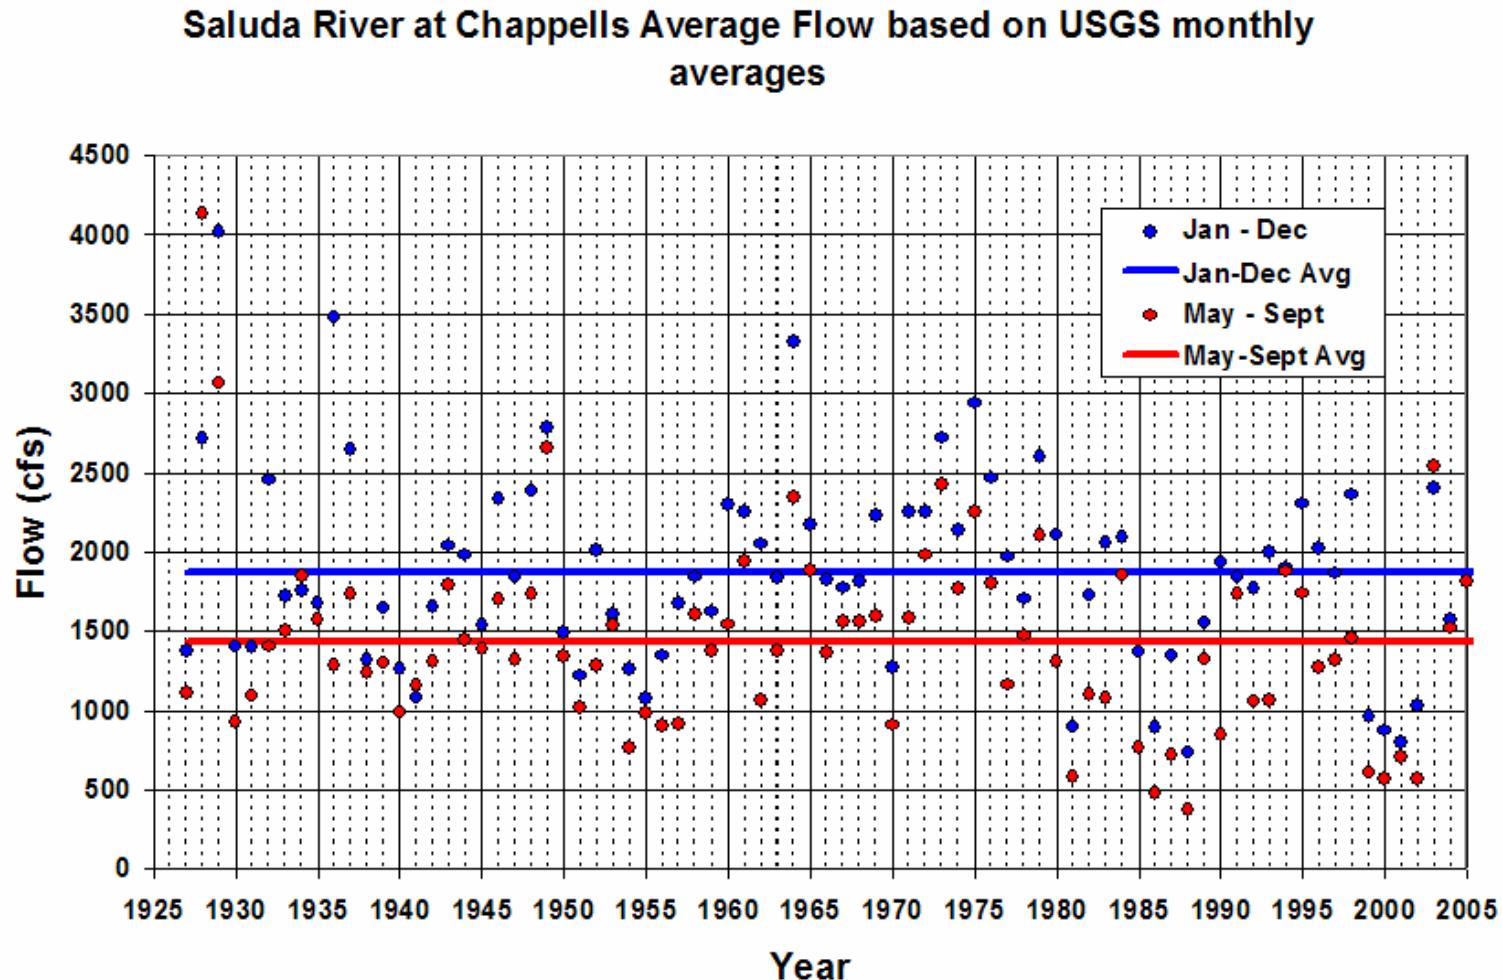


Average Annual Flow – Saluda River at Chappells 1990-2005

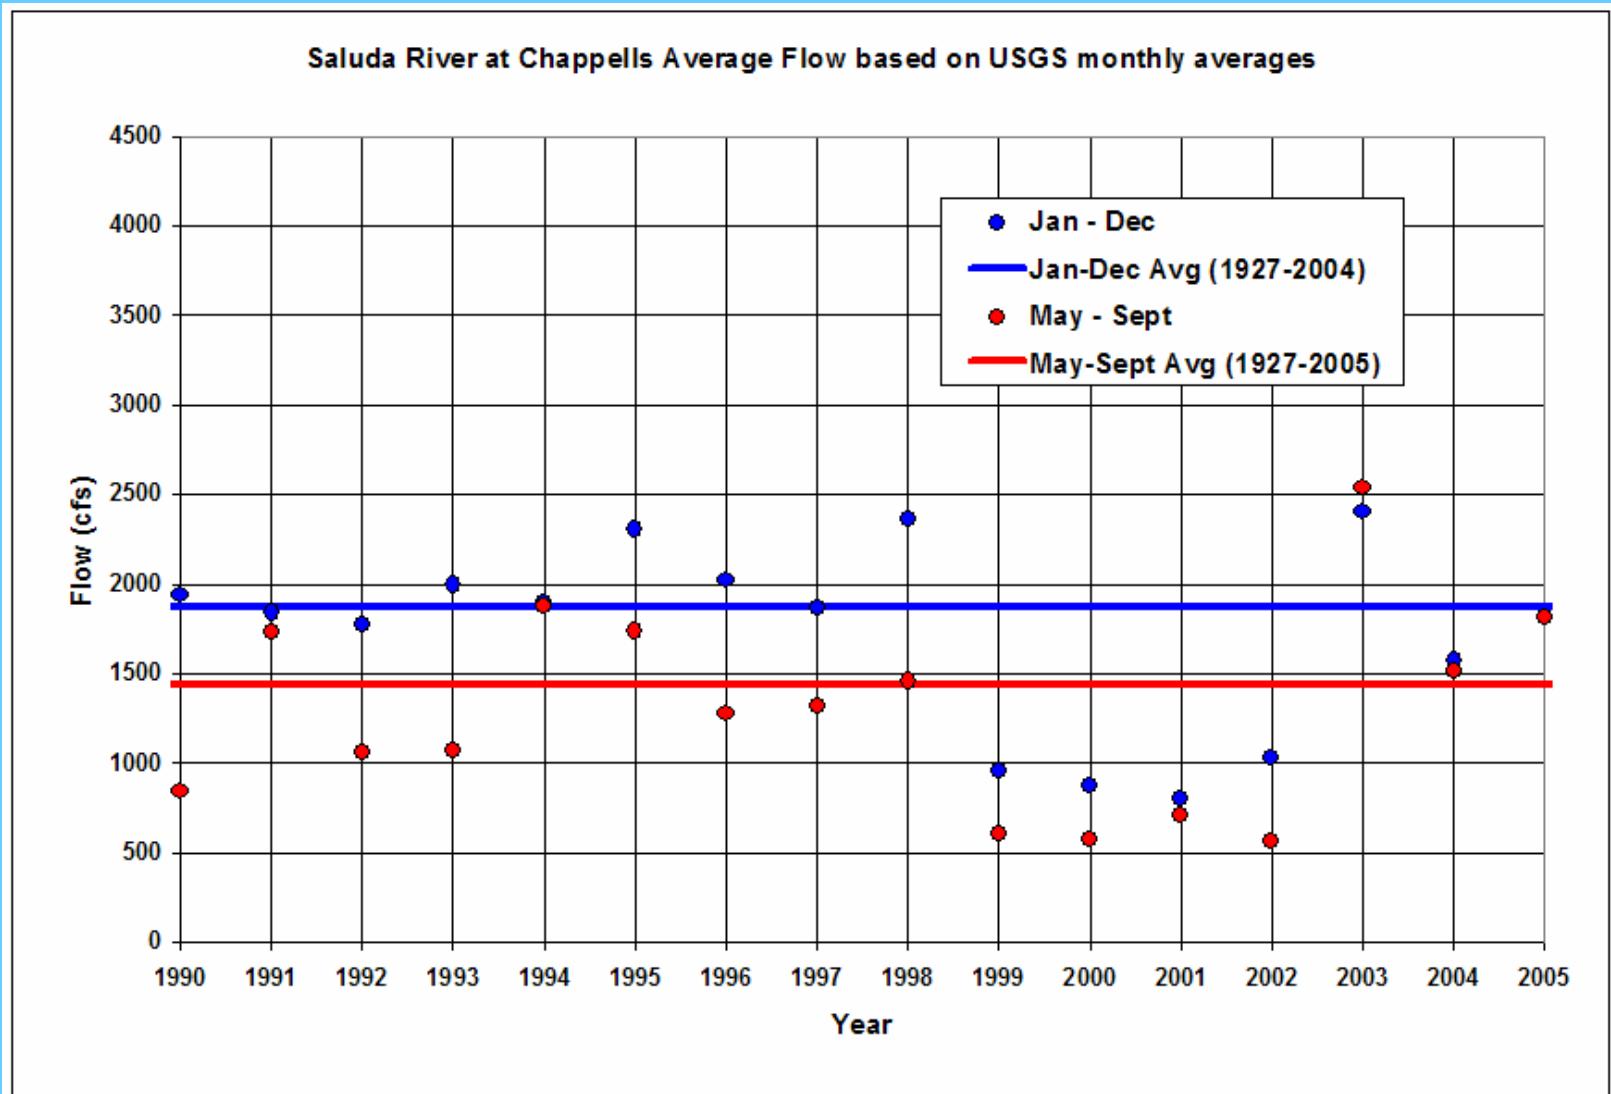

Average Annual Flow – Saluda River Below Lake Murray

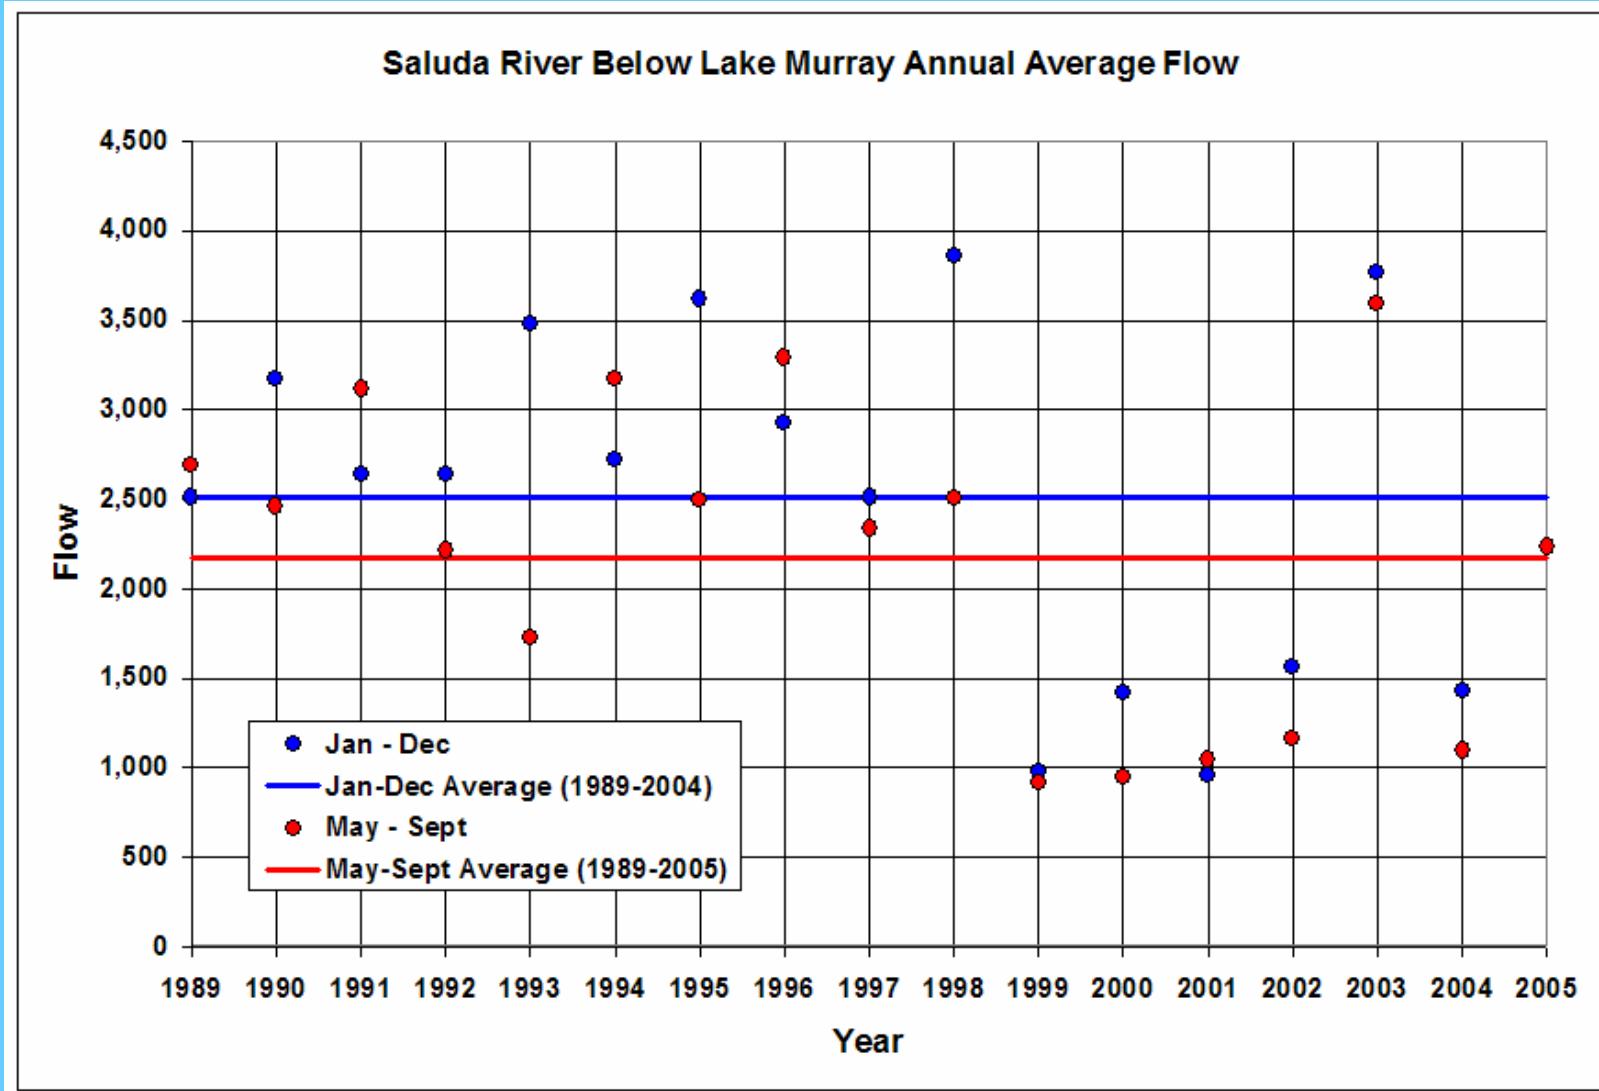


Cumulative Inflow

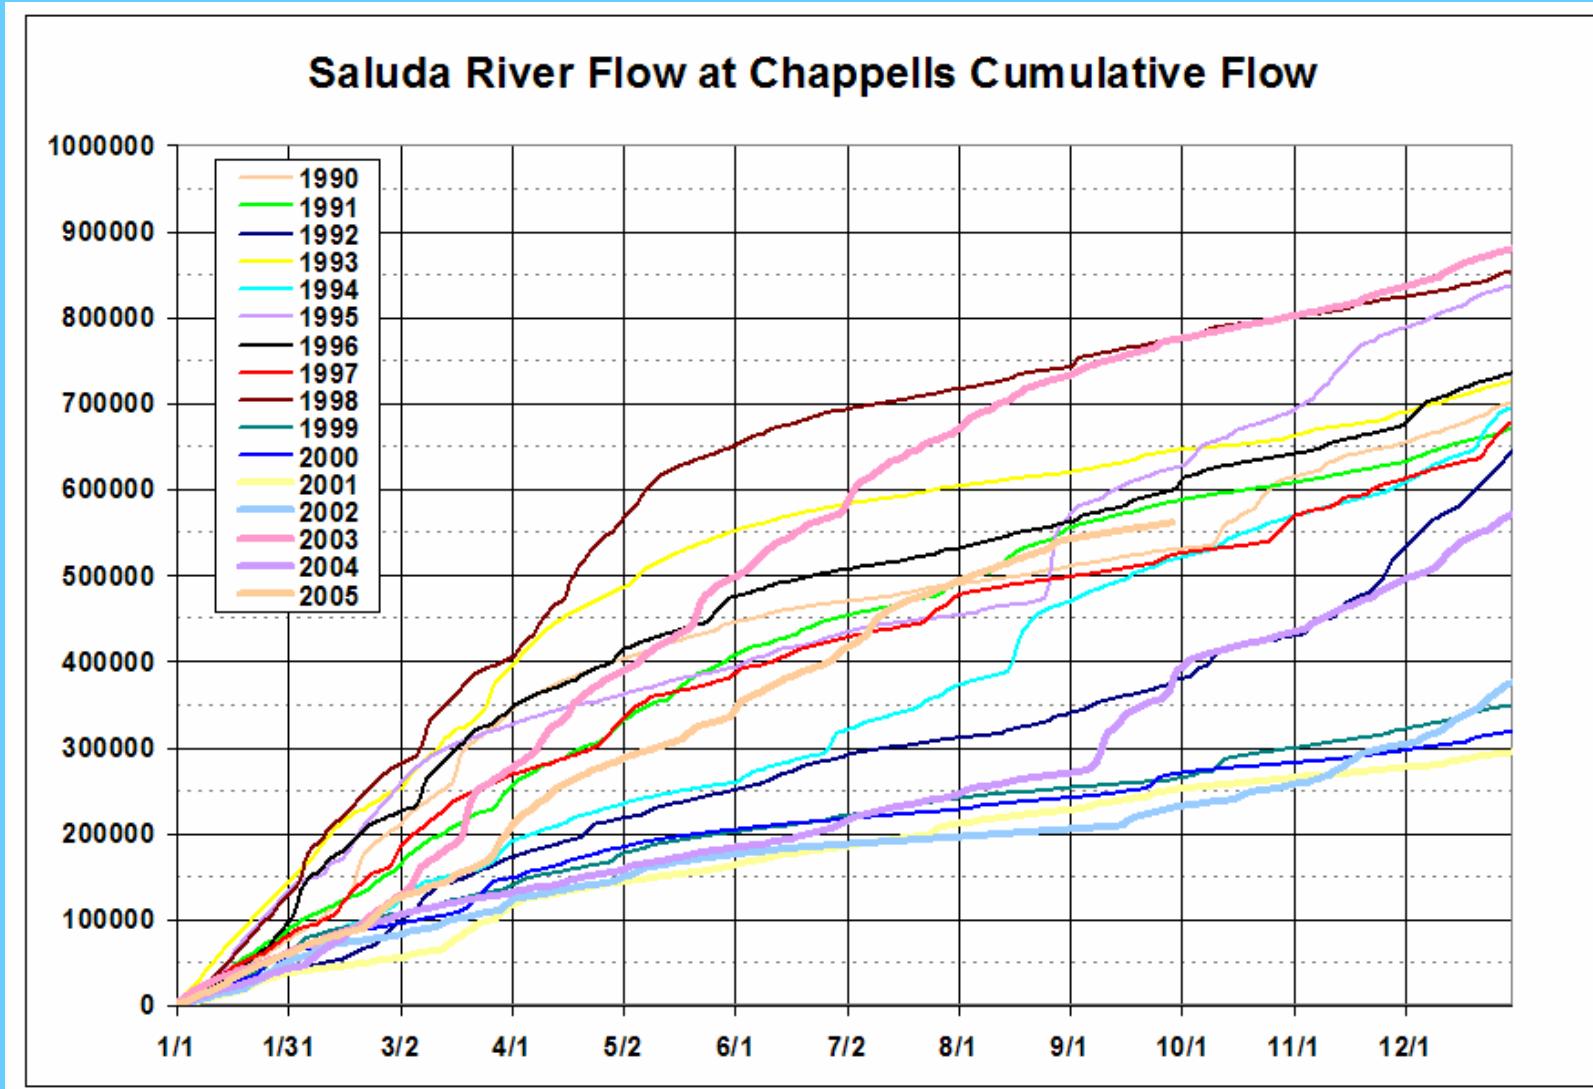


Cumulative Inflow

Years with documented striped bass kills are red

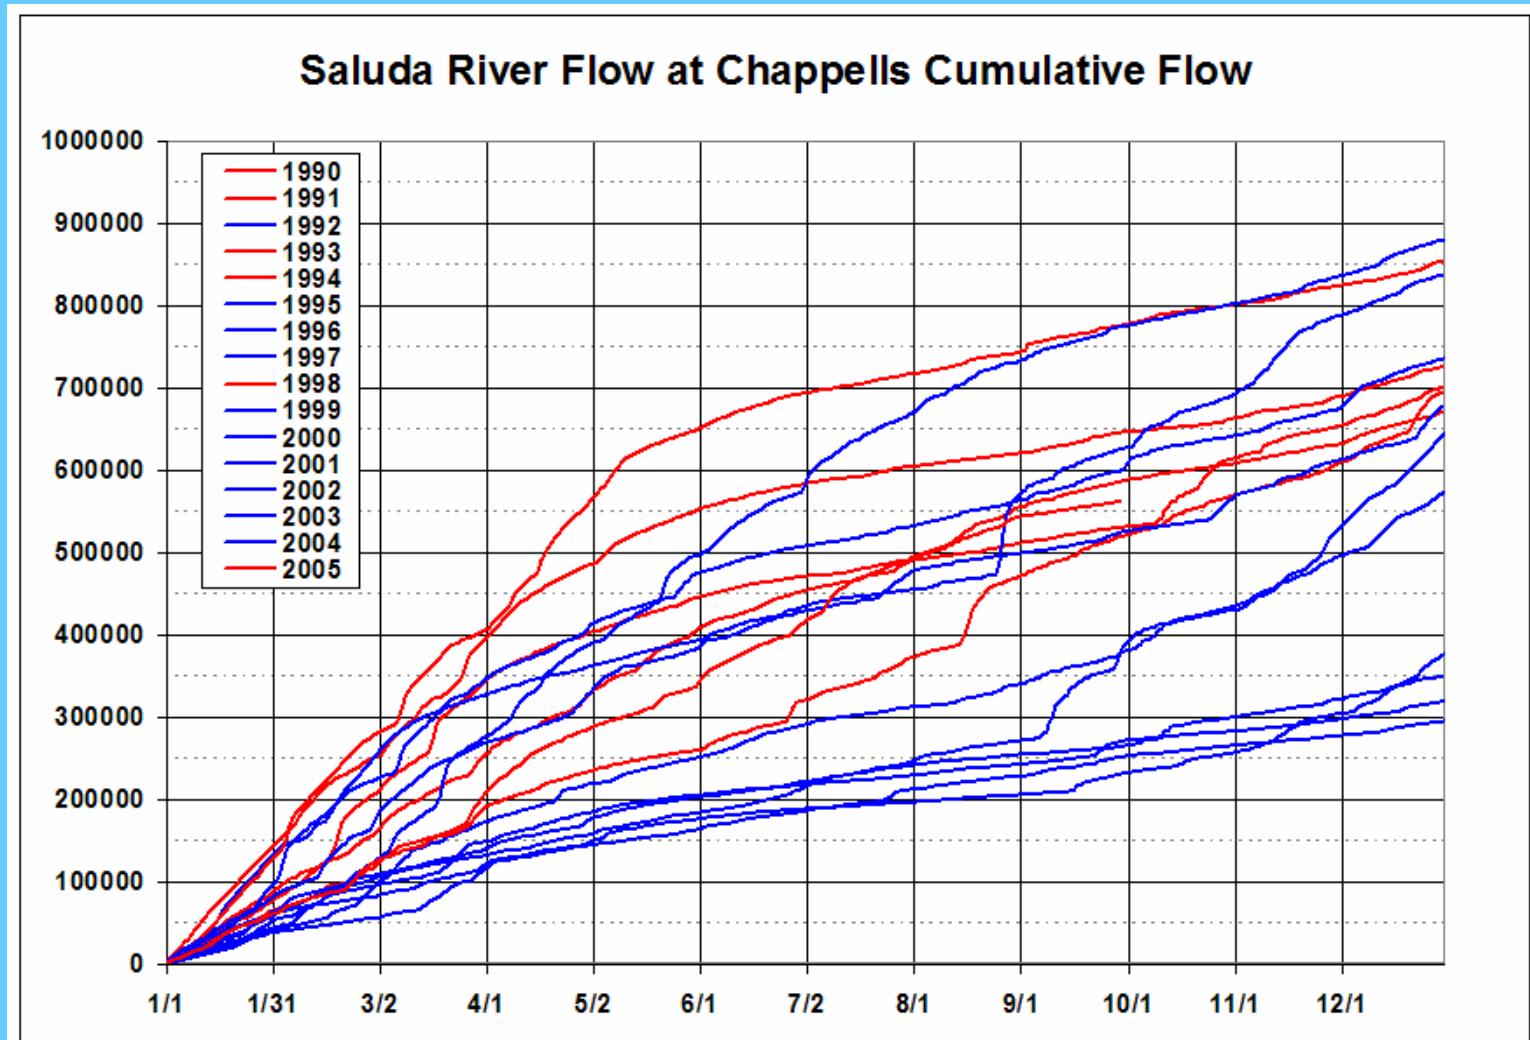


Cumulative Outflow

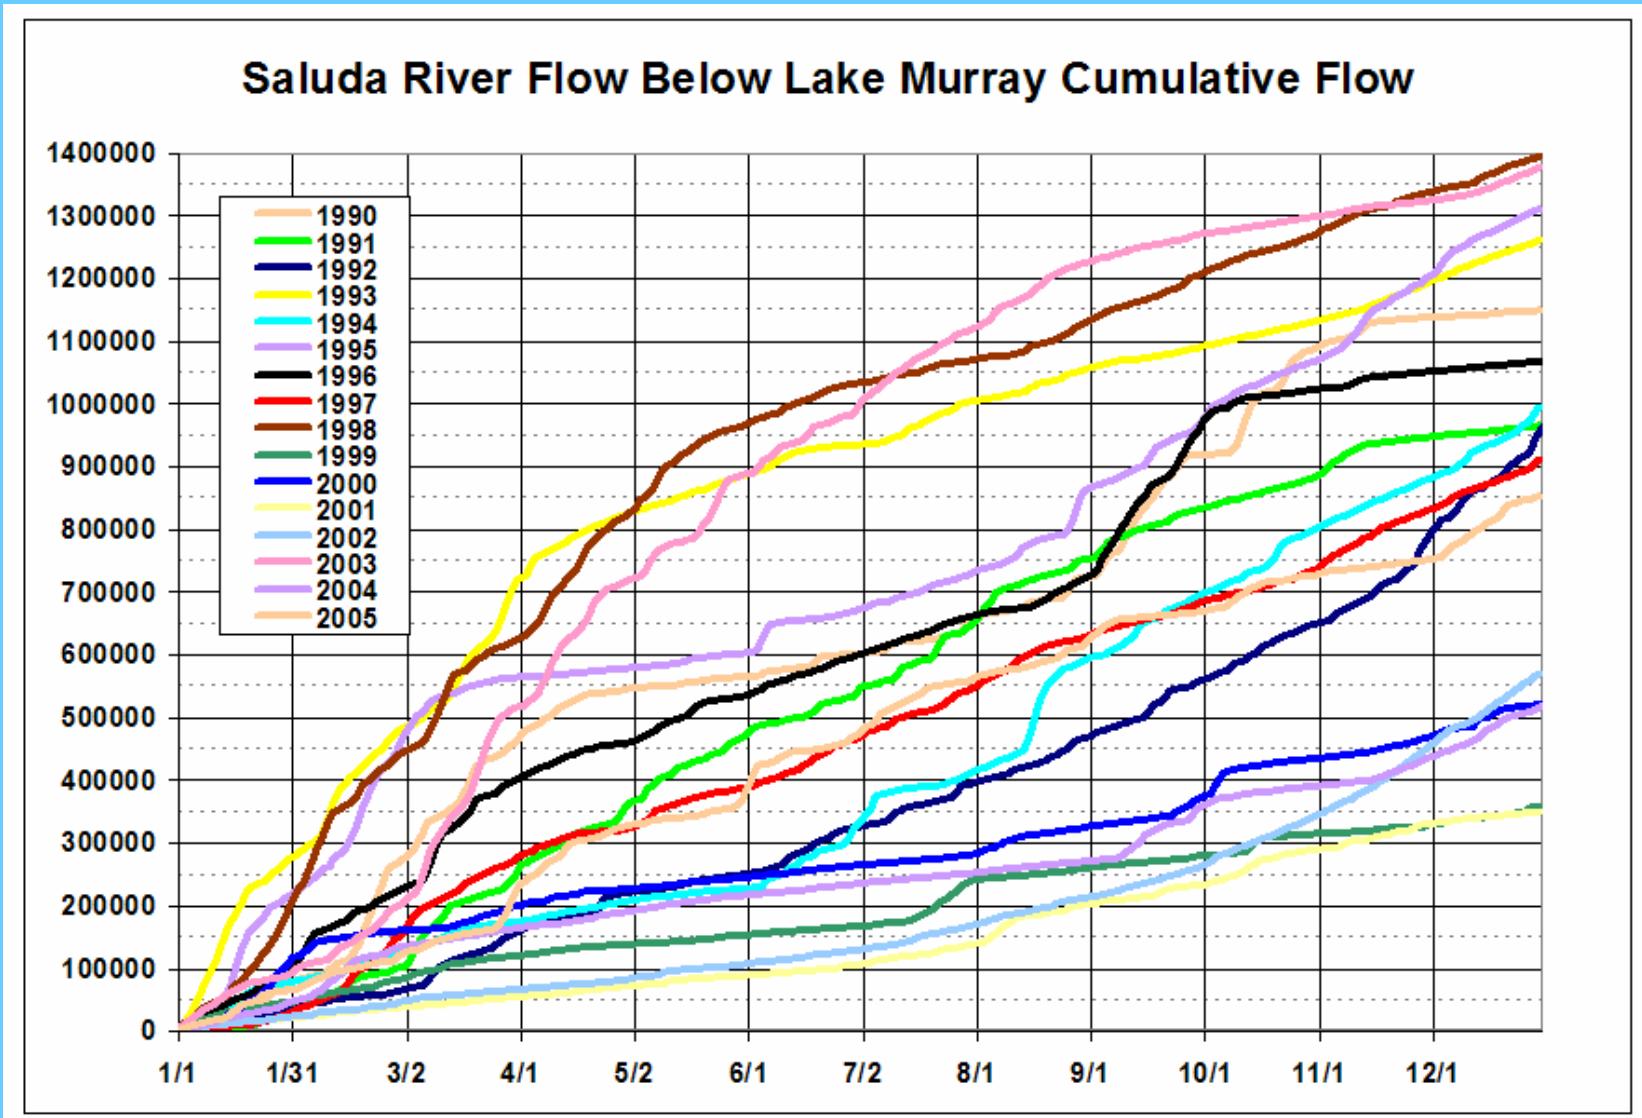


Cumulative Outflow


Years with documented striped bass kills are red

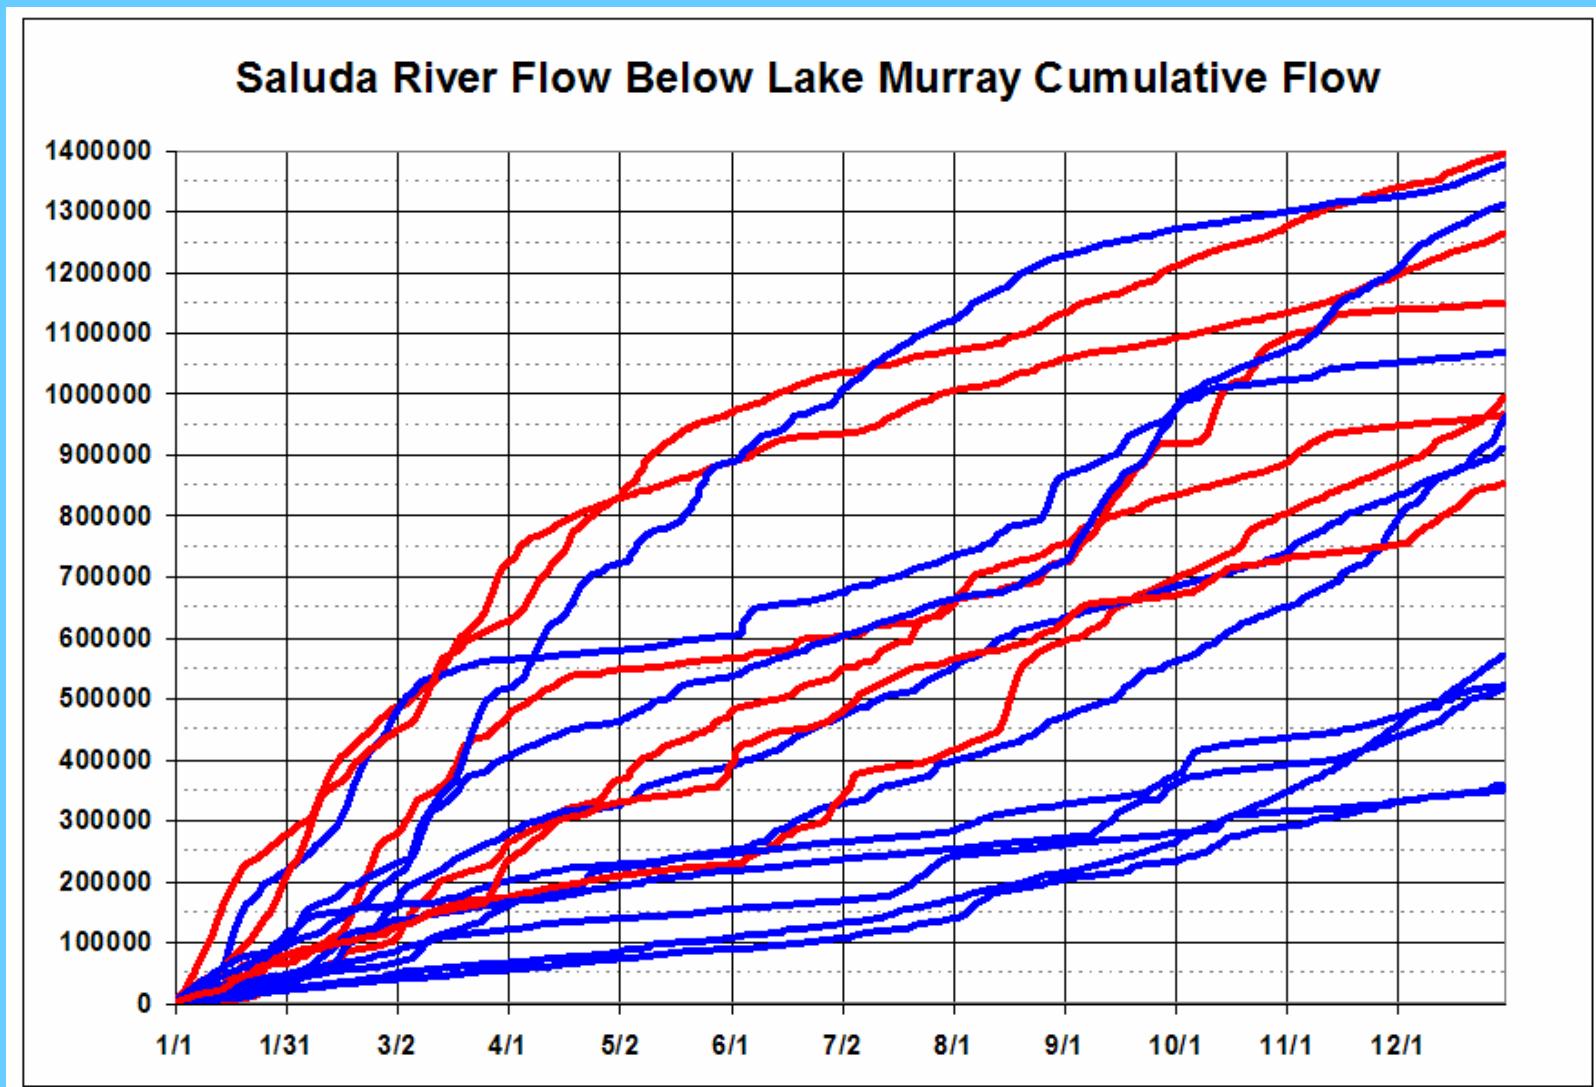


Murray Forebay Temperature Profiles - June

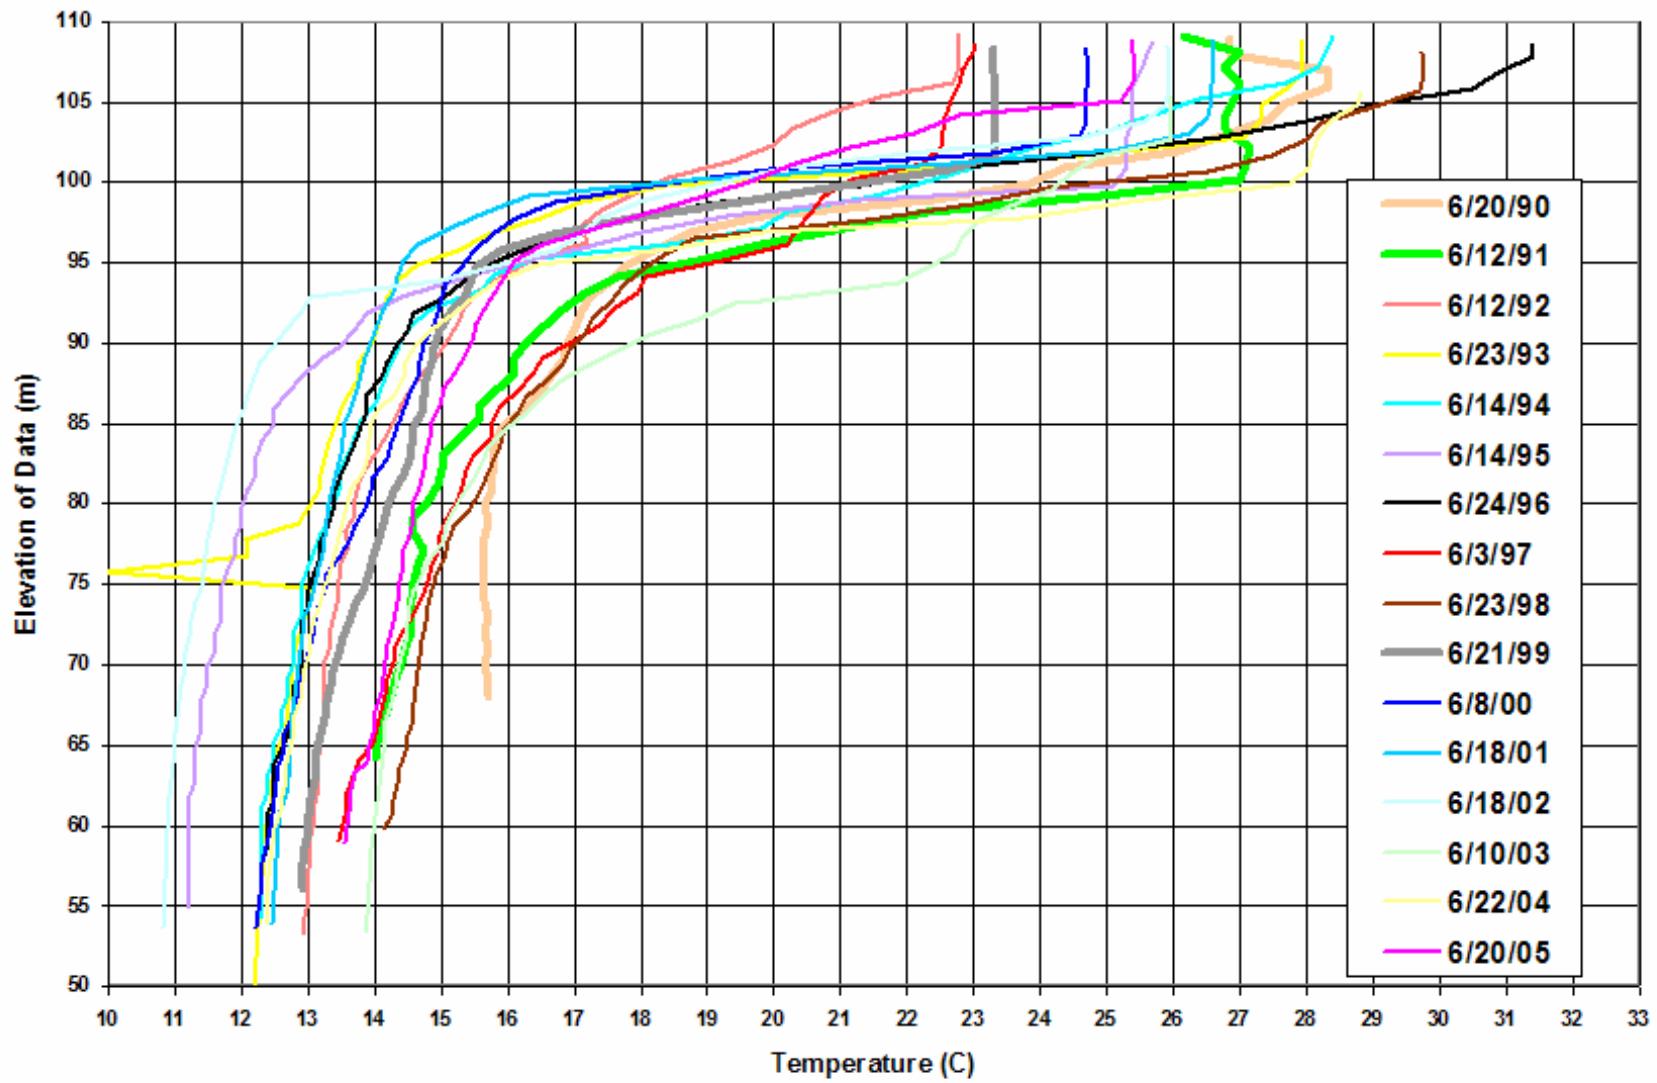


Murray Forebay Temperature Profiles - June

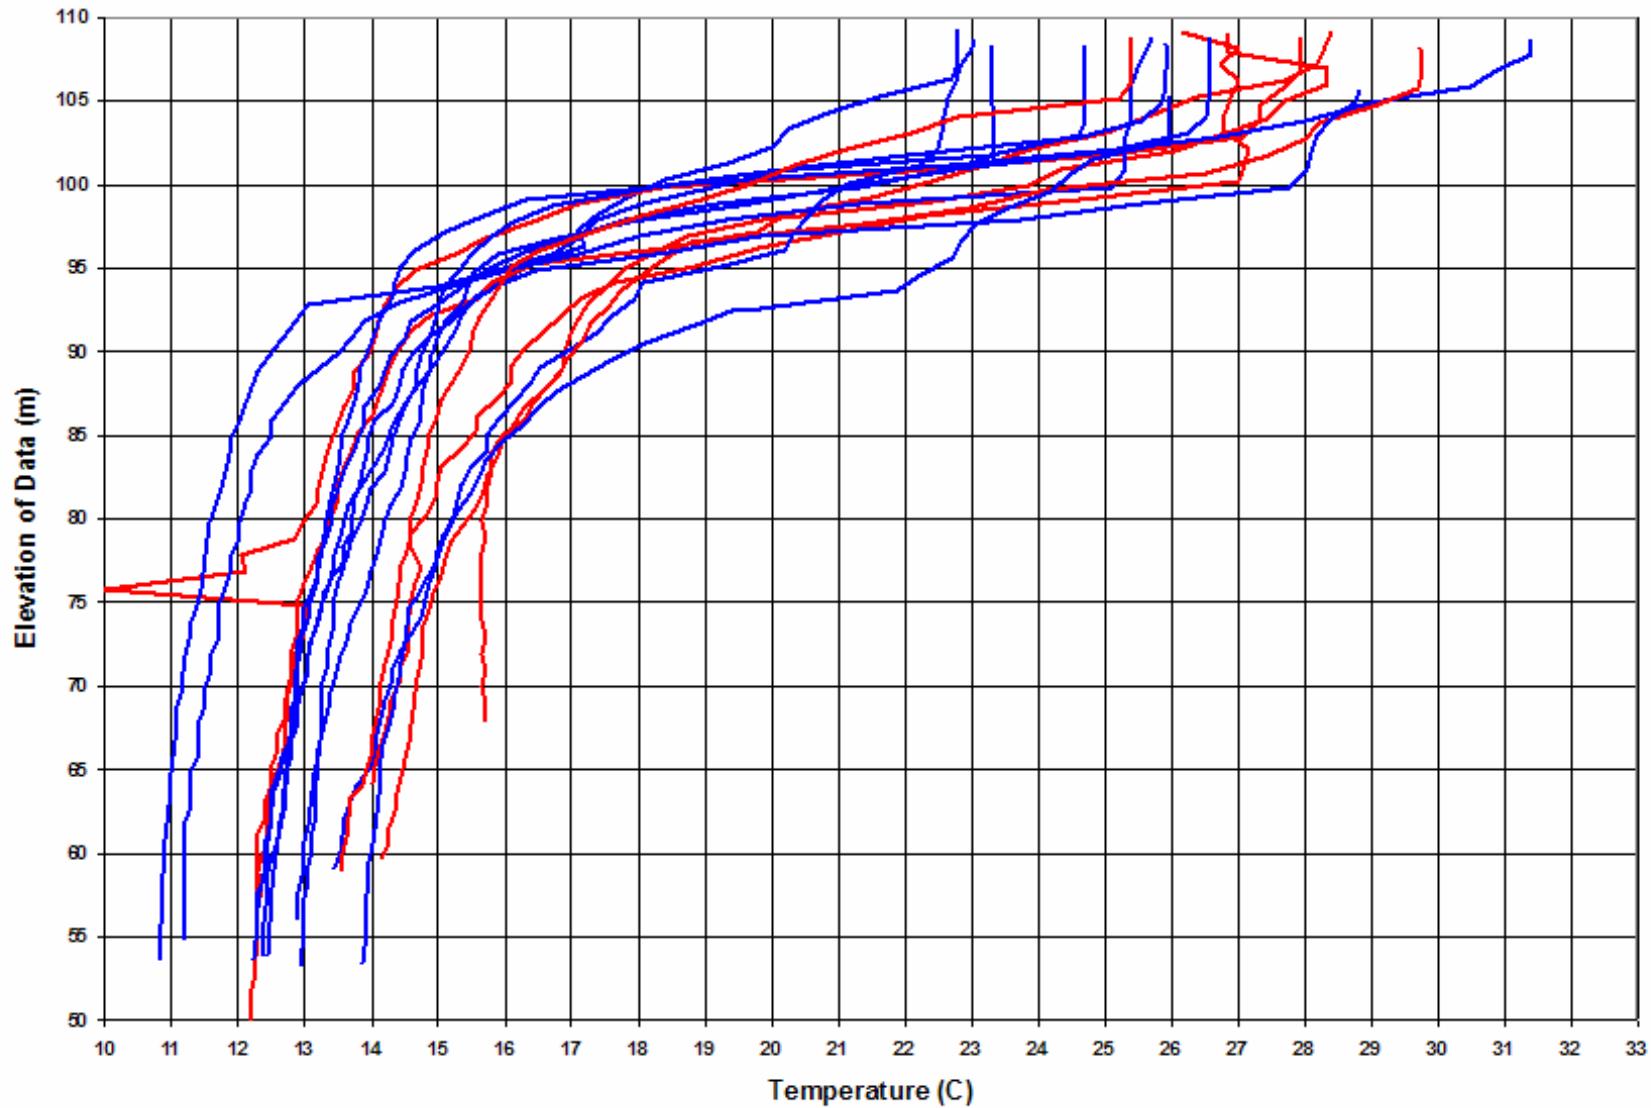


Murray Forebay Temperature Profiles - July

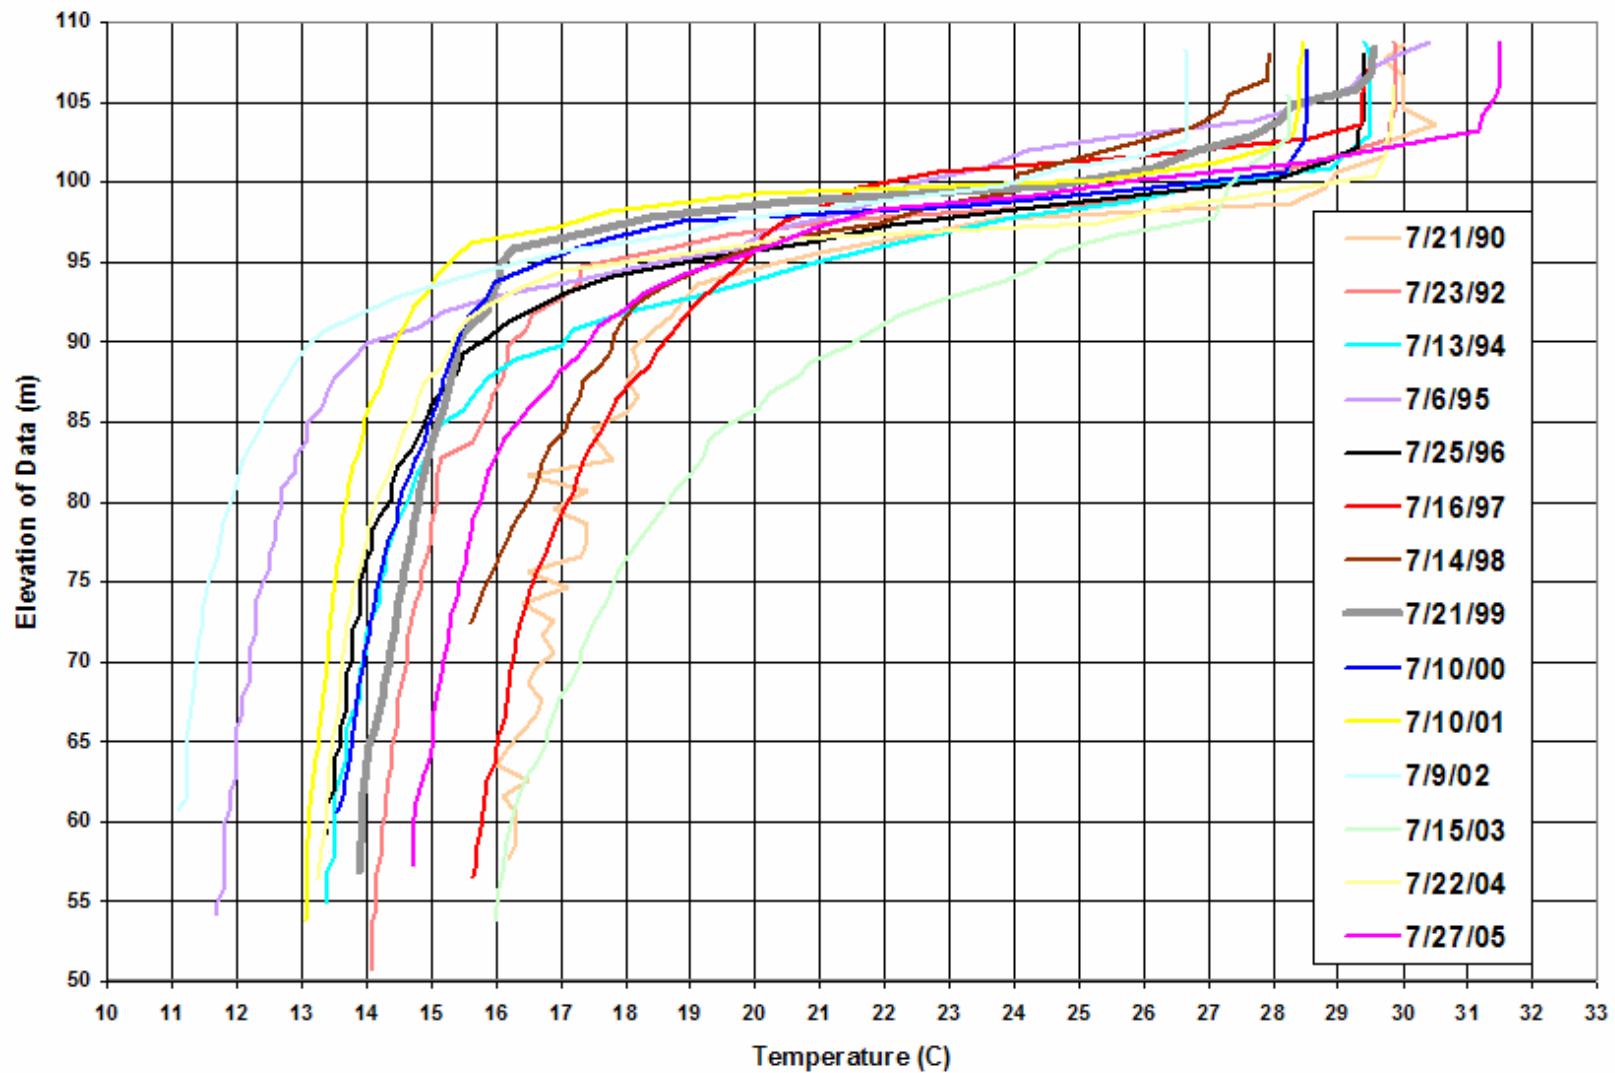


Murray Forebay Temperature Profiles - July

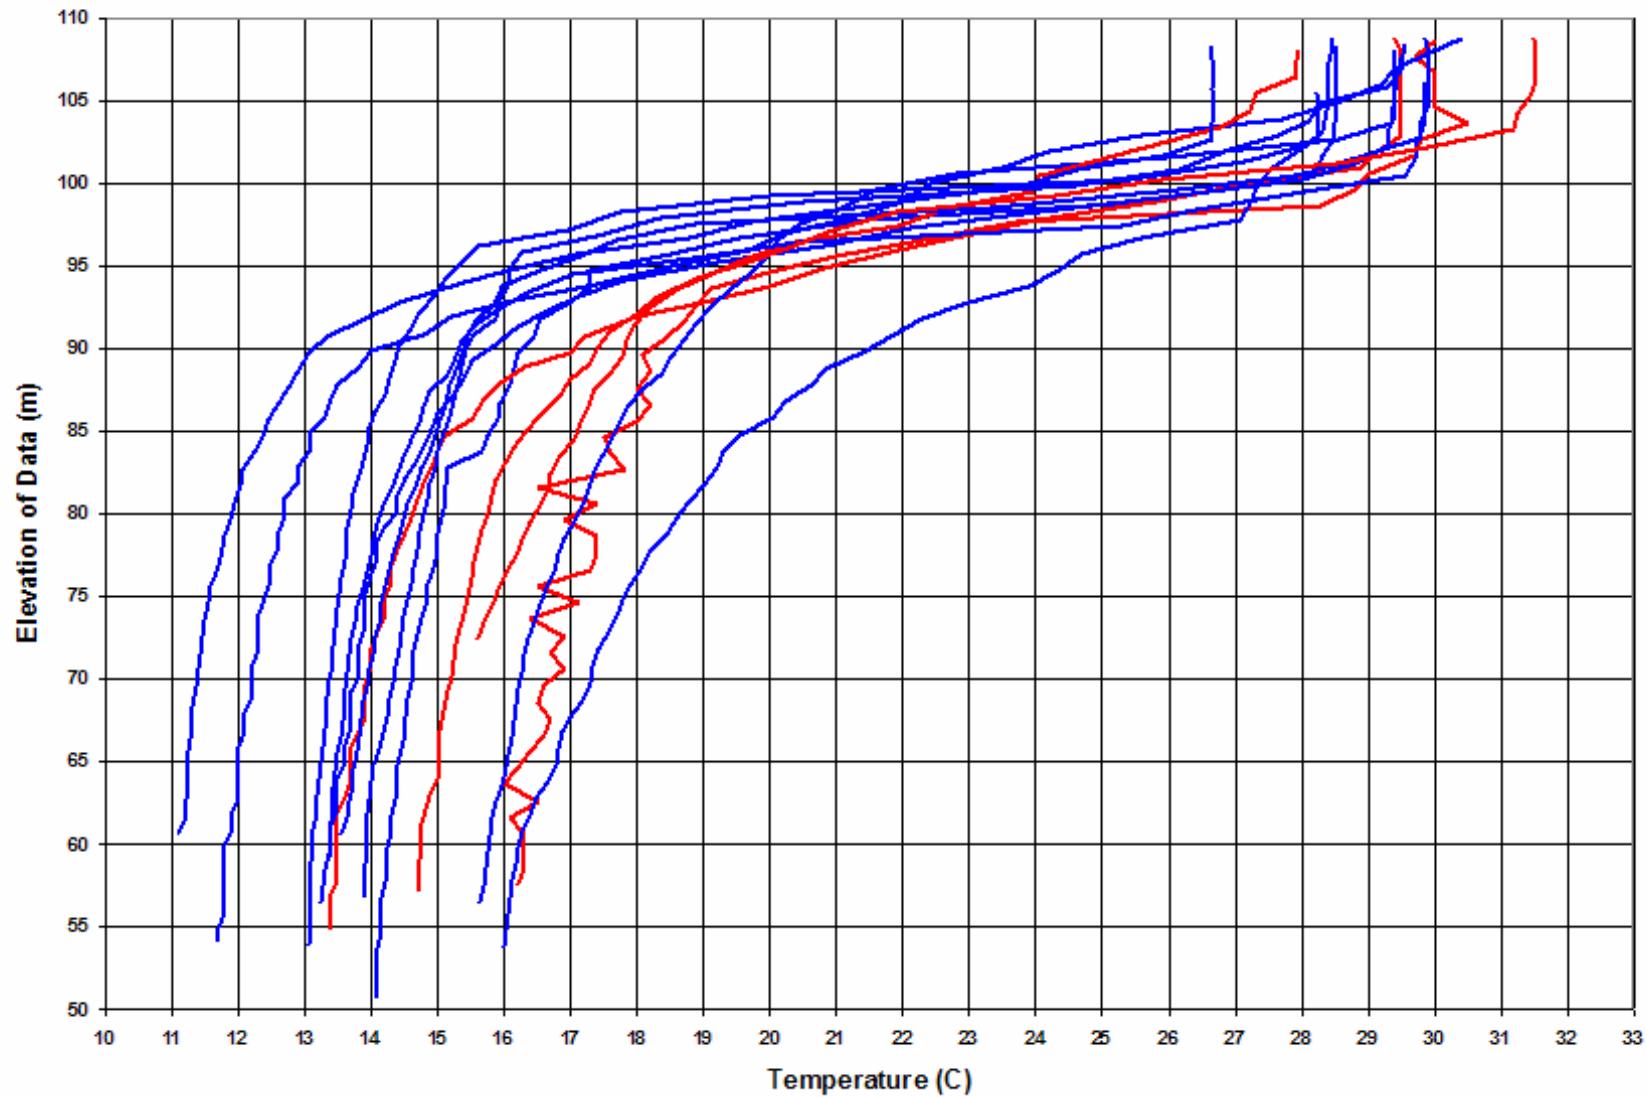


Murray Forebay Temperature Profiles - August

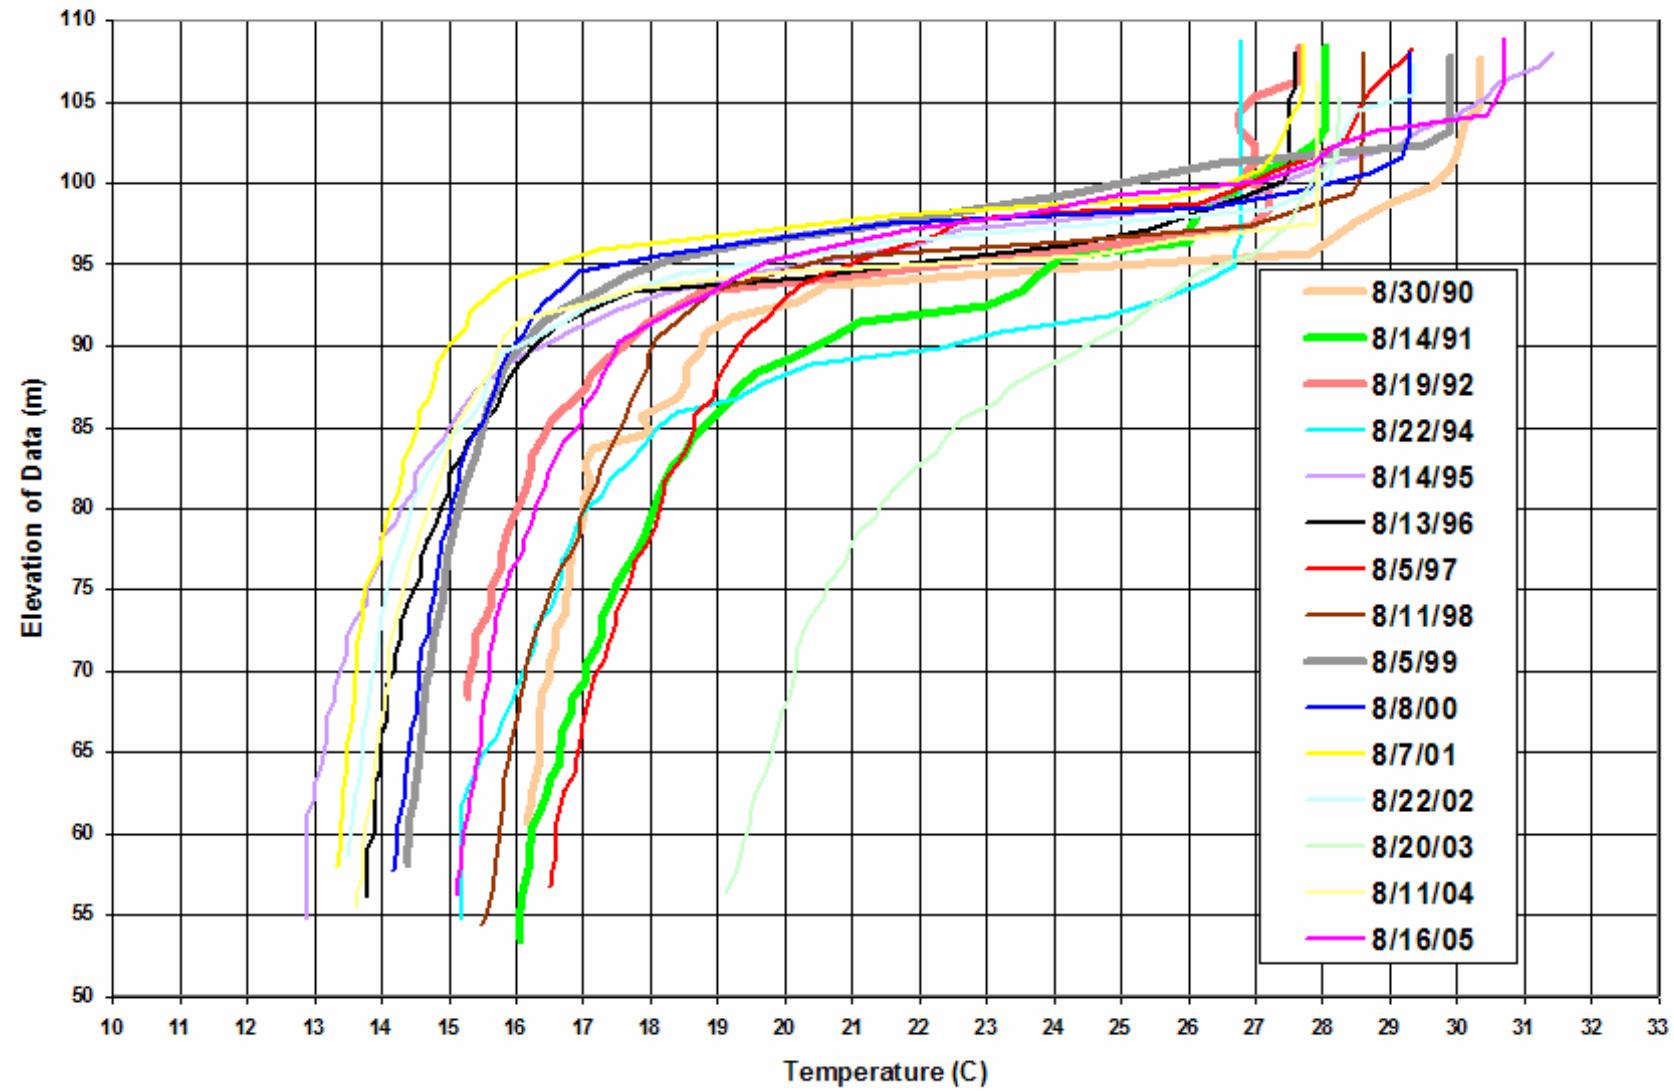


Murray Forebay Temperature Profiles - August

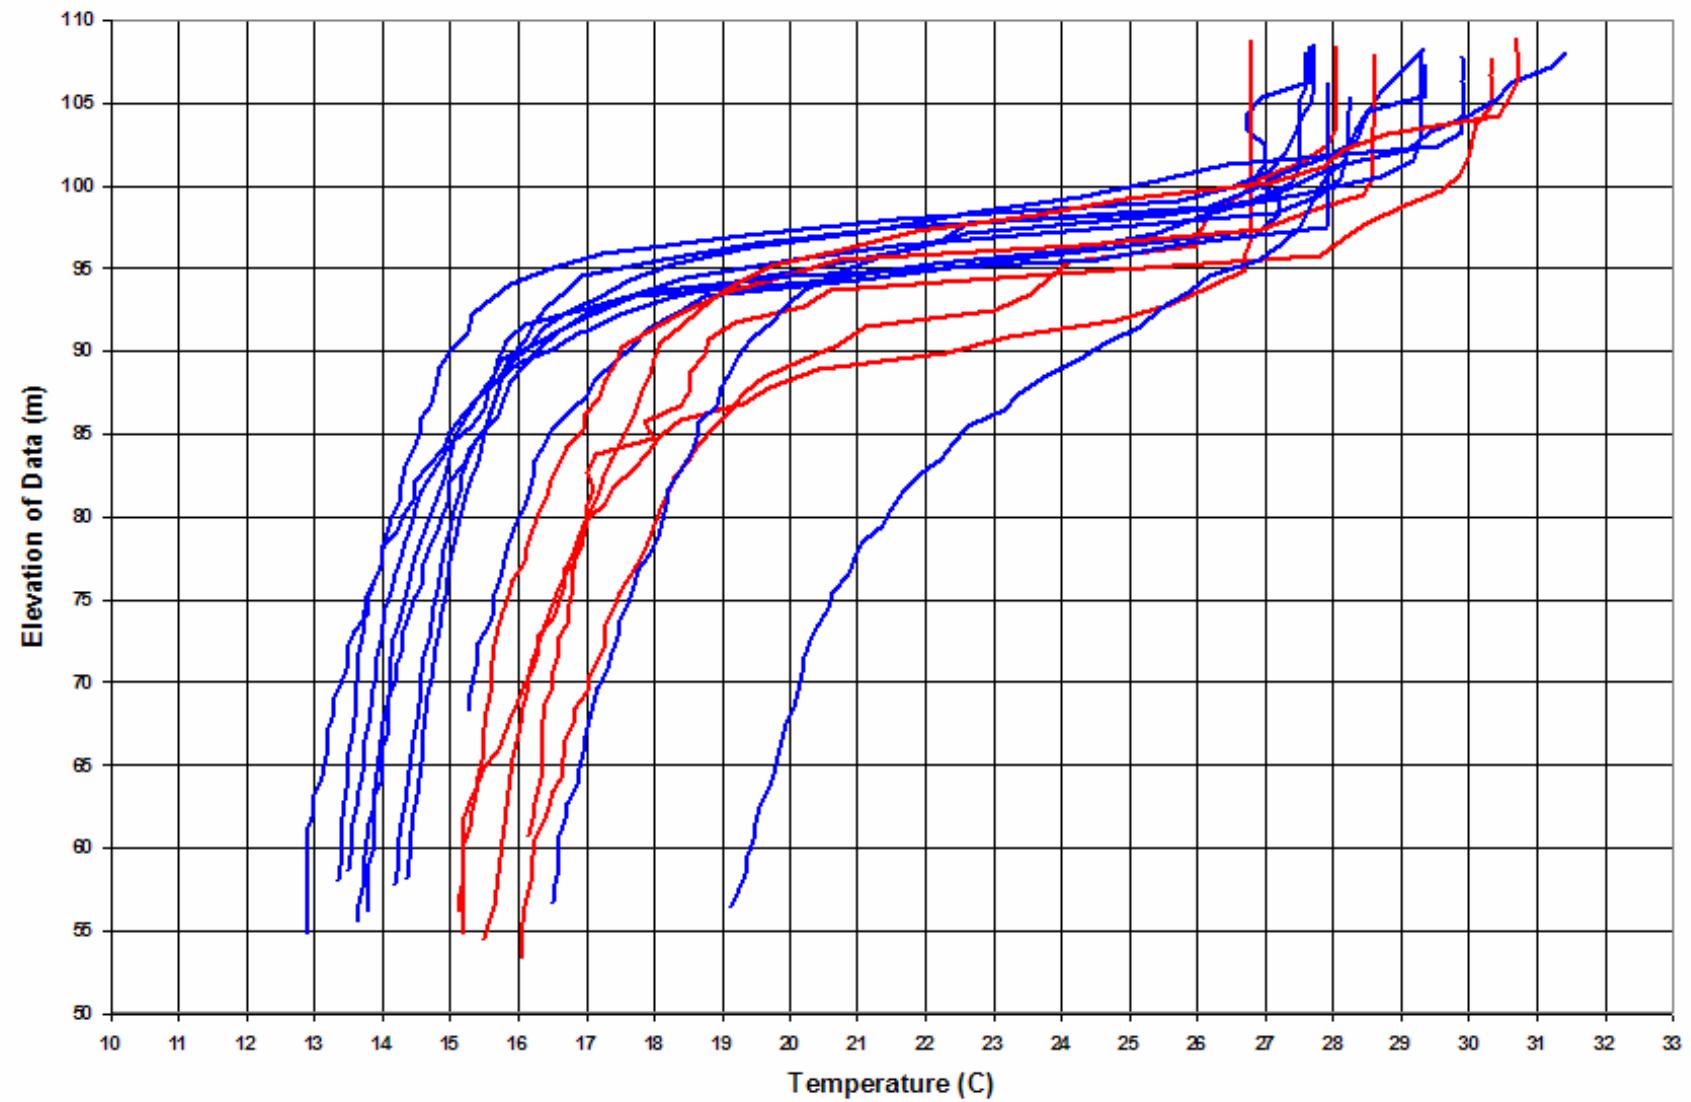


Murray Forebay Temperature Profiles - September

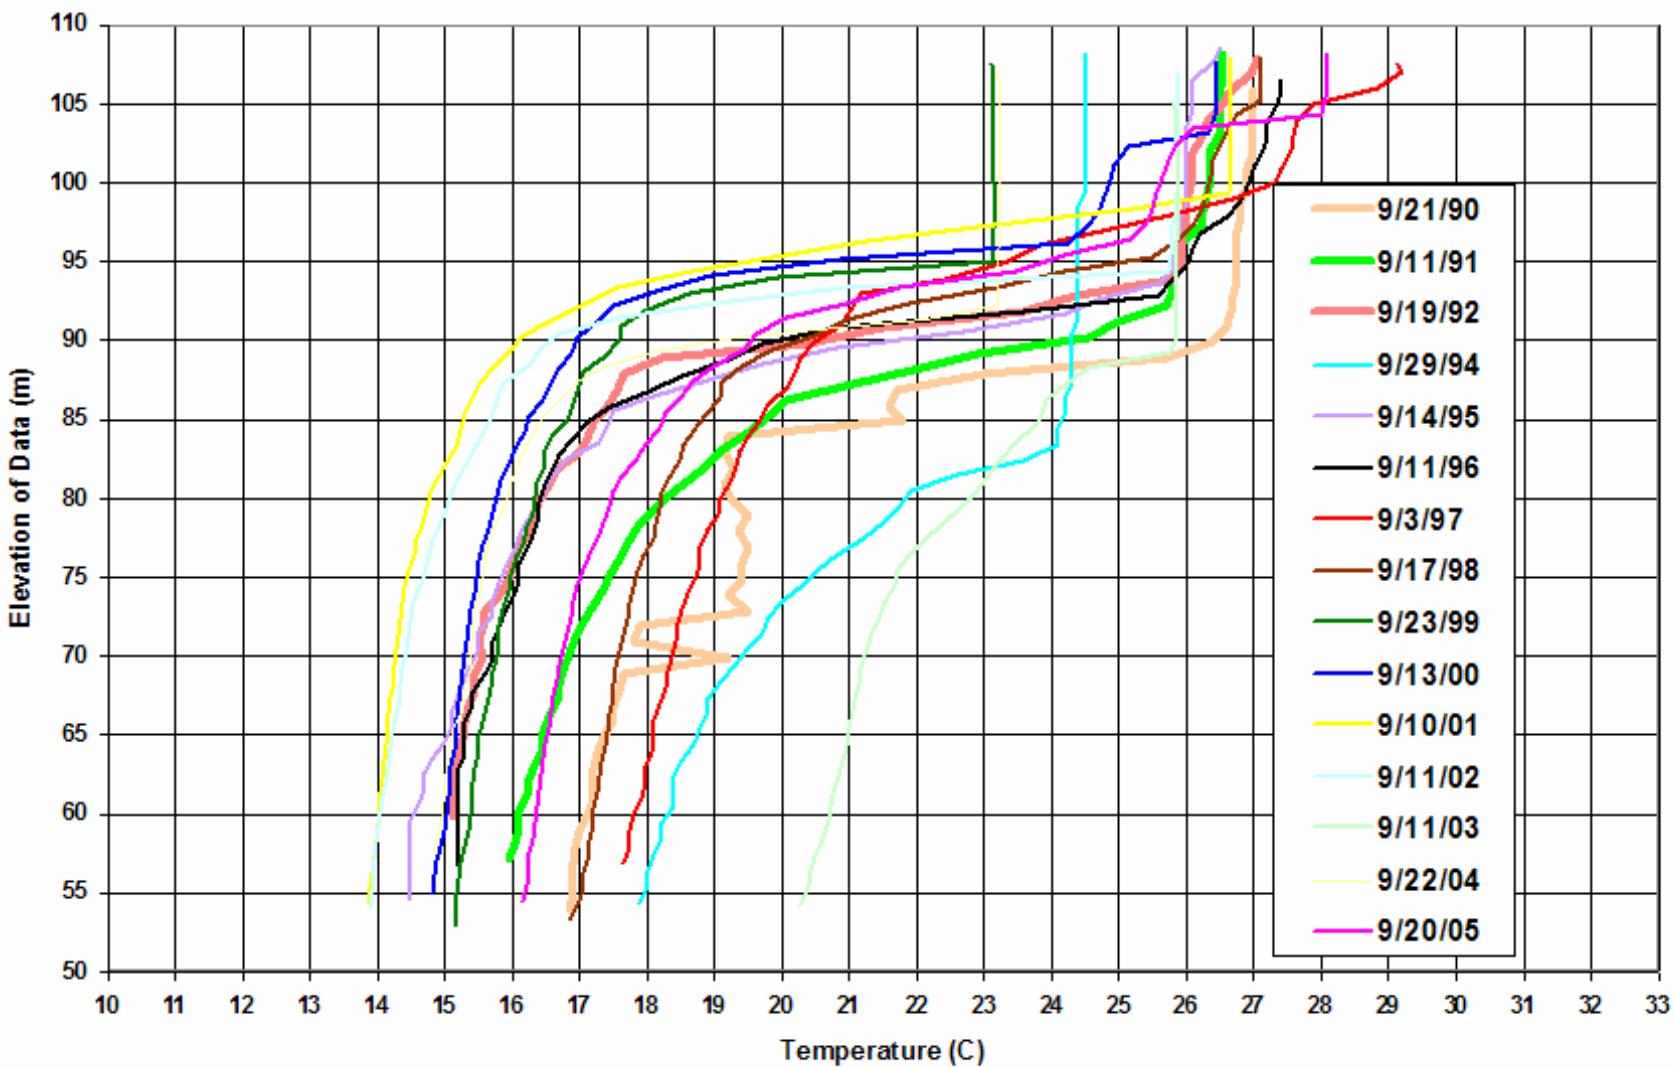


Murray Forebay Temperature Profiles - September

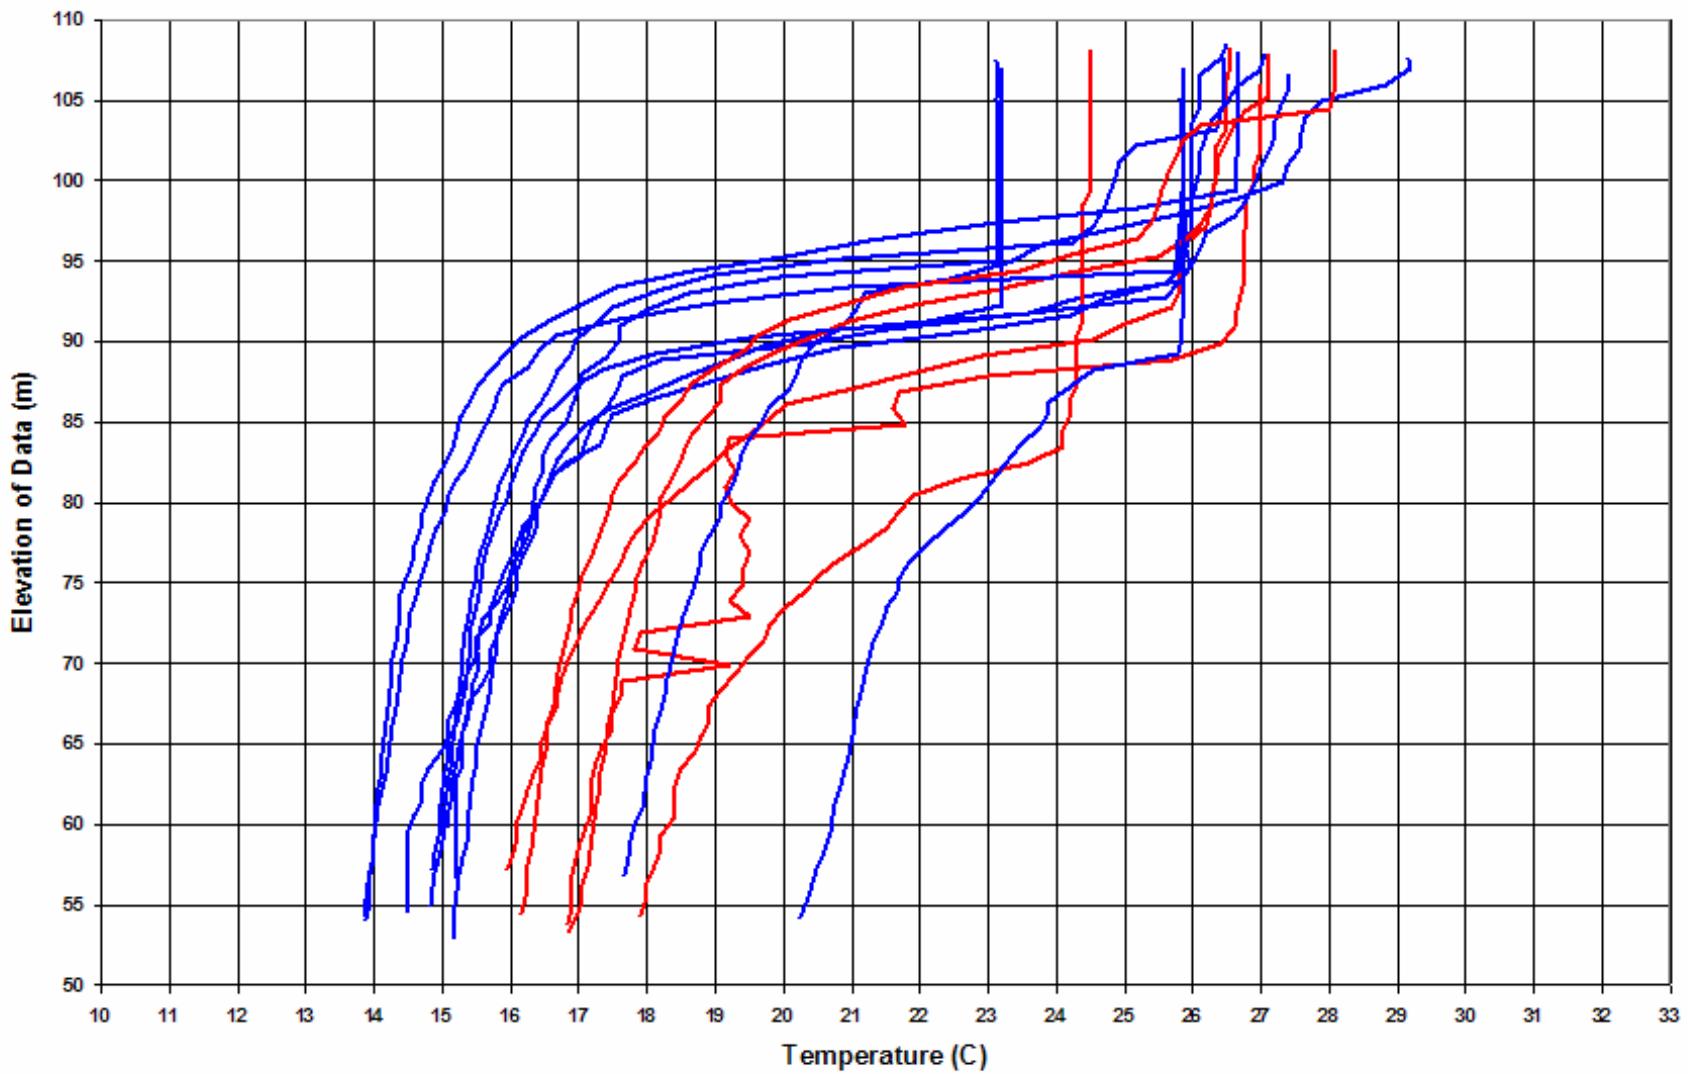


Murray Forebay DO Profiles - June

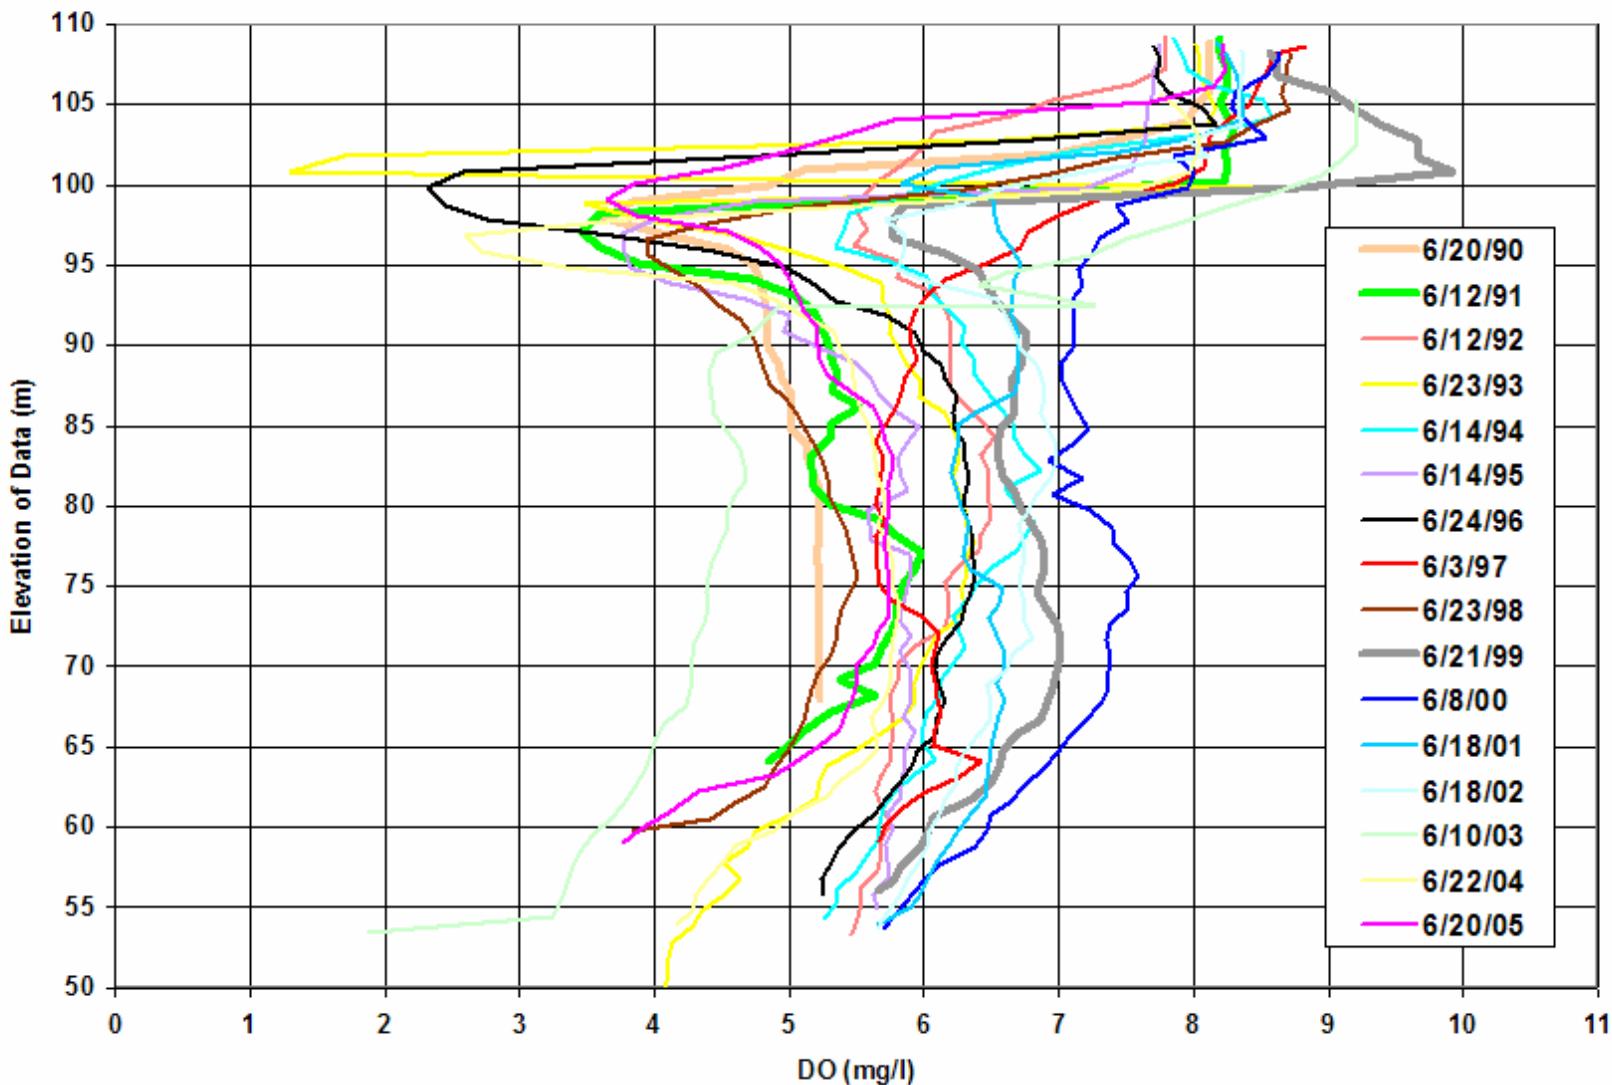


Murray Forebay DO Profiles - June

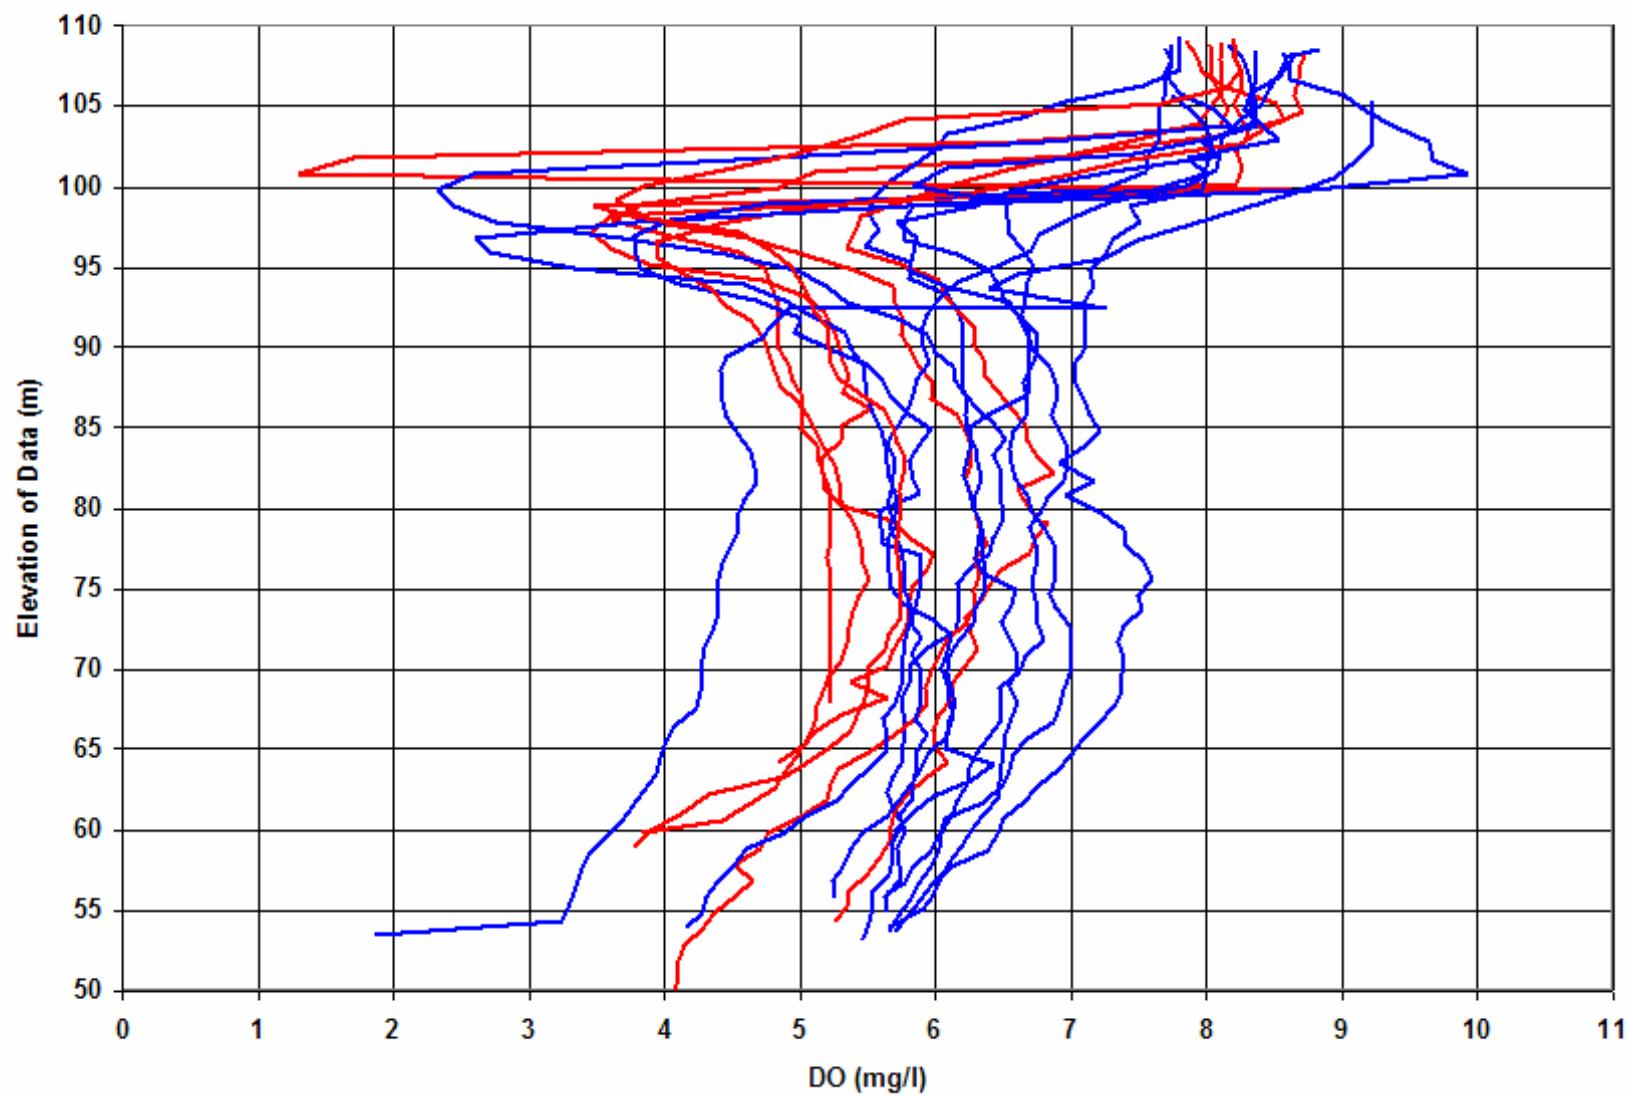


Murray Forebay DO Profiles - July

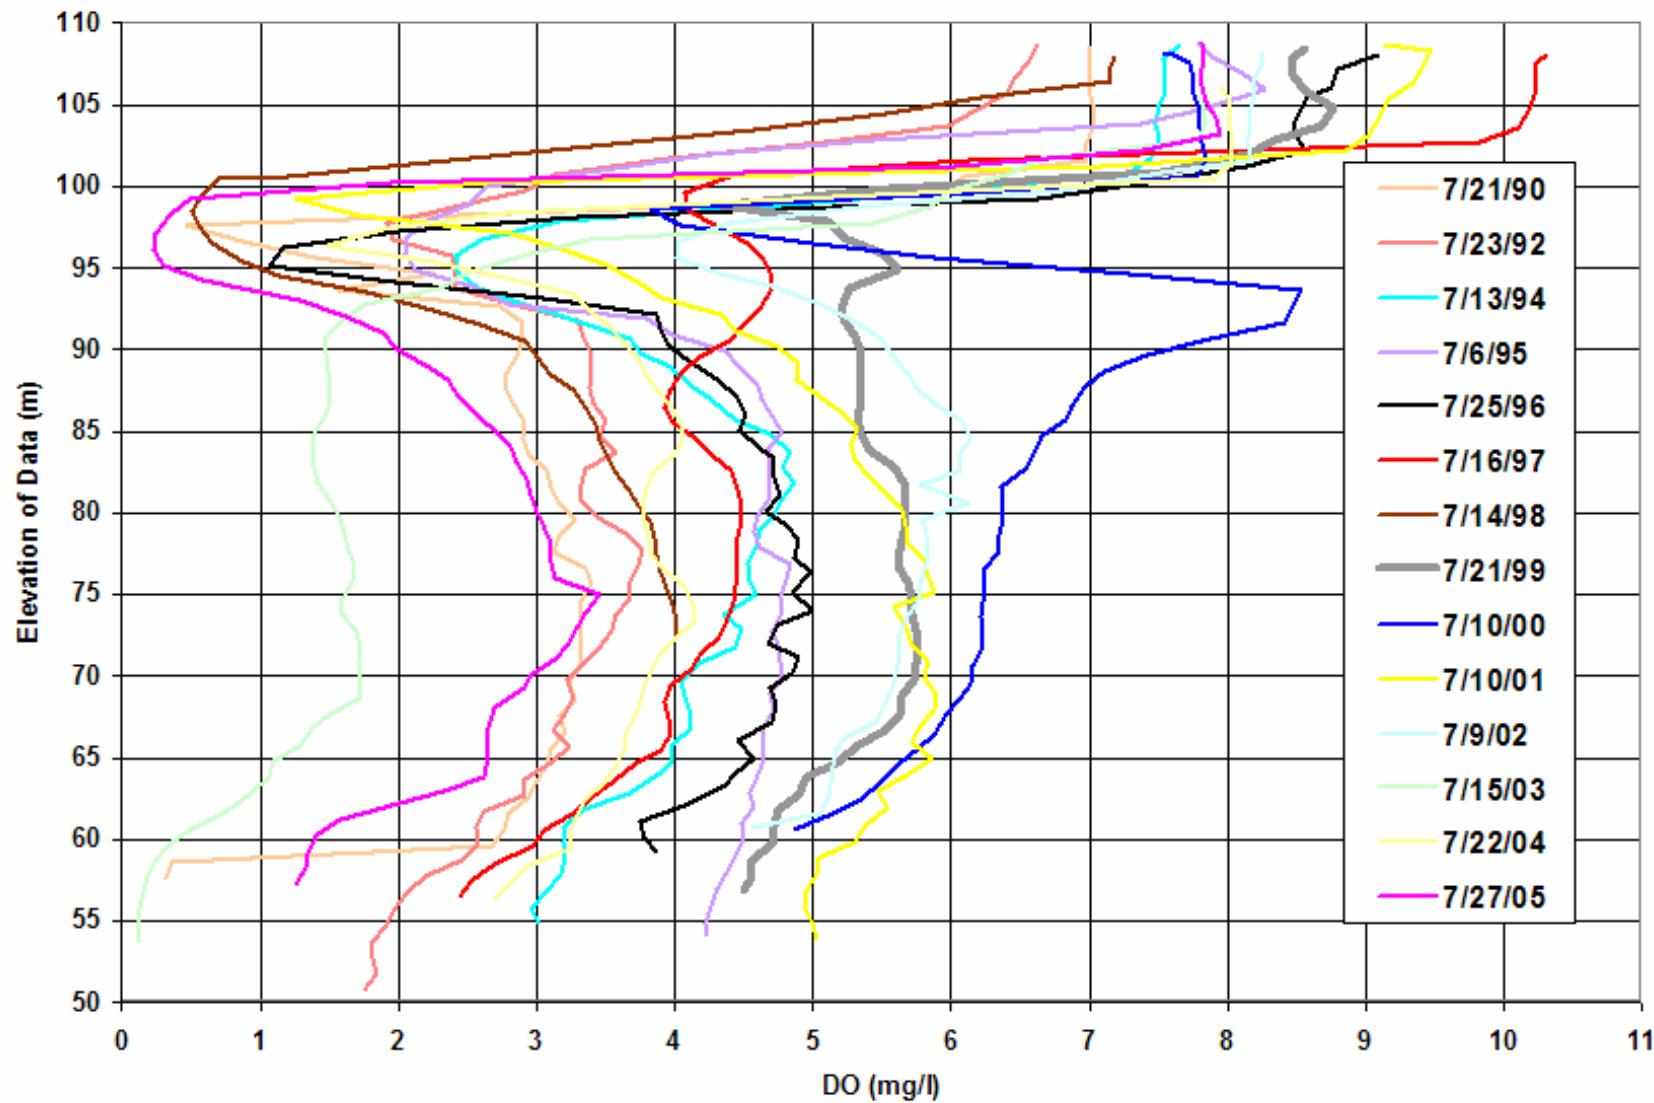


Murray Forebay DO Profiles - July

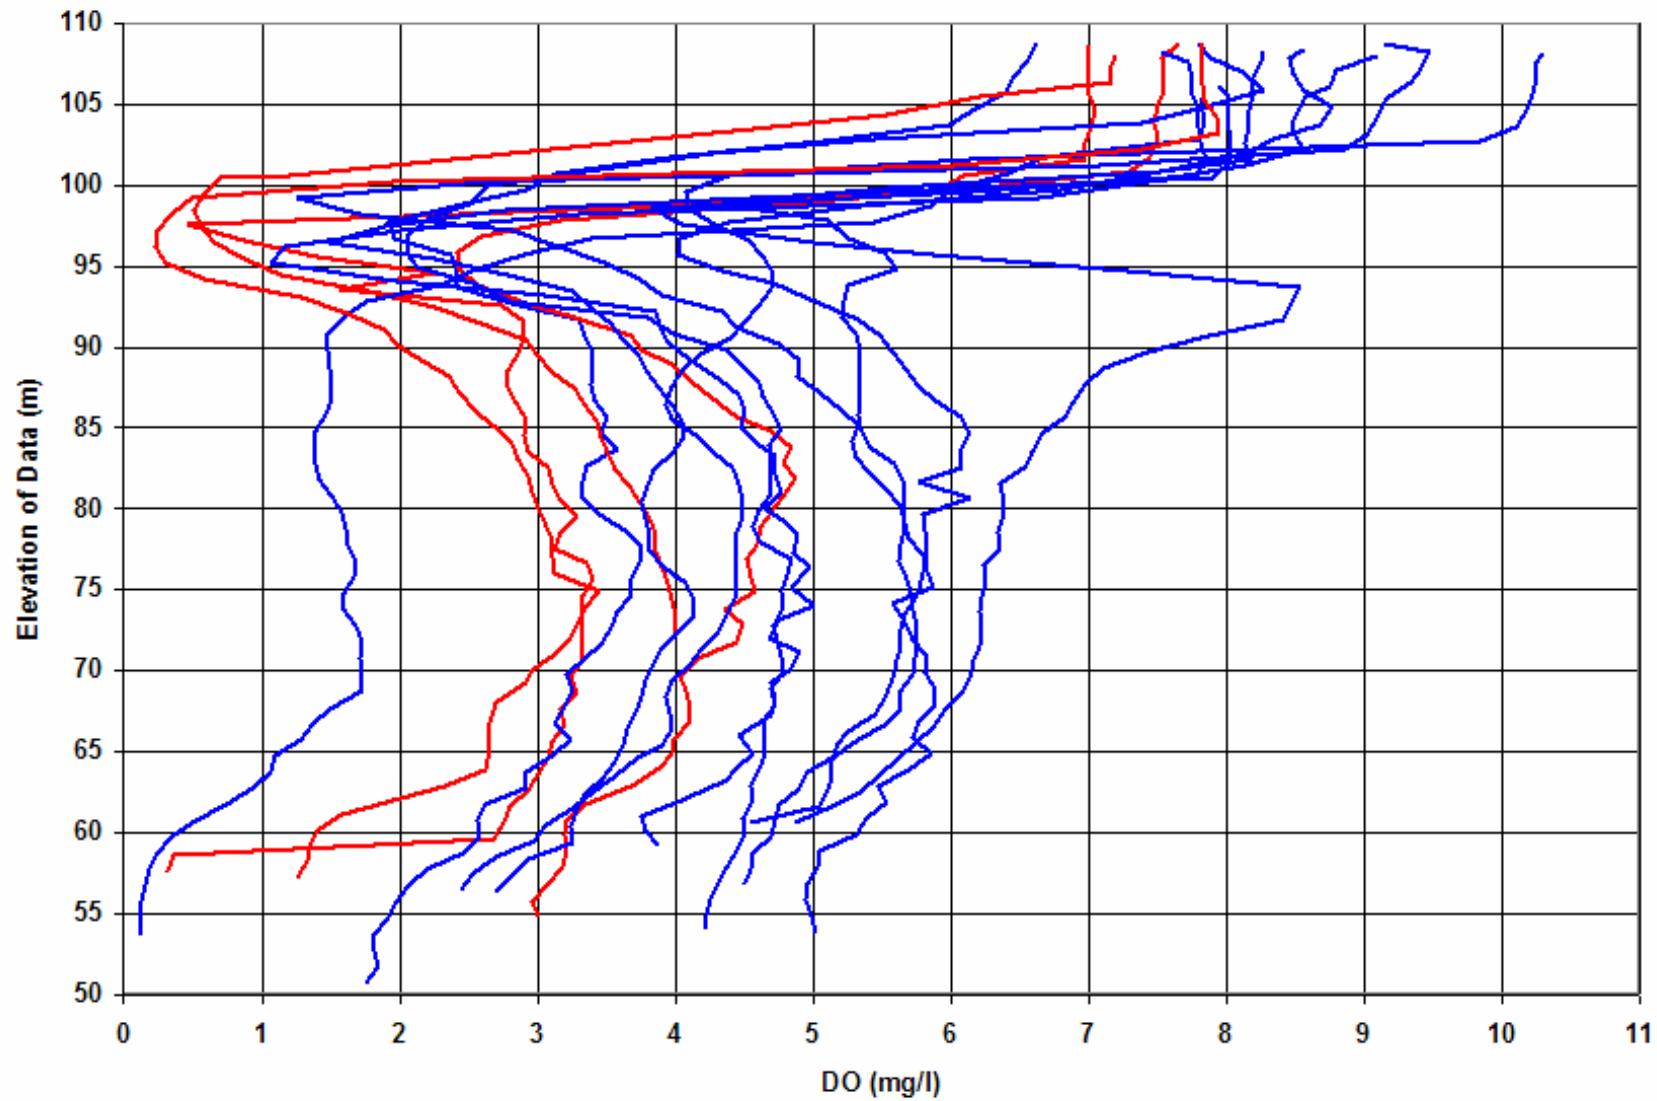


Murray Forebay DO Profiles - August

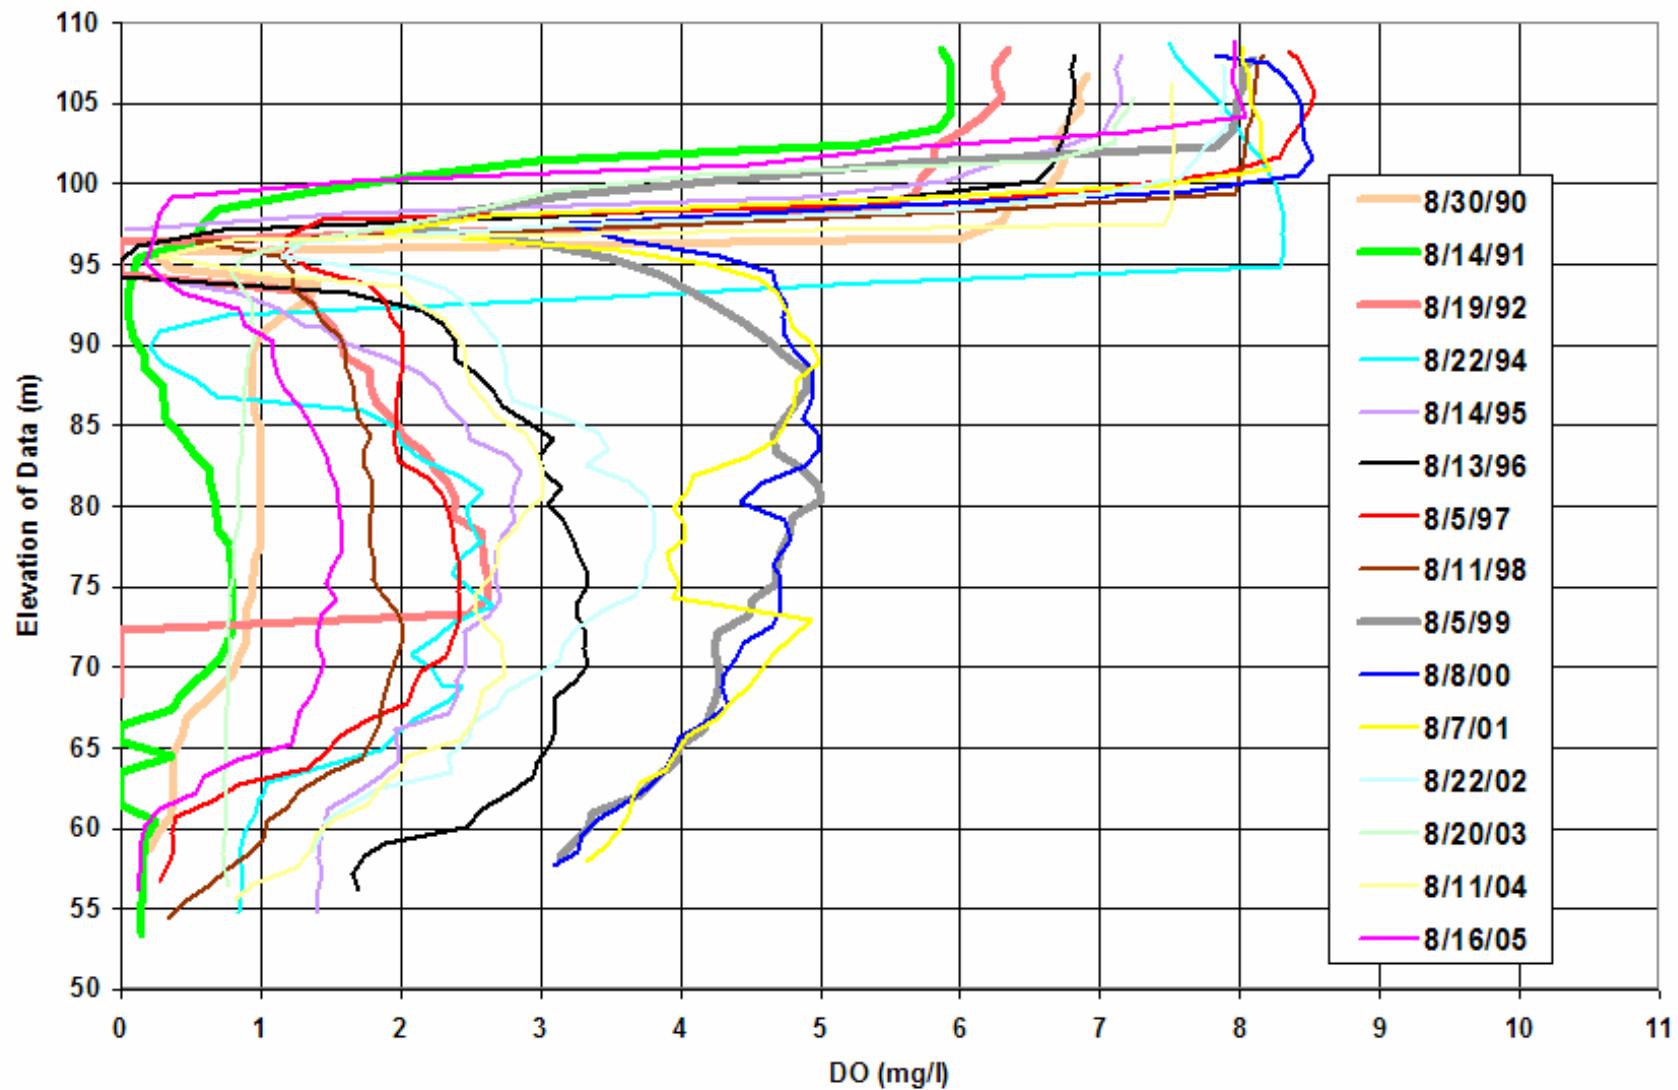


Murray Forebay DO Profiles - August

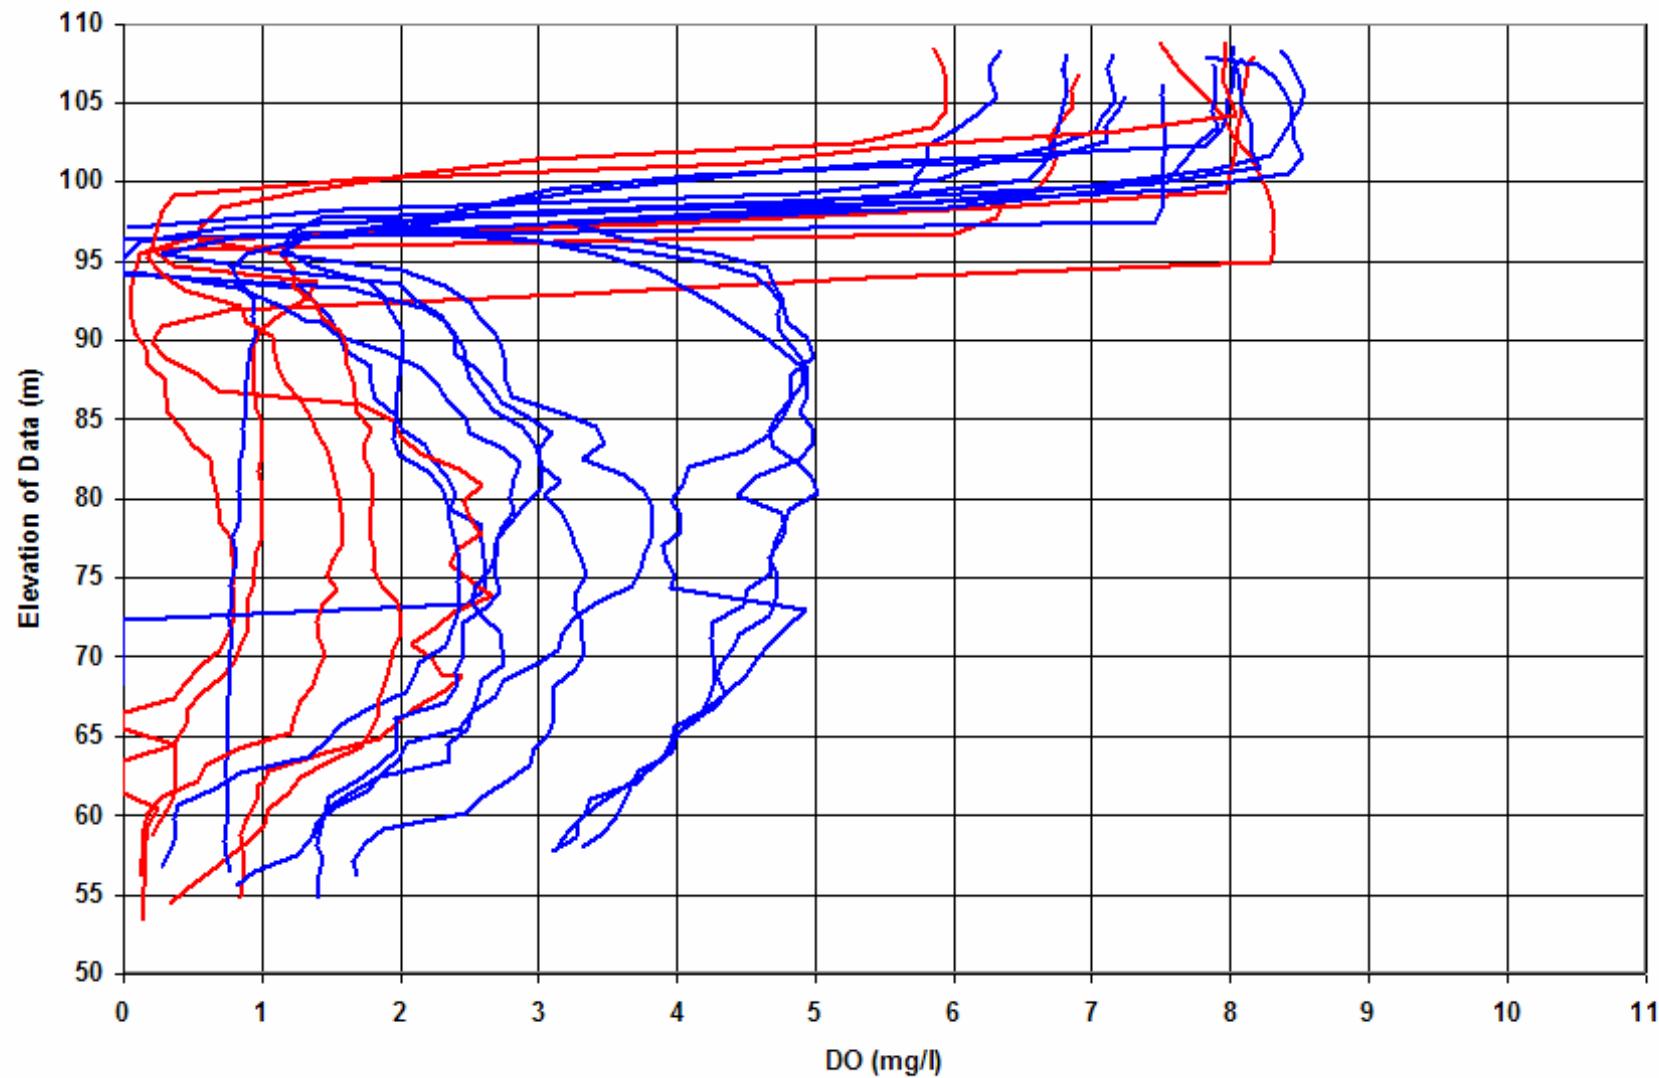

Murray Forebay DO Profiles - September

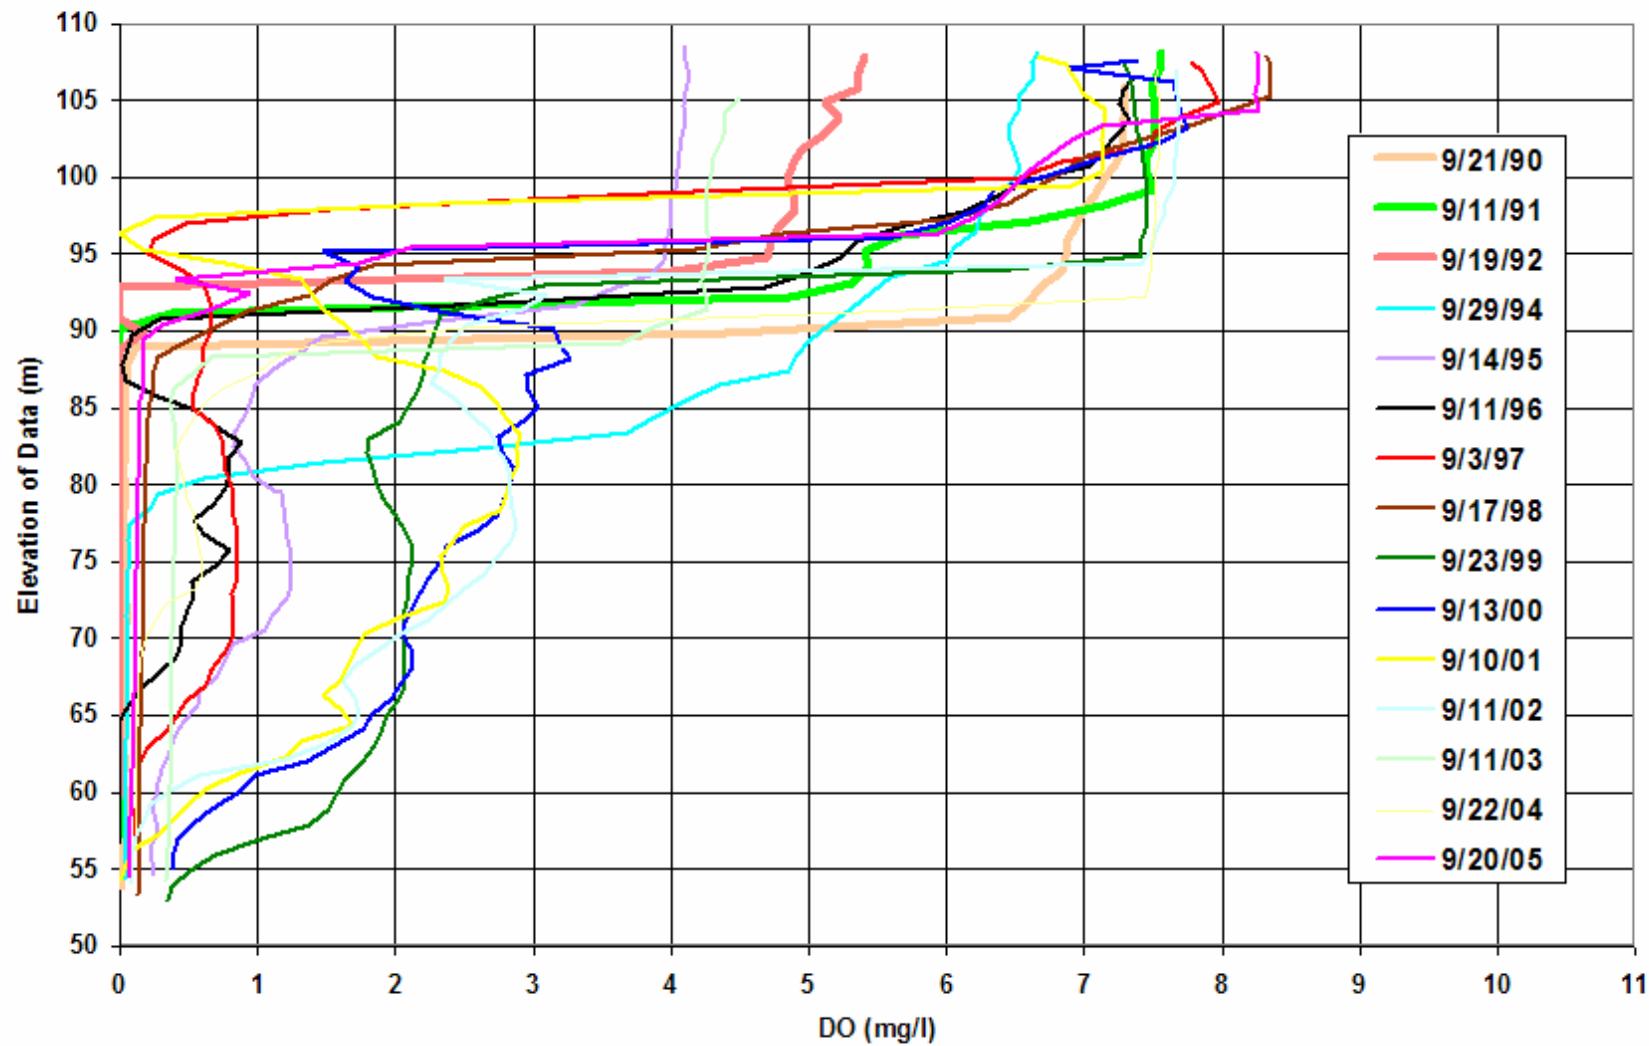


Murray Forebay DO Profiles - September

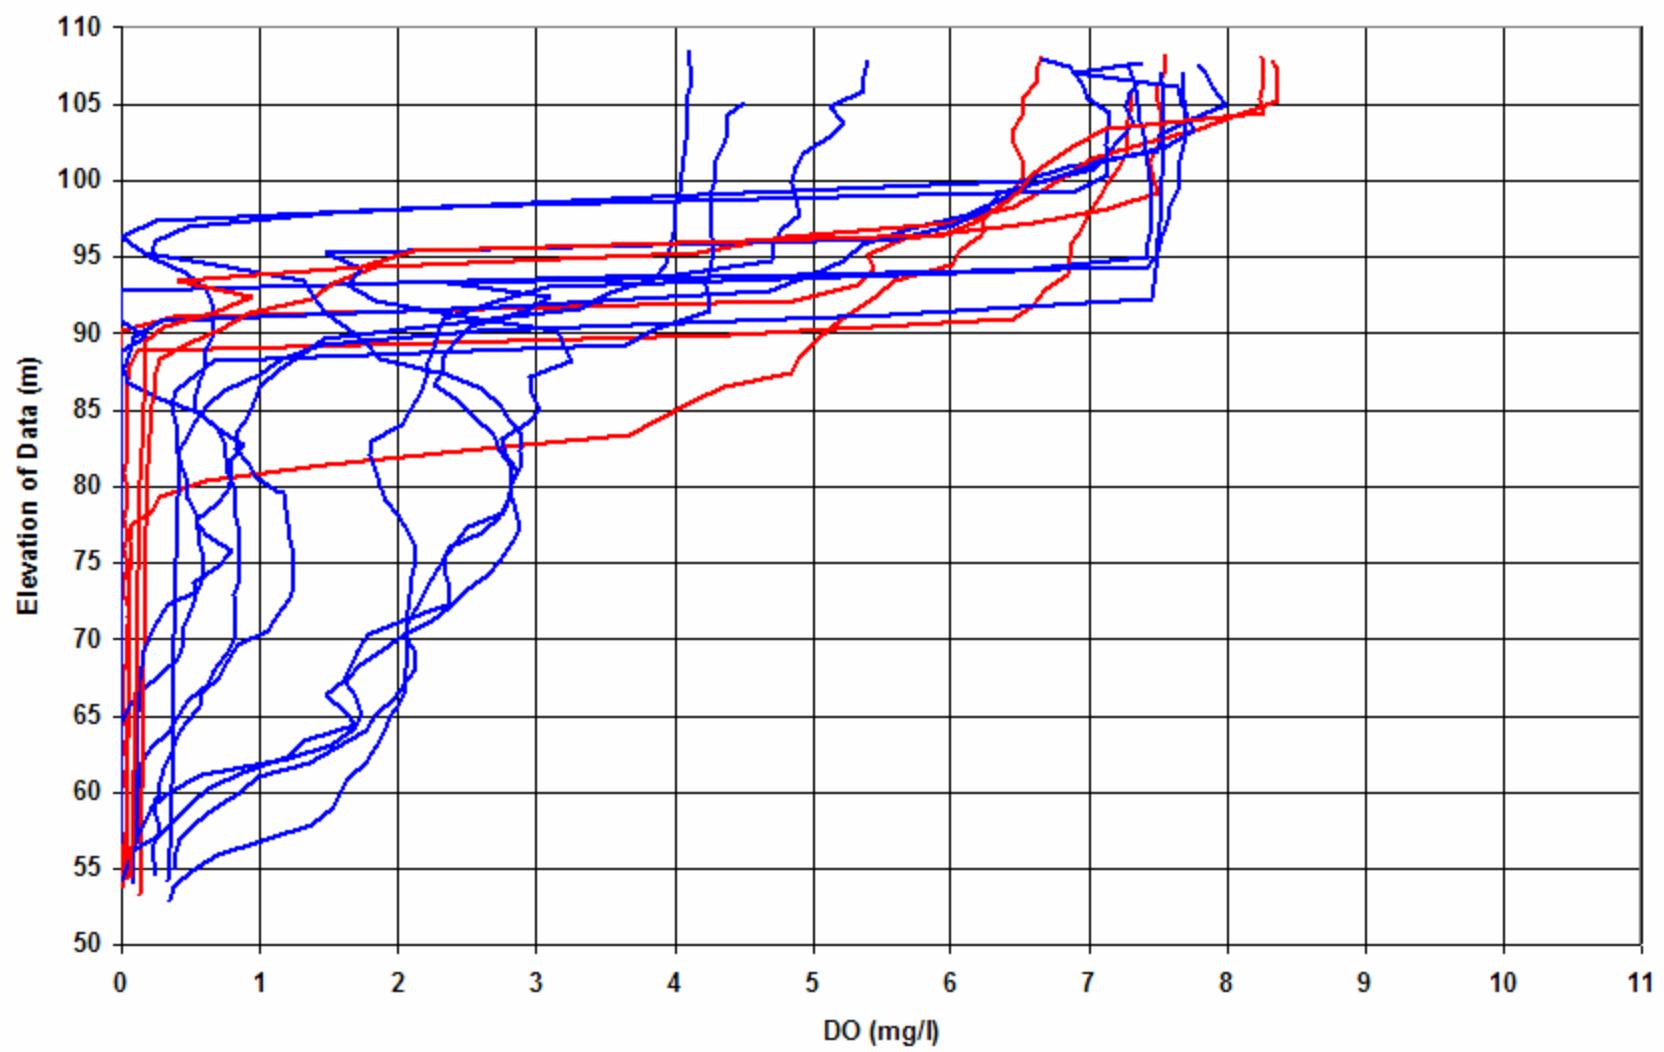


Lake Murray Contour Plots


June 2002 Temperature

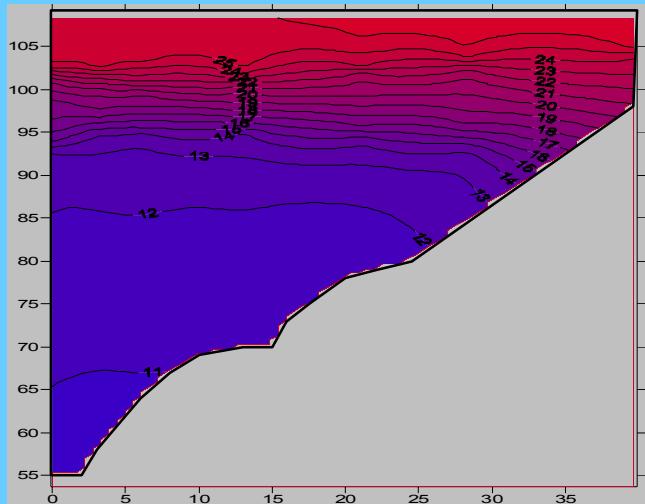


June 2005 Temperature

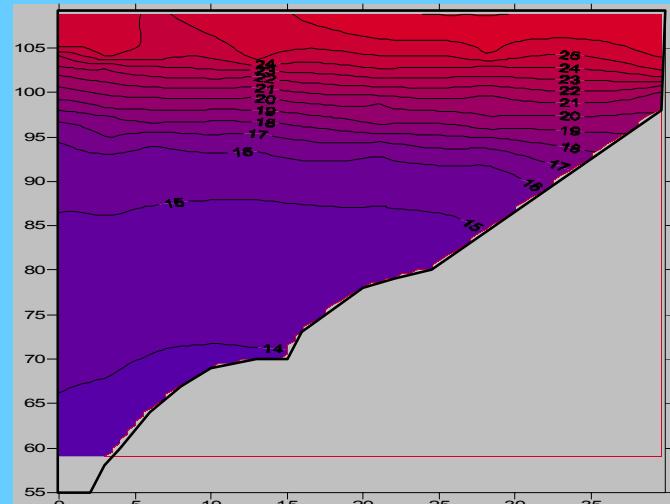

June 2002 DO

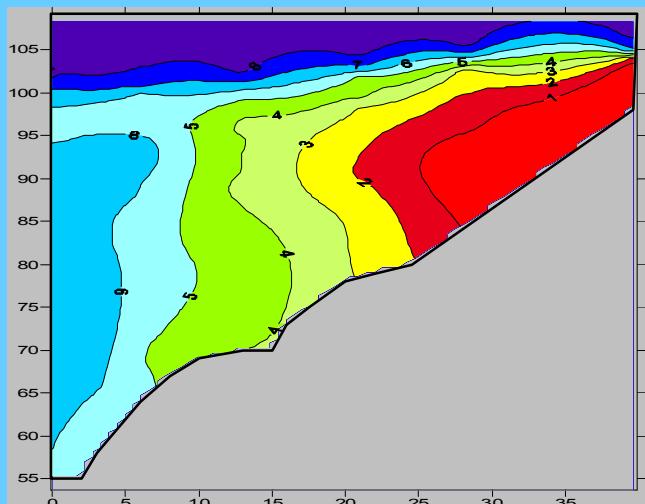


June 2005 DO

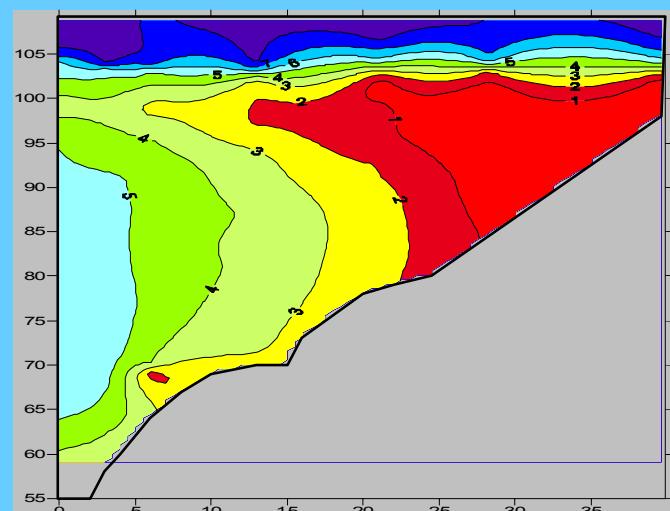


Lake Murray Contour Plots


July 2002 Temperature

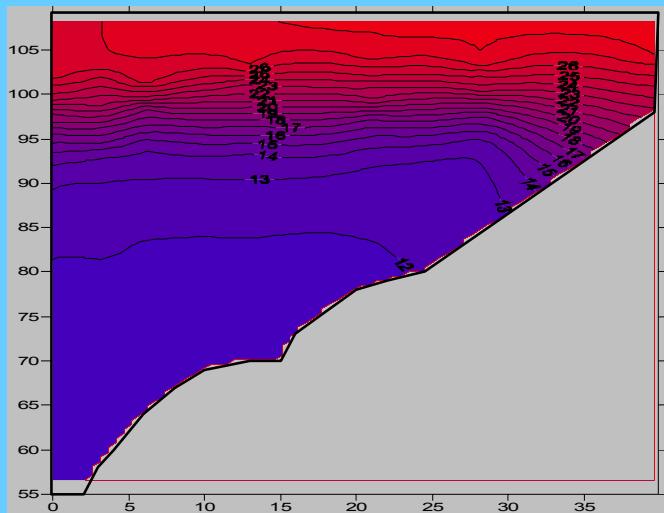

July 2005 Temperature

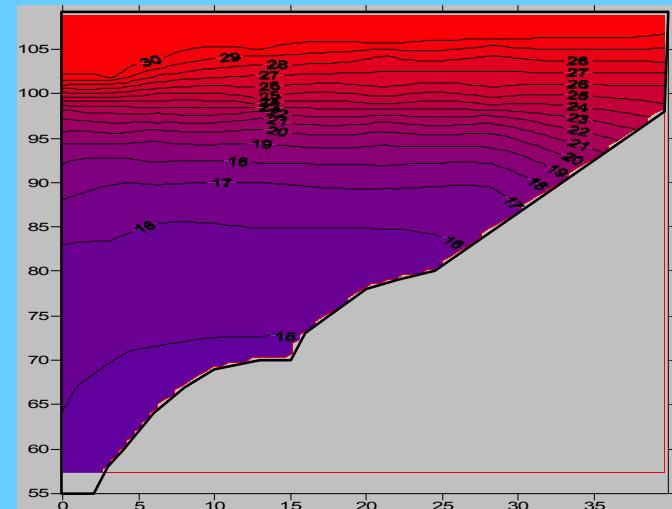


July 2002 DO

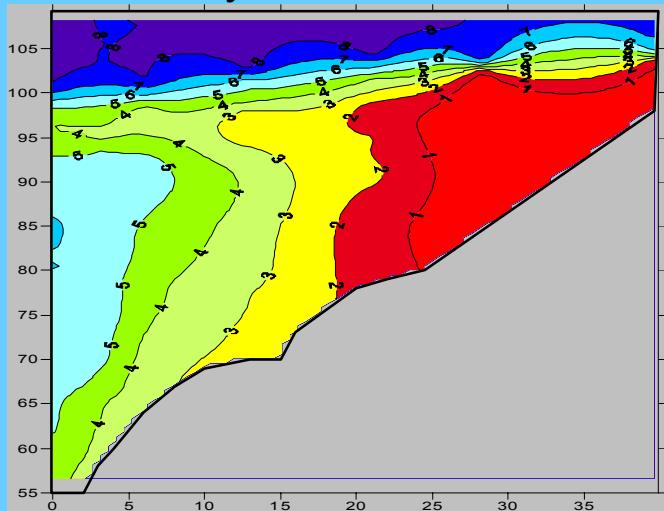


Lake Murray Contour Plots


August 2002 Temperature

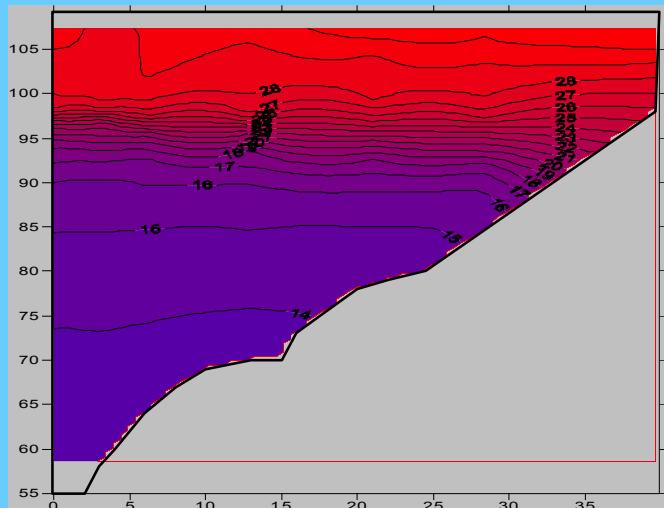


August 2005 Temperature

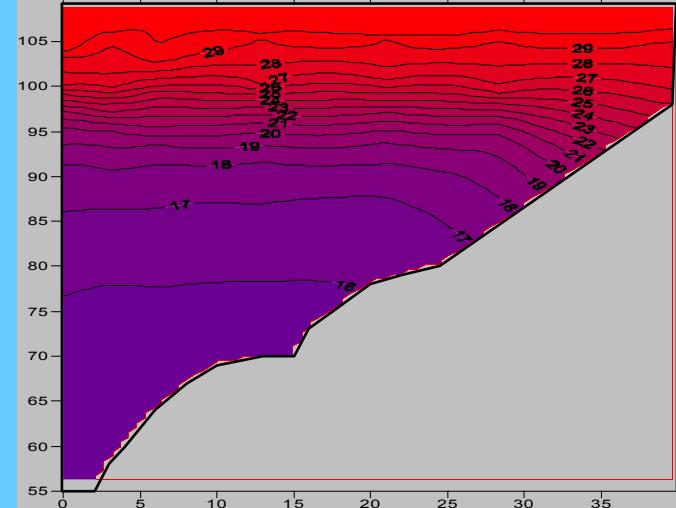

August 2002 DO

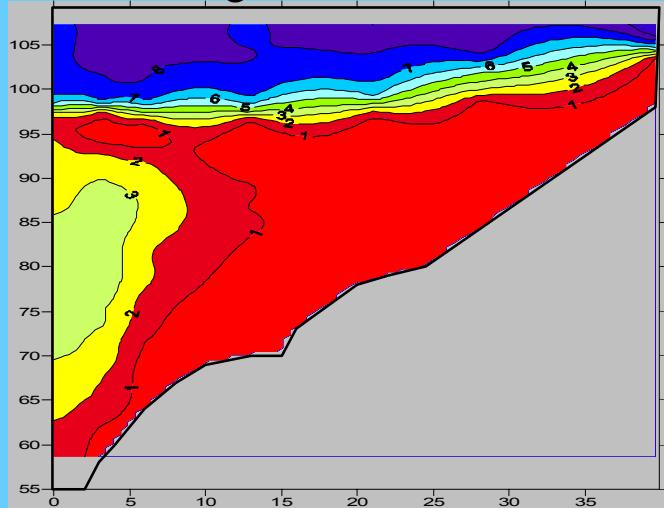


August 2005 DO

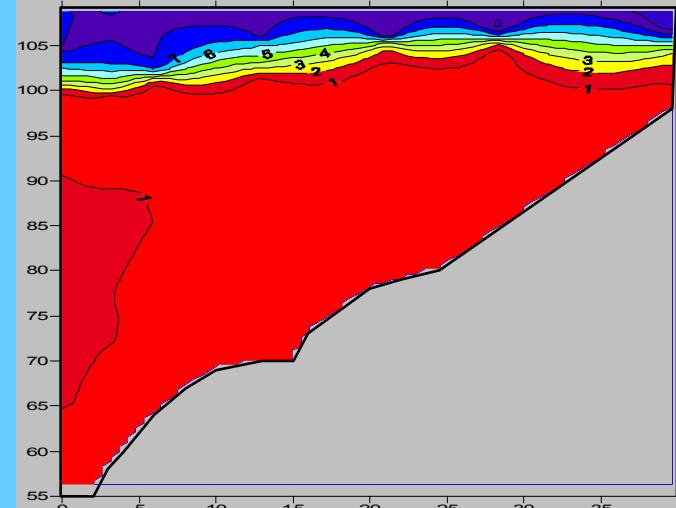


Lake Murray Contour Plots


September 2002 Temperature

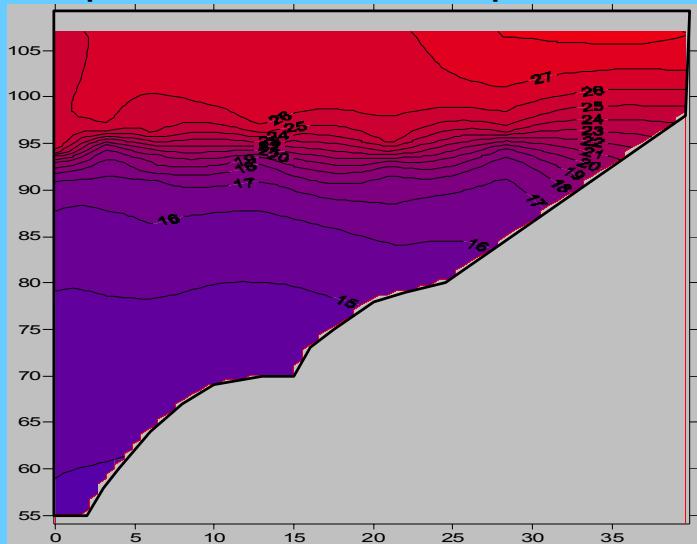


September 2005 Temperature

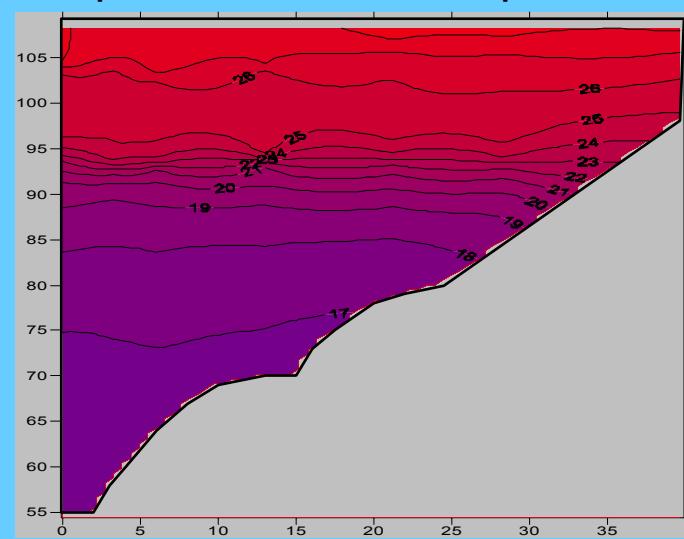


September 2002 DO

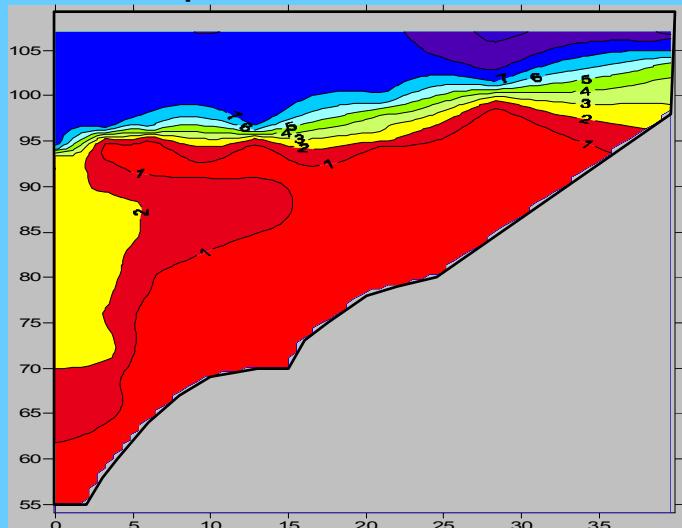


September 2005 DO

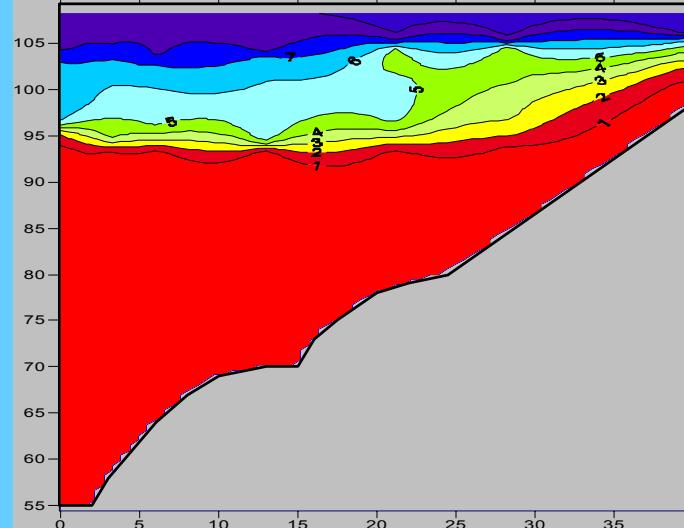


Columbia, SC Daily Average Air Temperature

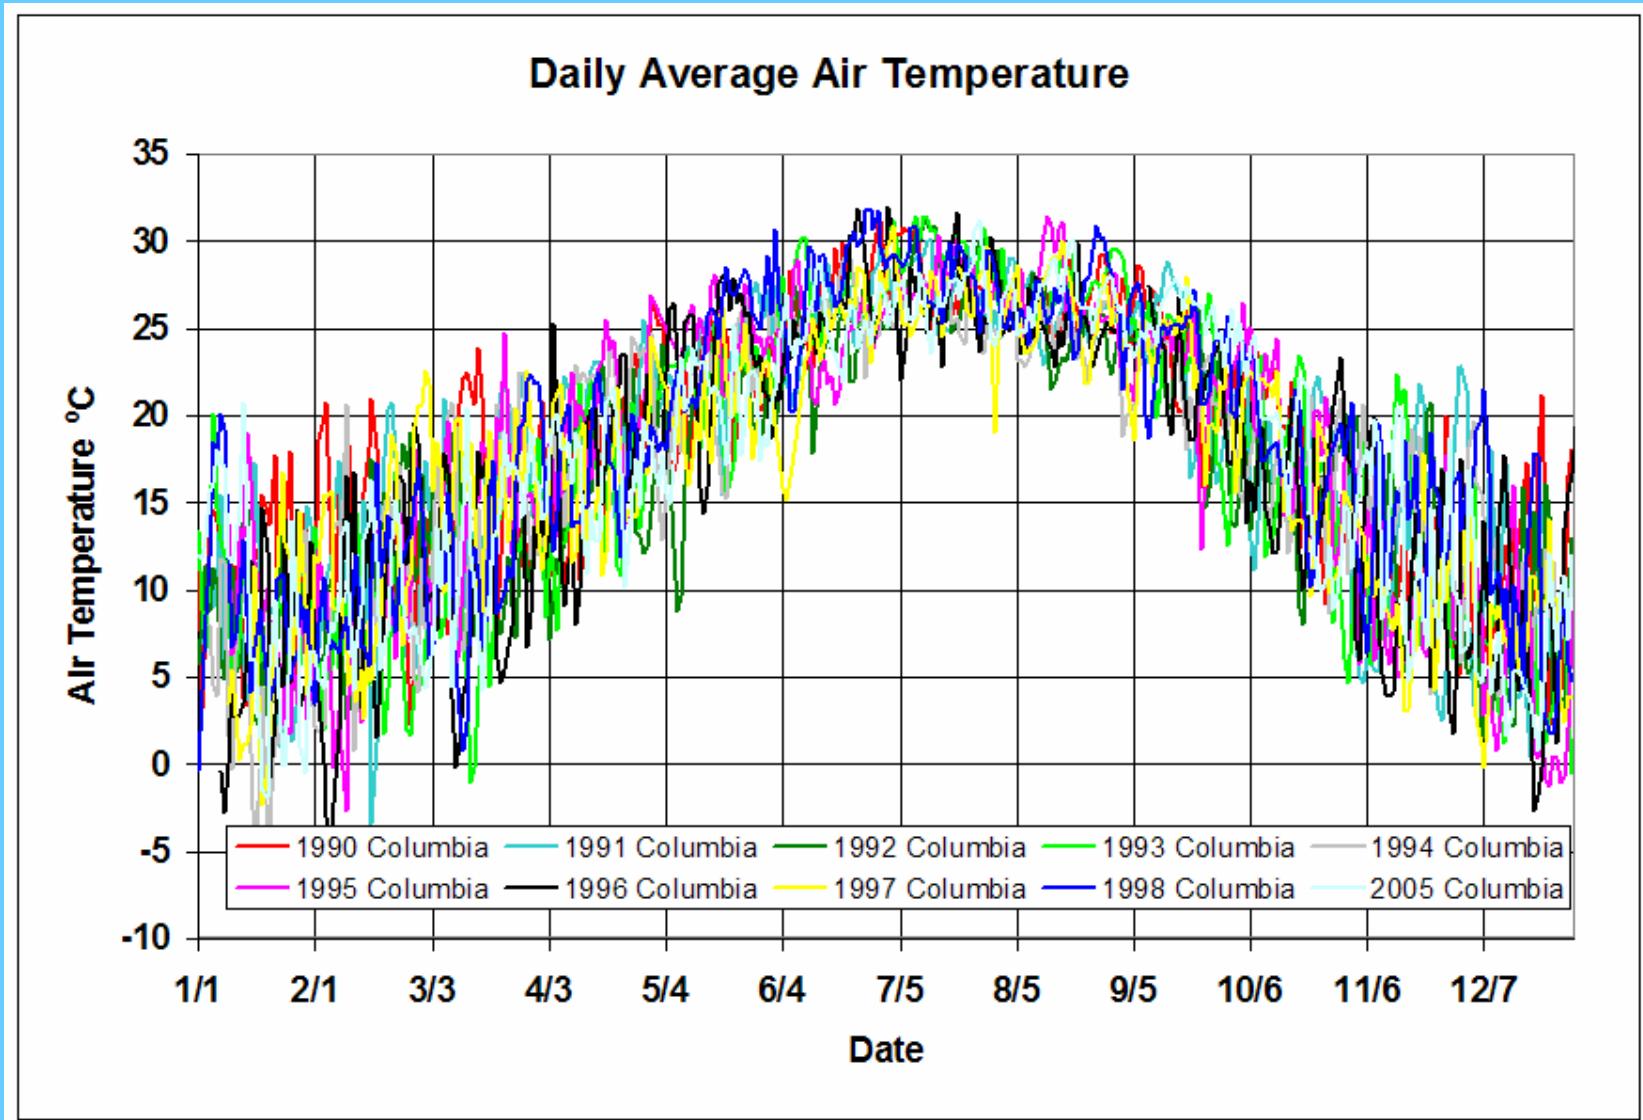

Columbia, SC 7-day Running Average Air Temperature

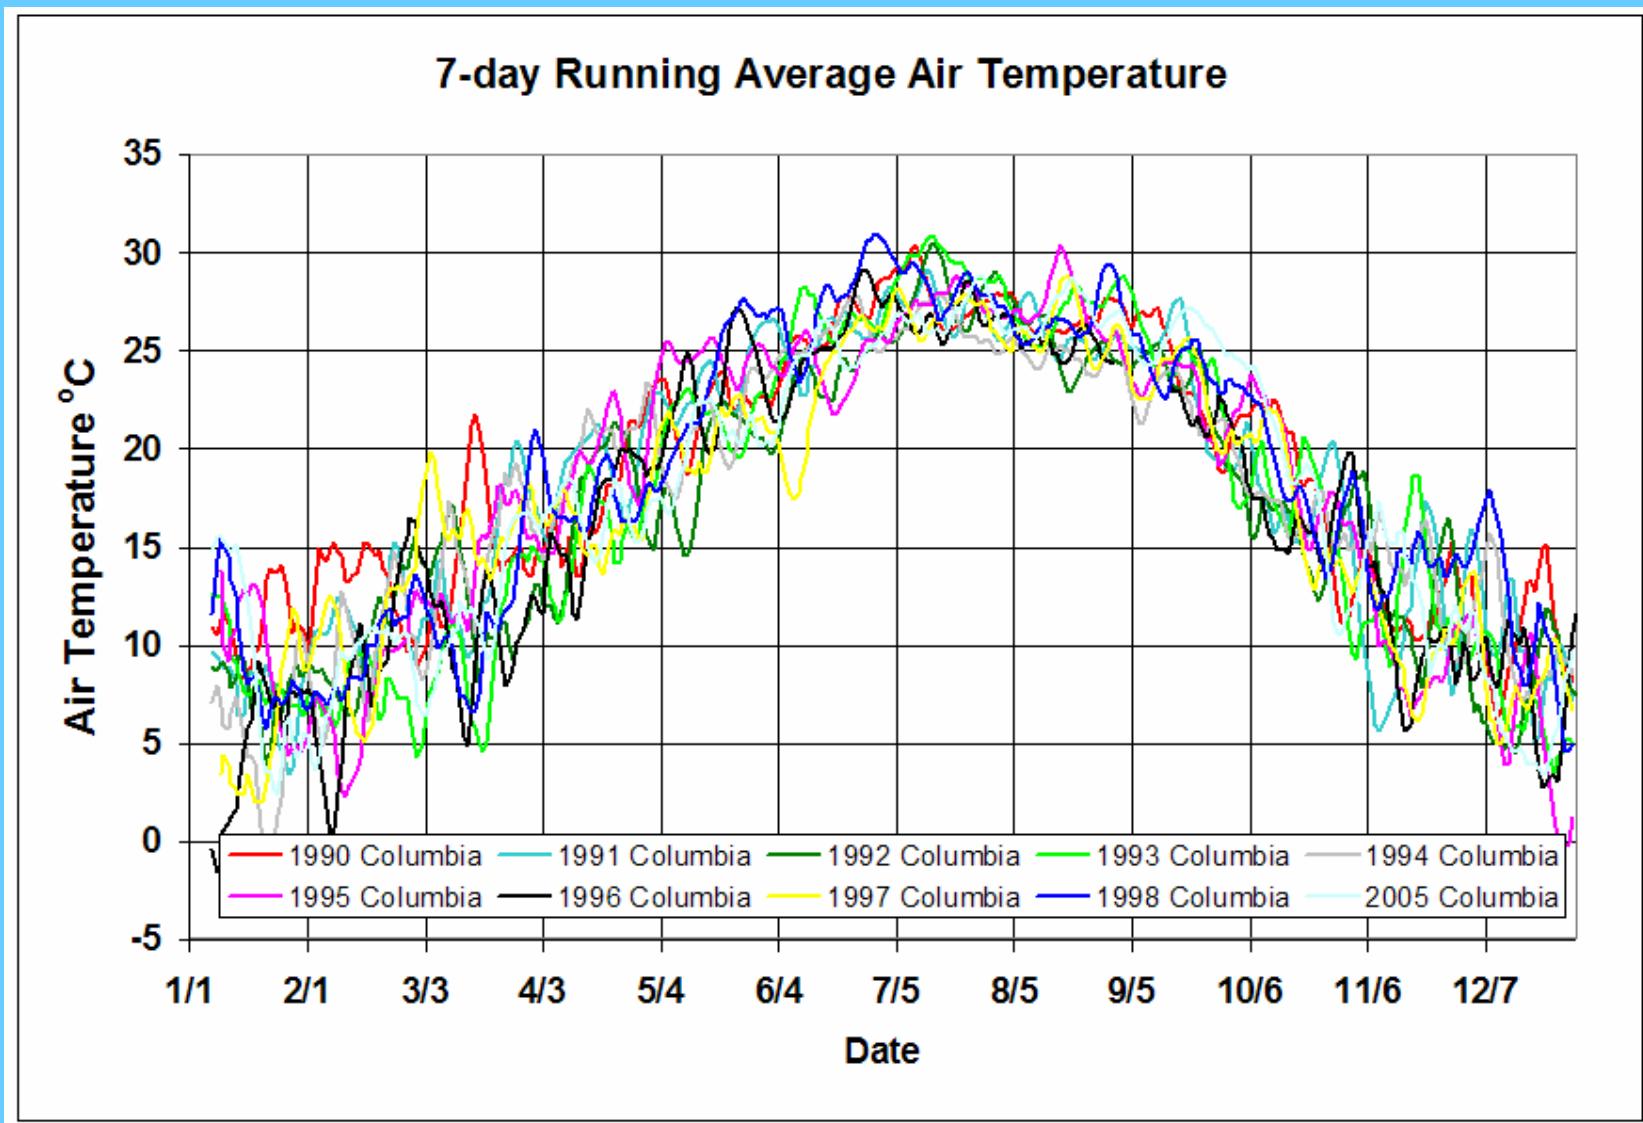


Columbia, SC 14-day Running Average Air Temperature

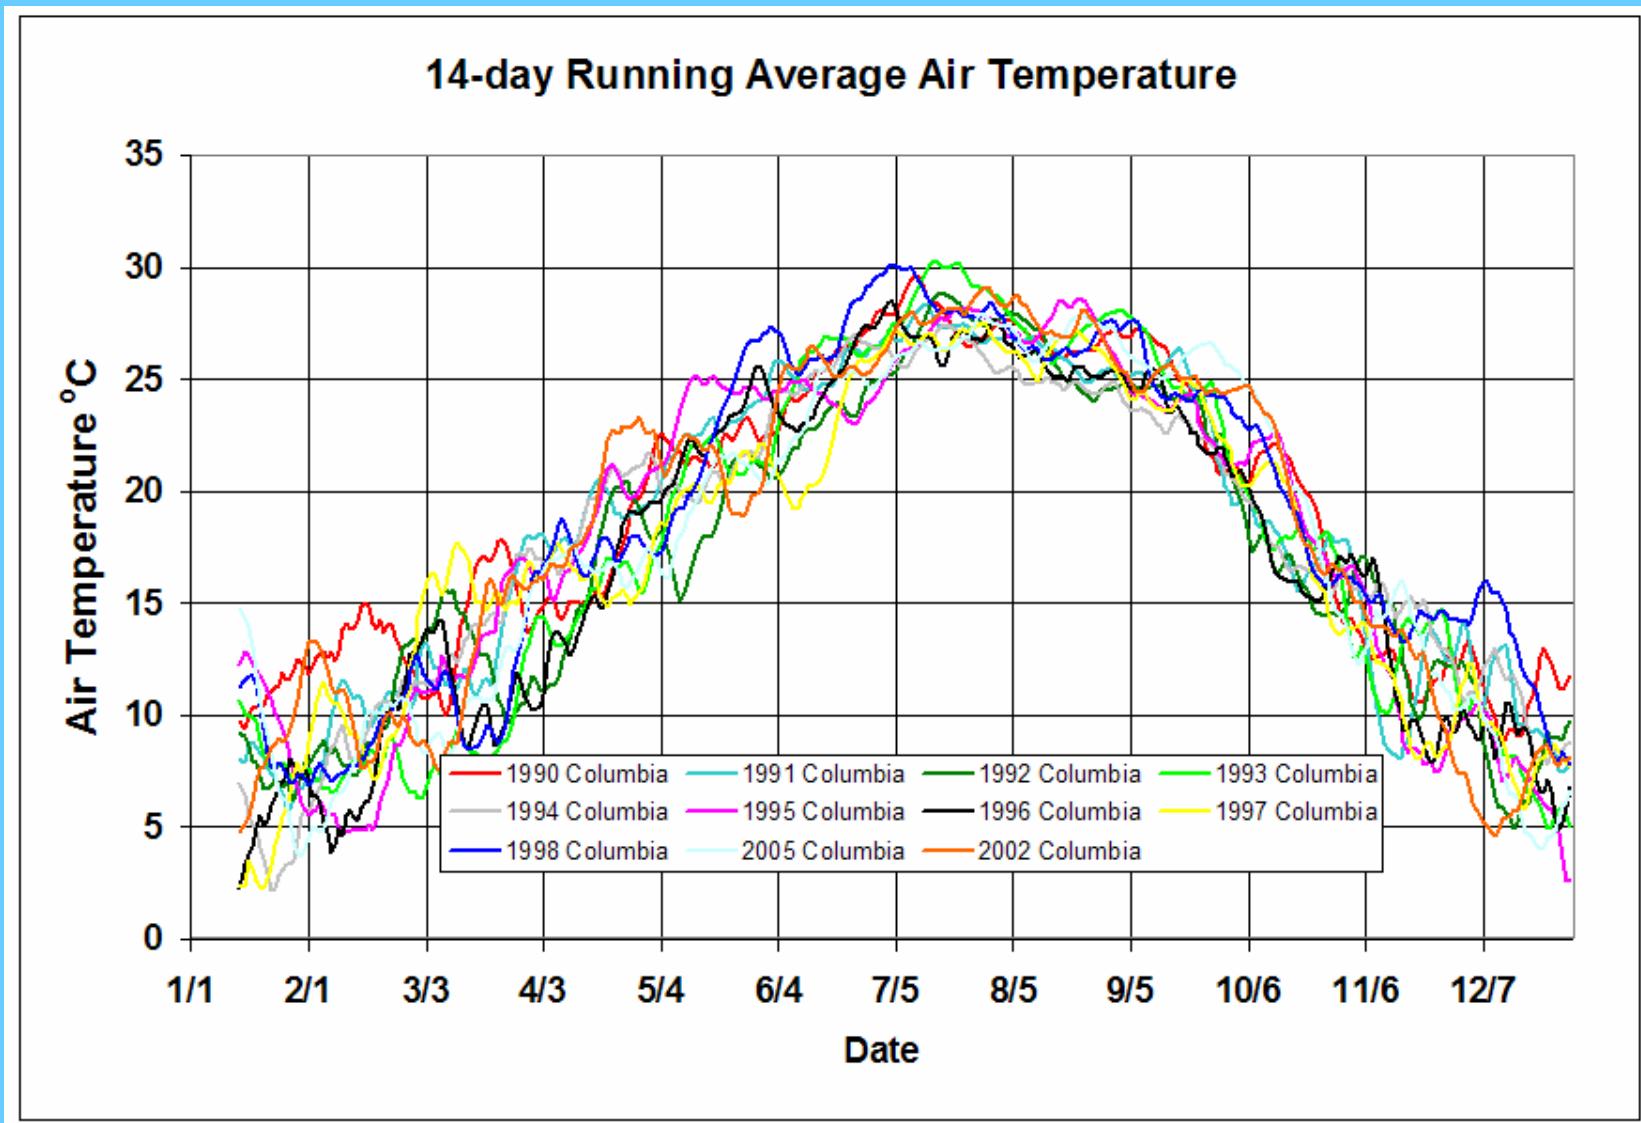


Columbia, SC 14-day Running Average Air Temperature

Years with documented striped bass kills are red

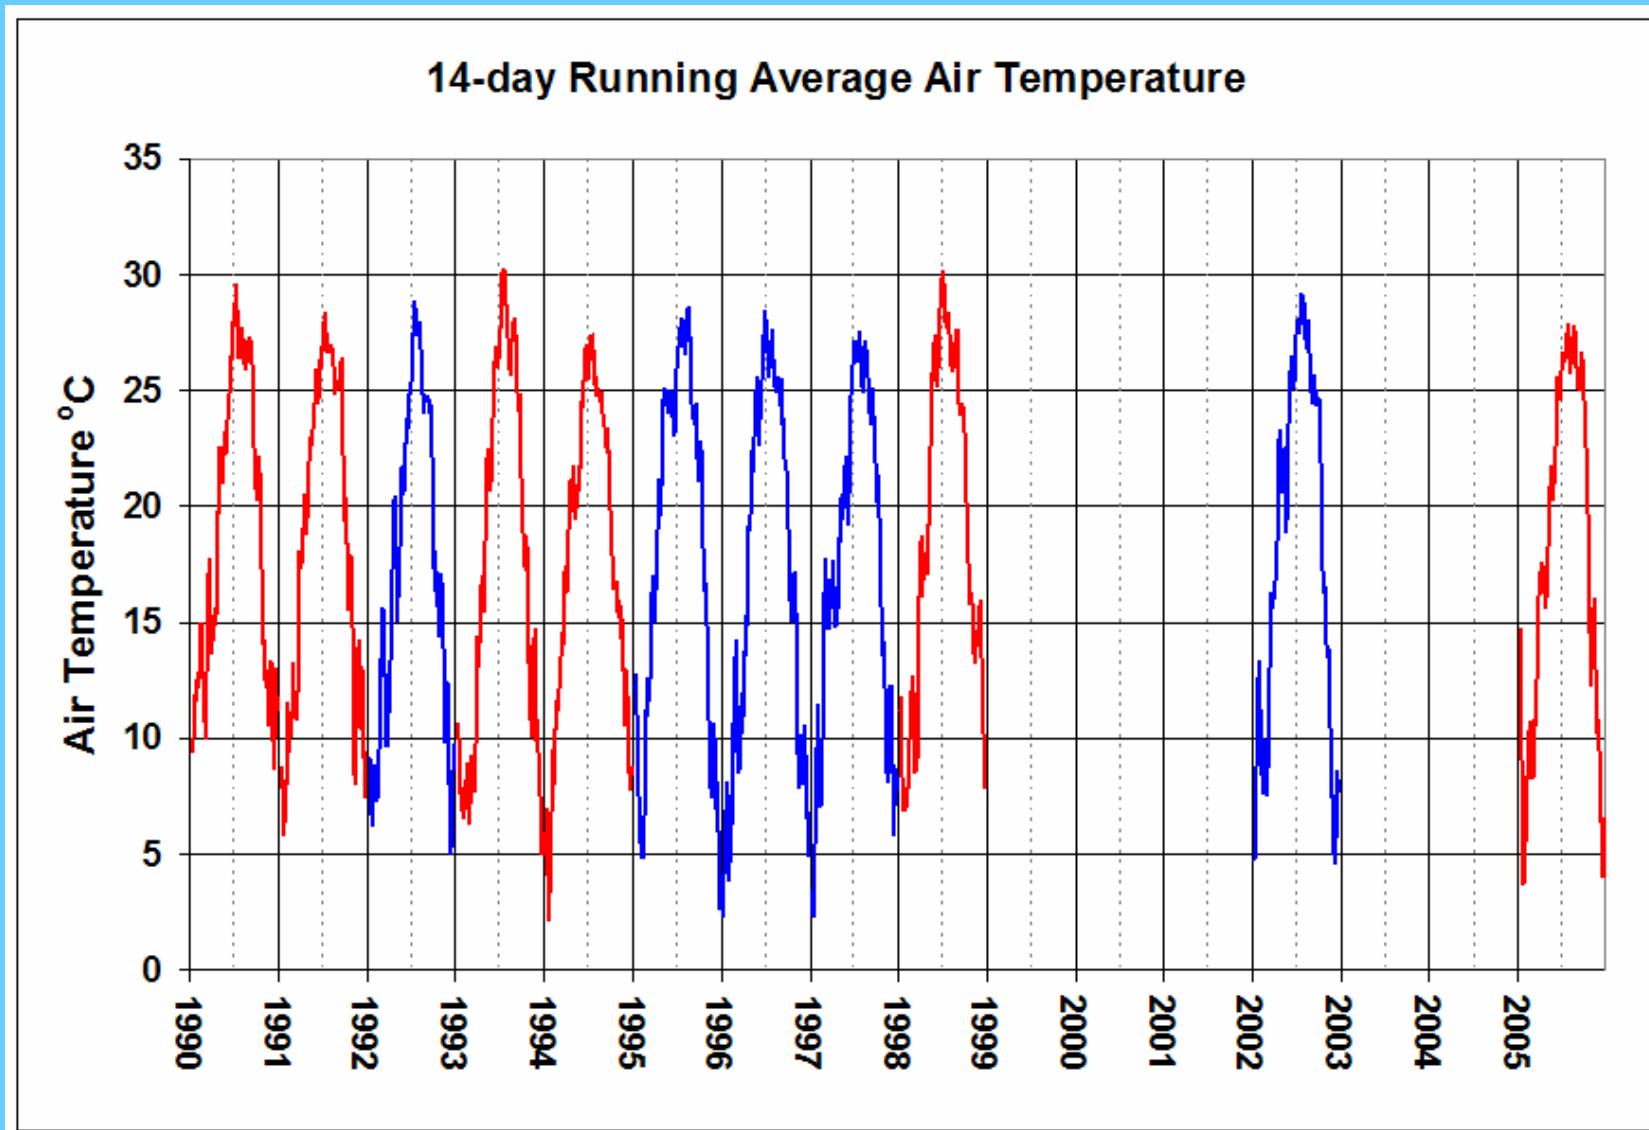

Columbia, SC 14-day Running Average Wind Speed

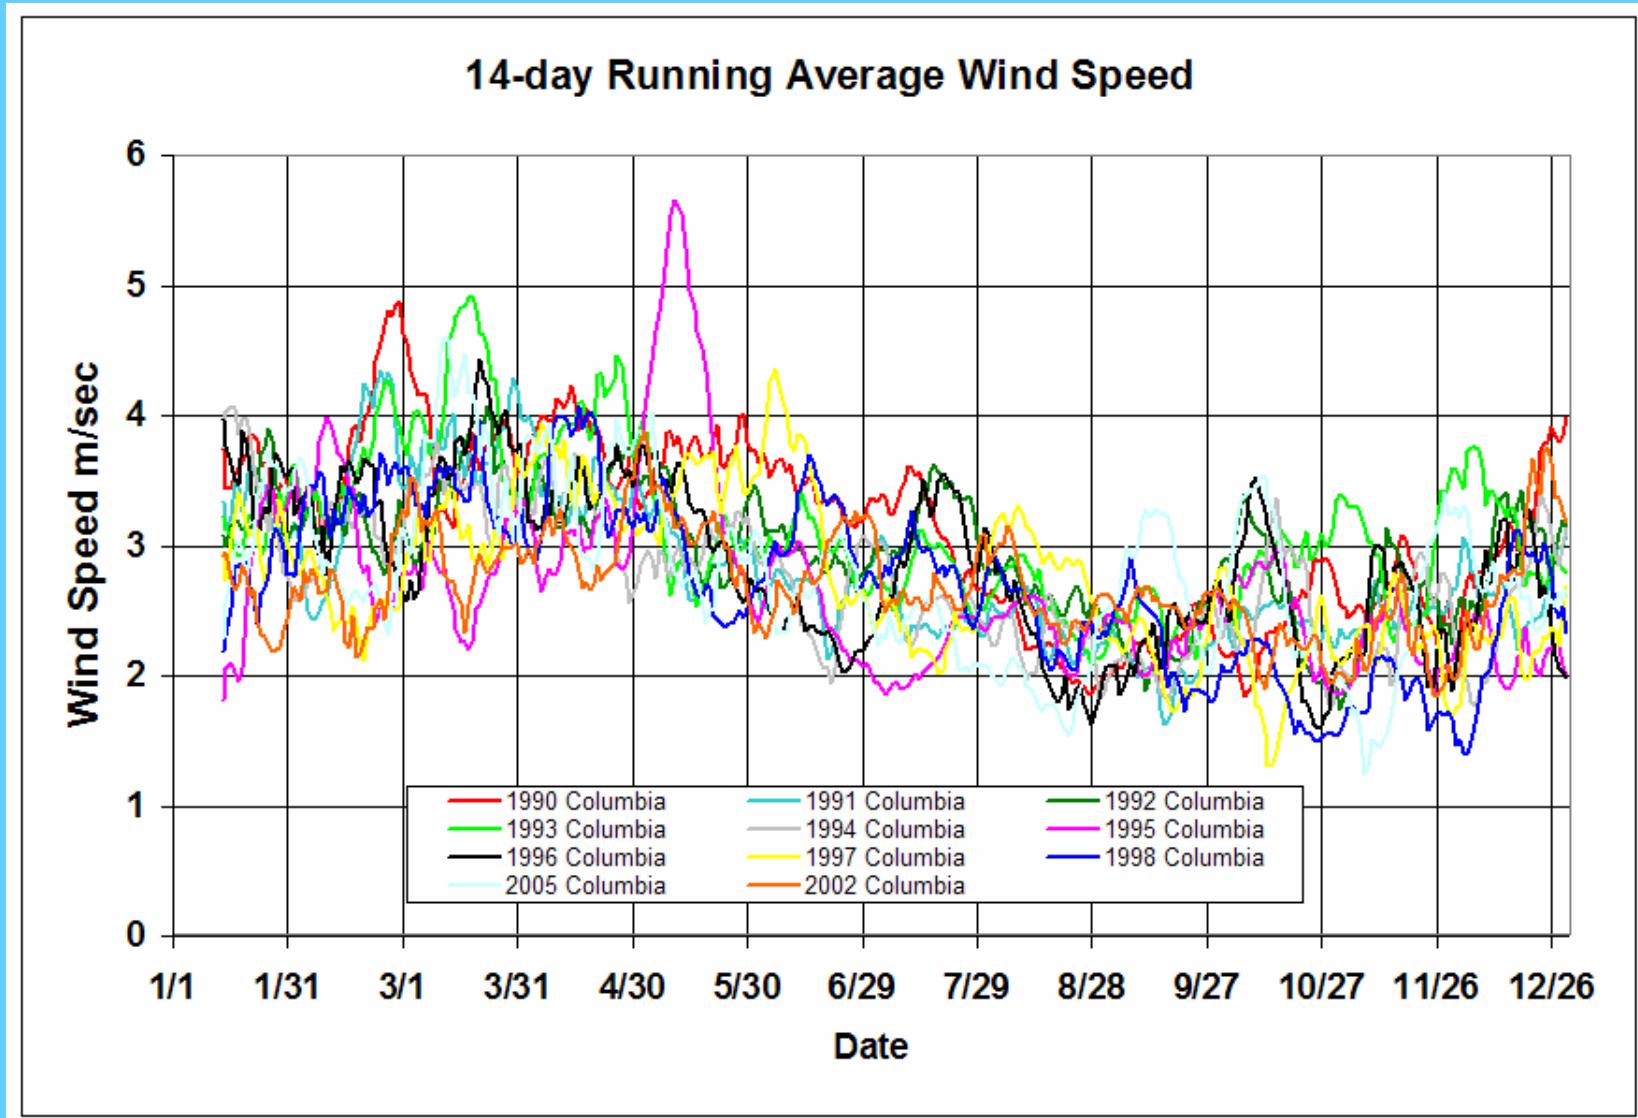

Next Steps

- Continue analyzing flow and met data
- More detailed analysis of operations
- Model selected years





















Cone Valve Aeration Variables

- Amount of flow through the cone valve and in the tailwater
- Velocity of jet
- Head, pressure
- Hood vs no hood
- Angle of jet

Considerations: DO uptake, TDG, temperature

Summary of Test Results on the Cone Valve--September 27, 2006

Test Conditions	Measured DO in total discharge	Calculated DO in the turbine releases using mass balance calcs	Calculated DO in the turbine releases and saturated DO in CV flow	Total Project Flow	DO added by CV flow assuming it is saturated	DO uptake induced by jet action of CV	Total DO added by CV	Total DO added by CV	Measured TDG in total discharge	Measured T in total discharge
	mg/L	mg/L	mg/L	cfs	mg/L	mg/L	mg/L	tons/day	psia	TEMP
Unit 4	2.9	2.8	2.8	2,700	0	0	0	1	13.60	16.04
Unit 4 + CV	5.5	2.8	3.2	2,950	0.4	2.3	2.8	24	14.30	16.67
Units 3&4 + CV	4.1	1.6	1.8	5,650	0.3	2.3	2.6	40	13.90	16.50
Units 1,3&4 + CV	3.8	2.1	2.3	8,350	0.2	1.5	1.7	39	13.83	16.41
Units 1,2,3&4 + CV	2.9	1.7	1.8	11,050	0.1	1.1	1.2	38	13.62	16.32
Units 1,2,3&4	1.6	1.7	1.7	10,800	0	-0.1	-0.1	-3	13.37	16.28


CV: cone valve

Notes:


1. the cone valve can add ~ 40 tons/day of DO to the total plant discharge...this would cost about \$4000 per day if LOX was used
2. the cone valve appears to have the capability to increase DO in the discharge from Unit5 to about 4 mg/L using the existing hub baffles, or possibly with larger hub baffles

Test Conditions	Saturation DO at Meas. T in Total Discharge	Saturation DN at Meas. T in Total Discharge	Measured TDG in total discharge	Calculated DN based on DO and TDG Data	Calculated DN based on DN Saturation	Calculated Cone Valve Temperature	Calculated DN conc in CV	DN sat. based on est. temp.
	mg/L	mg/L	% sat.	% sat.	mg/L	celcius	mg/L	mg/L
Unit 4	10.00	16.38	92.52	109.4	17.9	16.04	17.9	16.38
Unit 4 + CV	9.86	16.18	97.28	108.3	17.5	23.47	13.27	14.38
Units 3&4 + CV	9.90	16.23	94.56	108.7	17.6	26.44	11.67	13.80
Units 1,3&4 + CV	9.92	16.26	94.08	108.9	17.7	28.40	10.93	13.49
Units 1,2,3&4 + CV	9.94	16.29	92.65	109.5	17.8	28.42	14.50	13.49
Units 1,2,3&4	9.94	16.30	90.95	110.9	18.1	16.28	18.1	16.30

Saluda Project - Unit 1
Test of October 3, 2005

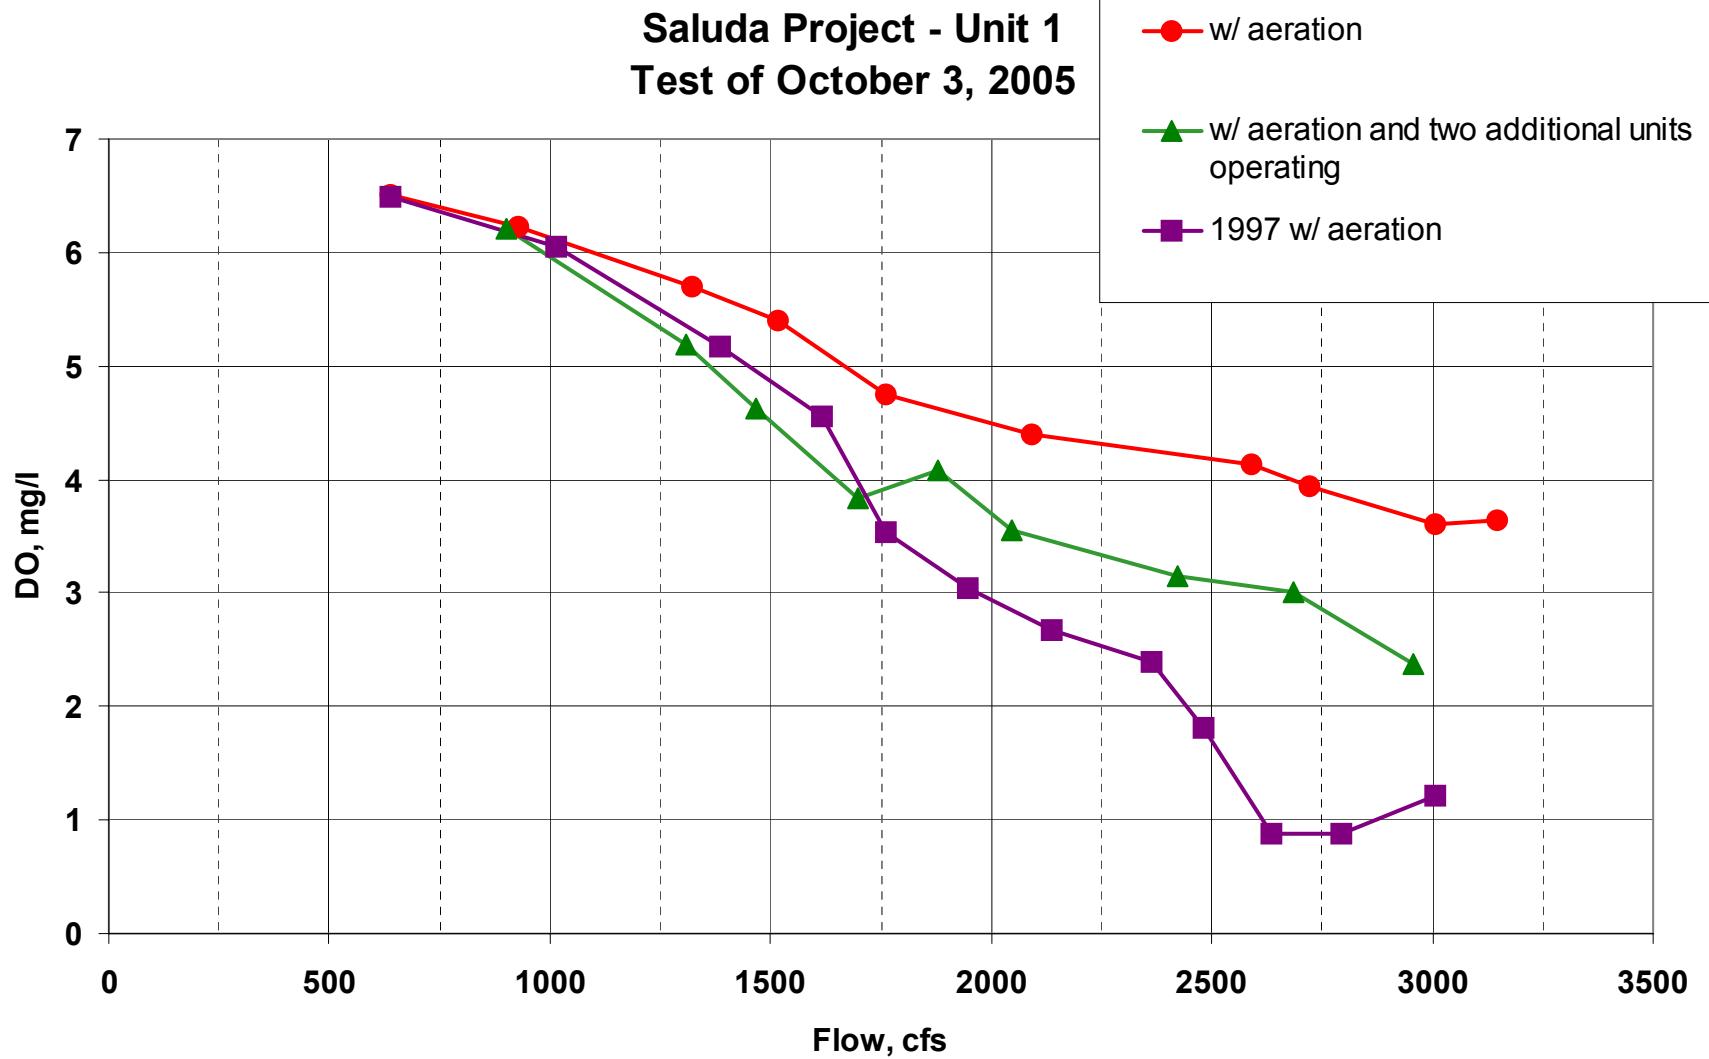


Saluda Project - Unit 1 When other Units are Operating up to 15,000 cfs--Test of October 4, 2005

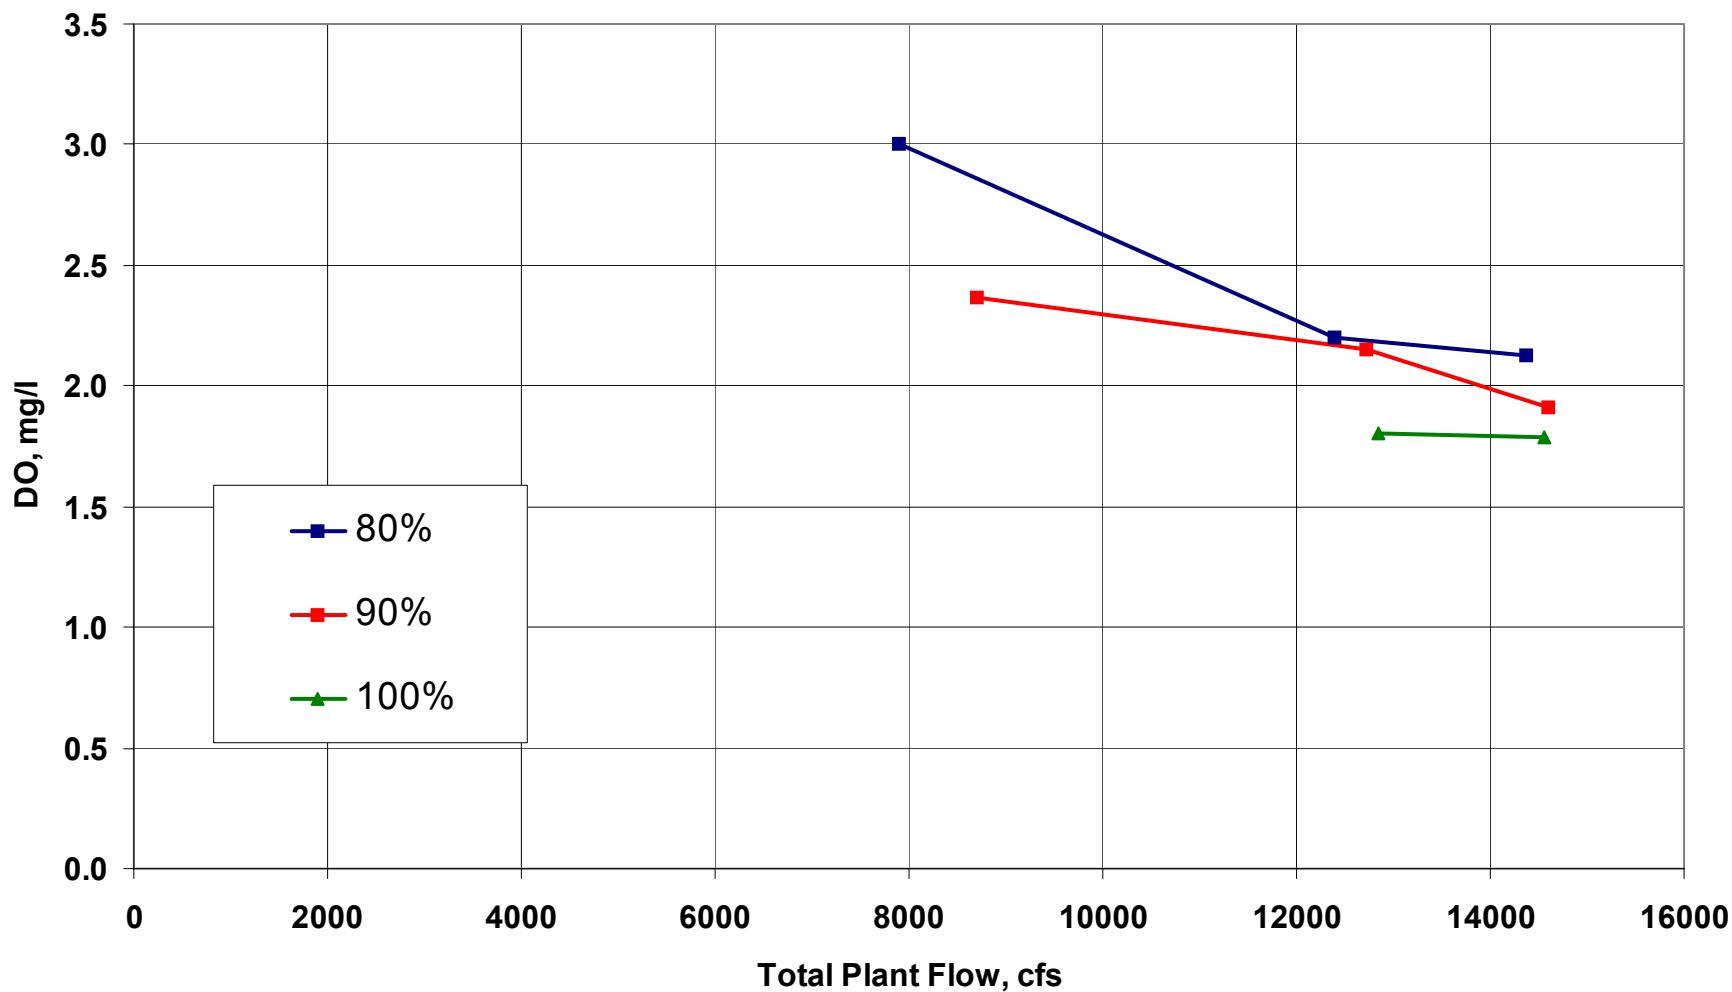


Before hub baffles were added, the minimum DO was 0.4 mg/L.


2005 U1 Calibration results best bubble size

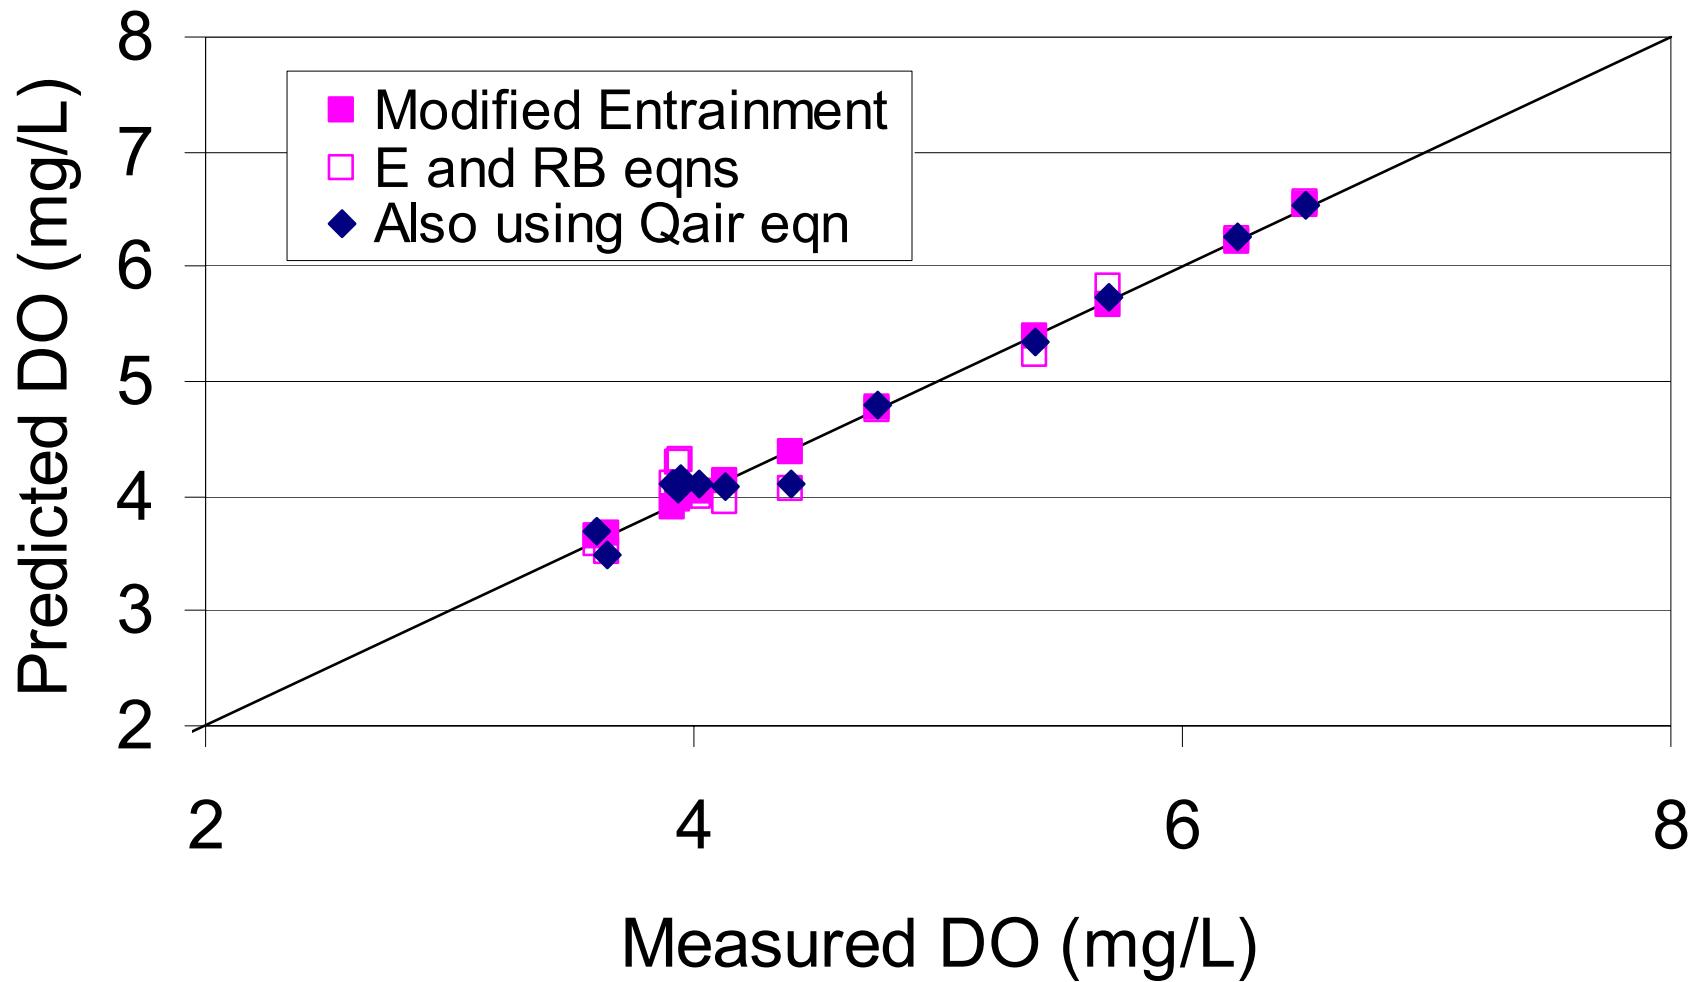

Saluda Project - Unit 1
Test of October 3, 2005

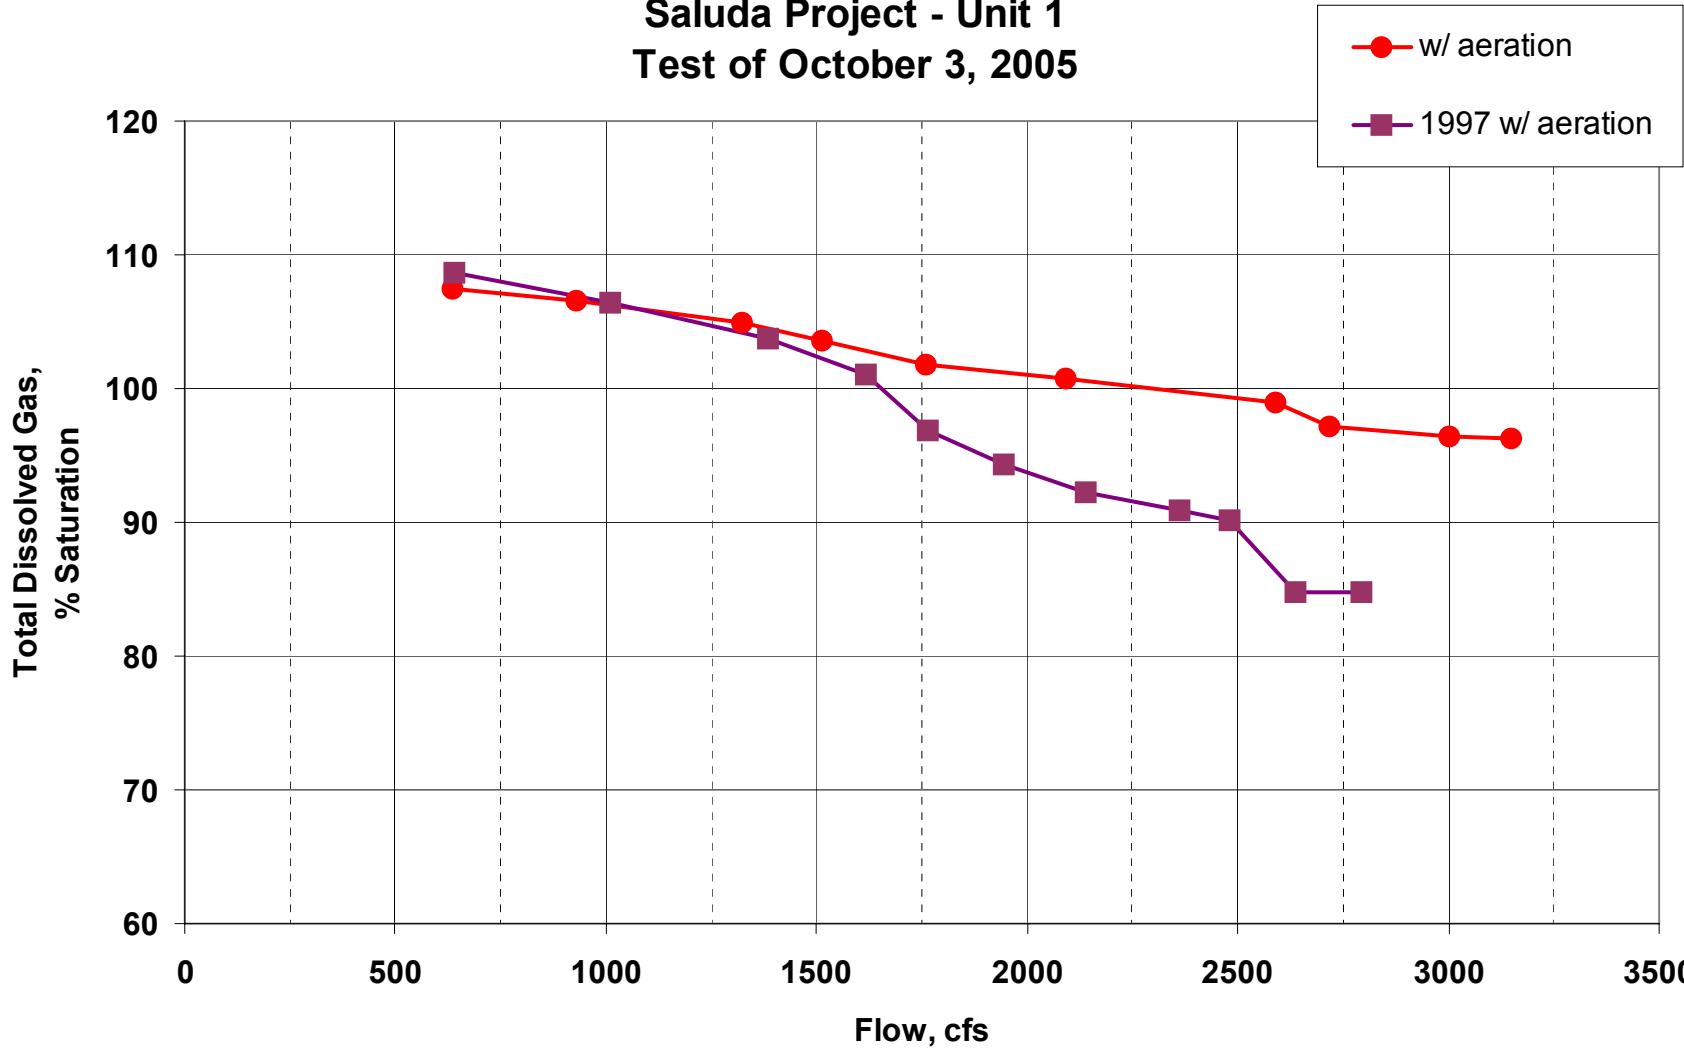


Saluda Project - Unit 5

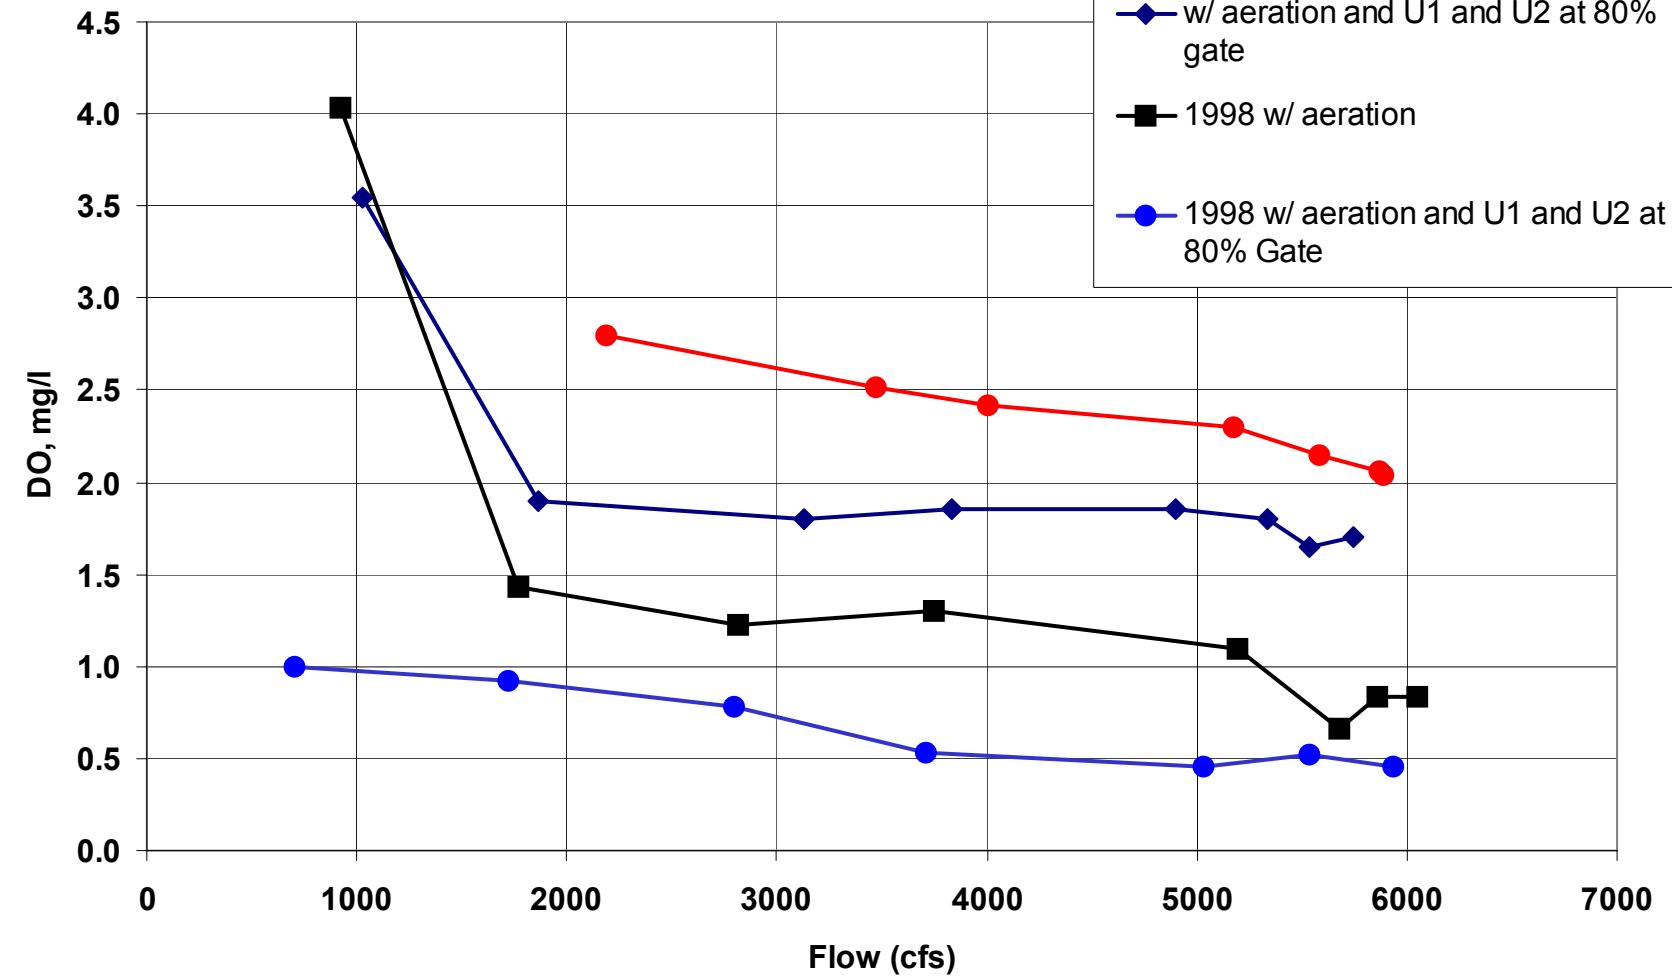


Peak project flow level for the 2005 U5 data was 11,100 cfs

Unit 4 Airflow data in 2006 Compared to Unit 1

Airflow data in 2005

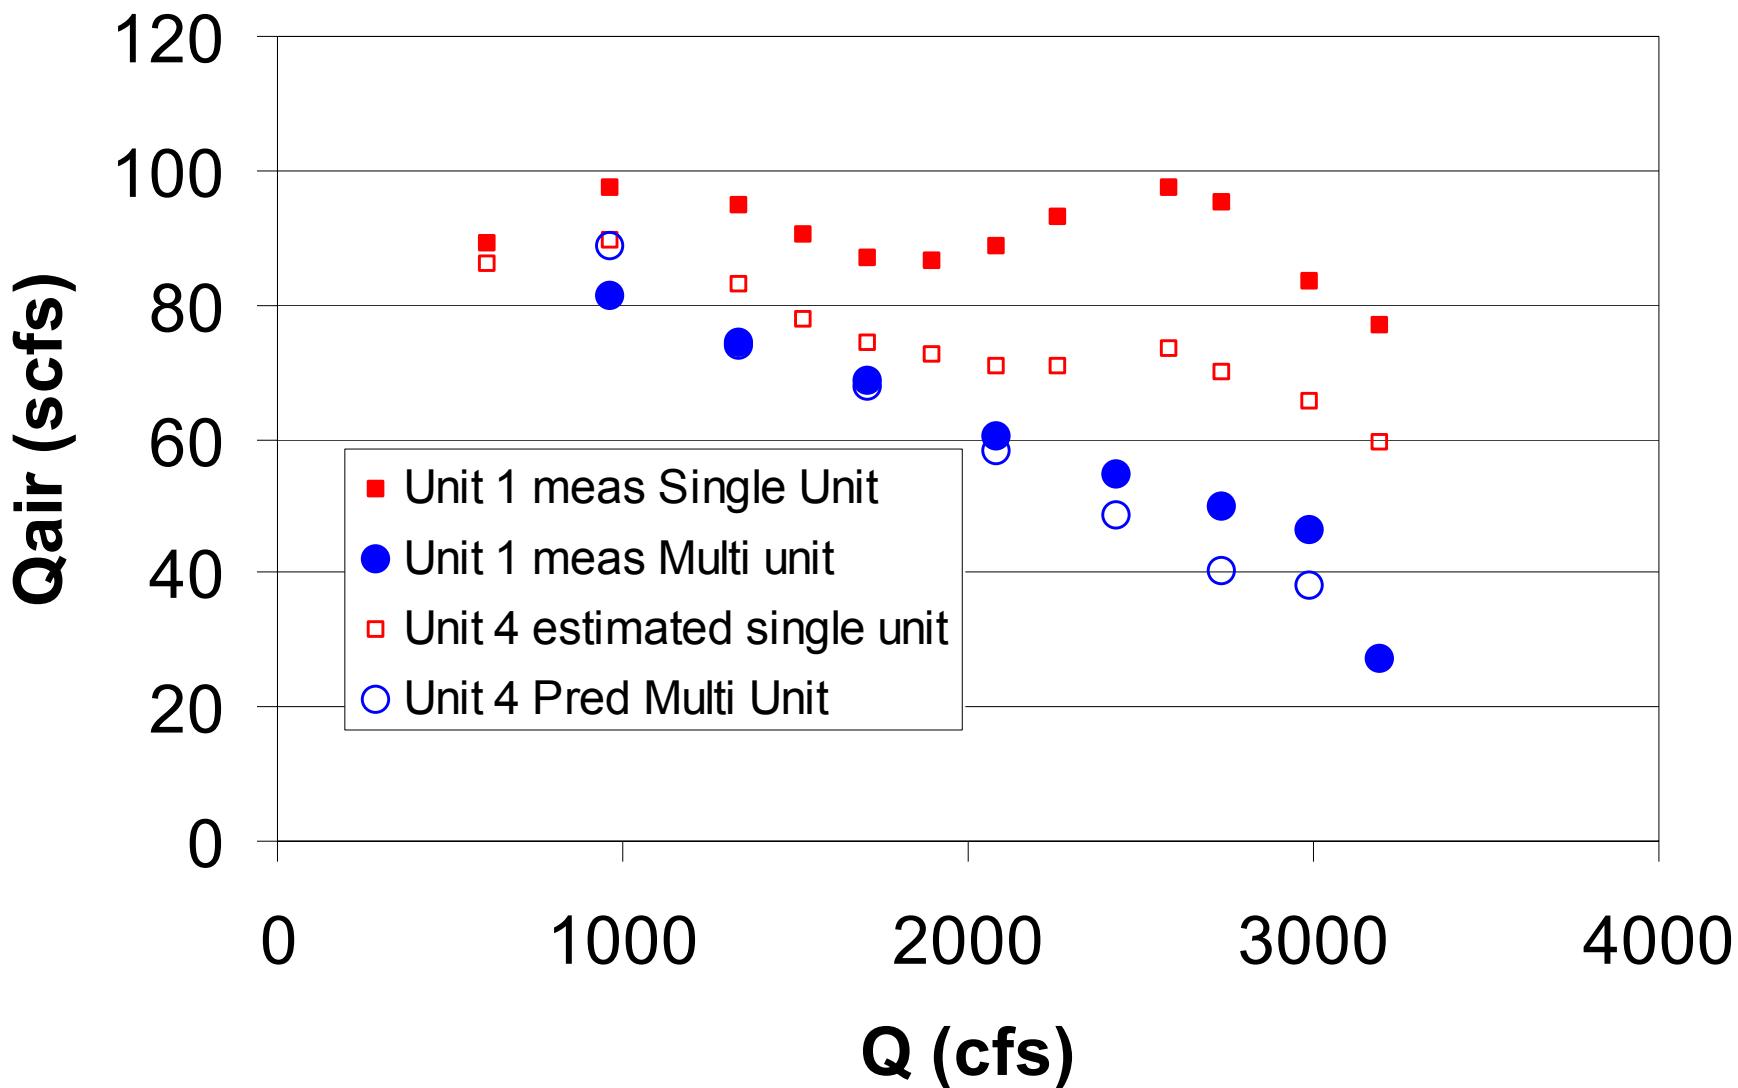

Unit 4 DO data in 2006 Compared to Predicted DO Based on Unit 1 data in 2005

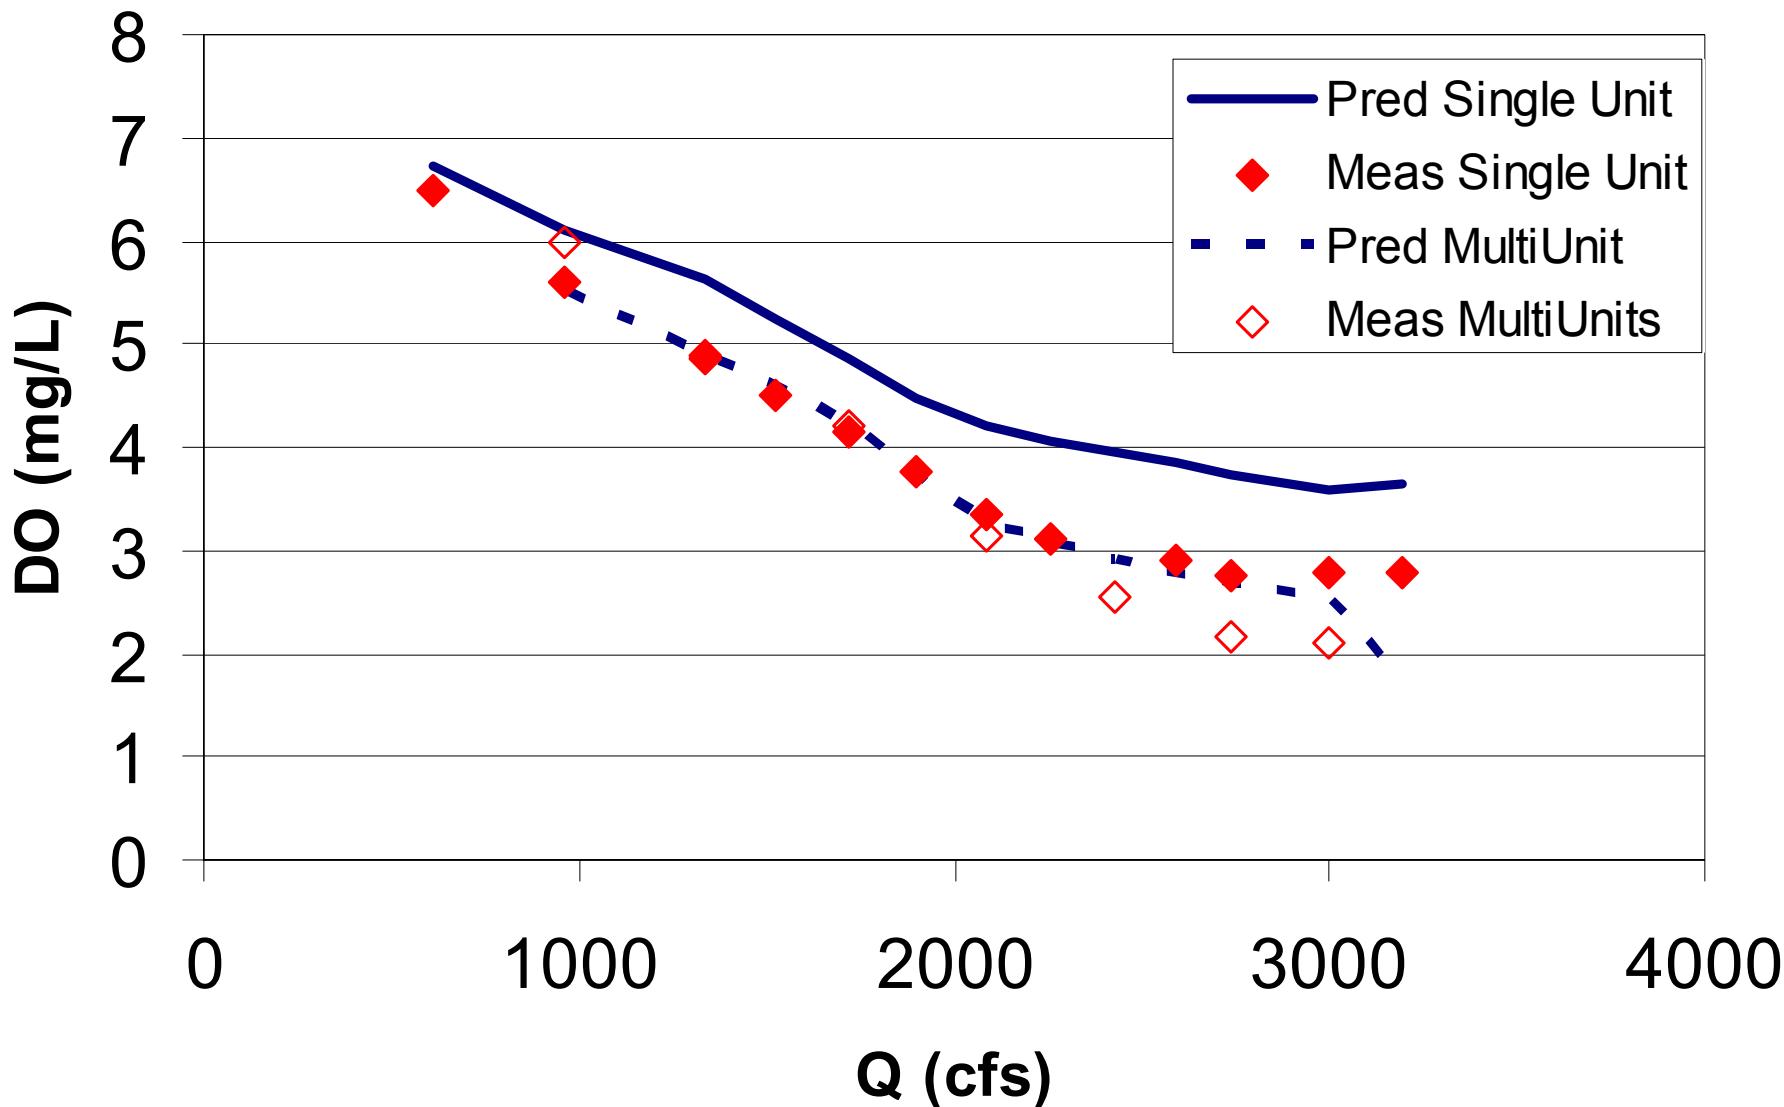

CE-QUAL-W2 Model for Lake Murray— Update on Calibration and Applications
















Presented by Andy Sawyer and Jim Ruane

Reservoir Environmental Management, Inc
















November 13, 2006

1996 Lake Murray Forebay DO Profiles


Model vs. Data [Overall Statistics: ABS = 0.57, RMS = 0.89]

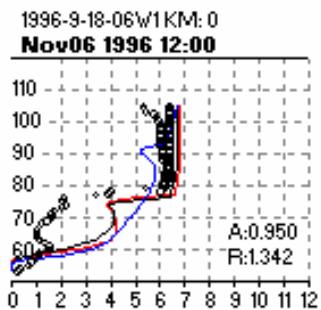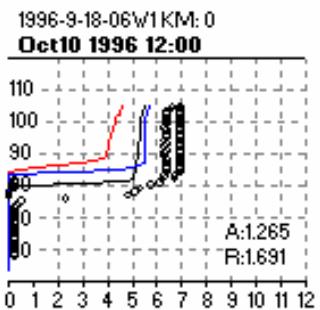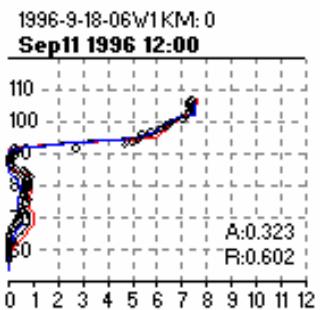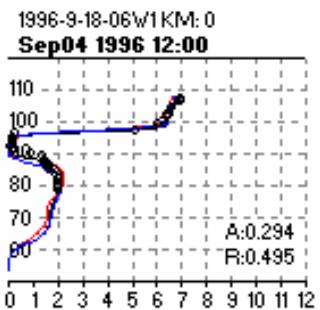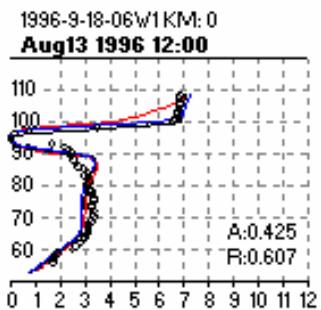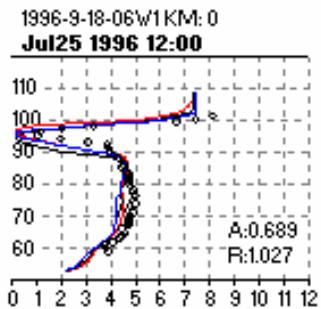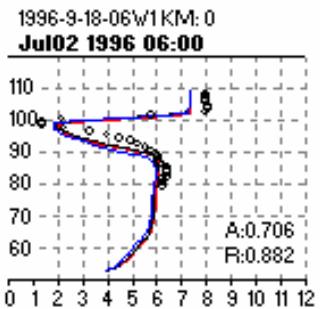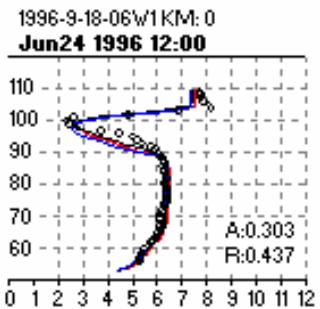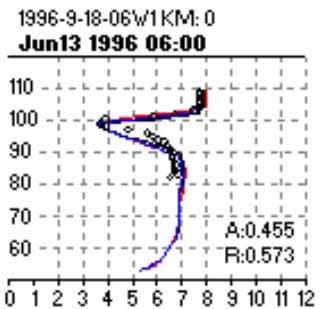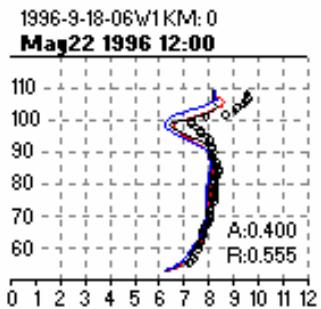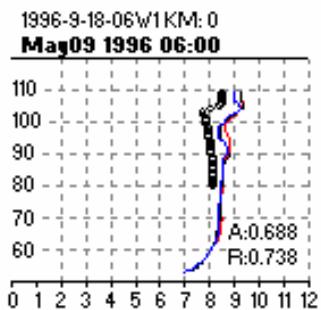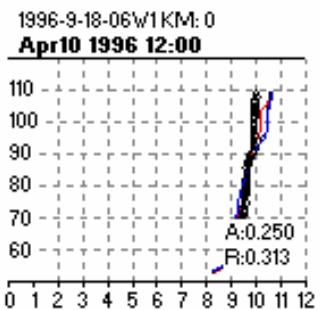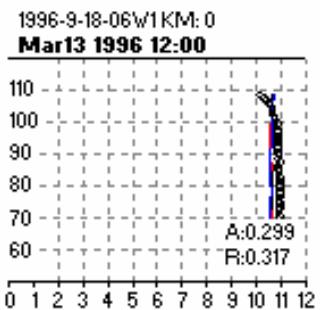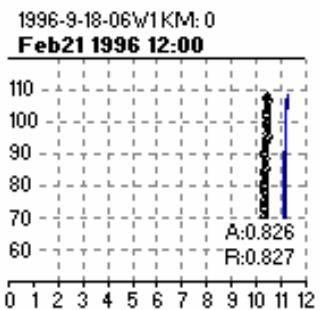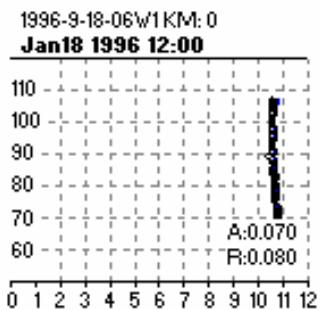















1996 Lake Murray DO Profiles – 6 Km Upstream of Dam Model vs. Data [Overall Statistics: ABS = 0.65, RMS = 1.00]

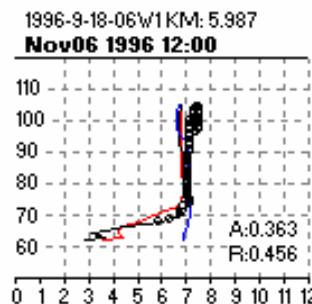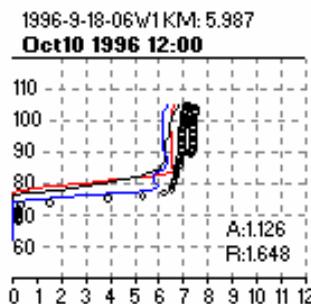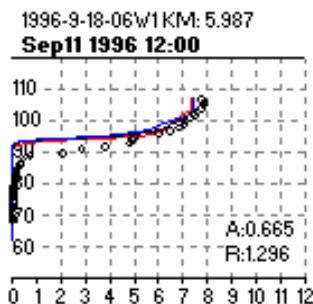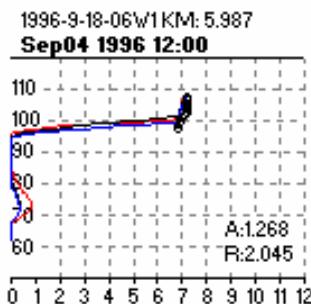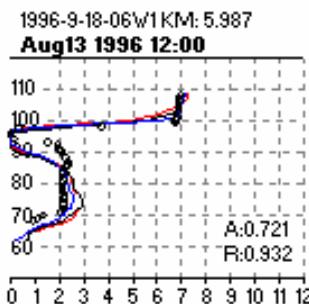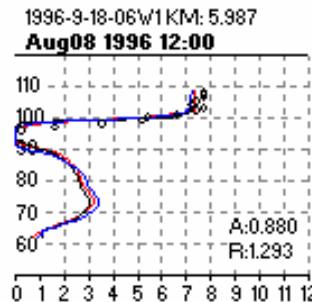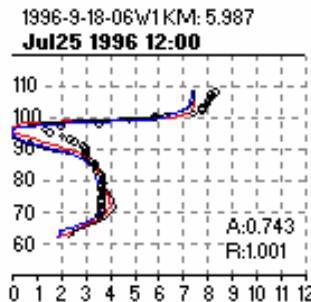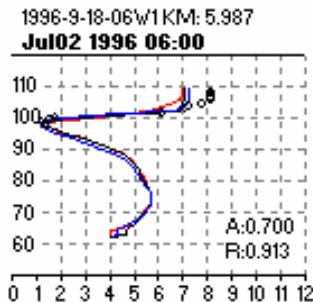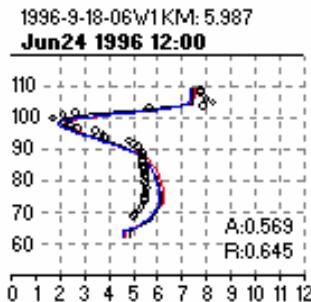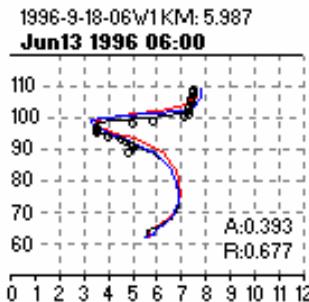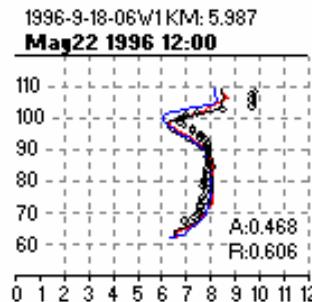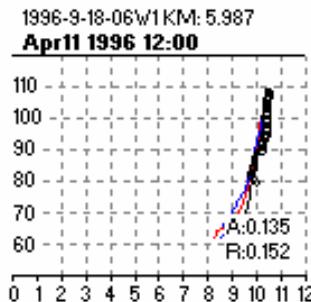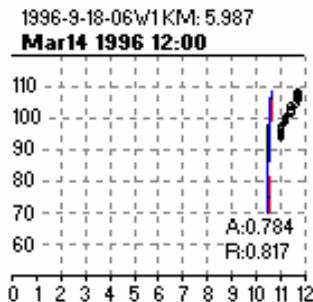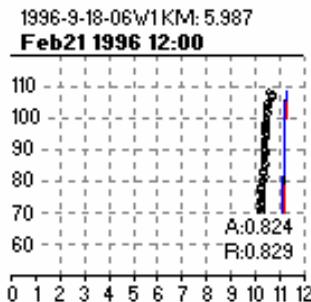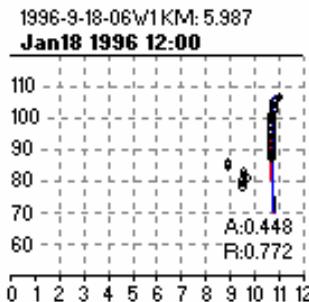

1996 Lake Murray DO Profiles – 19 Km Upstream of Dam Model vs. Data [Overall Statistics: ABS = 0.61, RMS = 0.77]

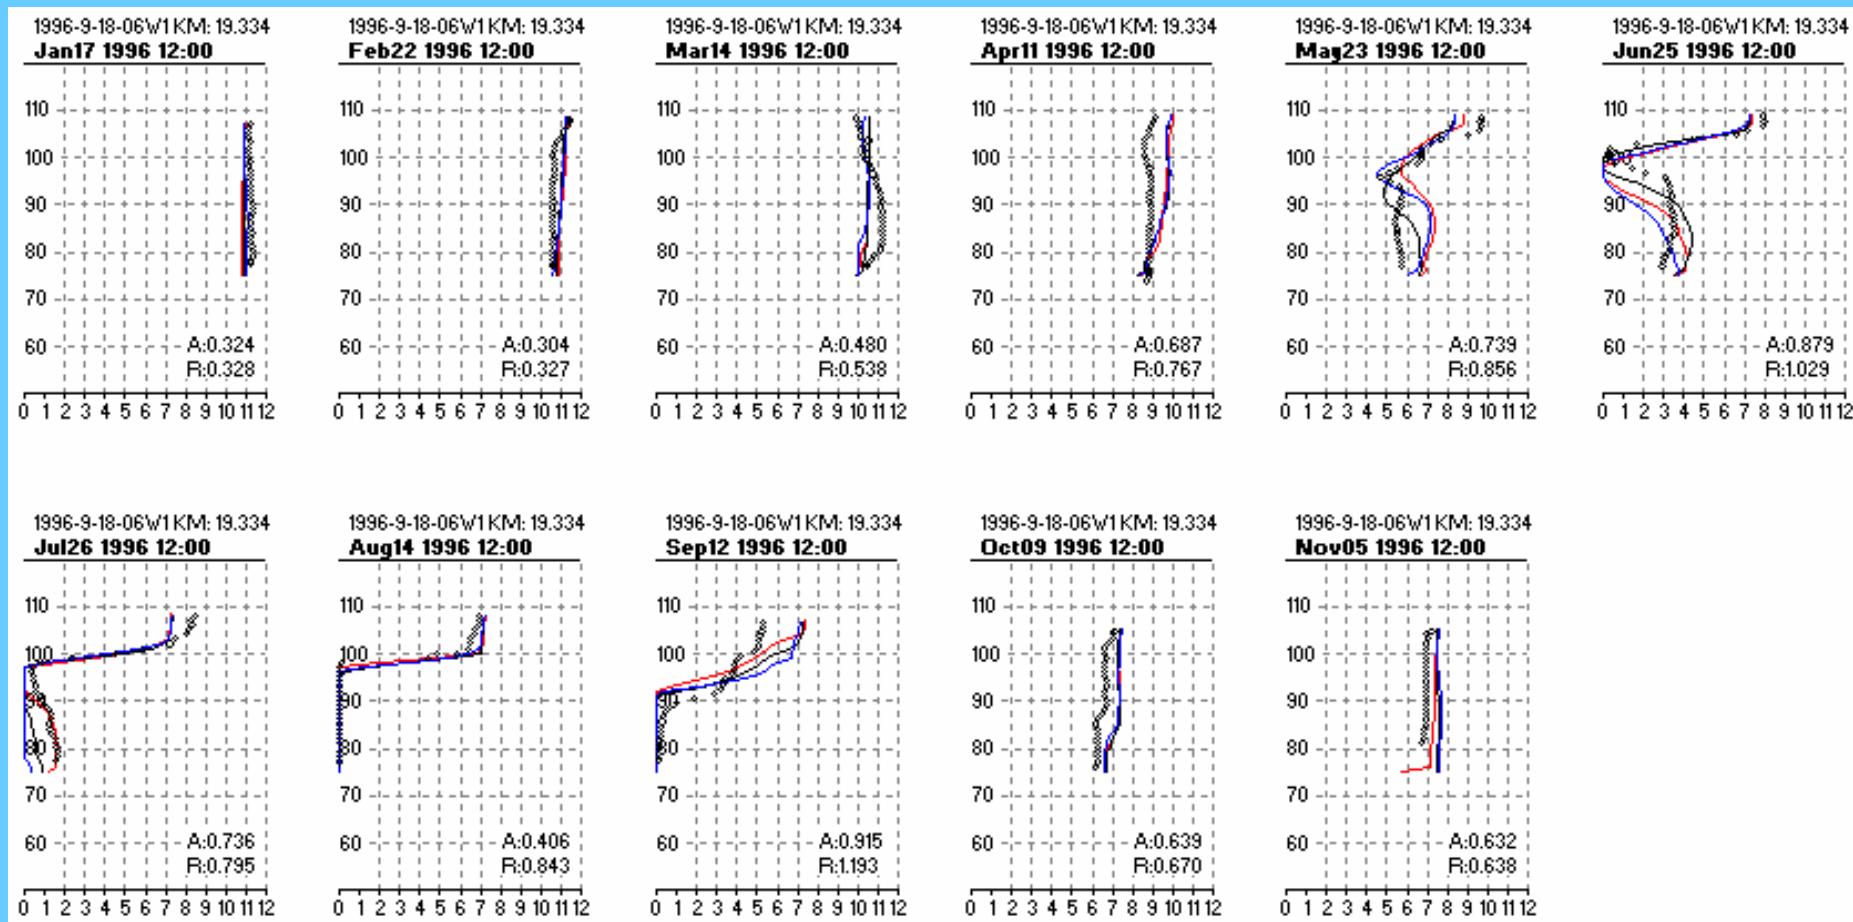

1996 Lake Murray DO Profiles – 27 Km Upstream of Dam Model vs. Data [Overall Statistics: ABS = 1.01, RMS = 1.54]

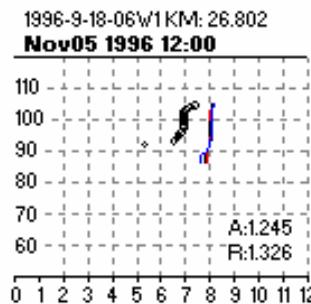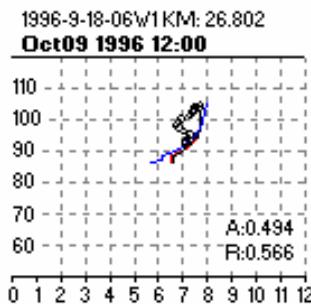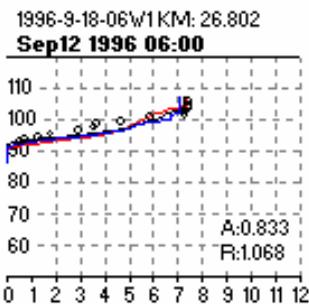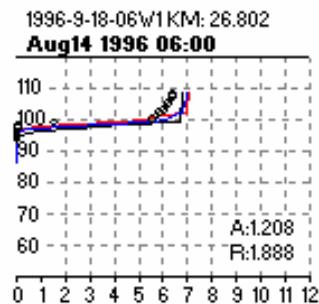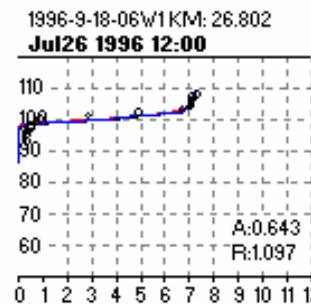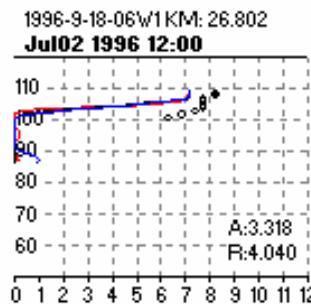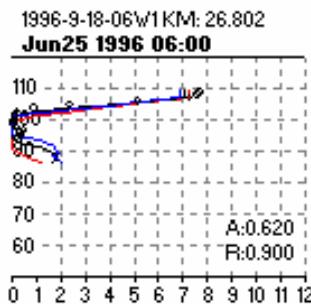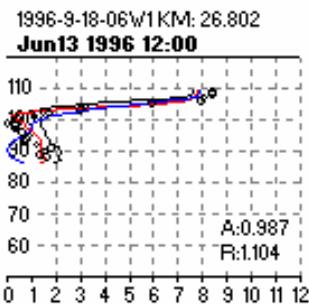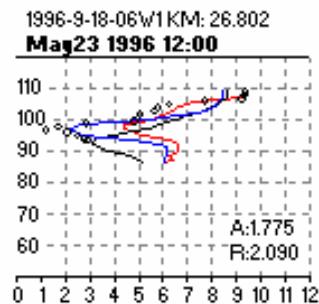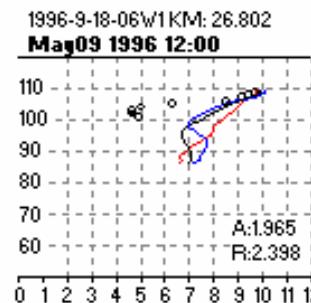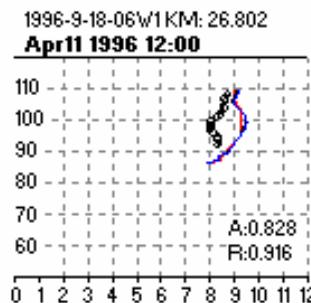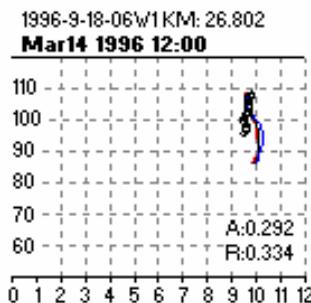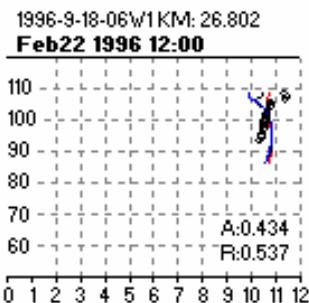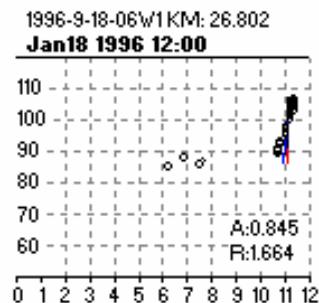


1996 Statistics

	Kilometers From Dam									
	0.0		6		19		27		Overall	
	AME	RMS	AME	RMS	AME	RMS	AME	RMS	AME	RMS
Temperature	0.49	0.67	0.57	0.80	0.63	0.84	0.94	1.28	0.66	0.90
DO	0.56	0.86	0.86	1.21	0.56	0.75	0.68	0.99	0.67	0.95


1996 DO

Date	Julian Day	Kilometers From Dam										Average
		0.0		6.0		19.3		26.8		AME	RMS	
AME	RMS	AME	RMS	AME	RMS	AME	RMS	AME	RMS	AME	RMS	Average
1/17-18	17-18	0.07	0.08	0.45	0.77	0.32	0.33	0.85	1.66	0.42	0.71	
2/21-22	52-53	0.83	0.83	0.82	0.83	0.30	0.33	0.43	0.54	0.60	0.63	
3/13-14	73-74	0.30	0.32	0.78	0.82	0.48	0.54	0.29	0.33	0.46	0.50	
4/10-11	101-103	0.25	0.31	0.14	0.15	0.69	0.77	0.83	0.92	0.48	0.54	
5/9-10	130-131	0.69	0.74	0.47	0.61			1.97	2.40	1.04	1.25	
5/22-23	143-144	0.40	0.56	0.39	0.68	0.74	0.86	1.78	2.09	0.83	1.04	
6/13	165	0.46	0.57	0.57	0.65			0.99	1.10	0.67	0.77	
6/24-25	176-177	0.30	0.44	0.70	0.91	0.88	1.03	0.82	0.90	0.63	0.82	
7/2	184	0.71	0.88	0.74	1.00			3.32	4.04	1.59	1.97	
7/25-26	207-208	0.69	1.03	0.88	1.29	0.74	0.80	0.64	1.10	0.74	1.05	
8/13-14	226-227	0.43	0.61	0.72	0.93	0.41	0.84	1.21	1.89	0.69	1.07	
9/4	248	0.29	0.50	1.27	2.05					0.78	1.27	
9/11-12	255-257	0.32	0.60	0.67	1.30	0.92	1.19	0.83	1.07	0.68	1.04	
10/9-10	283-284	1.27	1.69	1.13	1.65	0.64	0.67	0.49	0.57	0.88	1.14	
11/5-6	310-311	0.95	1.34	0.36	0.46	0.63	0.64	1.25	1.33	0.80	0.94	
Overall		0.57	0.89	0.65	1.00	0.61	0.77	1.01	1.54	0.65	1.00	


1996 Comparison of Modeled versus Measured Saluda Release DO

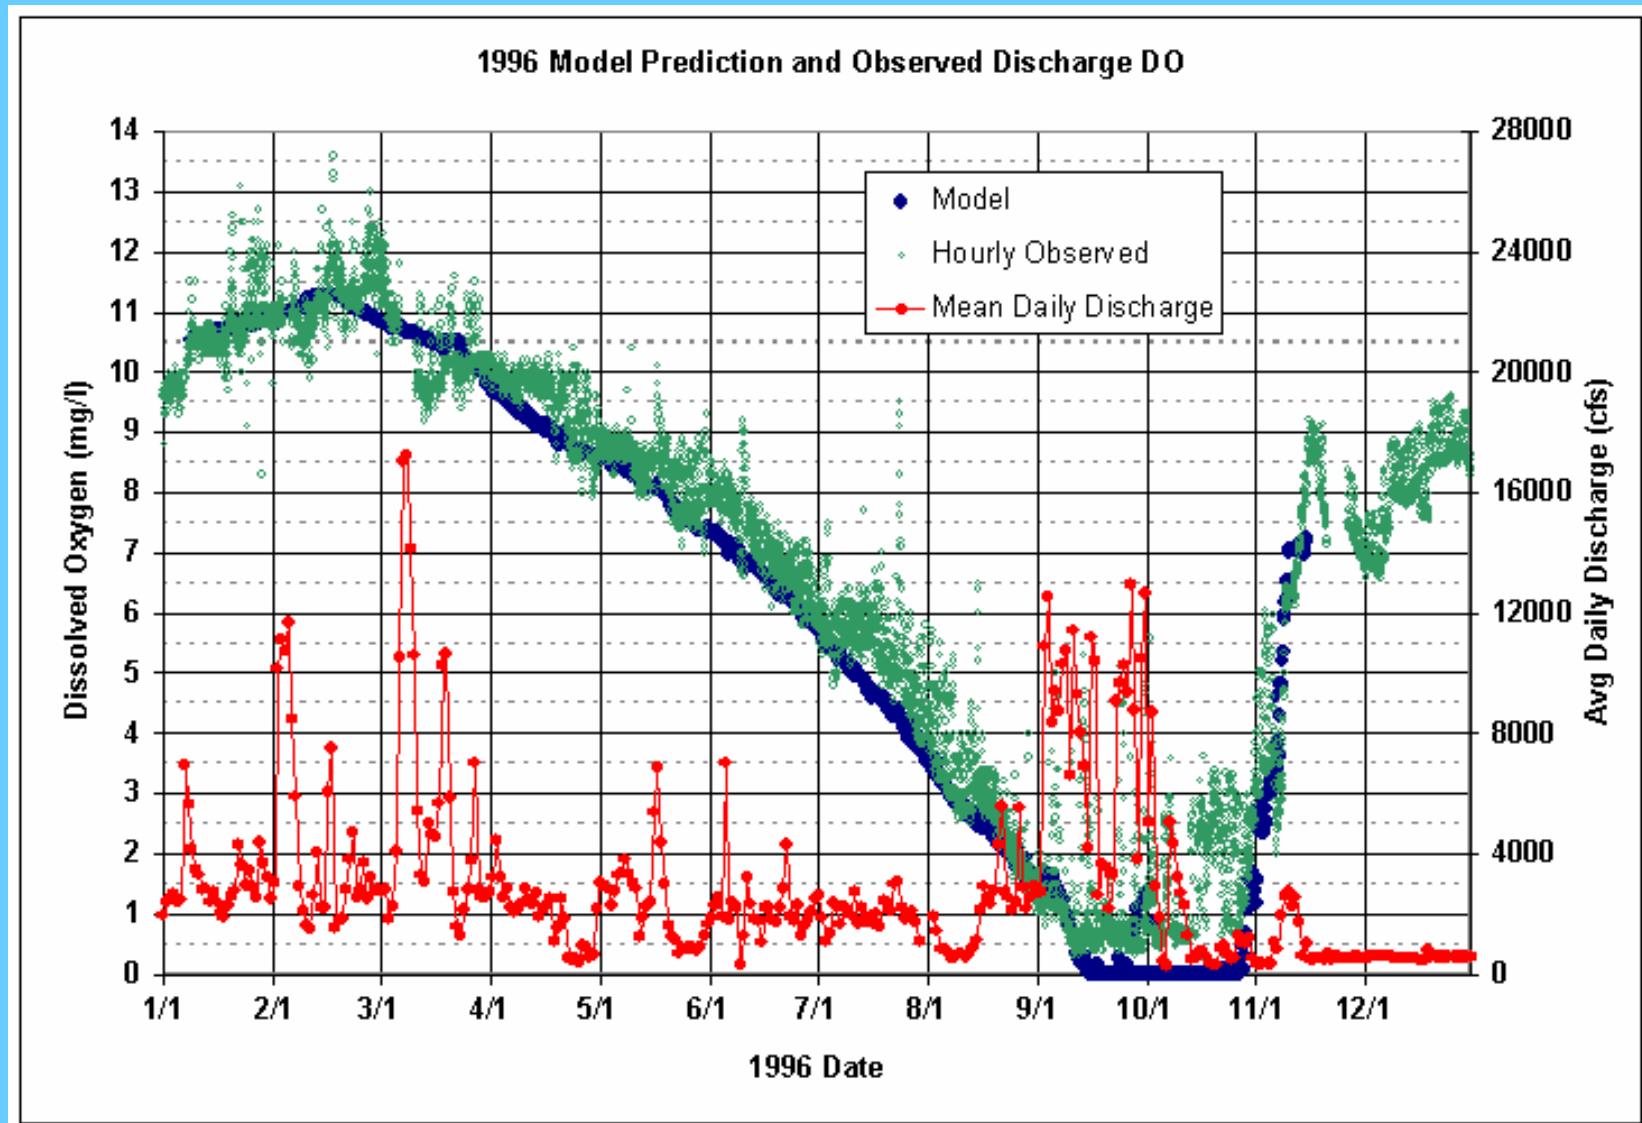

1992 Comparison of Modeled versus Measured Saluda Release DO

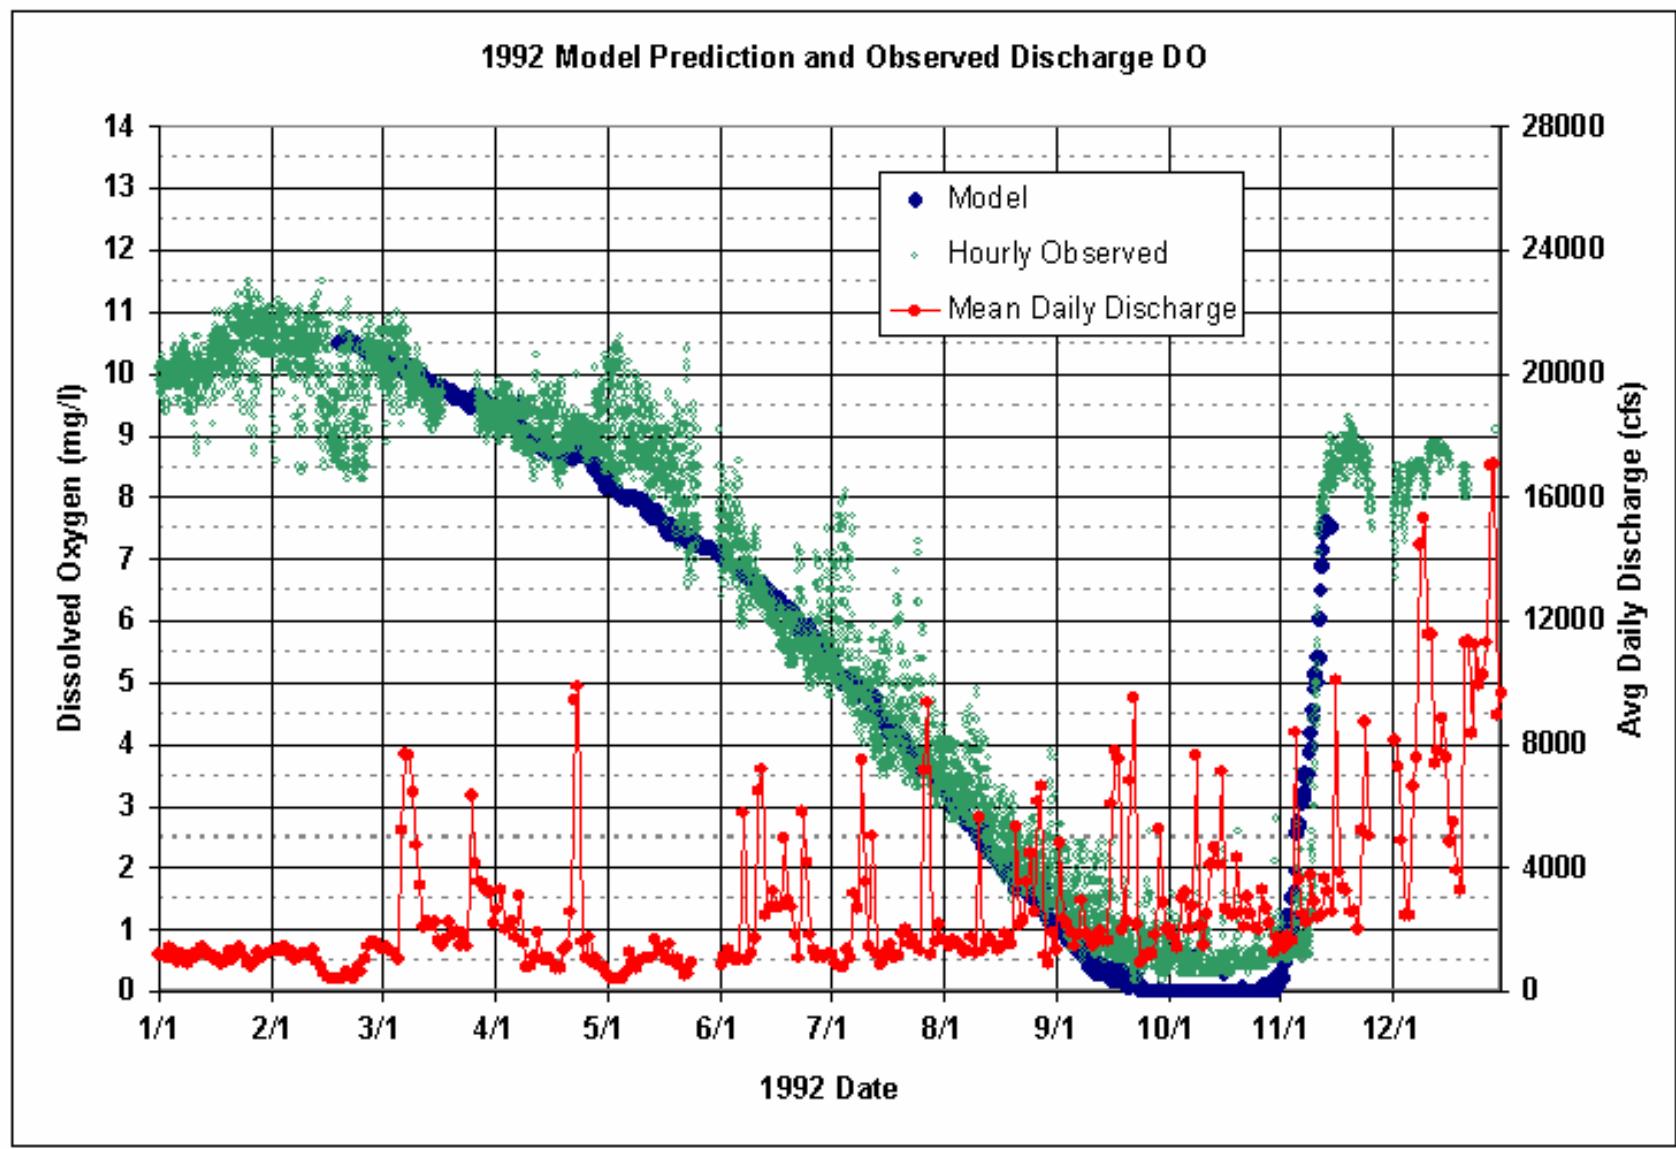


1997 Comparison of Modeled versus Measured Saluda Release DO

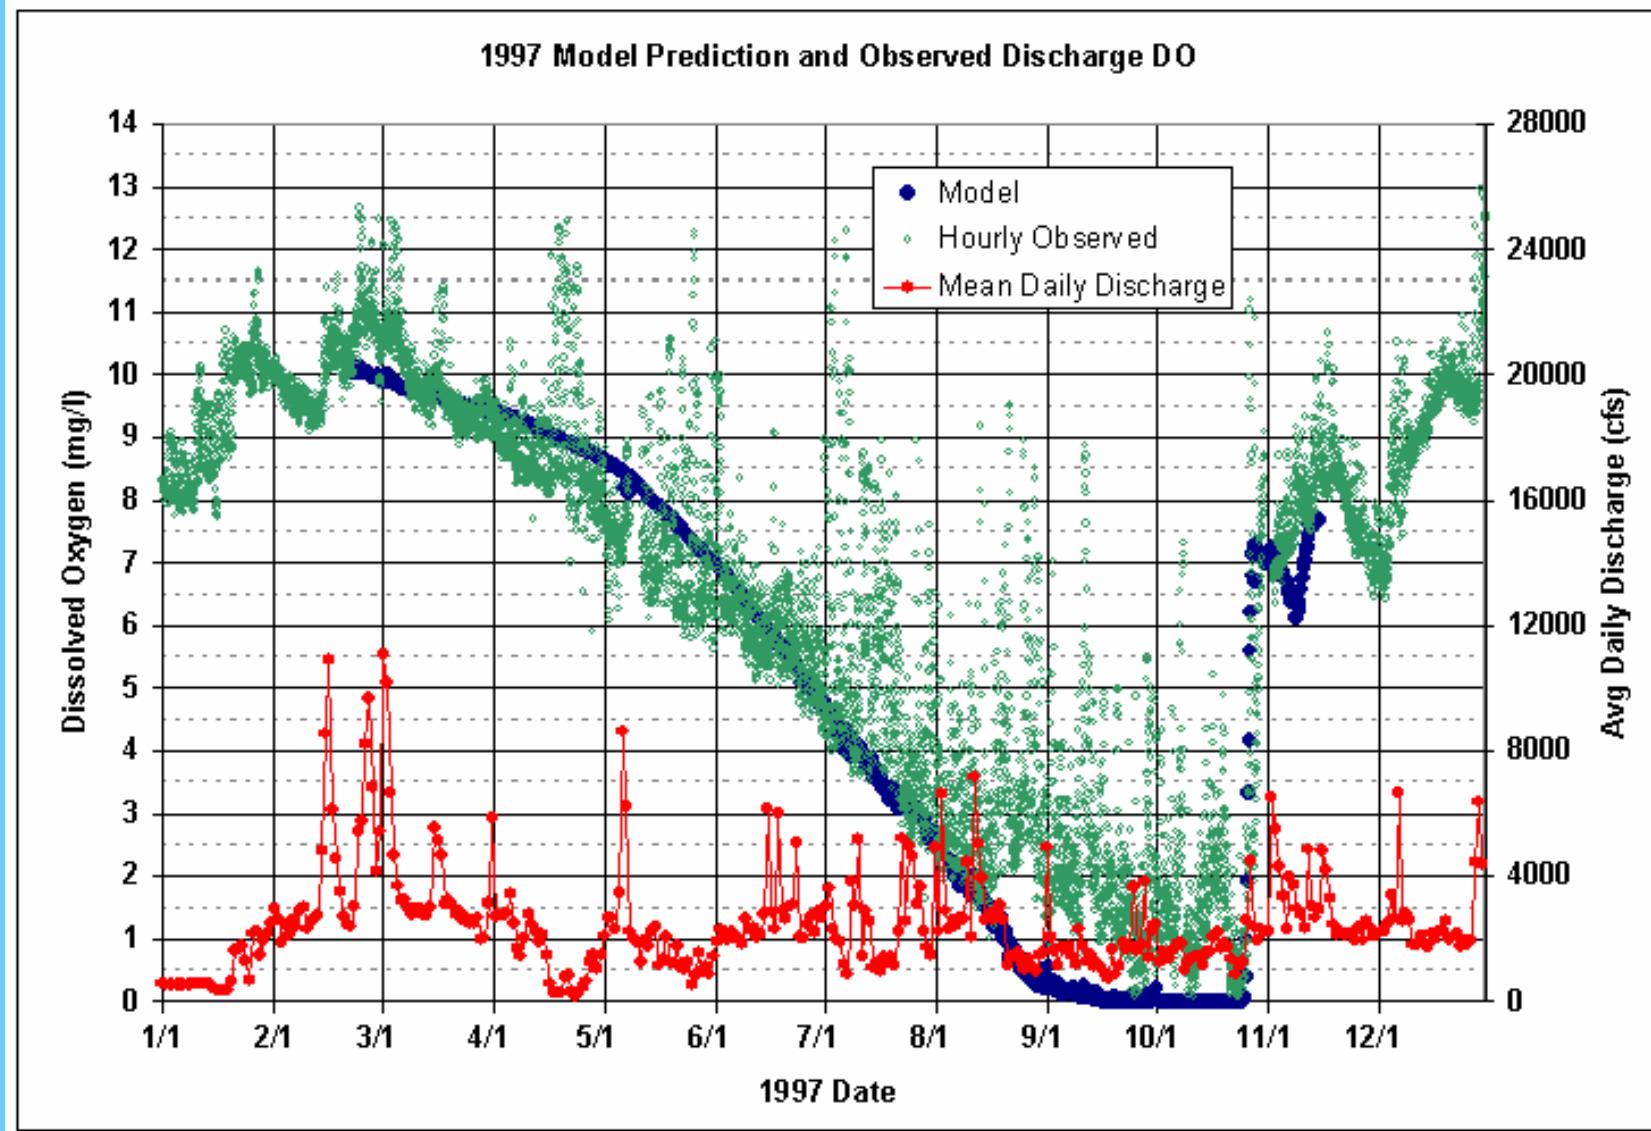


1996 Modeled versus Measured DO at the level of the Unit 5 Intake


1992 Modeled versus Measured DO at the level of the Unit 5 Intake

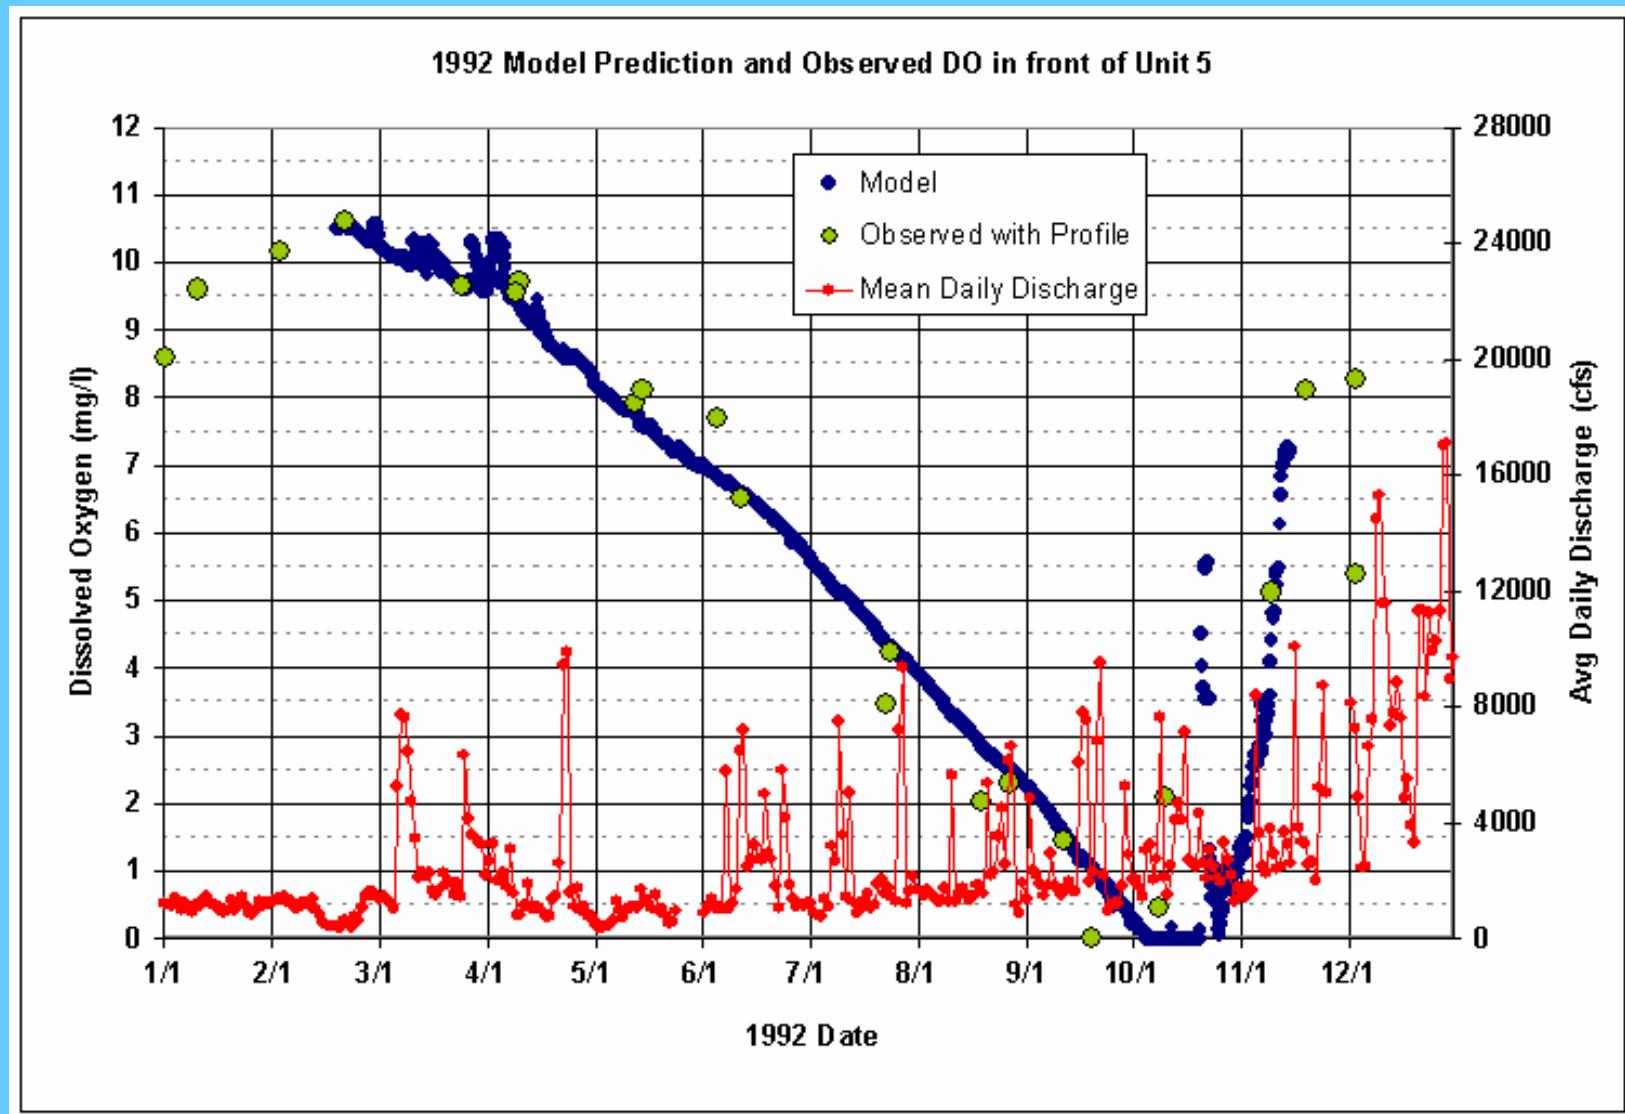


1997 Modeled versus Measured DO at the level of the Unit 5 Intake

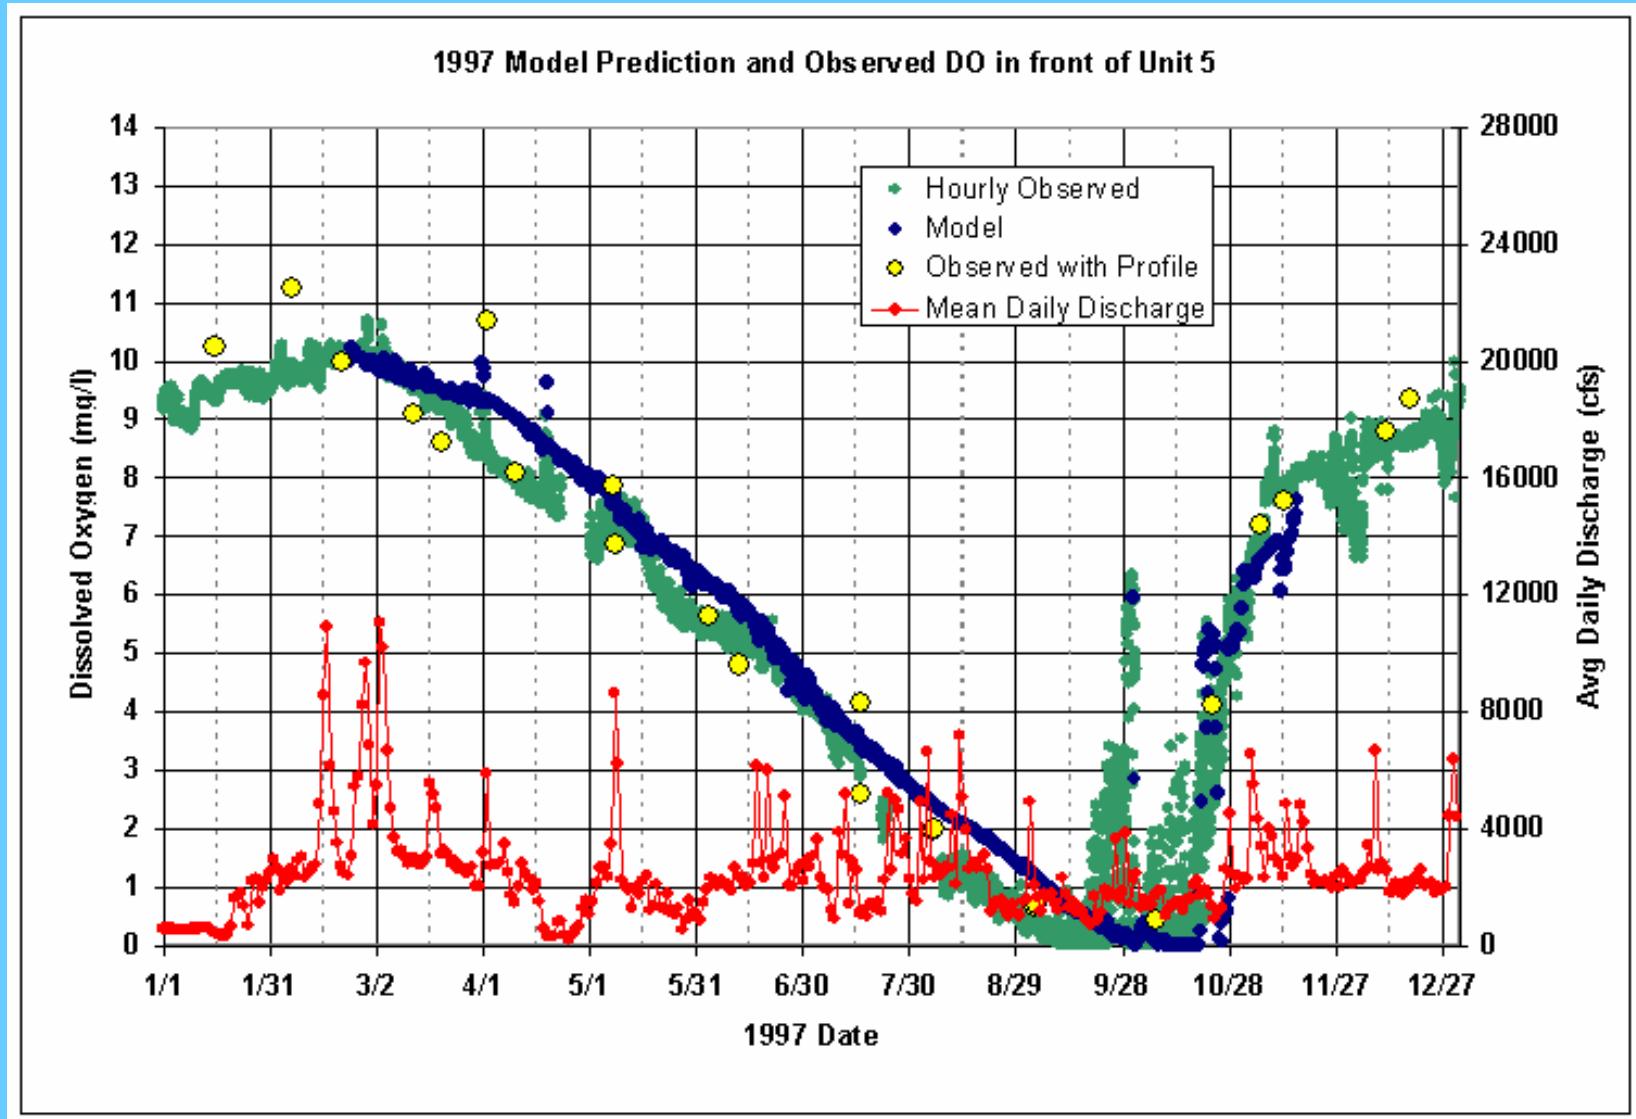


1996 Discharge DO for Current and Reduced Phosphorus, and without the Special Drawdown

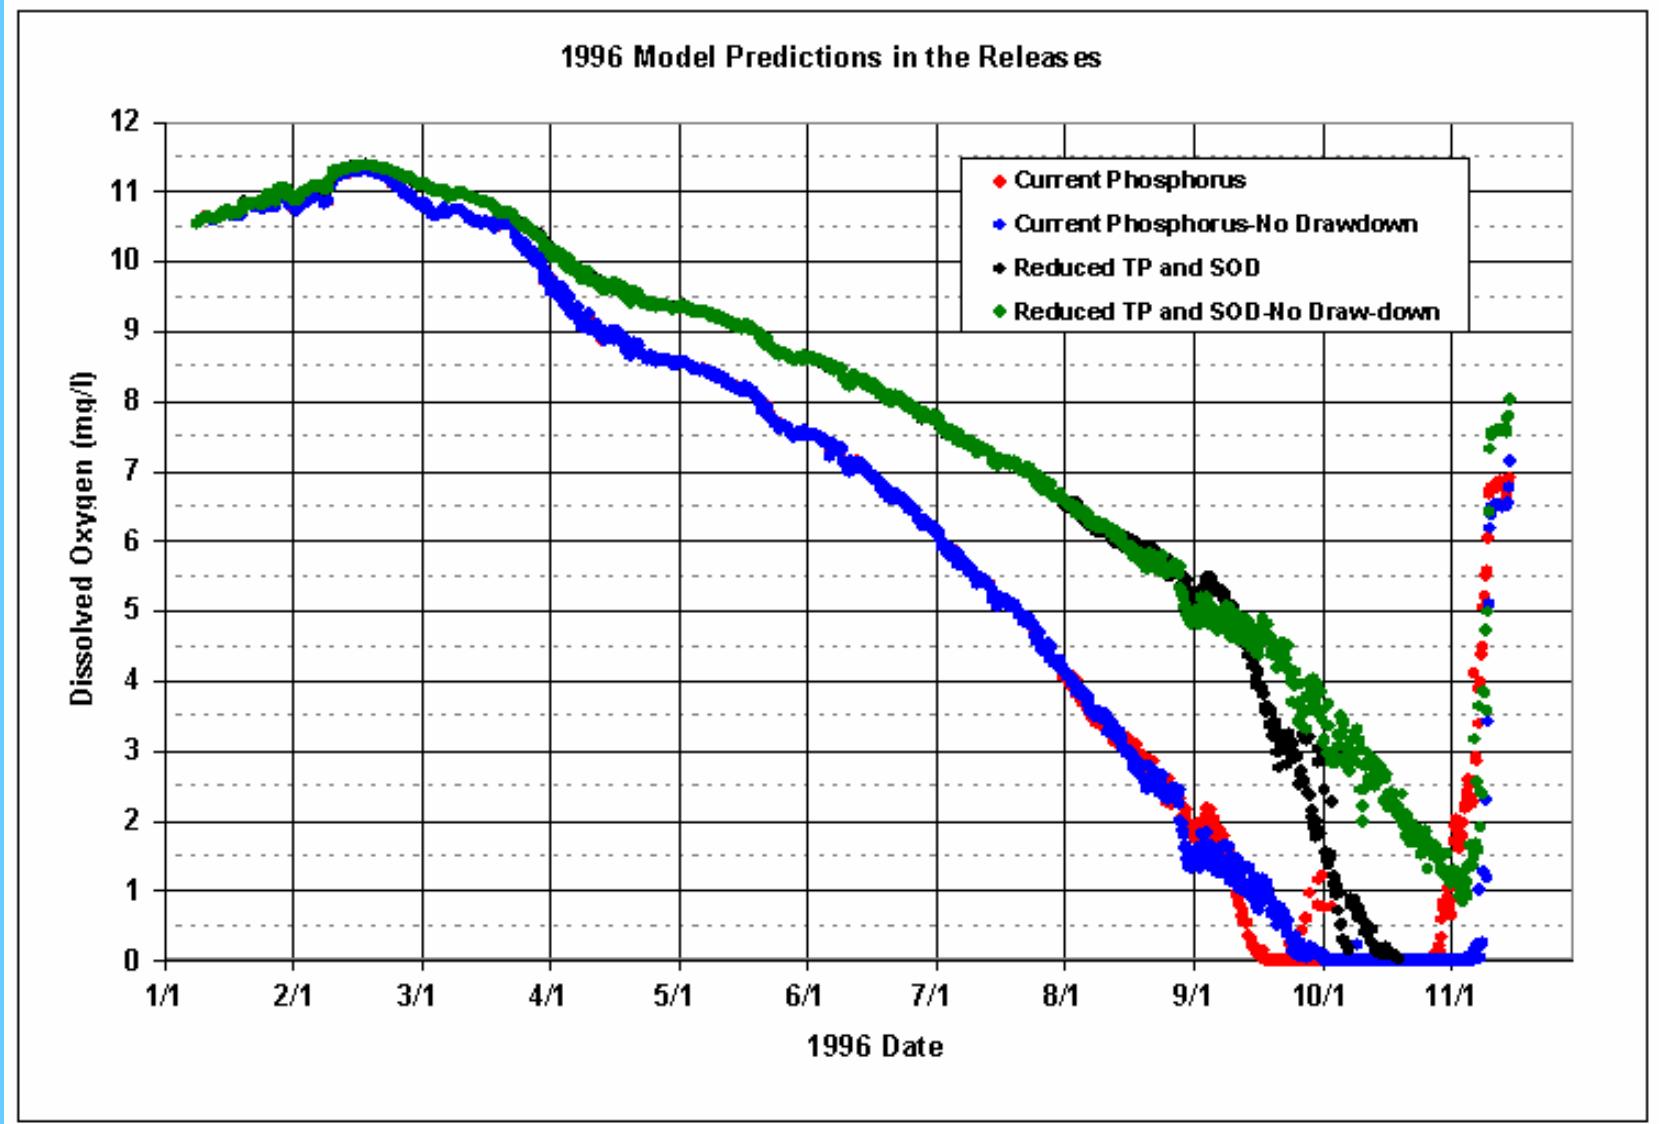


1992 Discharge DO for Current and Reduced Phosphorus

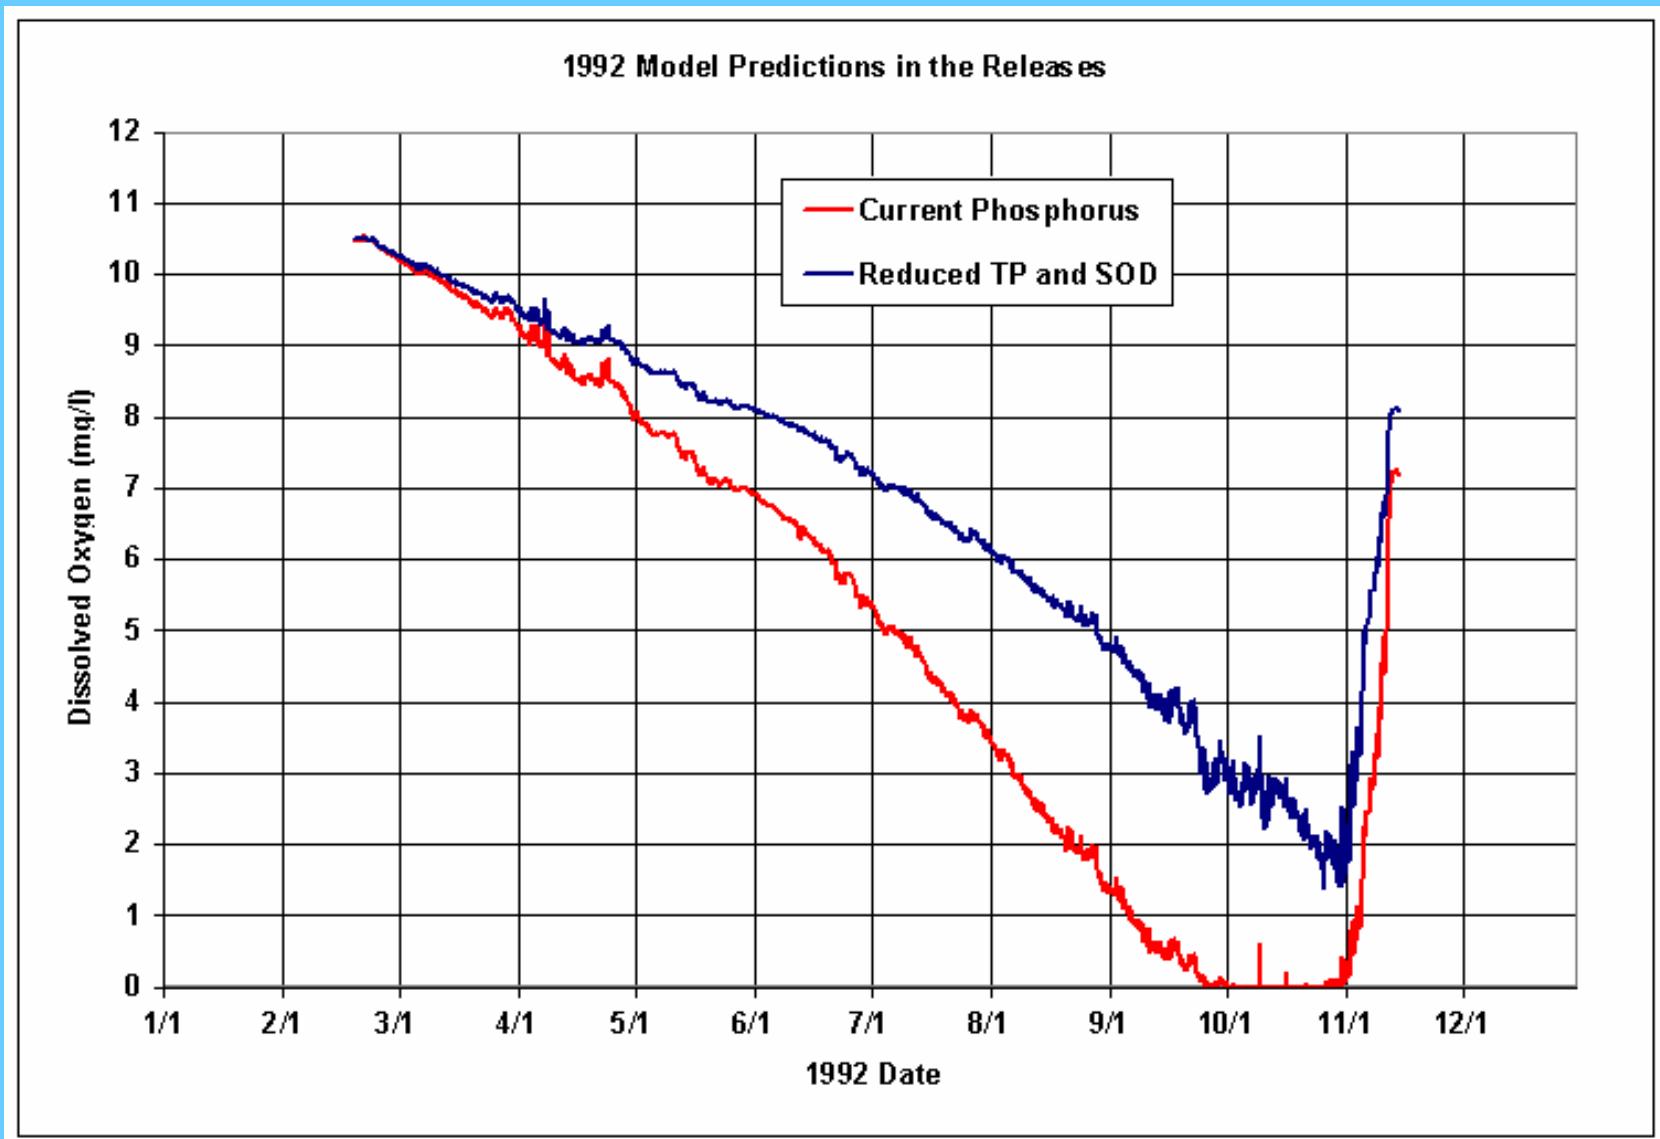


1997 Discharge DO for Current and Reduced Phosphorus

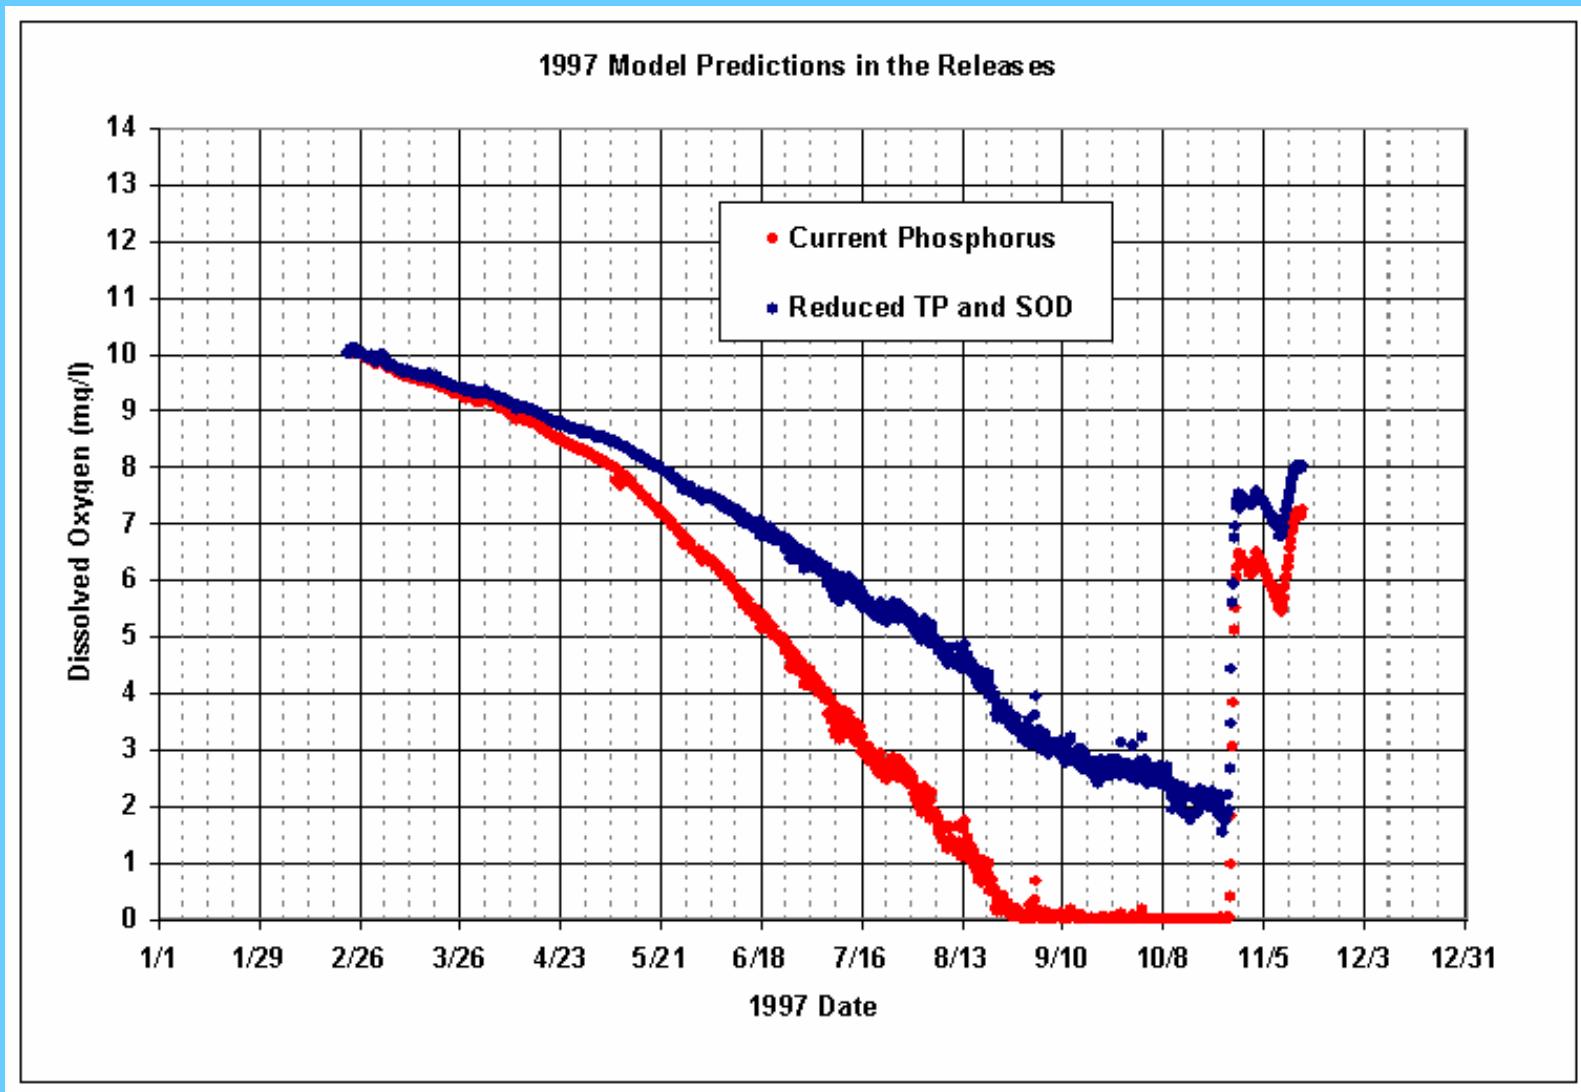


1996 DO at the Elevation of the Unit 5 Intake for Current and Reduced Phosphorus, and without the Special Drawdown

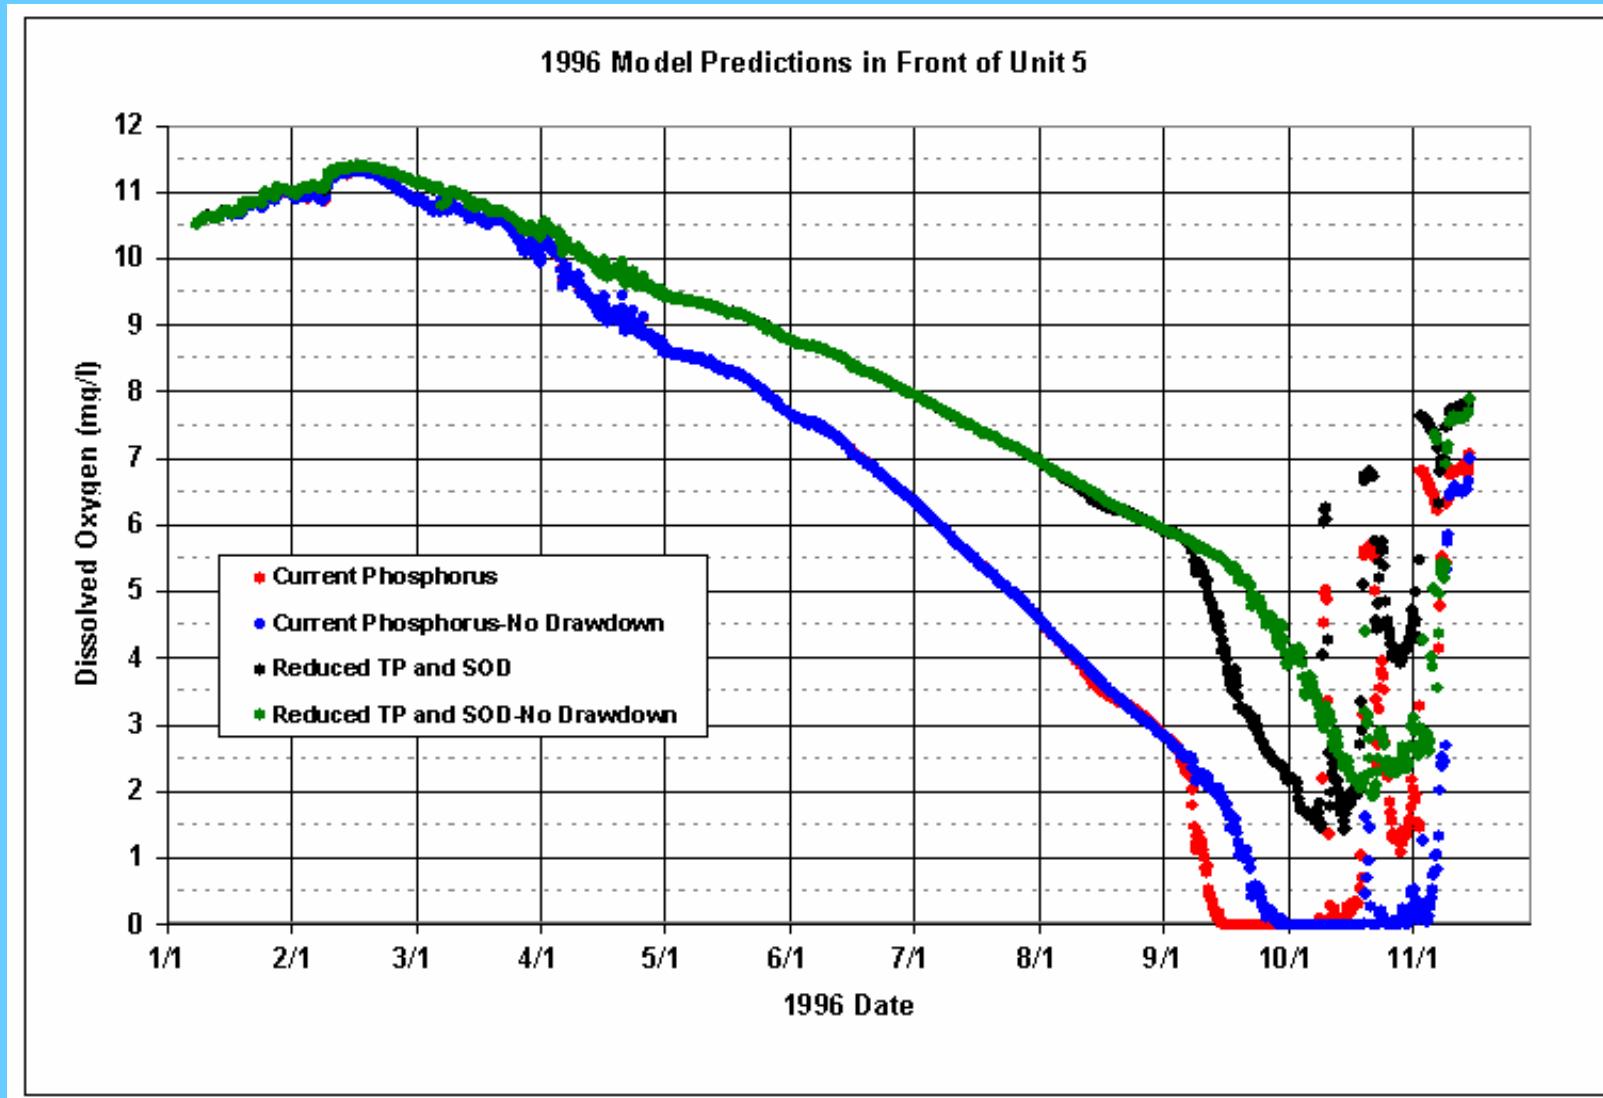

1992 DO at the Level of the Unit 5 Intake for Current and Reduced Phosphorus

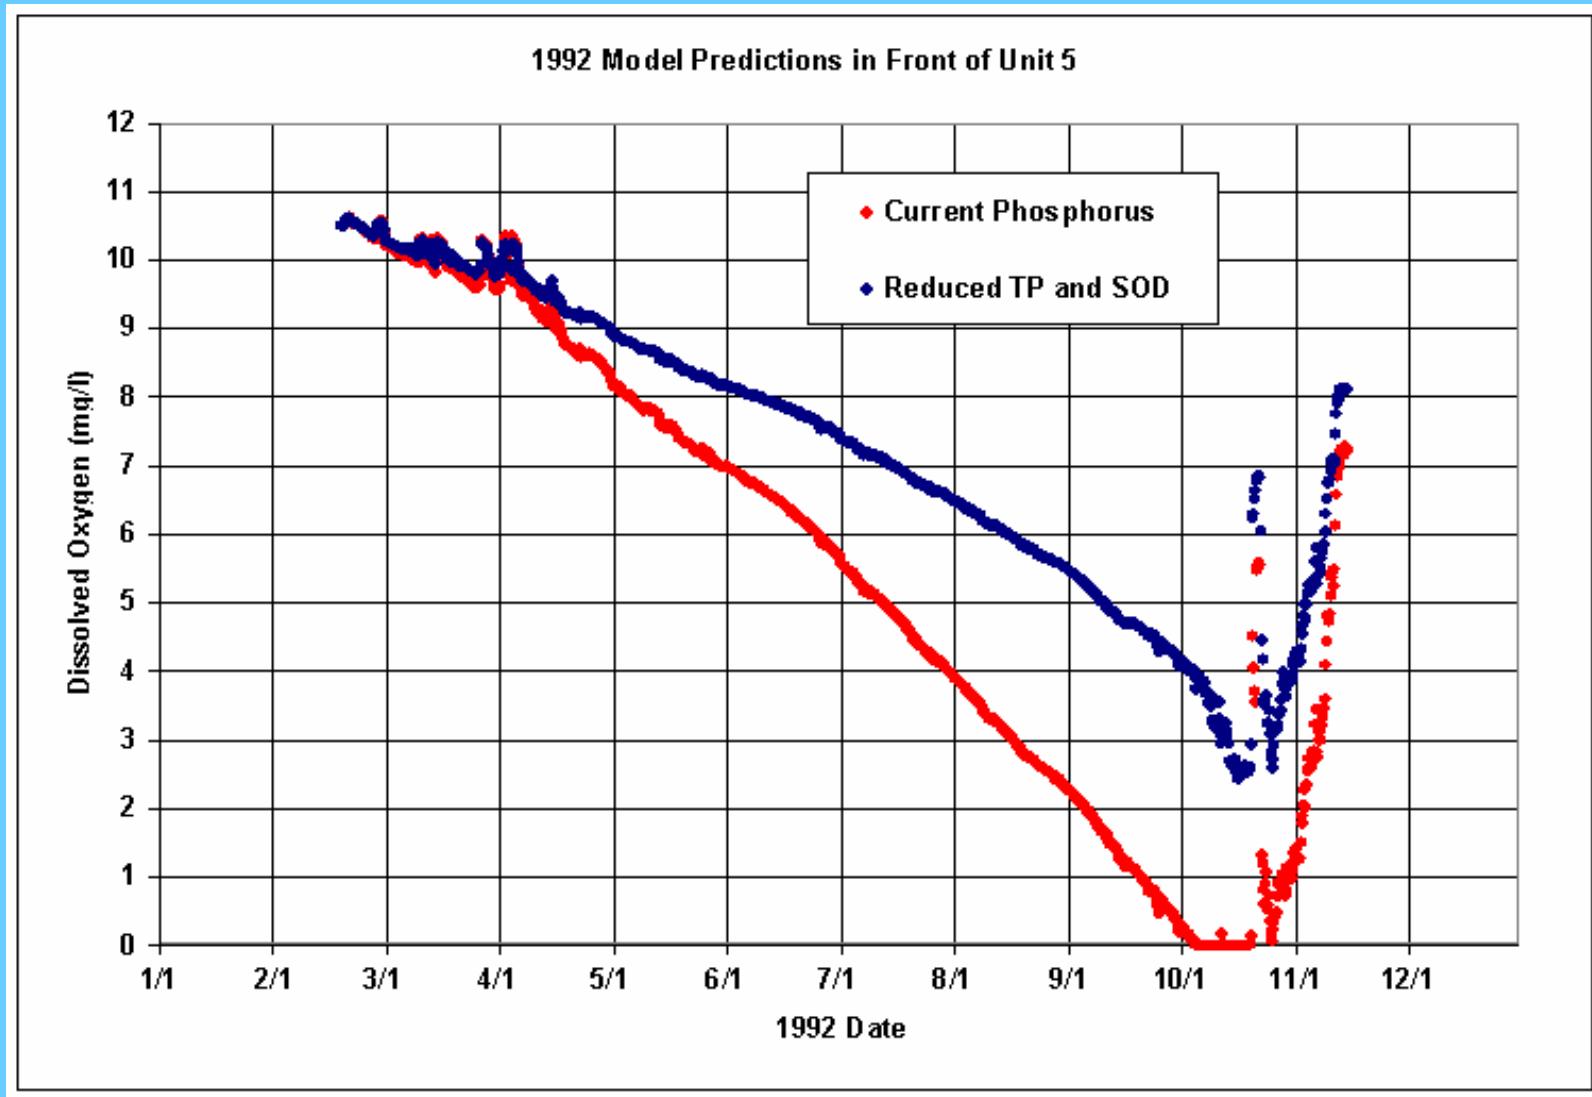

1997 DO at the Level of the Unit 5 Intake for Current and Reduced Phosphorus

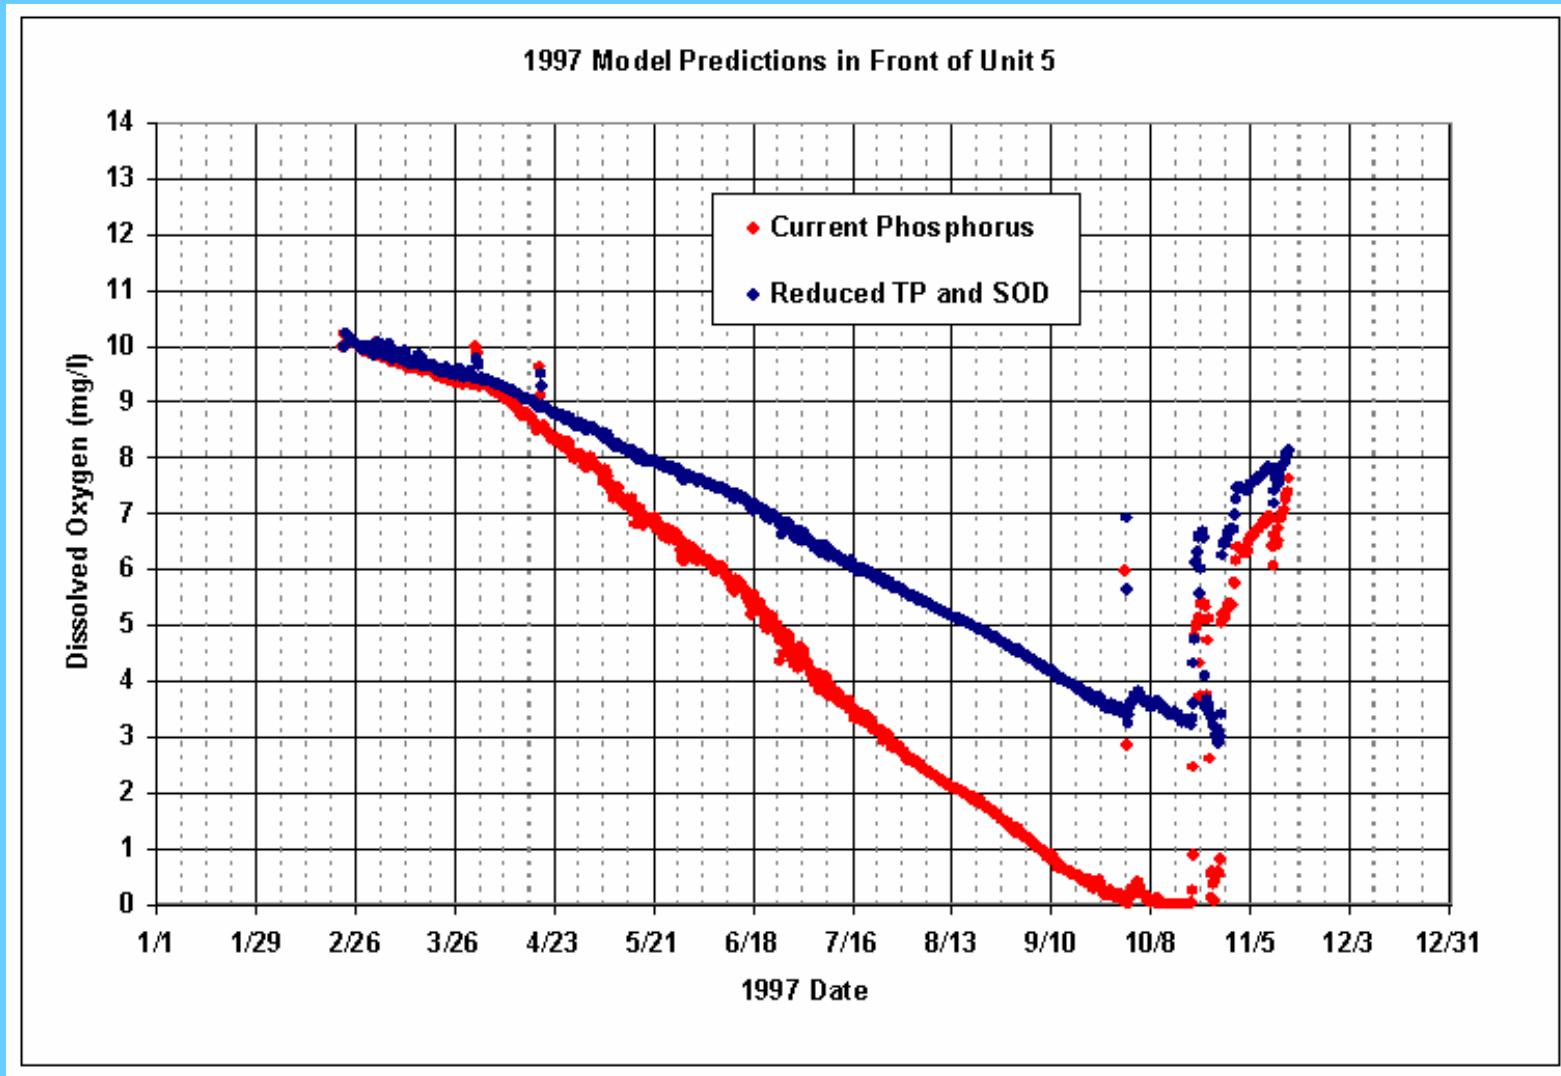

The End

CE-QUAL-W2 Model for Lake Murray— Progress Report on Calibration and Applications

Presented by Andy Sawyer and Jim Ruane


Reservoir Environmental Management, Inc

August 23, 2006


Overview of Presentation

- Present the calibration of the CE-QUAL-W2 model that will be used to simulate water quality in Lake Murray
- Illustrate use of the model to explore management strategies for improving water quality and uses of the lake


Lake Murray Watershed

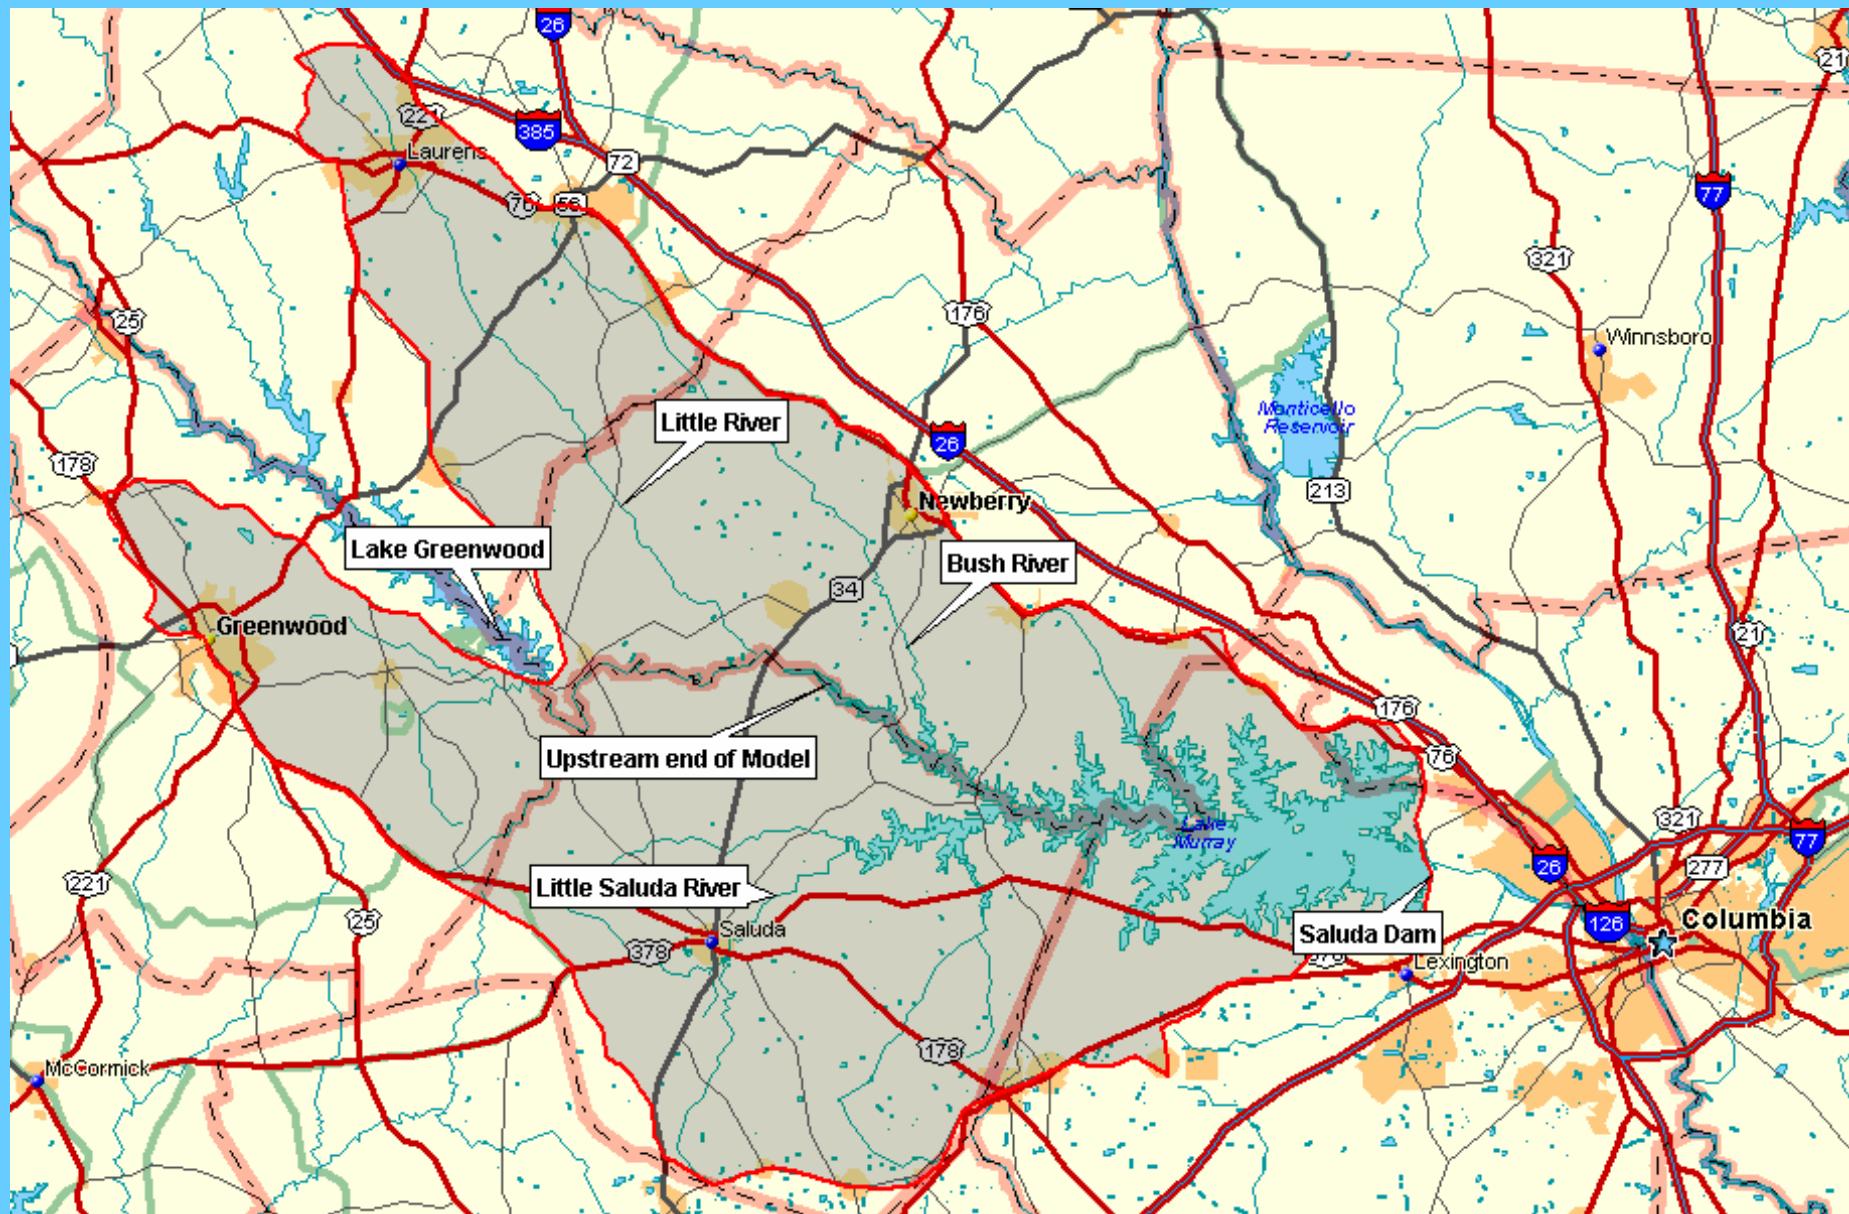

Primary SCDHEC and SCE&G Monitoring Stations used for Lake Murray Water Quality Analyses

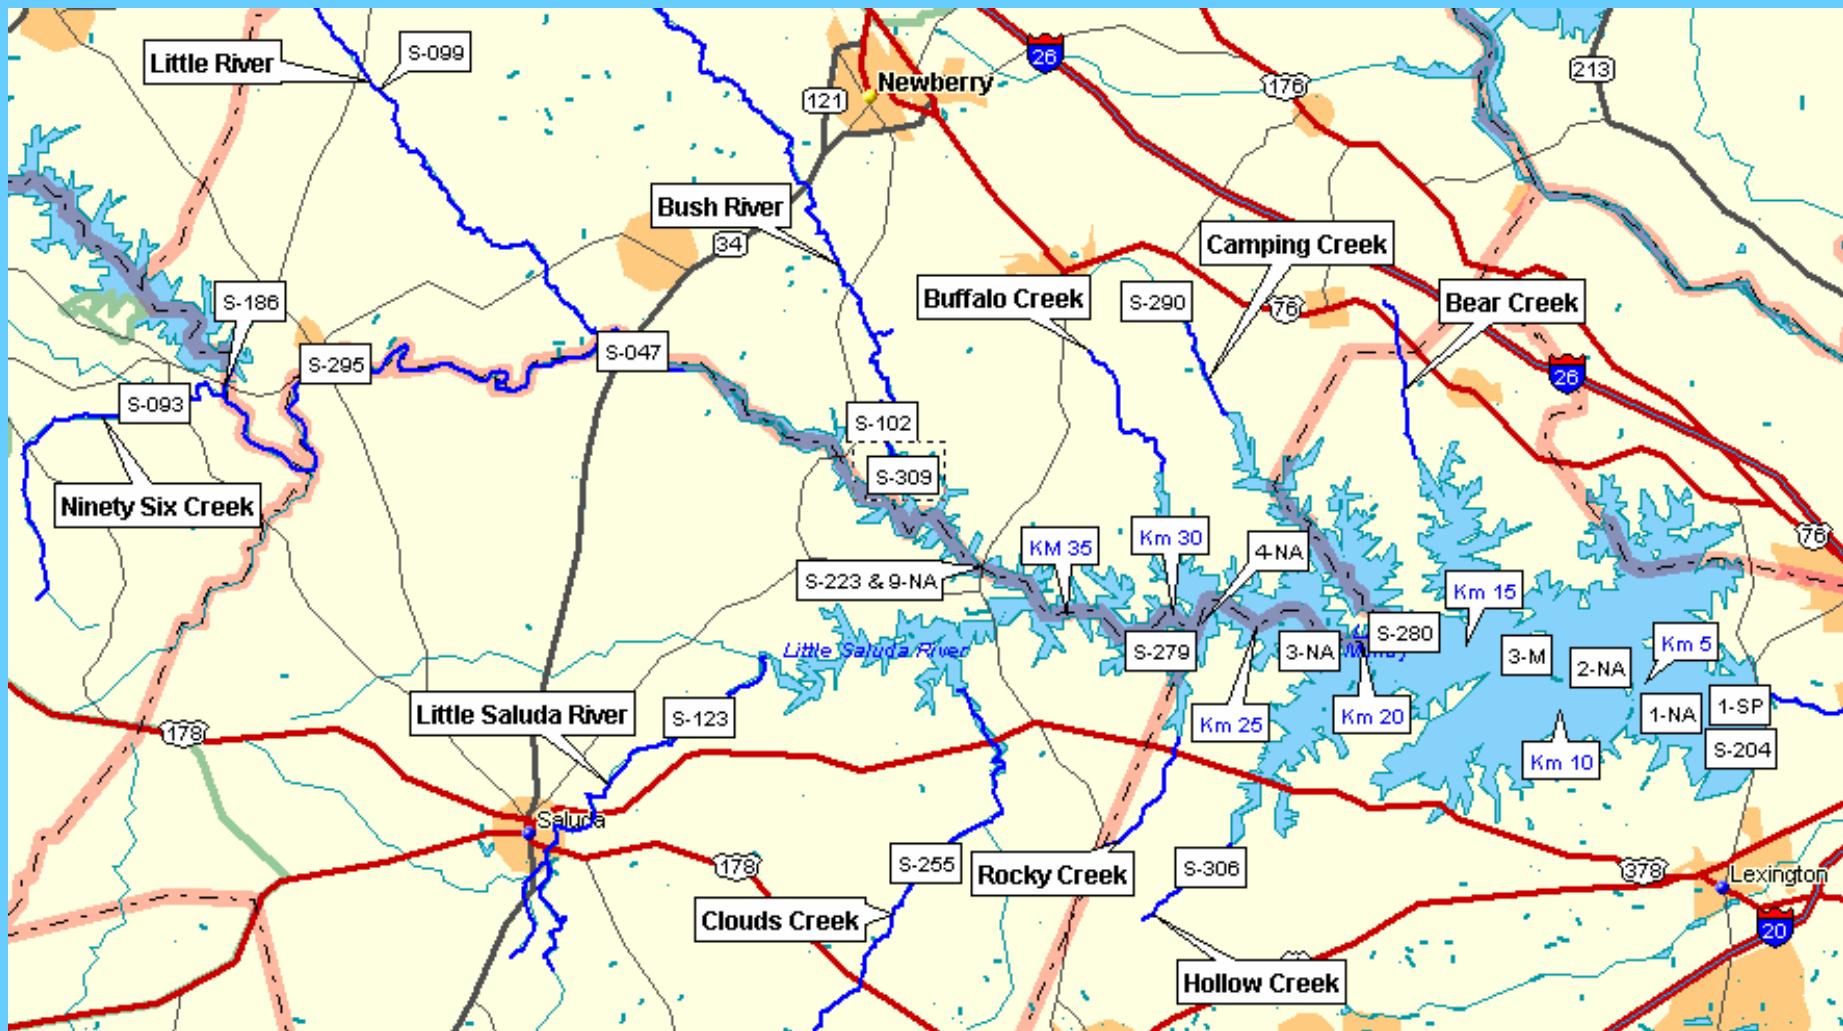

Map of Lake Murray Watershed Showing Location of USGS Monitors

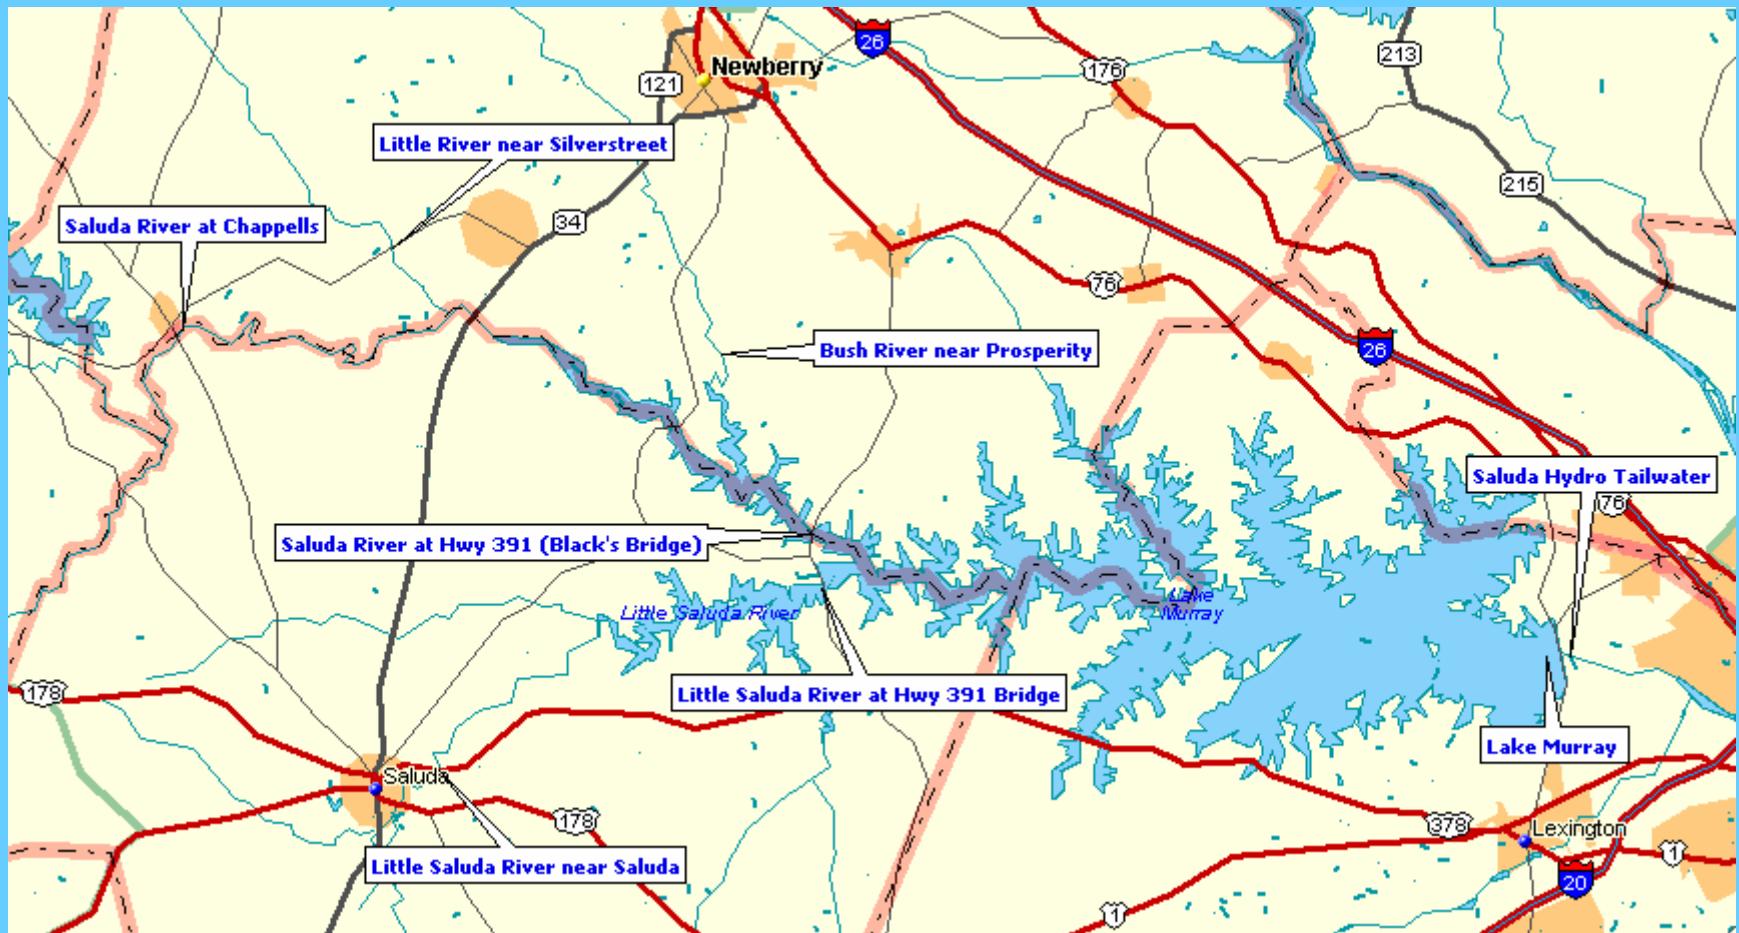

Summary of Key Issues to be Addressed Using the CE-QUAL-W2 Model

- Low DO in the releases from Saluda Hydro,
- Restrictions for operating Unit 5 due to entrainment of blue-back herring,
- Effects of project operations and water quality on Striped Bass habitat, including fish kills that have occurred in the past
- DO less than the State standard in the inflow regions of the lake,


Other issues not being addressed at this time using the model:

- low pH in Lower Saluda River (LSR)
- eutrophication in the upper regions of Lake Murray


Physical Characteristics of Lake Murray

	U.S. Customary System	Metric System
Maximum depth	175 feet	53.3 m
Total lake volume	2,317,000 ac-ft	2,636 hm³
Average Annual Flow	2778 cfs	78.7 cms
Nominal Residence Time	417 days	417 days
Depth of outlets, Units 1-4	175 feet	53 m
Depth of outlets, Unit 5	110 feet	33.5 m
Flow Capacity - Units 1-4	3000 cfs	85 cms
Flow Capacity, Unit 5	6000 cfs	170 cms

Plan view of Lake Murray with all Branches and Tributaries that are Included in the Model


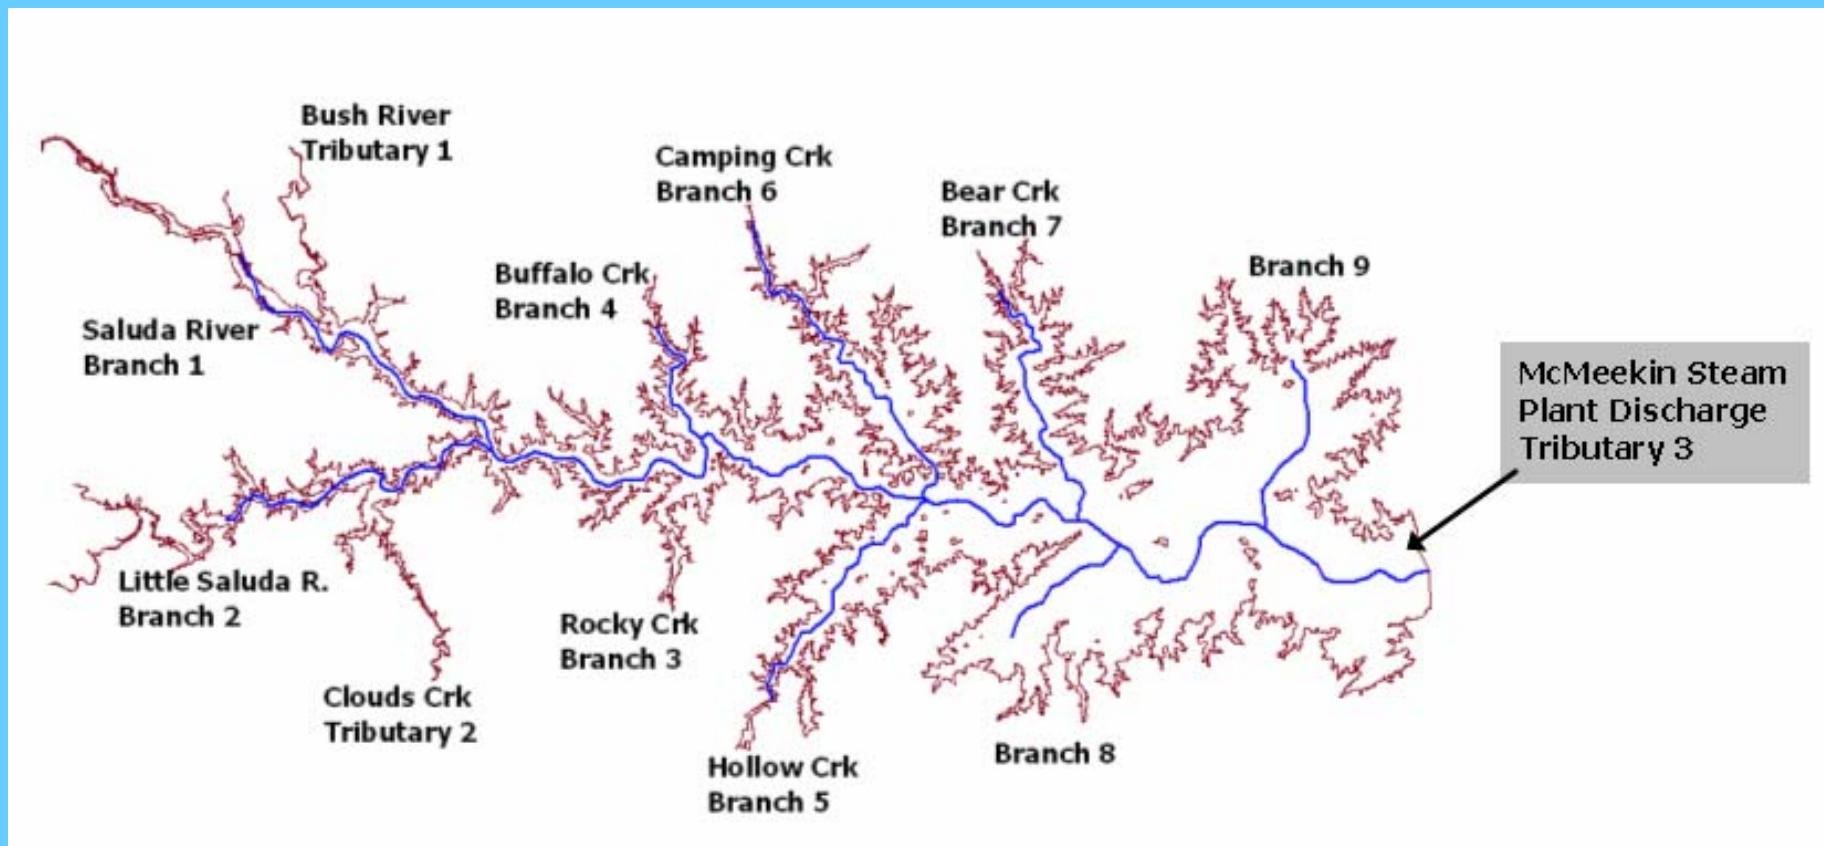


Plan View of Lake Murray Showing CE-QUAL-W2 Segmentation

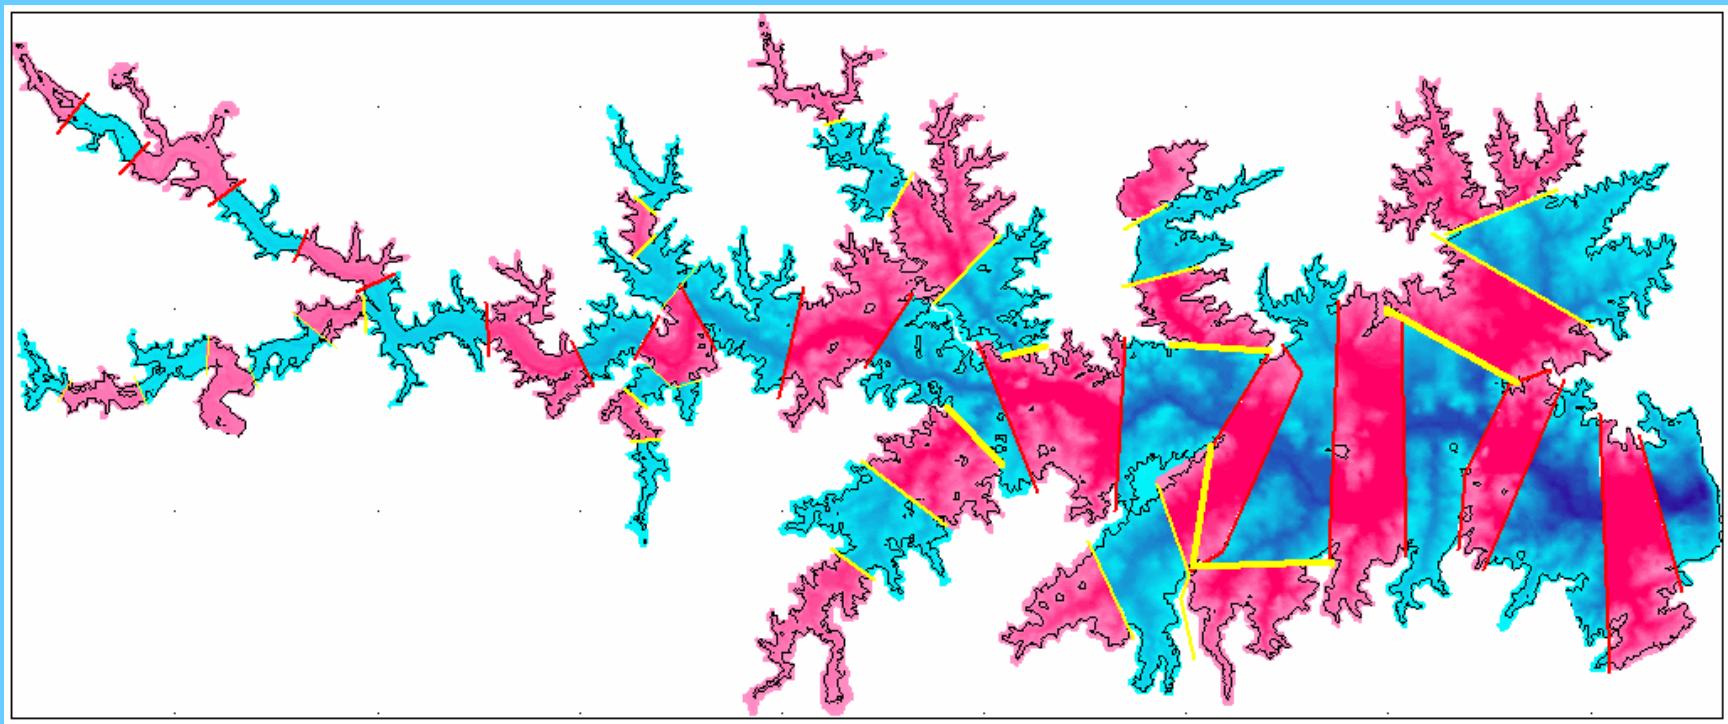


CE-QUAL-W2

Bathymetry for the Main Branch (Branch 1) of Lake Murray

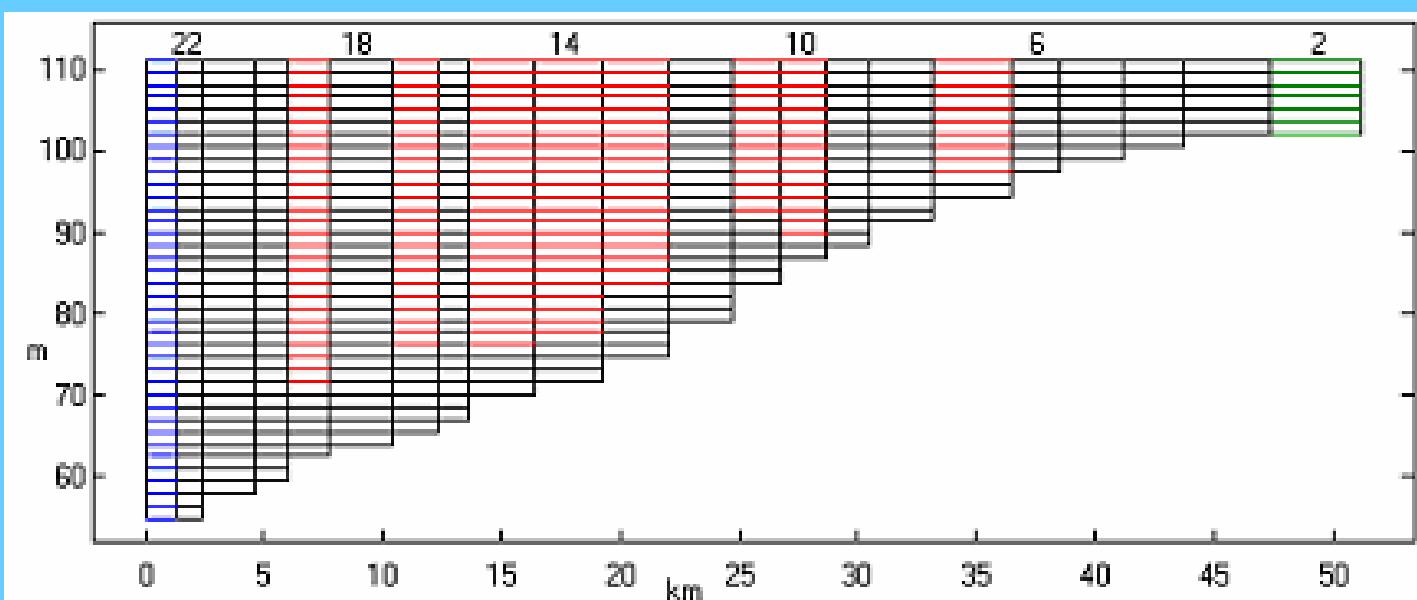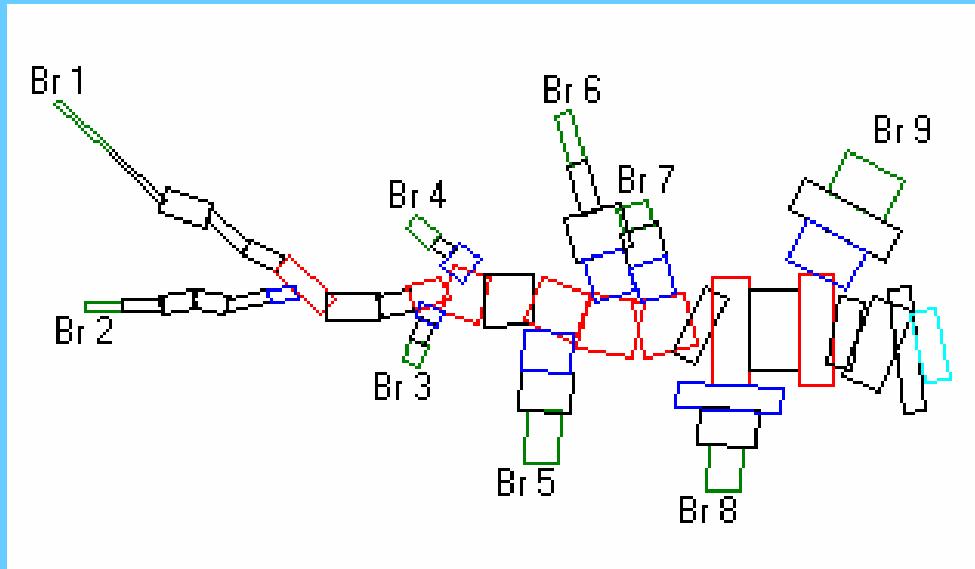


Physical processes

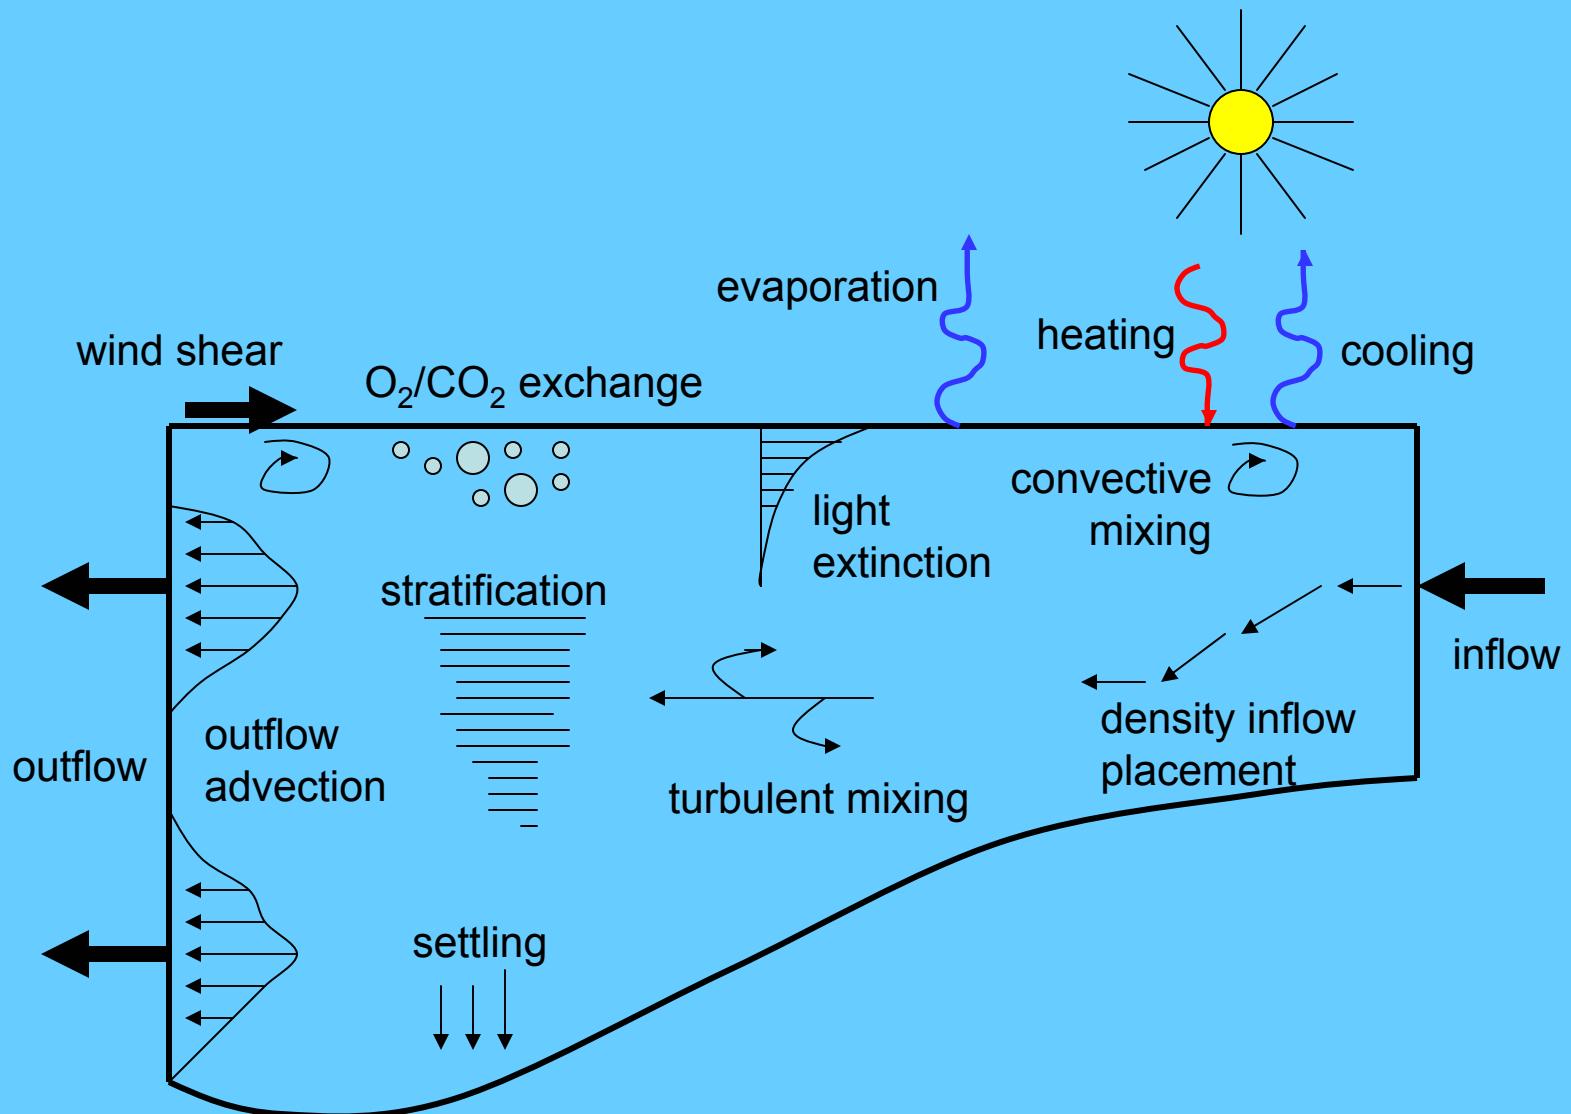

Highly coupled constituents

NH_4 = constituent


reaeration = process

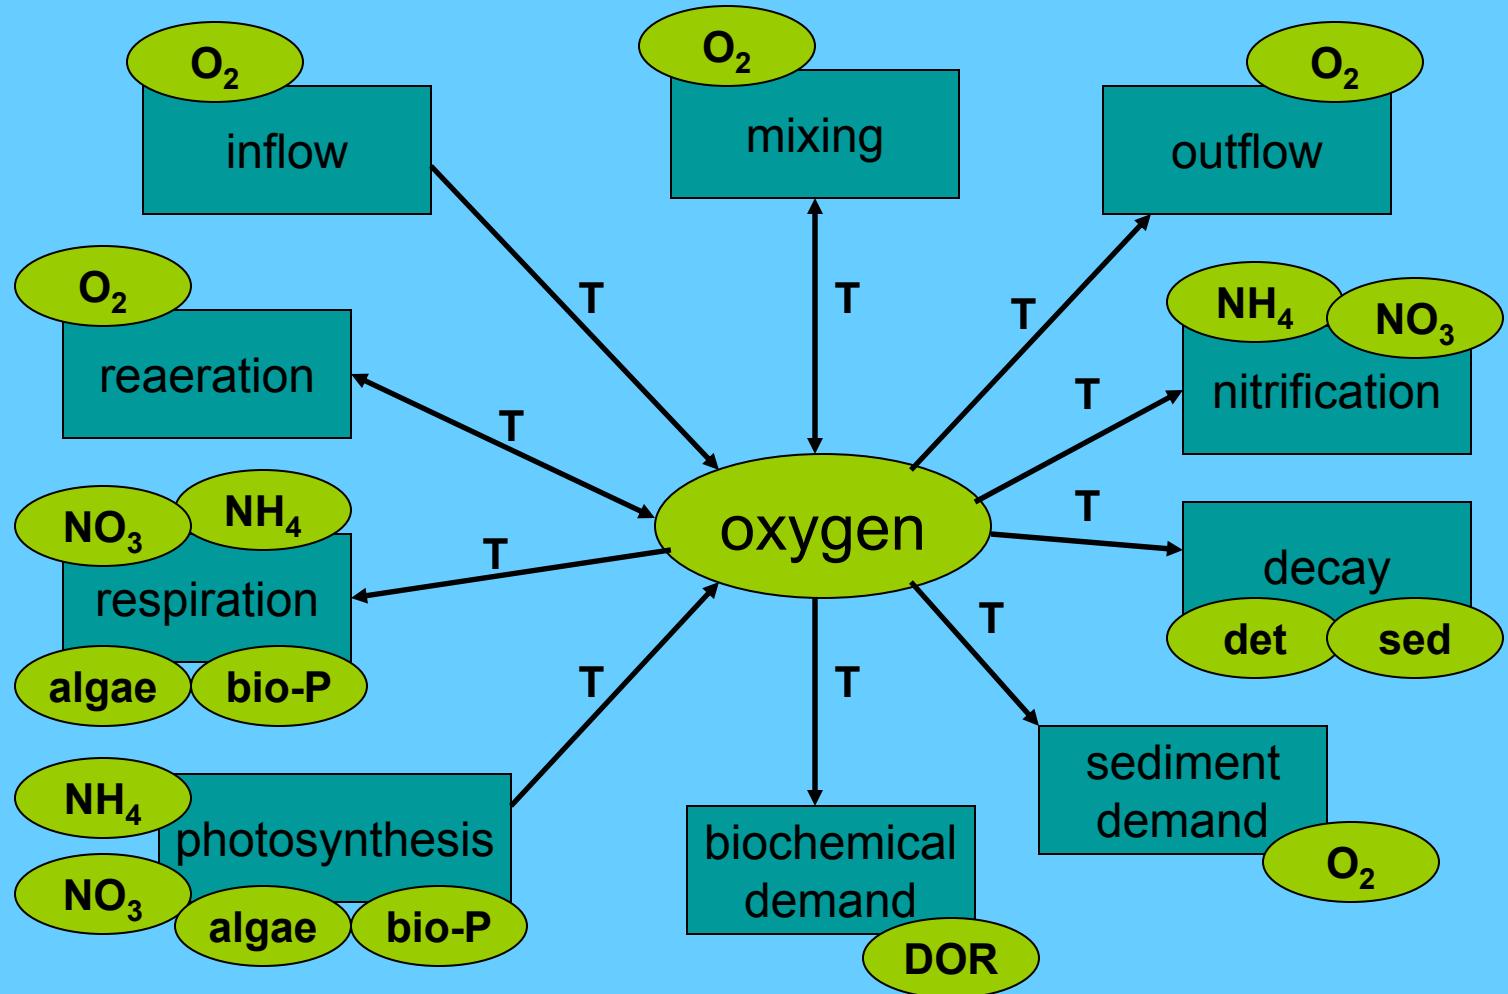


Model Upgrade Features

- Increased calibration focus at station located 6 Km (~ 4mi) upstream from the dam (for fish habitat issues)
- Refined withdrawal zone for Unit 5 (for fish habitat issues and DO in the releases)
- Sensitivity to TP in Saluda River inflow to Lake Murray
- Upgraded features for organic matter (labile and refractory nutrient cycling, sediment releases)
- Phosphorus settling
- Wuest wind drag coefficient to allow more mixing at low wind speeds


Map of Subwatershed Drainage Area Boundaries

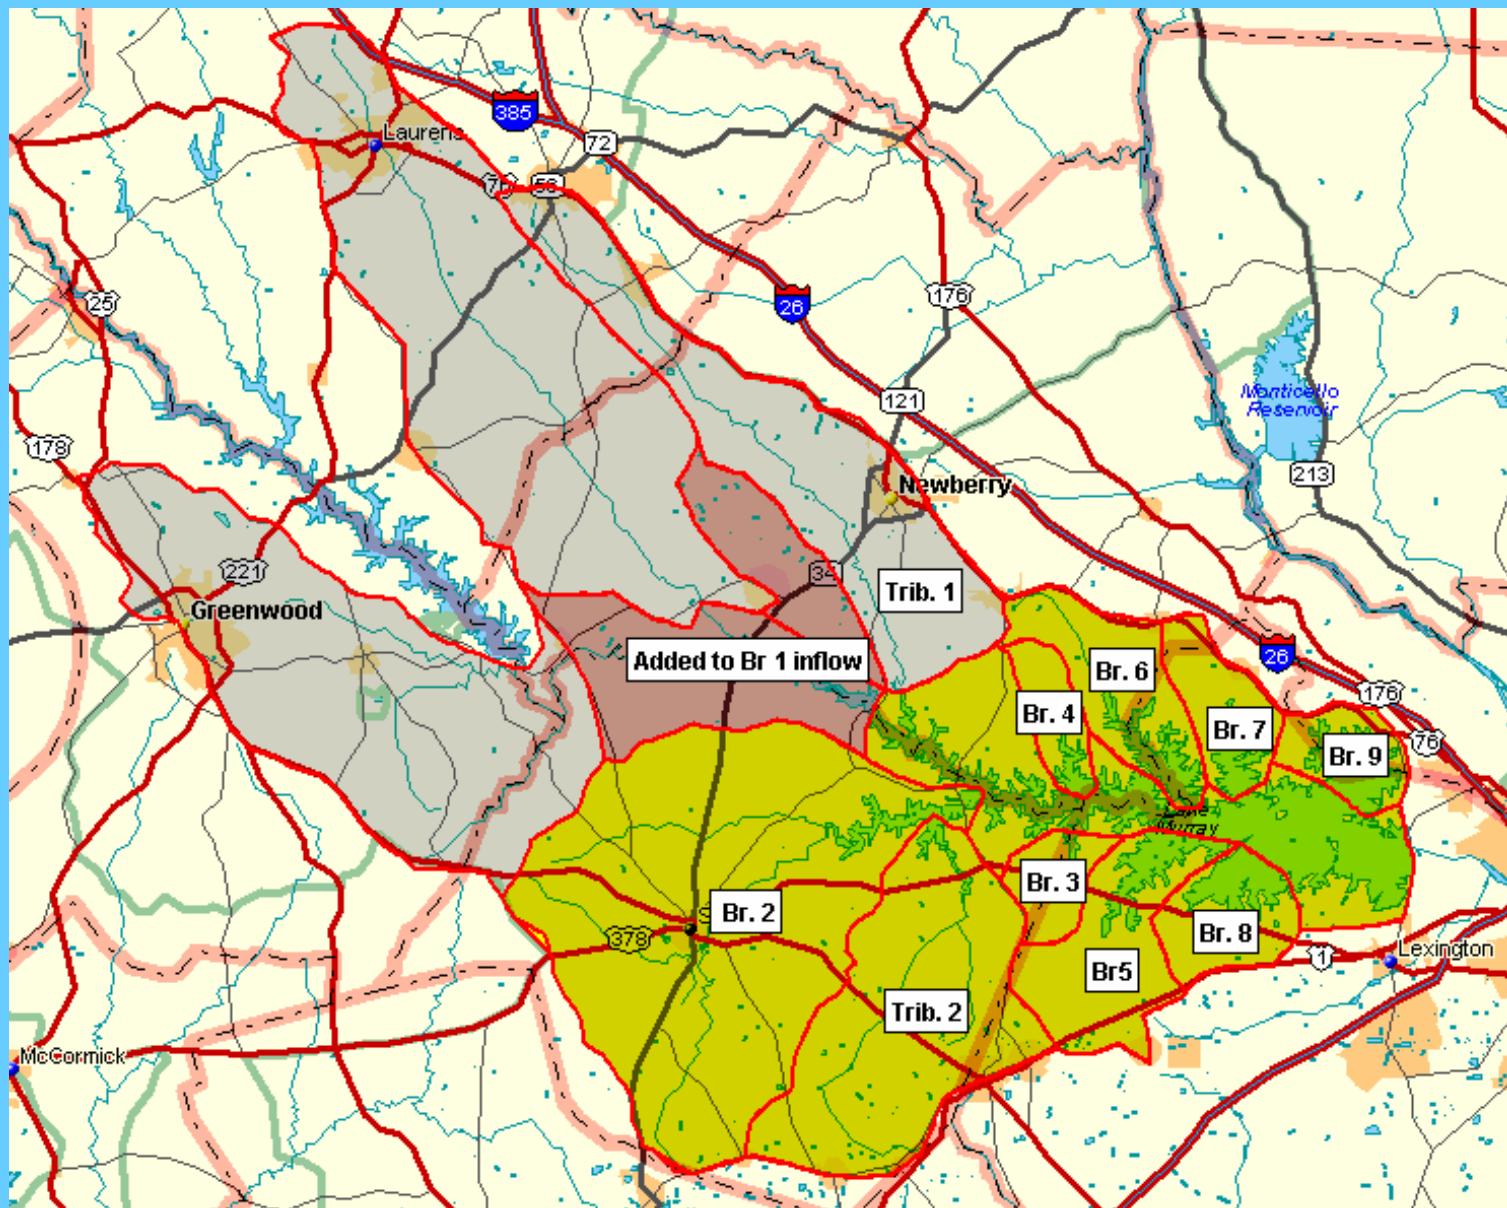


Phosphorus versus Flow Relationship found in the Bush River (Station S-102) using 1997 data

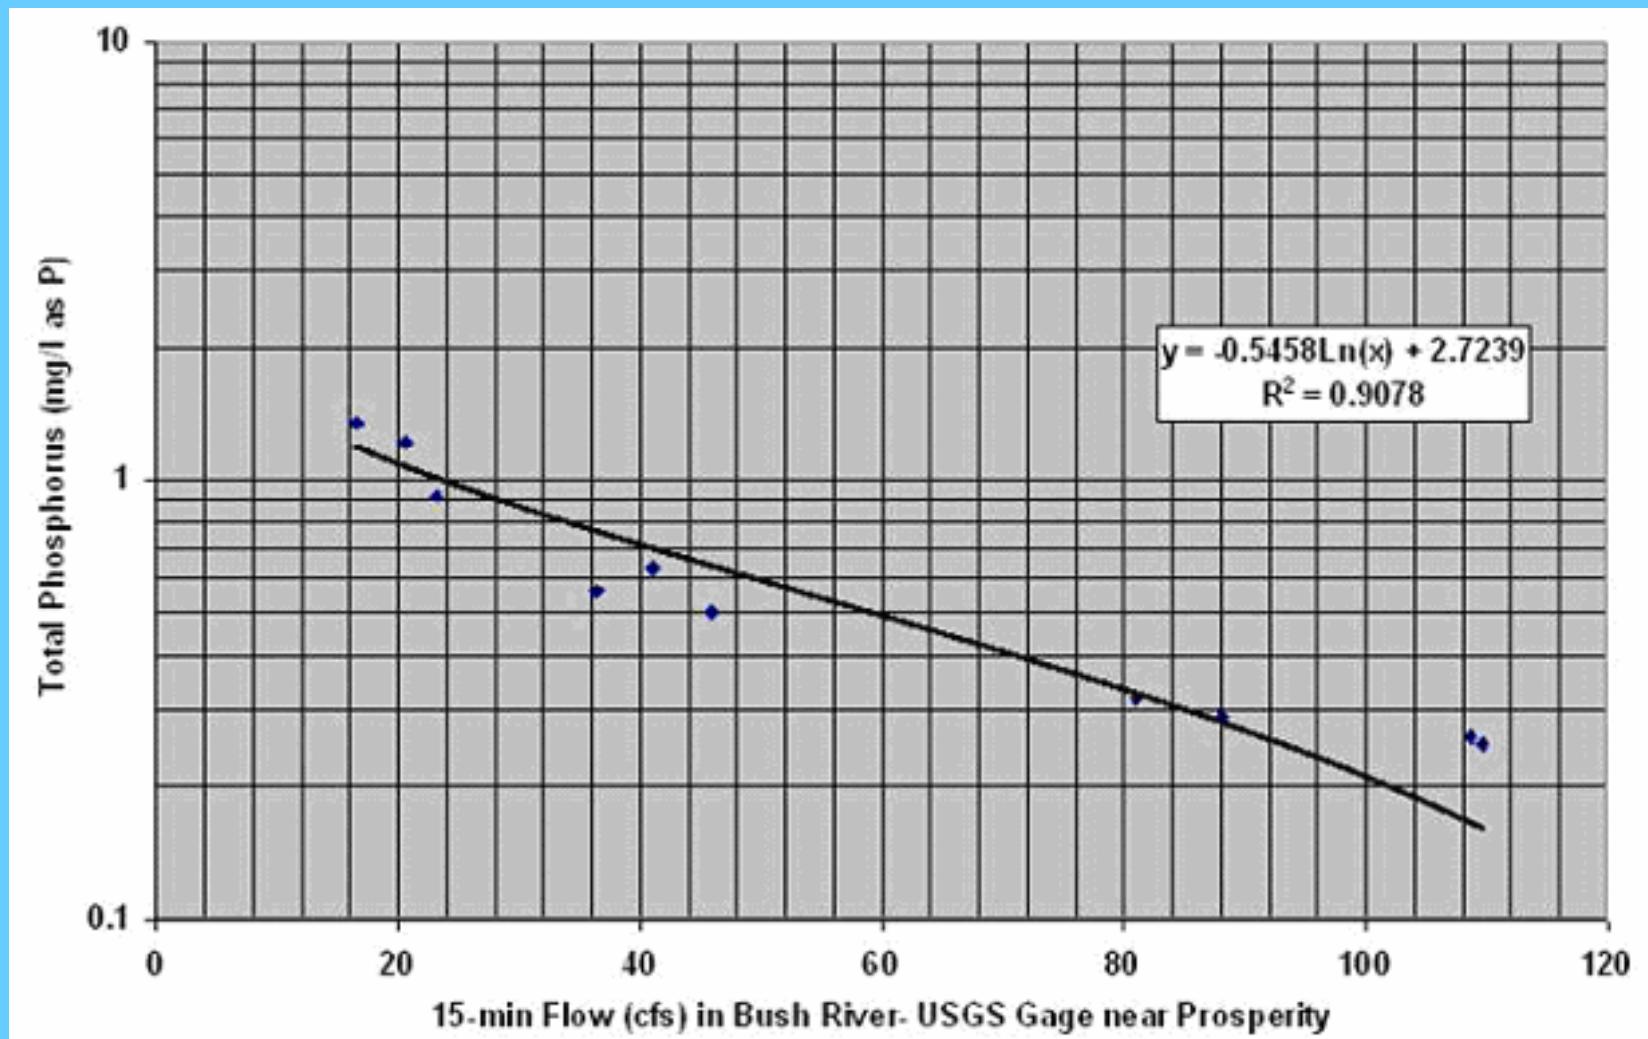


1996 Inflow Phosphorus Analysis for Bush River Inflow to Lake Murray

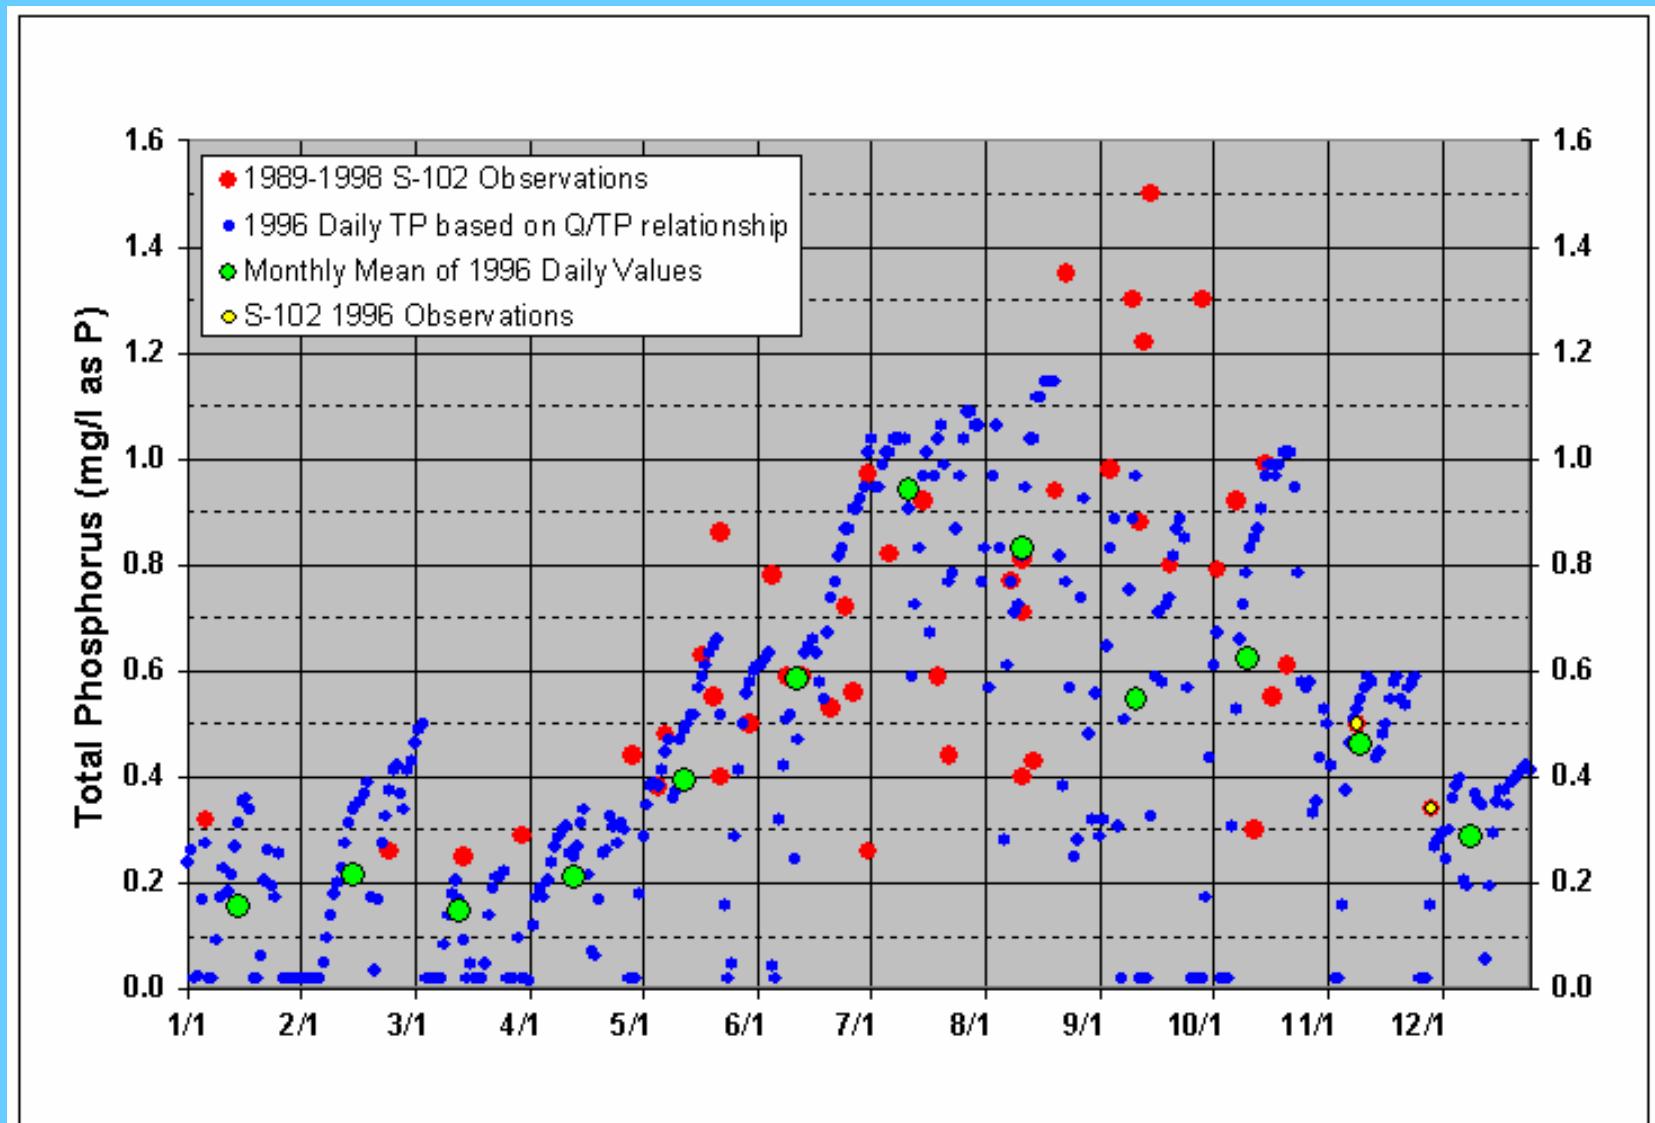


Total Phosphorus in the Little Saluda River

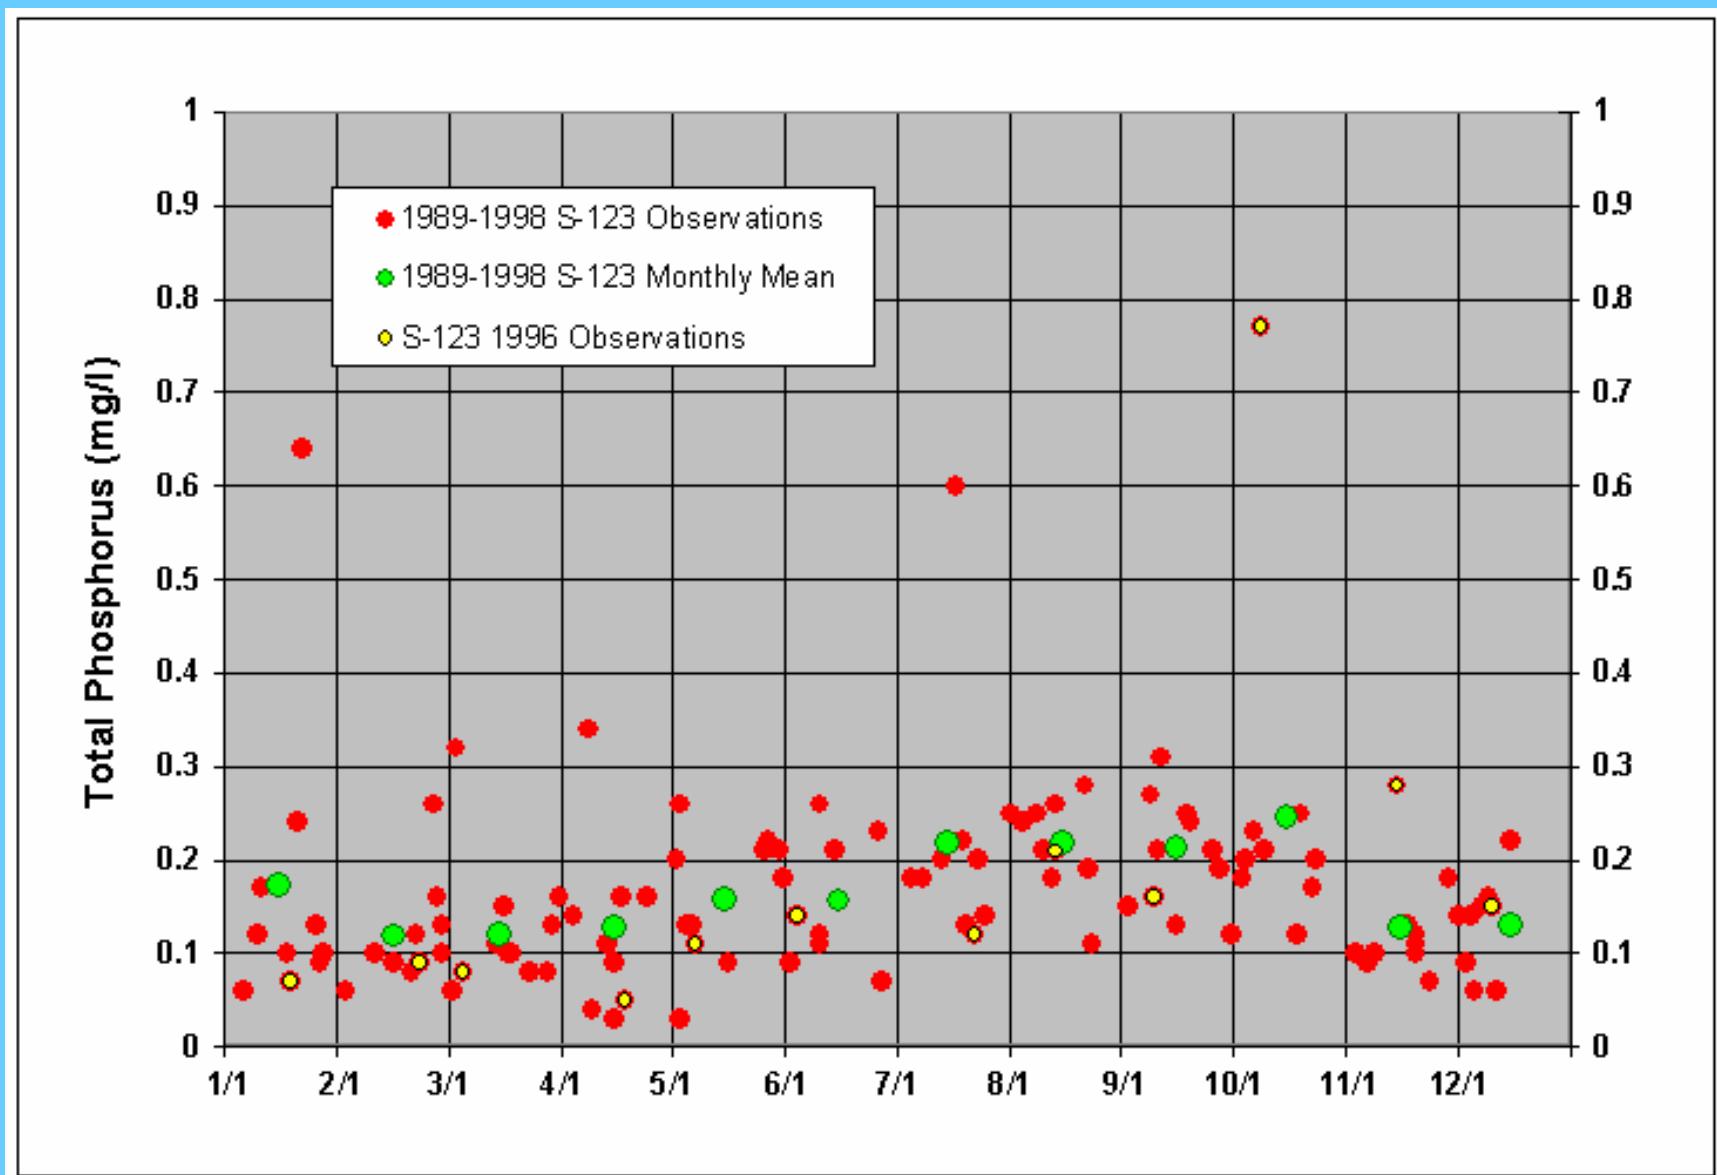


Total Phosphorus Clouds Creek

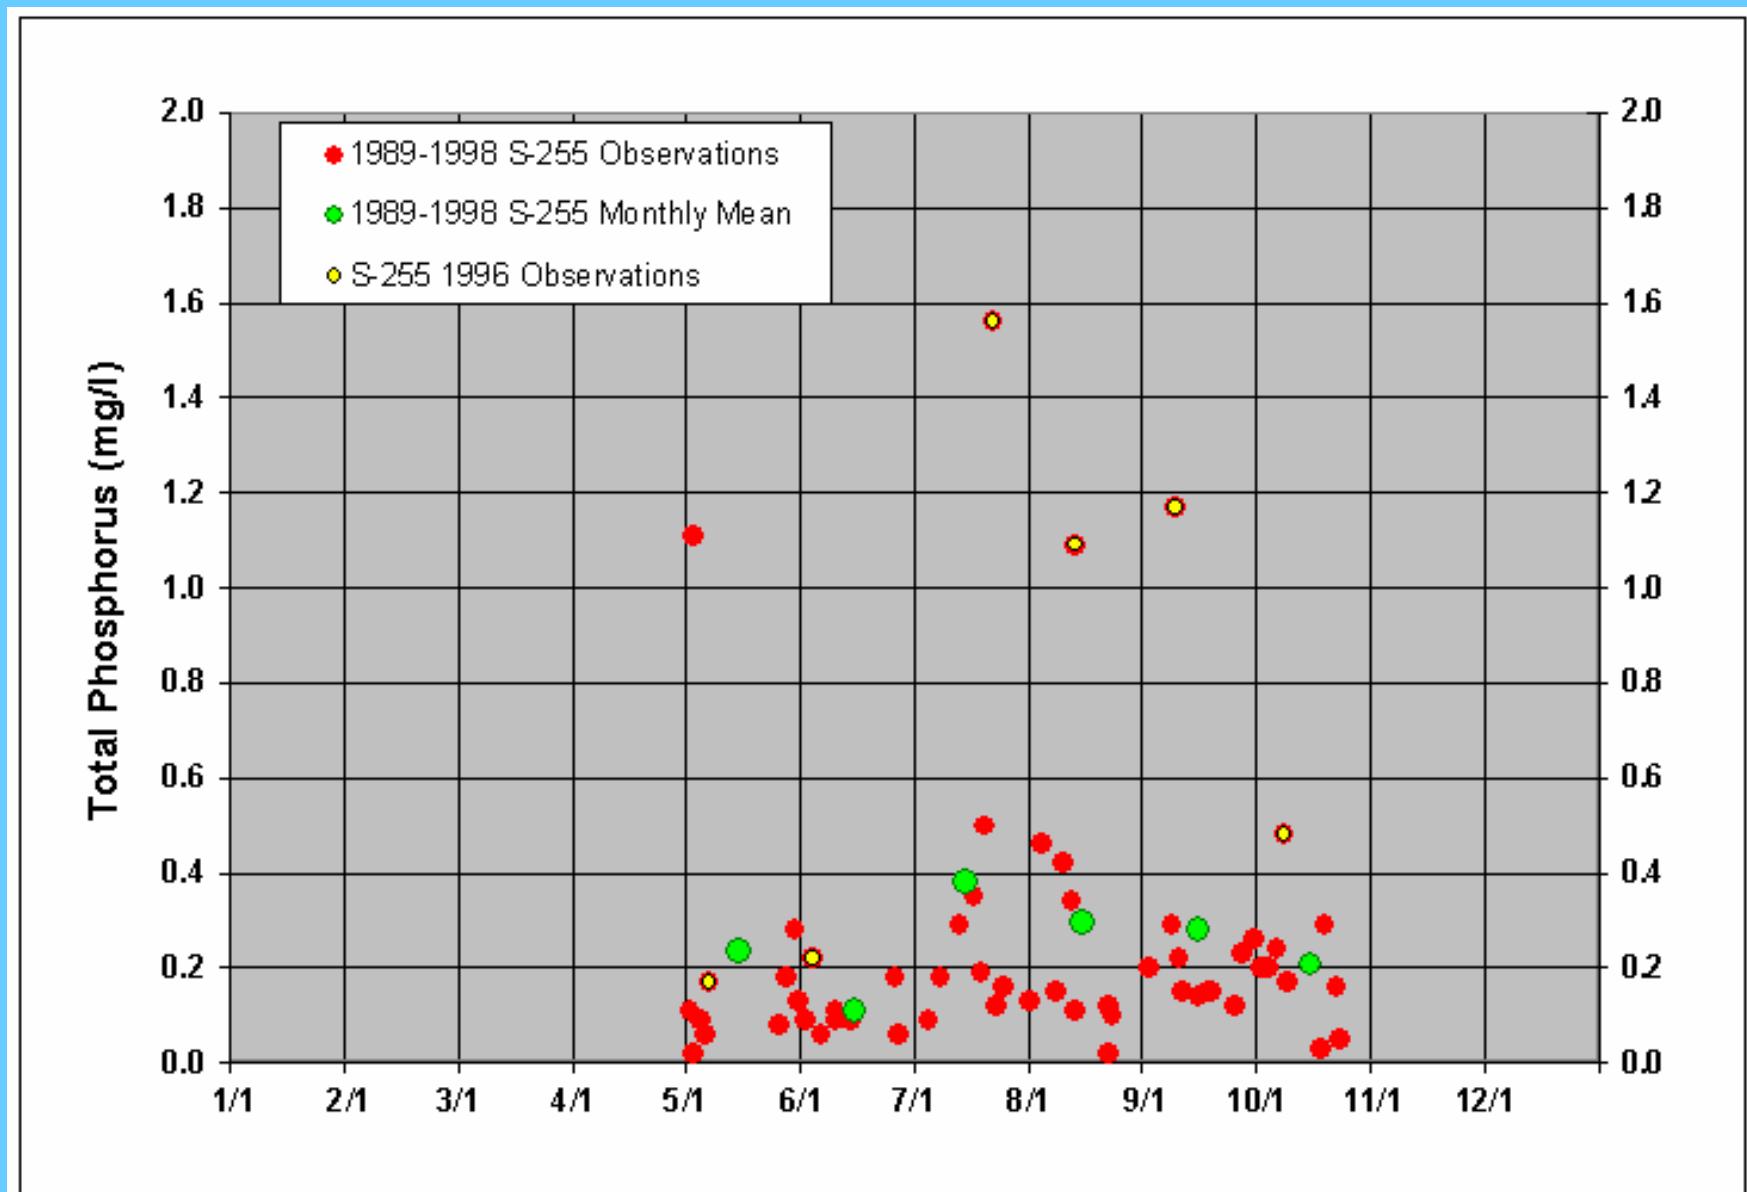


Total Phosphorus in Camping Creek

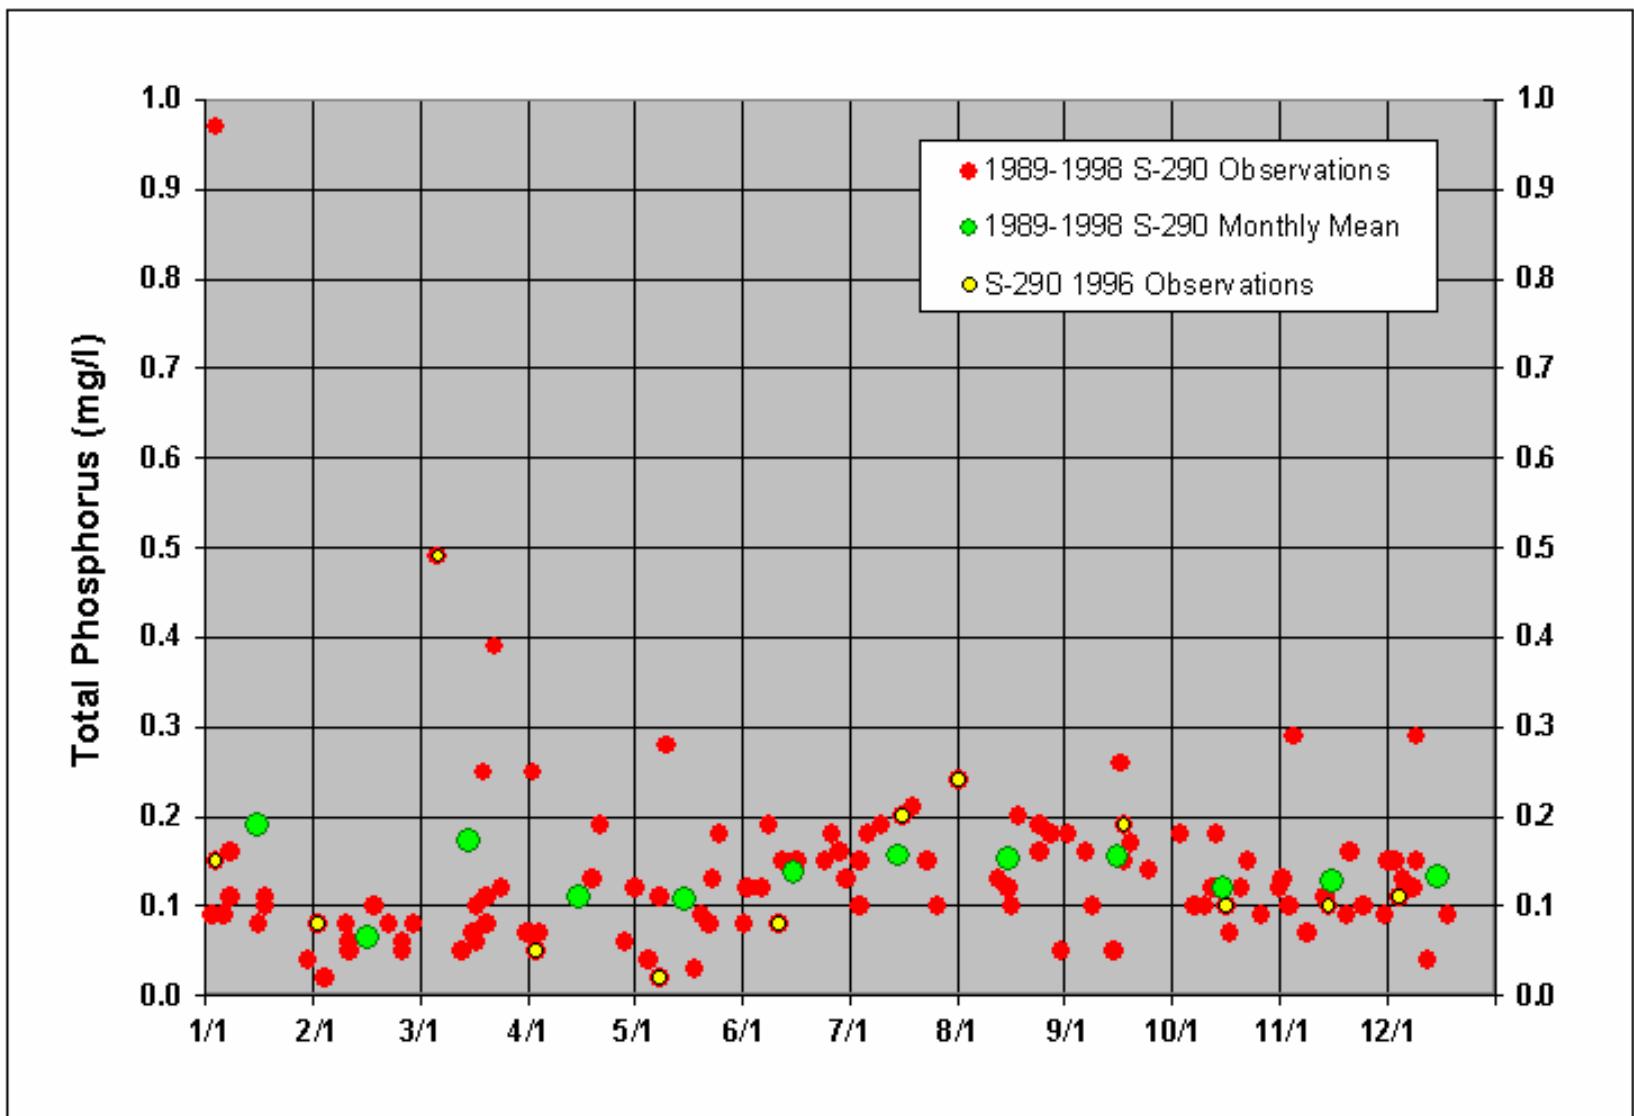


Inflow Dissolved Phosphorus Concentrations for Model Inflows to Lake Murray

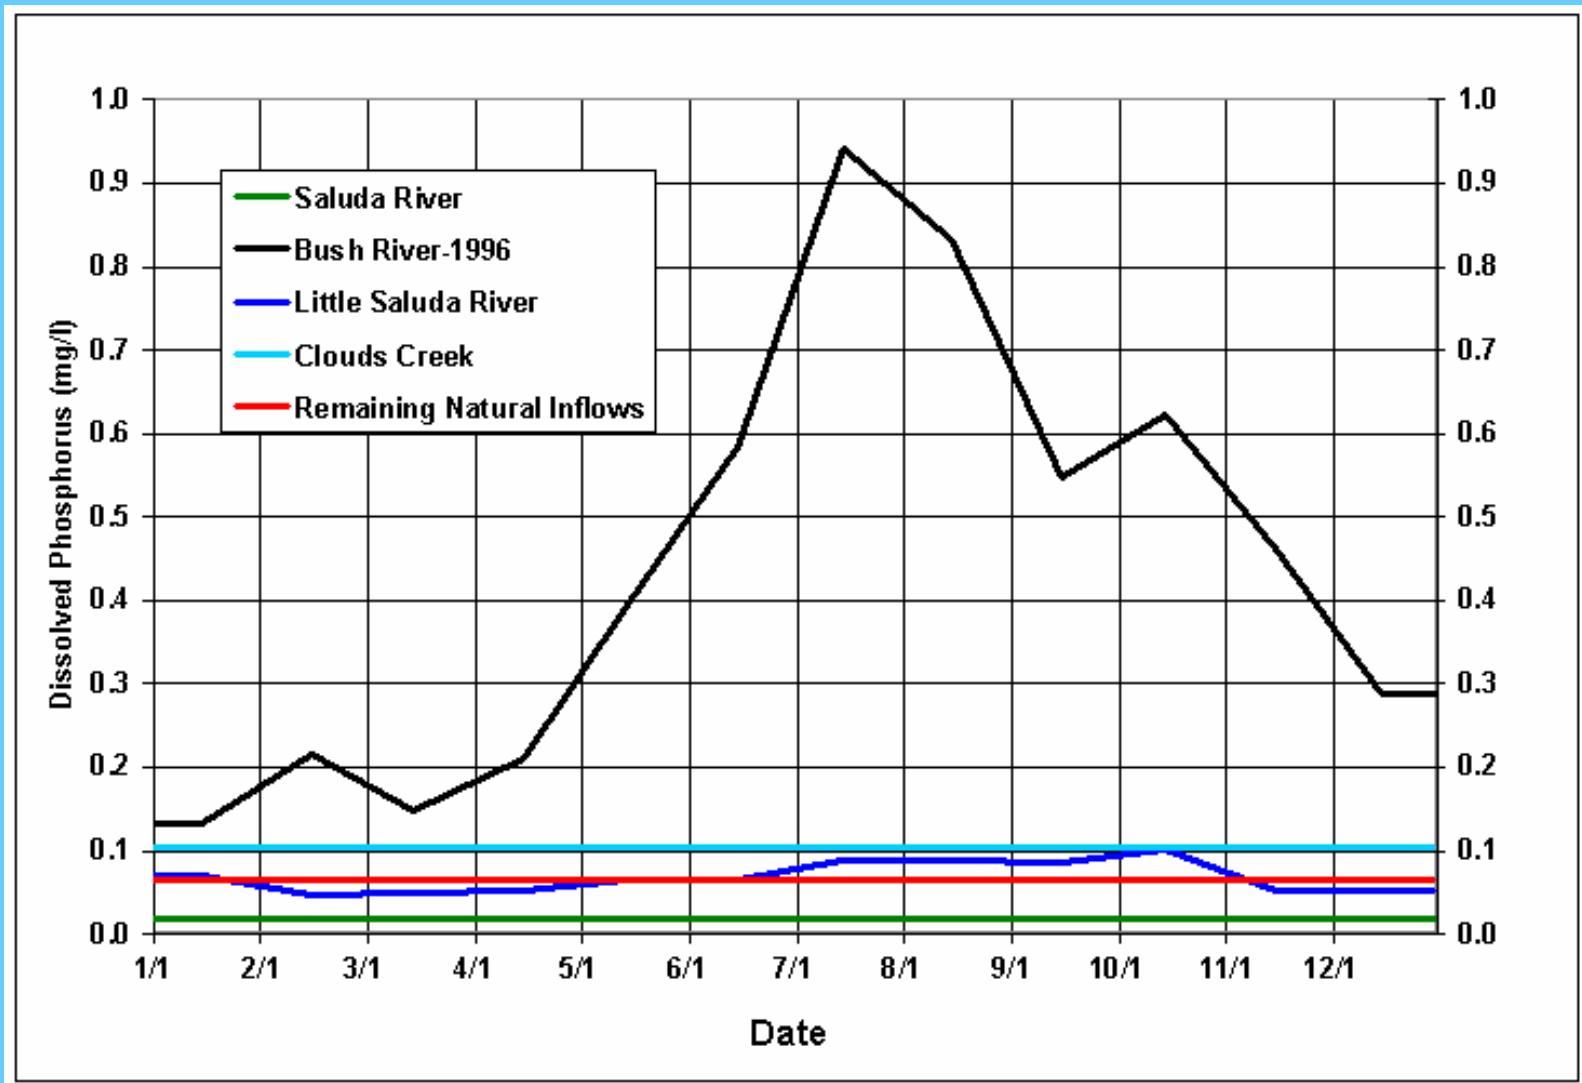


Nitrate Concentrations in the Inflows to the Lake Murray CE-QUAL-W2 Model

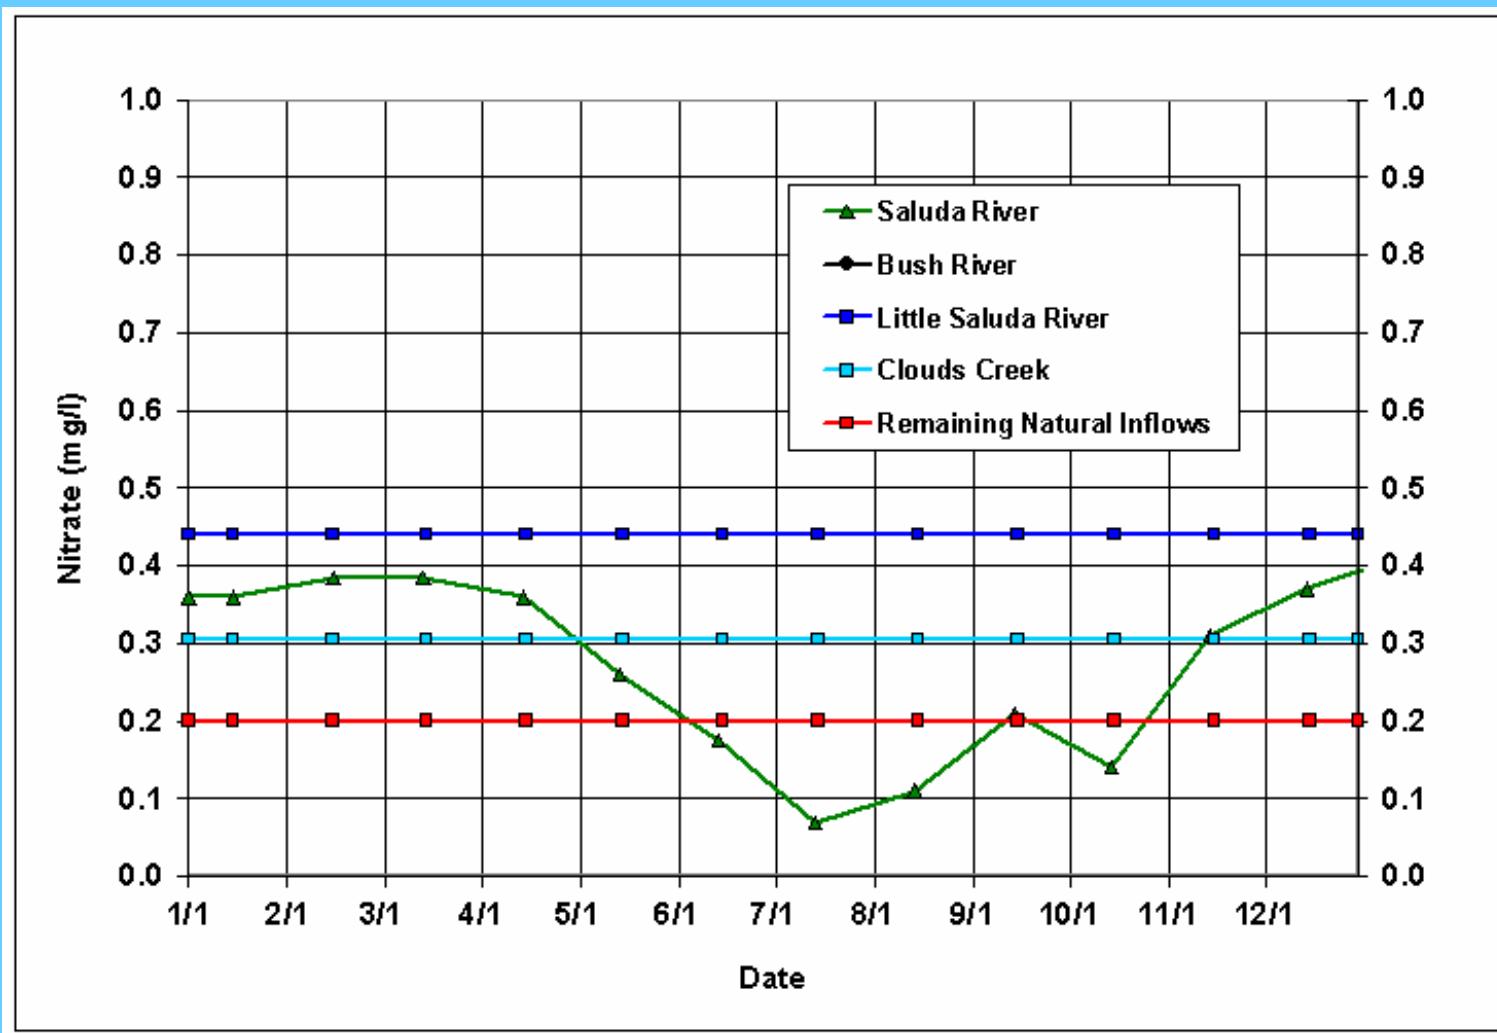


Ammonium Concentrations in the Inflows to the Lake Murray CE-QUAL-W2 Model

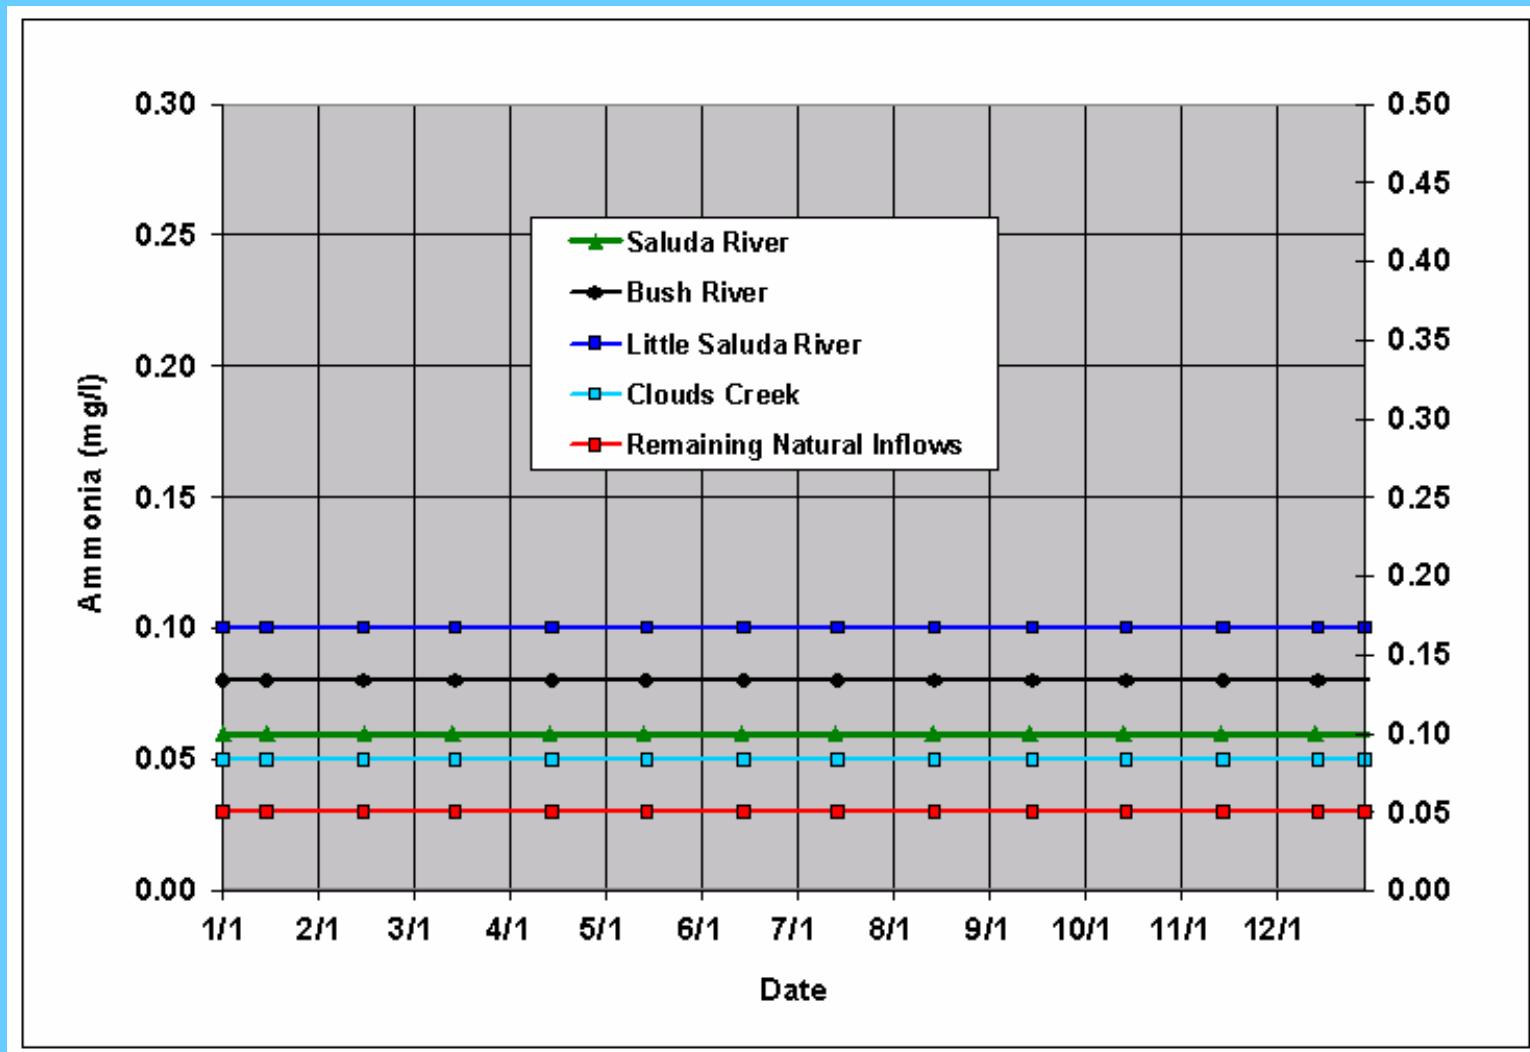


1996 Modeled and Measured Lake Murray Headwater Elevations

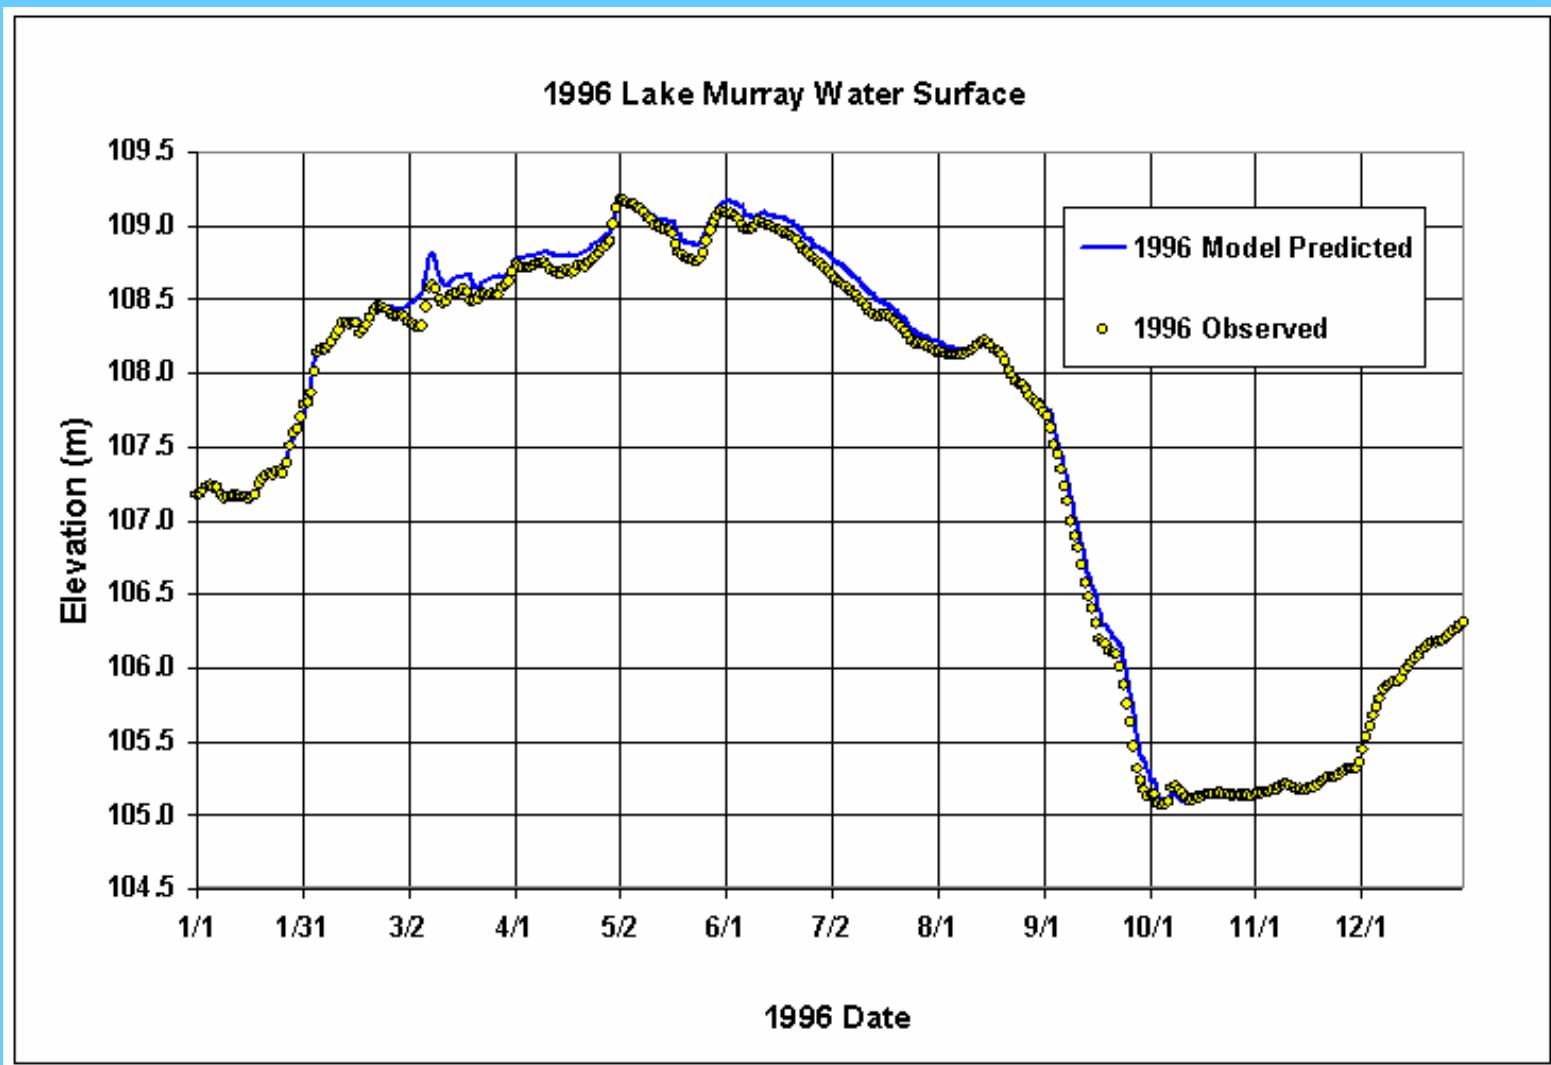


1992 Modeled and Measured Lake Murray Headwater Elevations

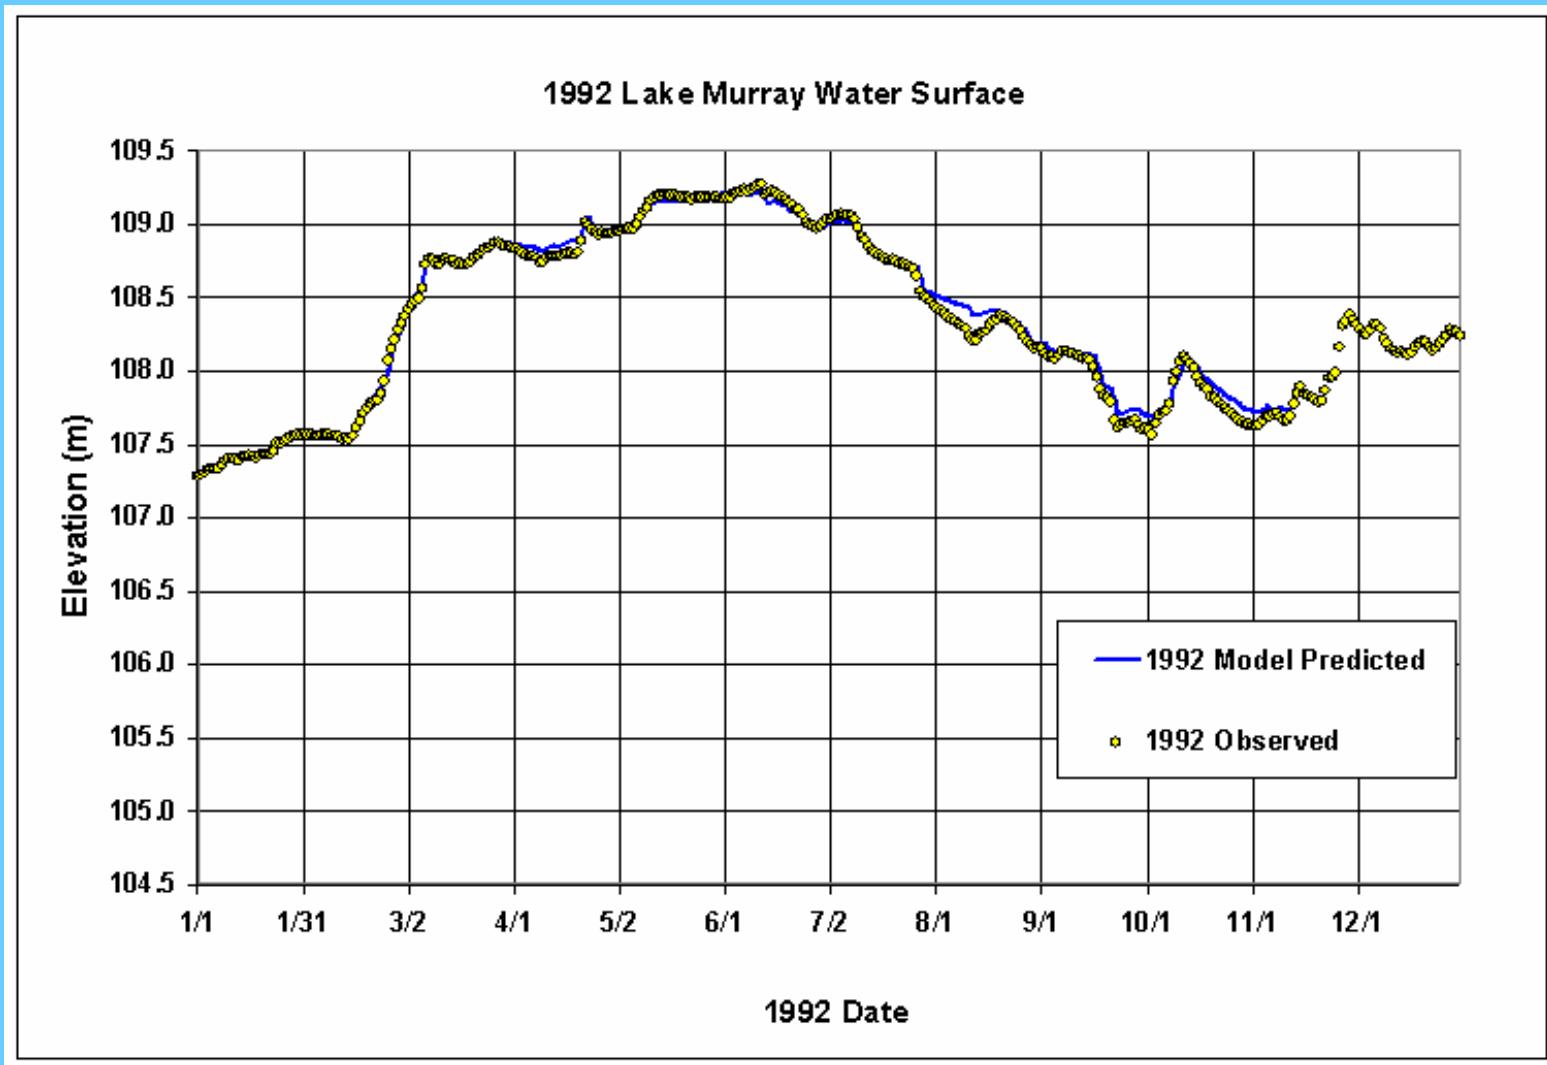















1997 Modeled and Measured Lake Murray Headwater Elevations

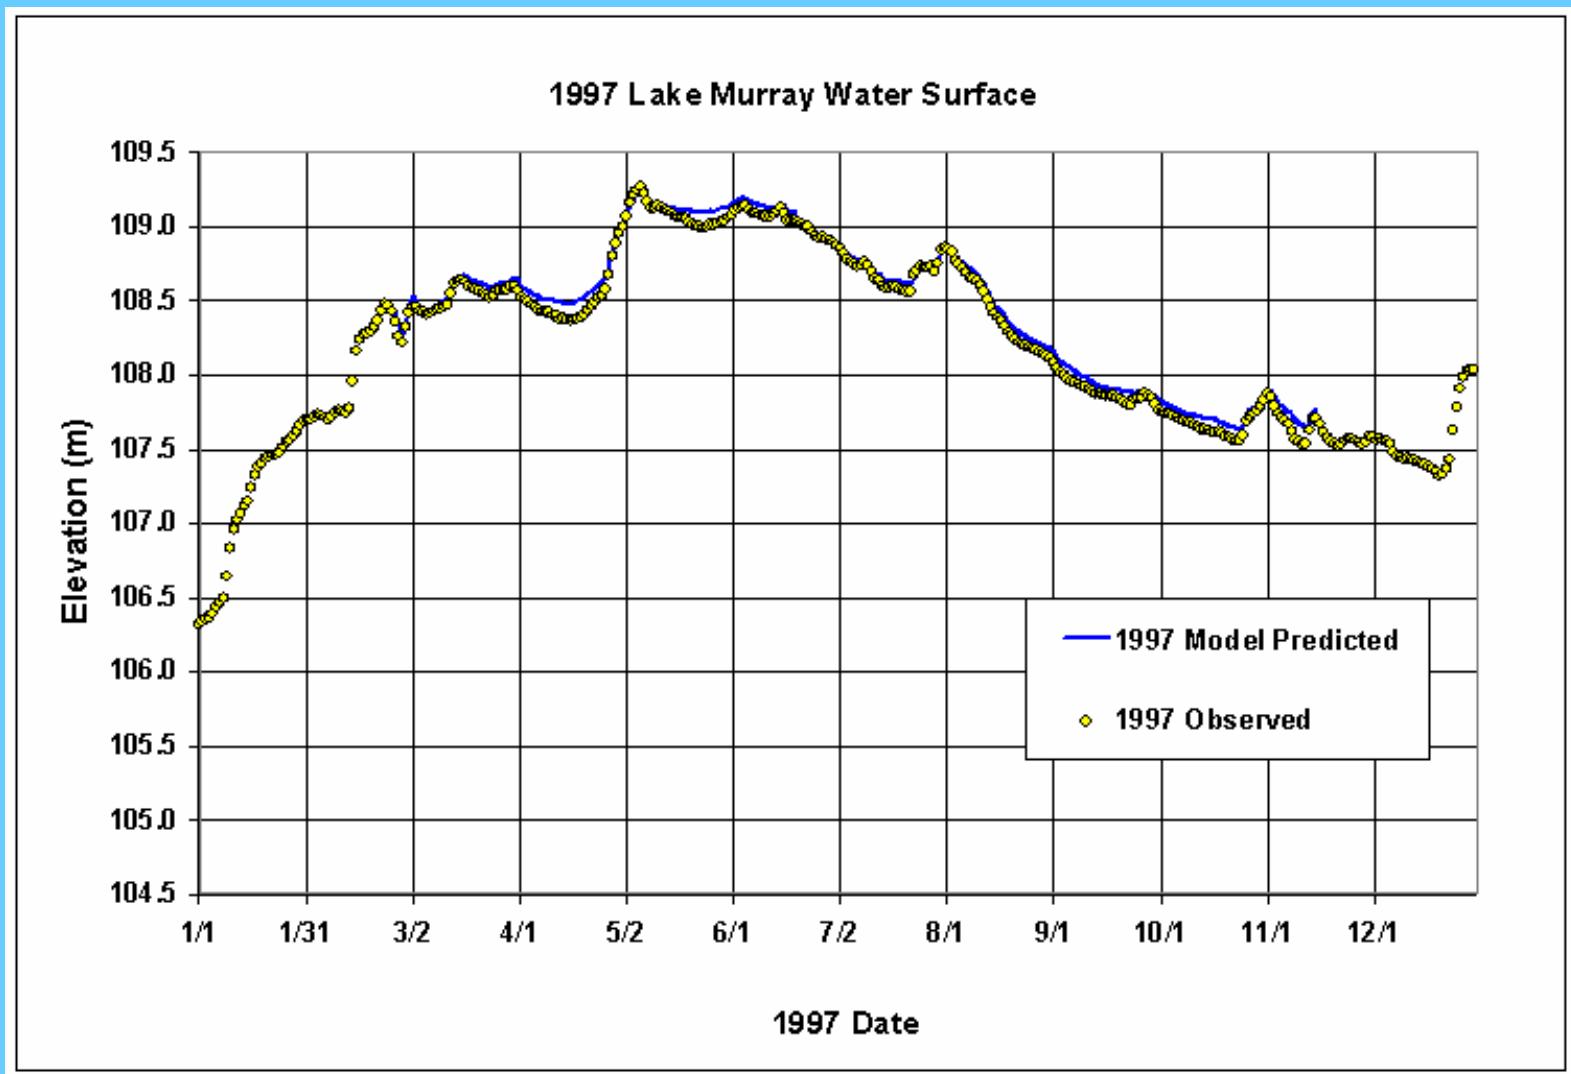


Primary Water Quality Calibration Locations

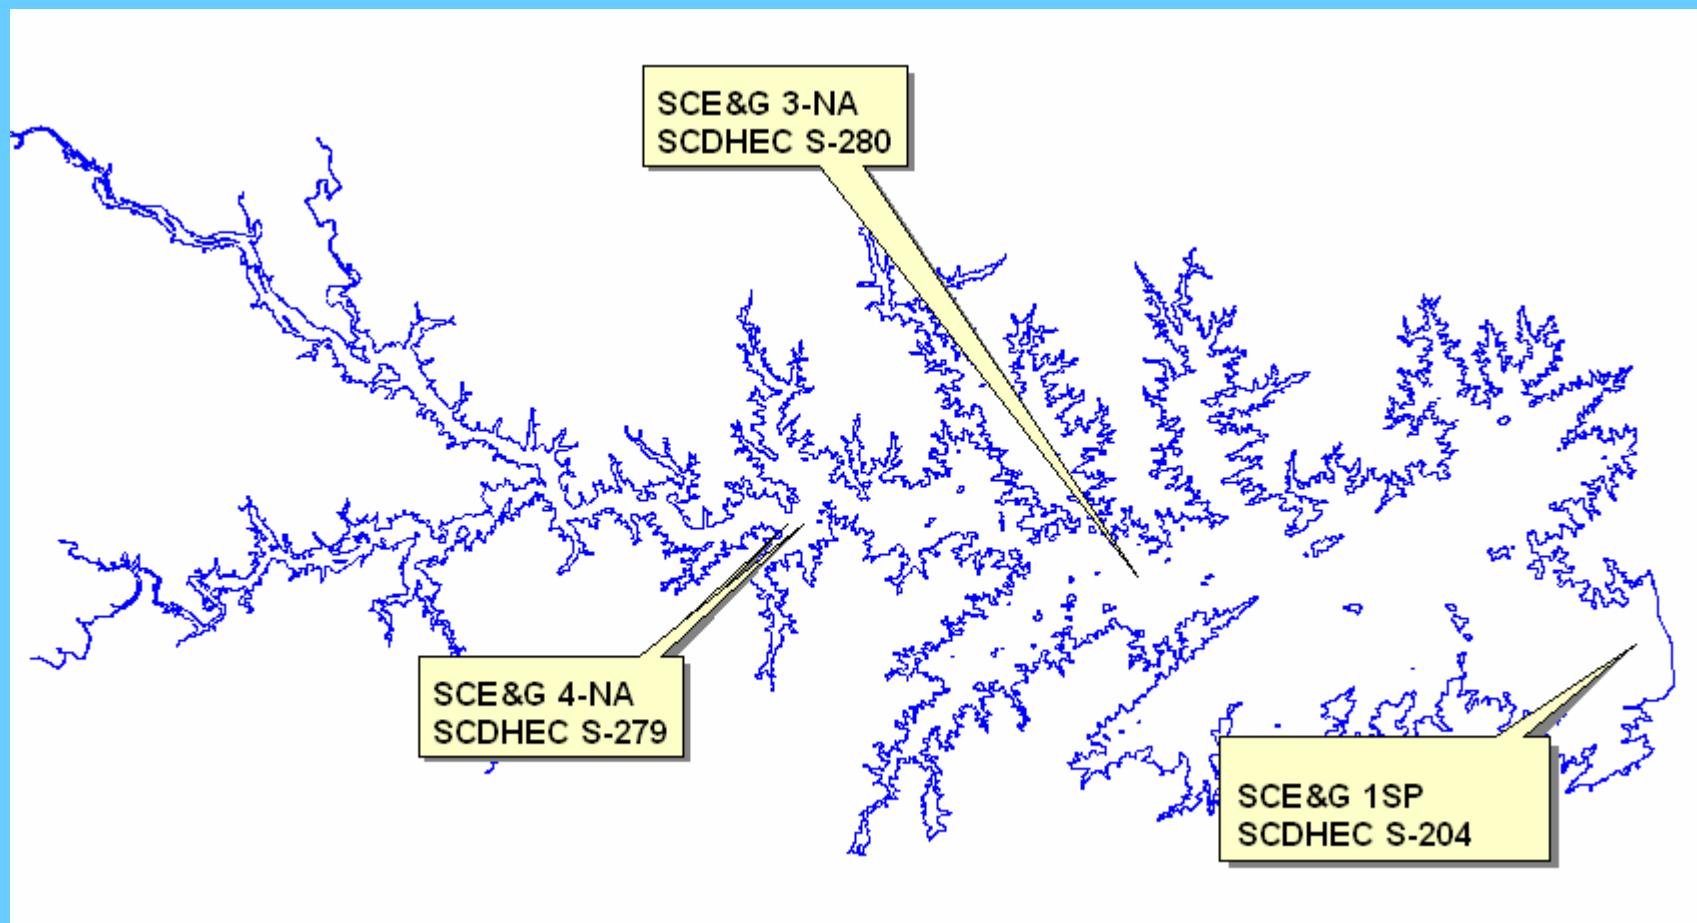


1996 Lake Murray Forebay Temperature Profiles Model vs. Data

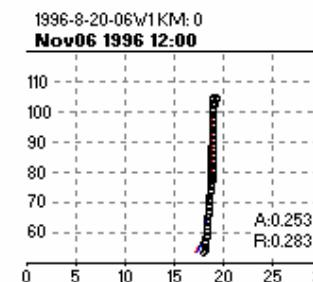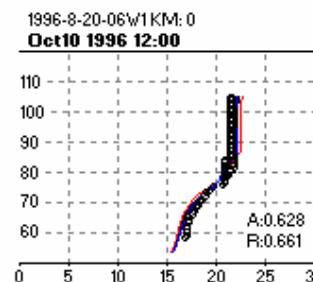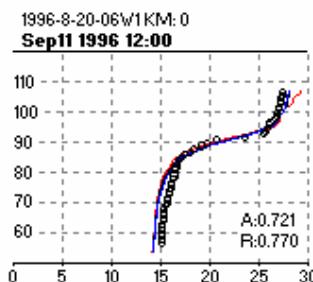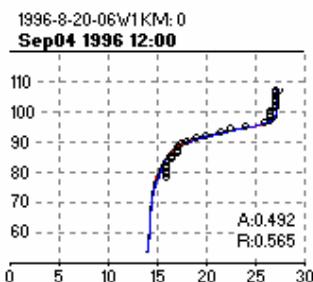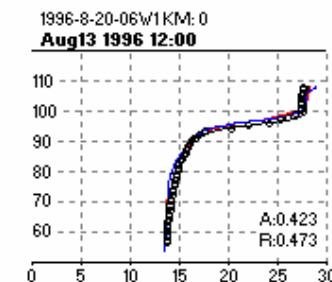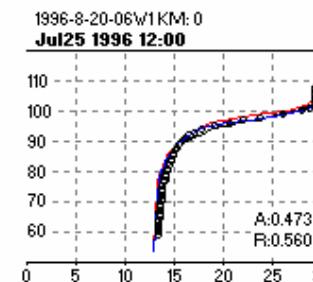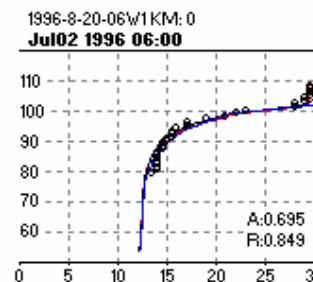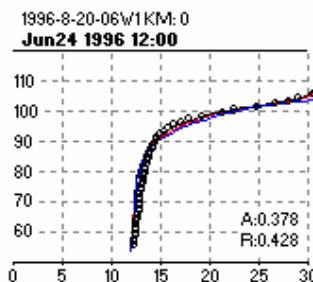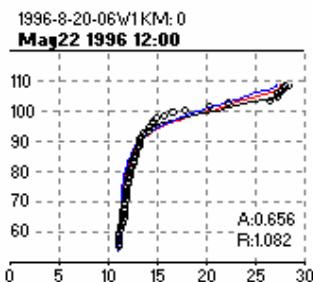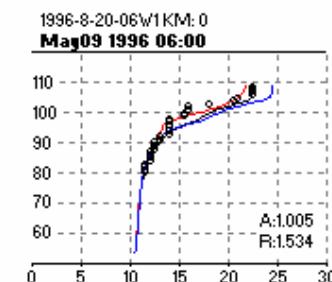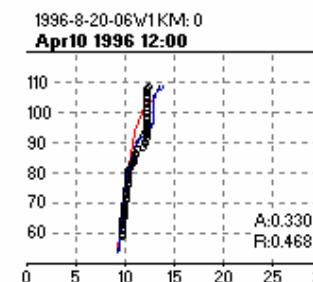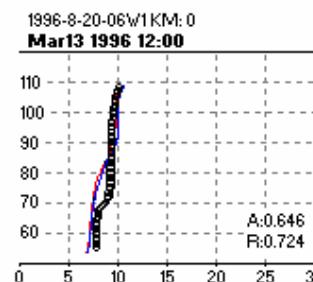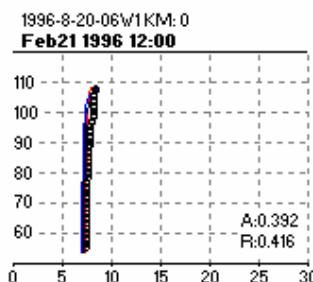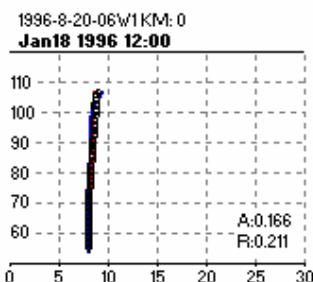


1996 Comparison of Modeled versus Measured Saluda Release Temperatures

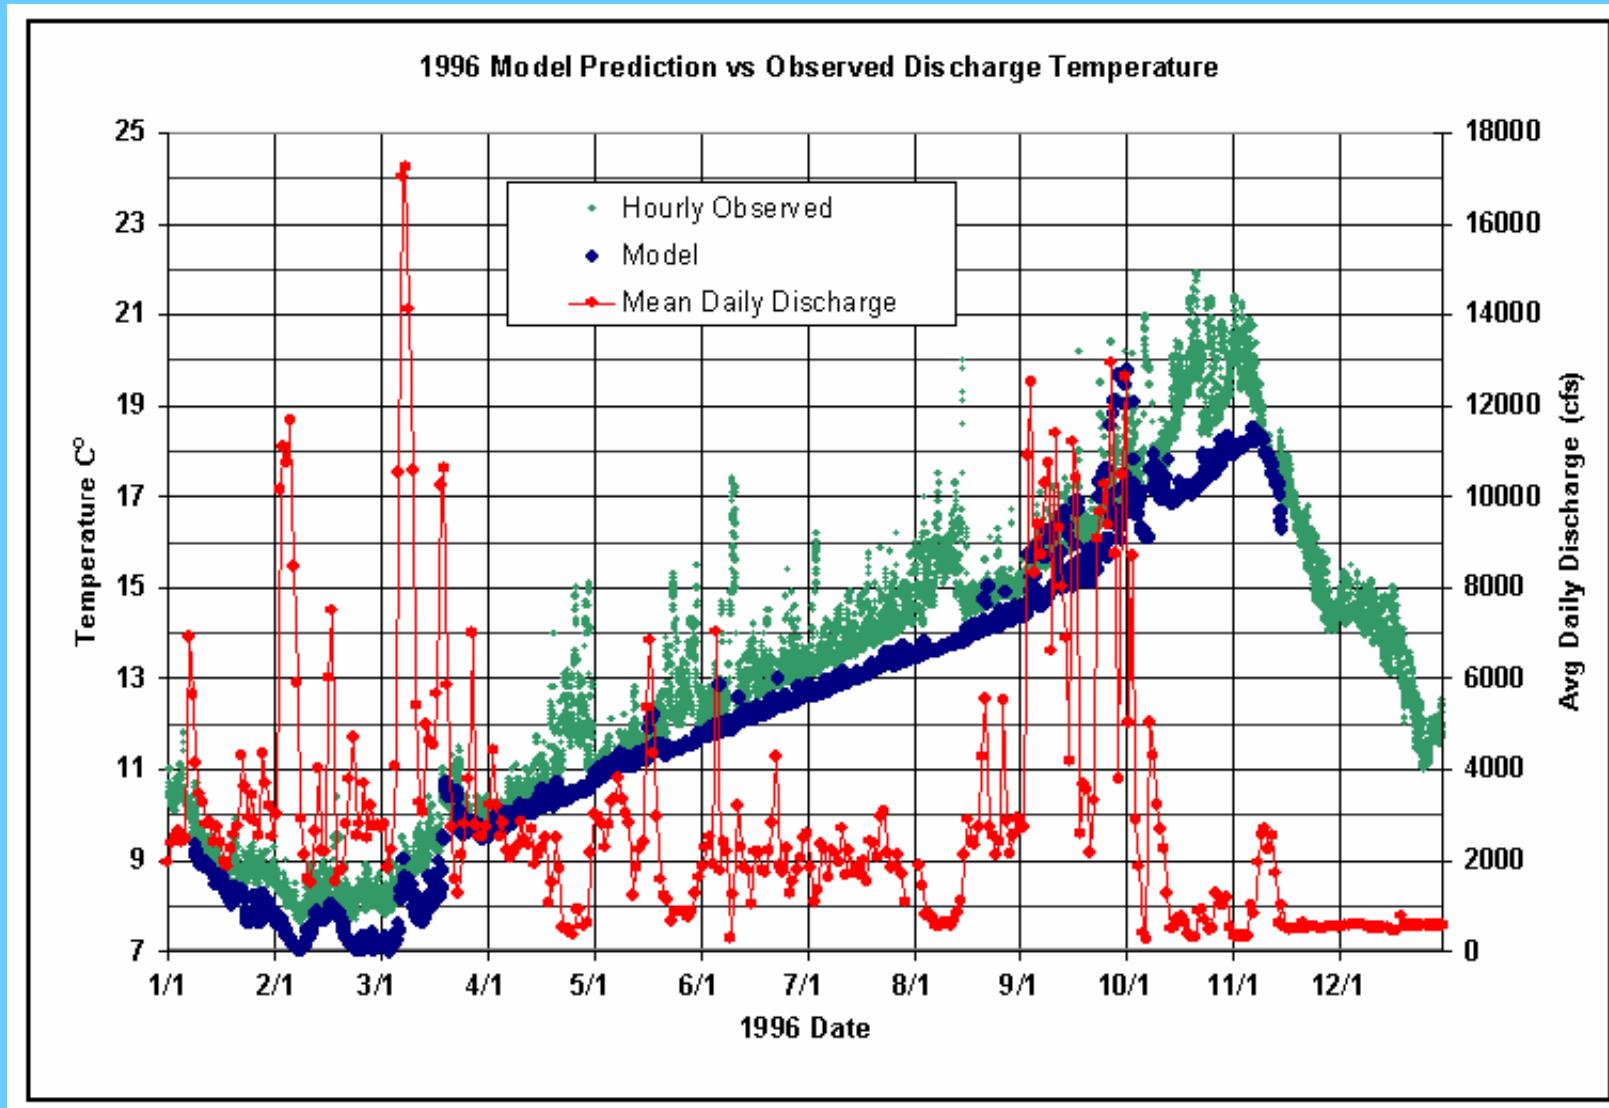


1992 Comparison of Modeled versus Measured Saluda Release Temperatures

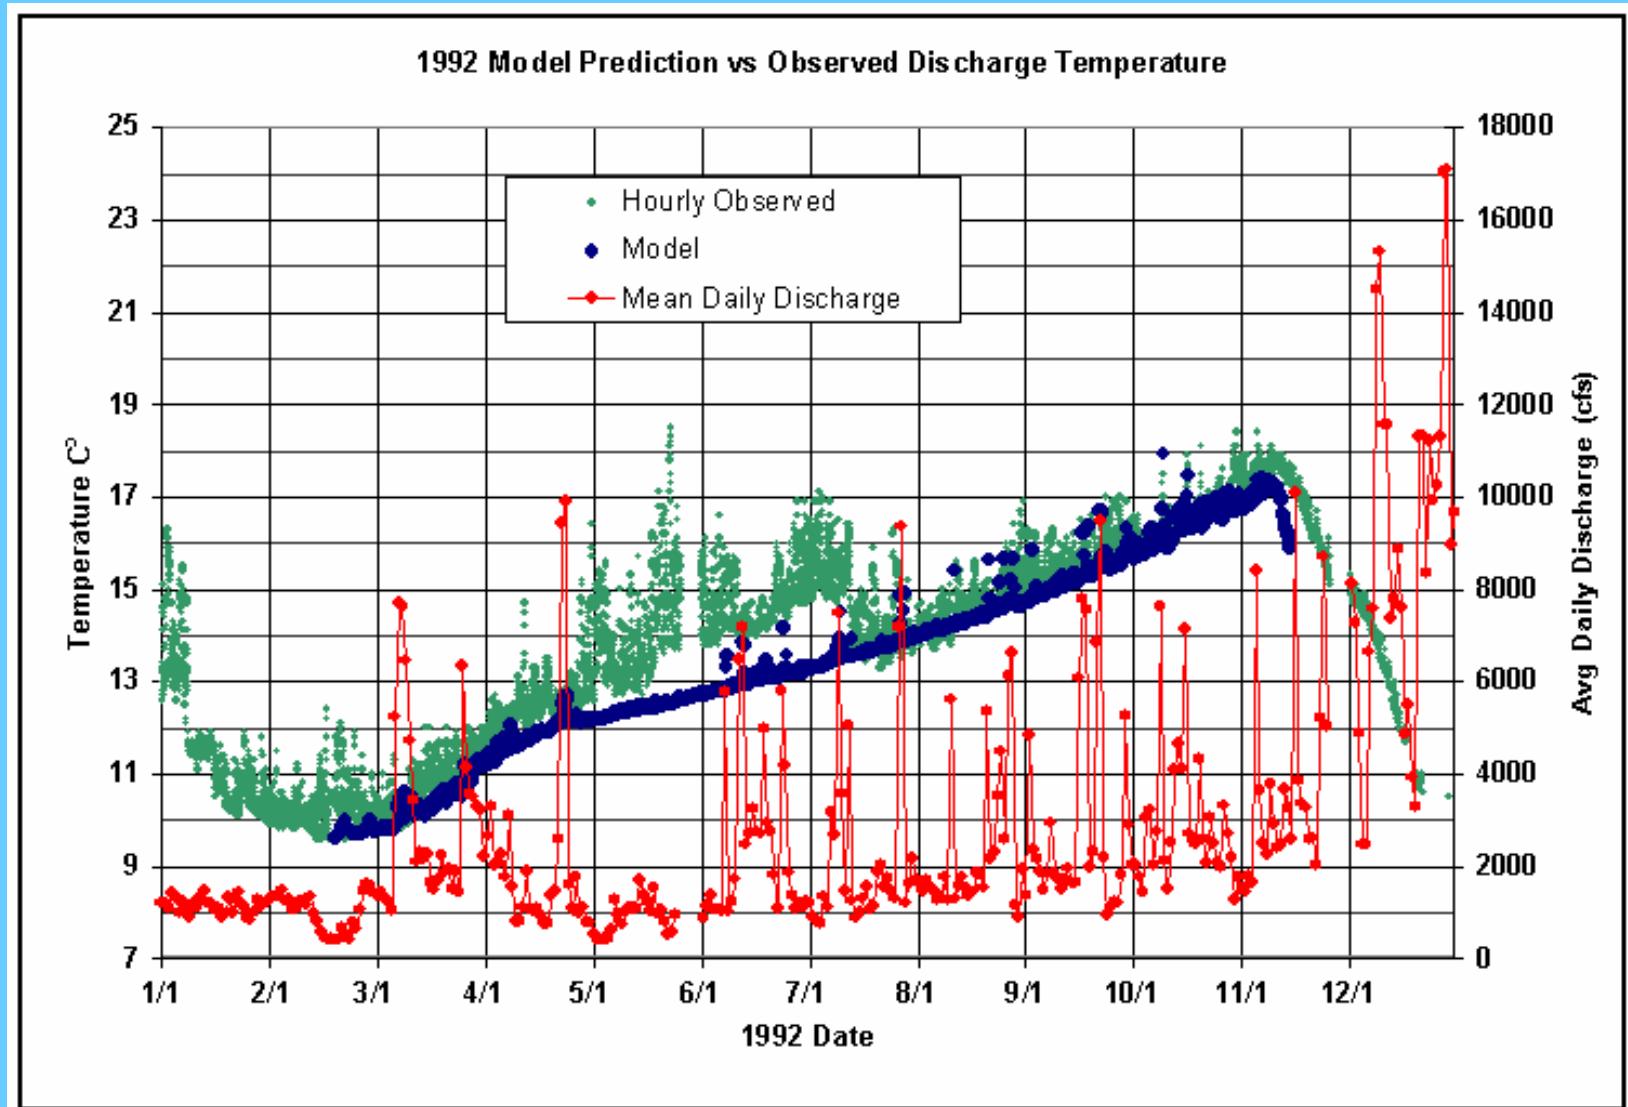


1997 Comparison of Modeled versus Measured Saluda Release Temperatures

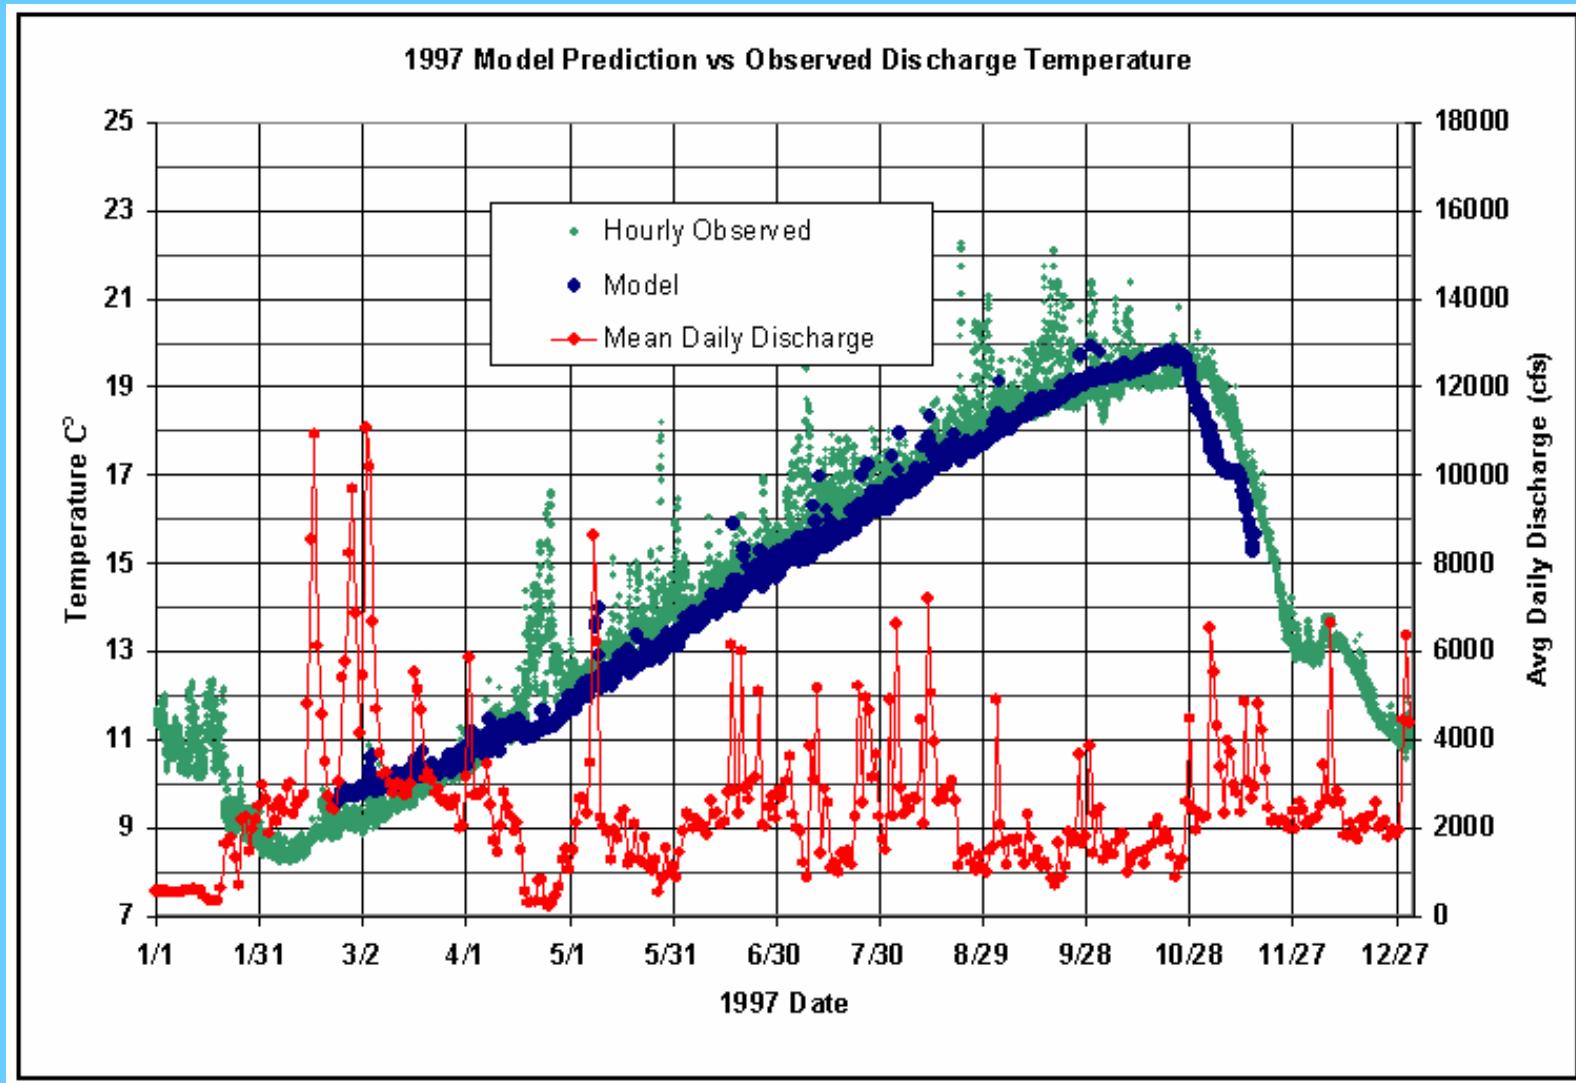


1996 Comparison of Modeled versus Measured Temperature in Front of the Unit 5 Intake

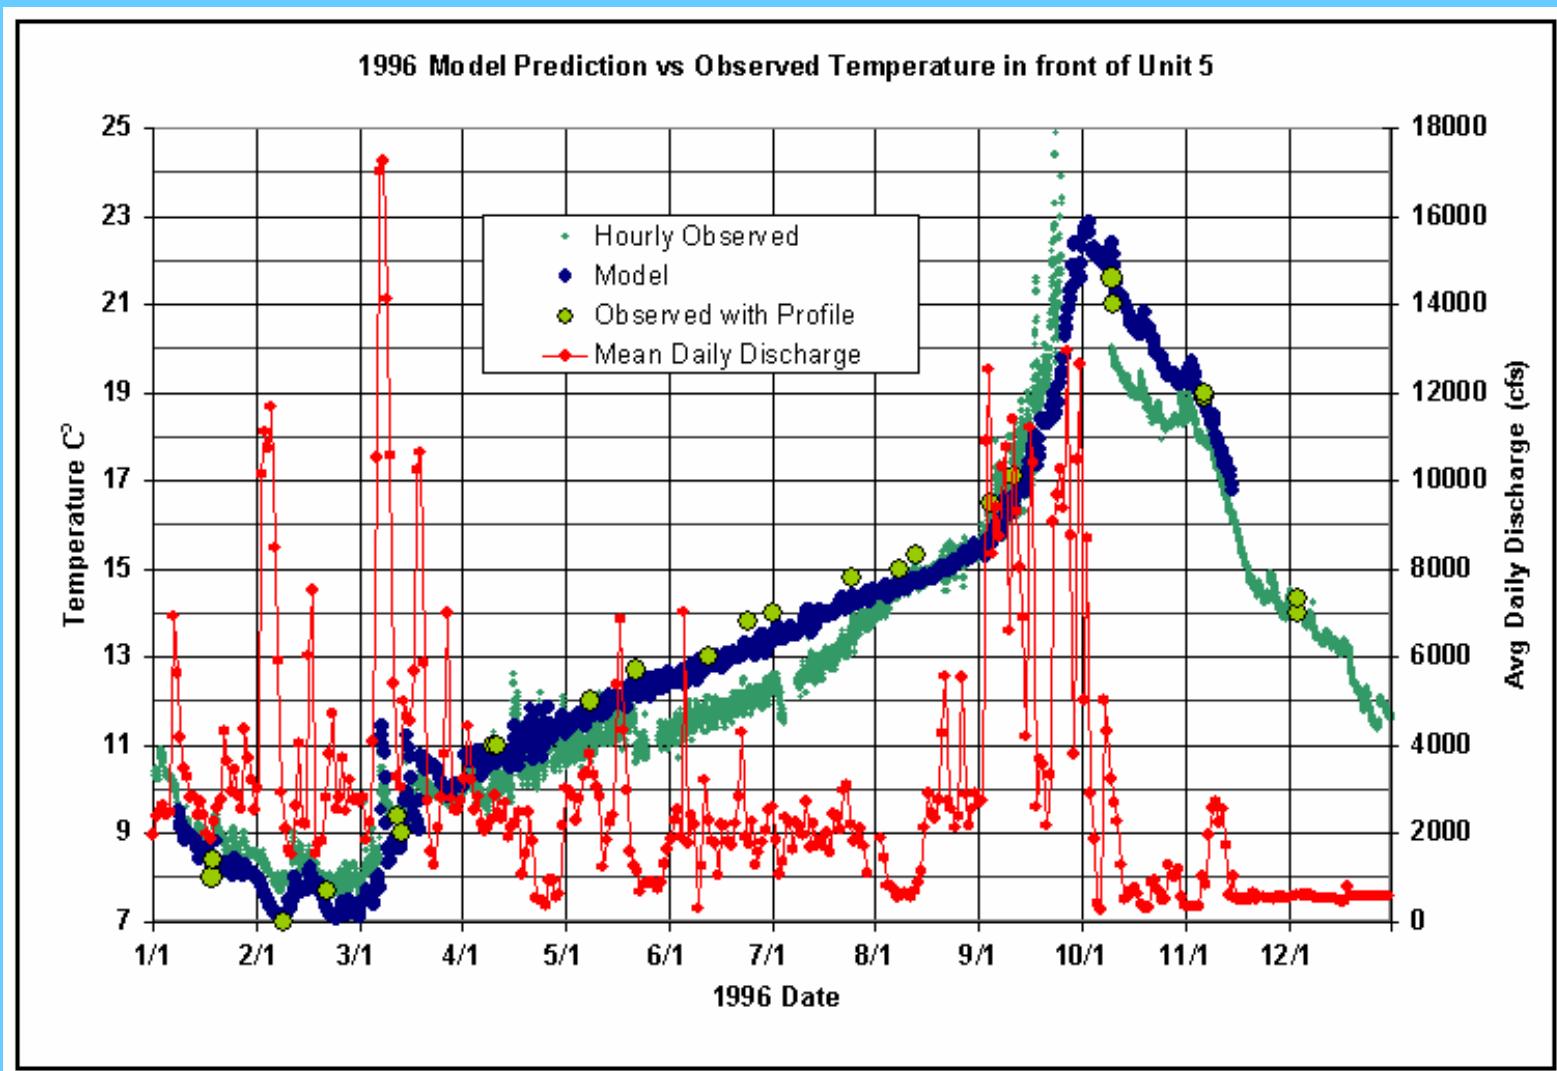


1992 Comparison of Modeled versus Measured Temperature in Front of the Unit 5 Intake

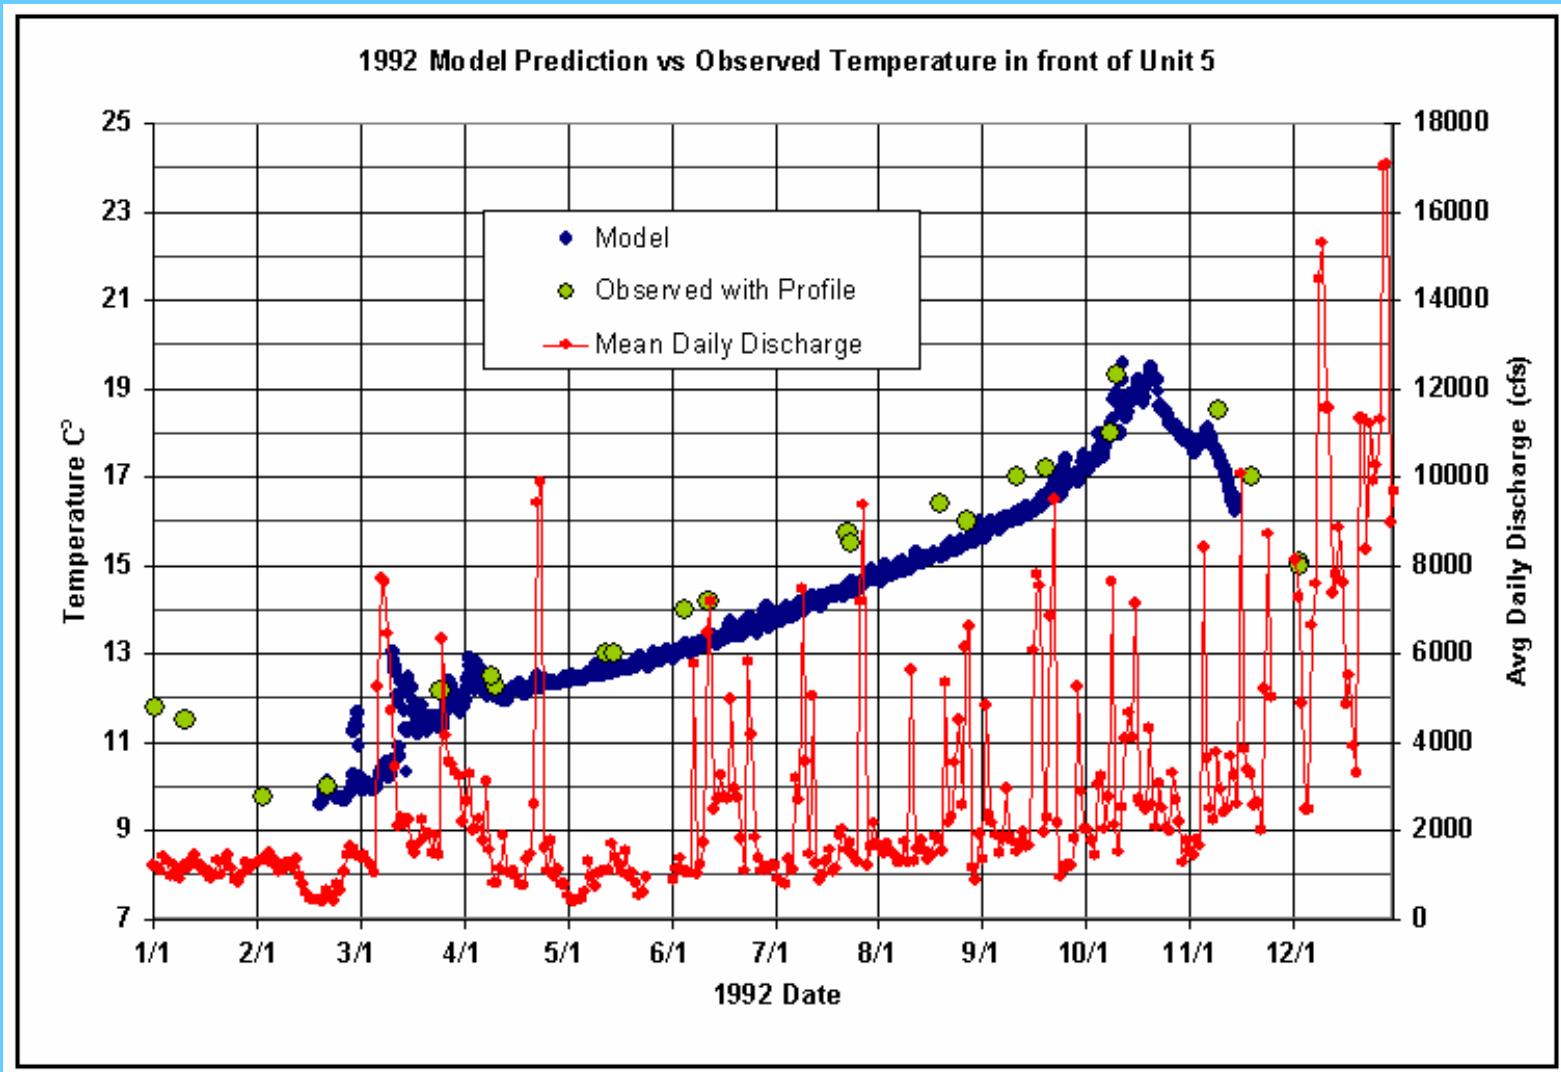


1997 Comparison of Modeled versus Measured Temperature in Front of the Unit 5 Intake

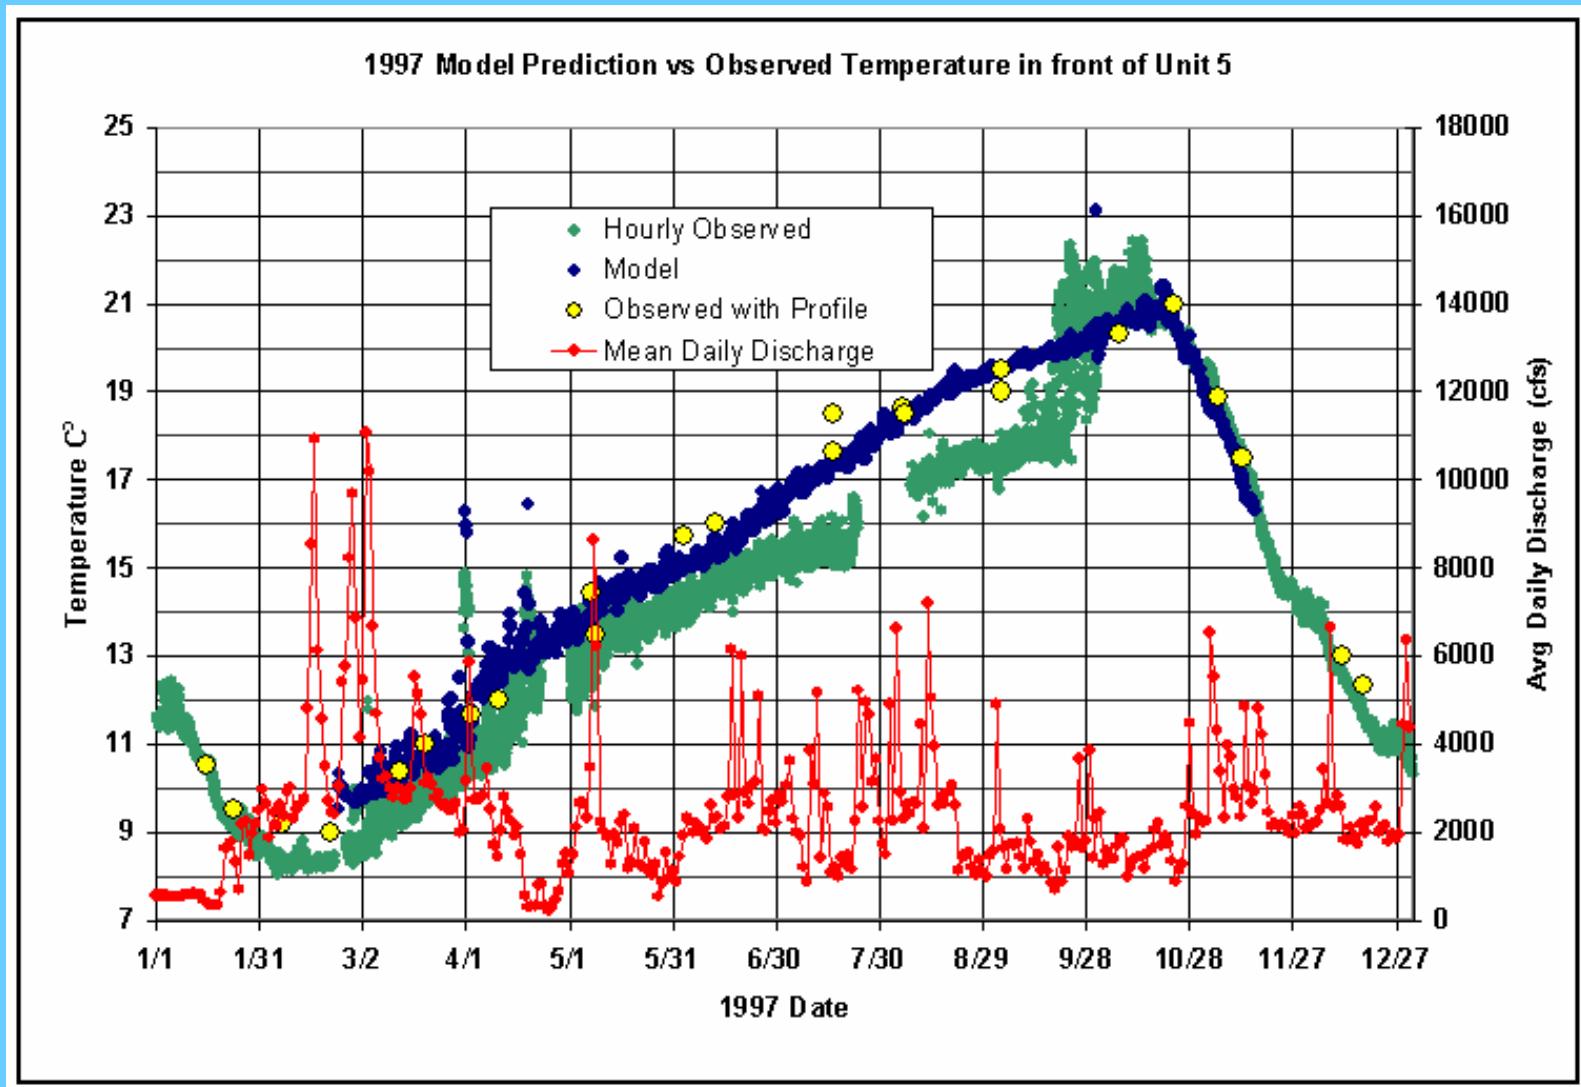


1996 Chlorophyll a at Four Locations in Lake Murray Model vs. Data

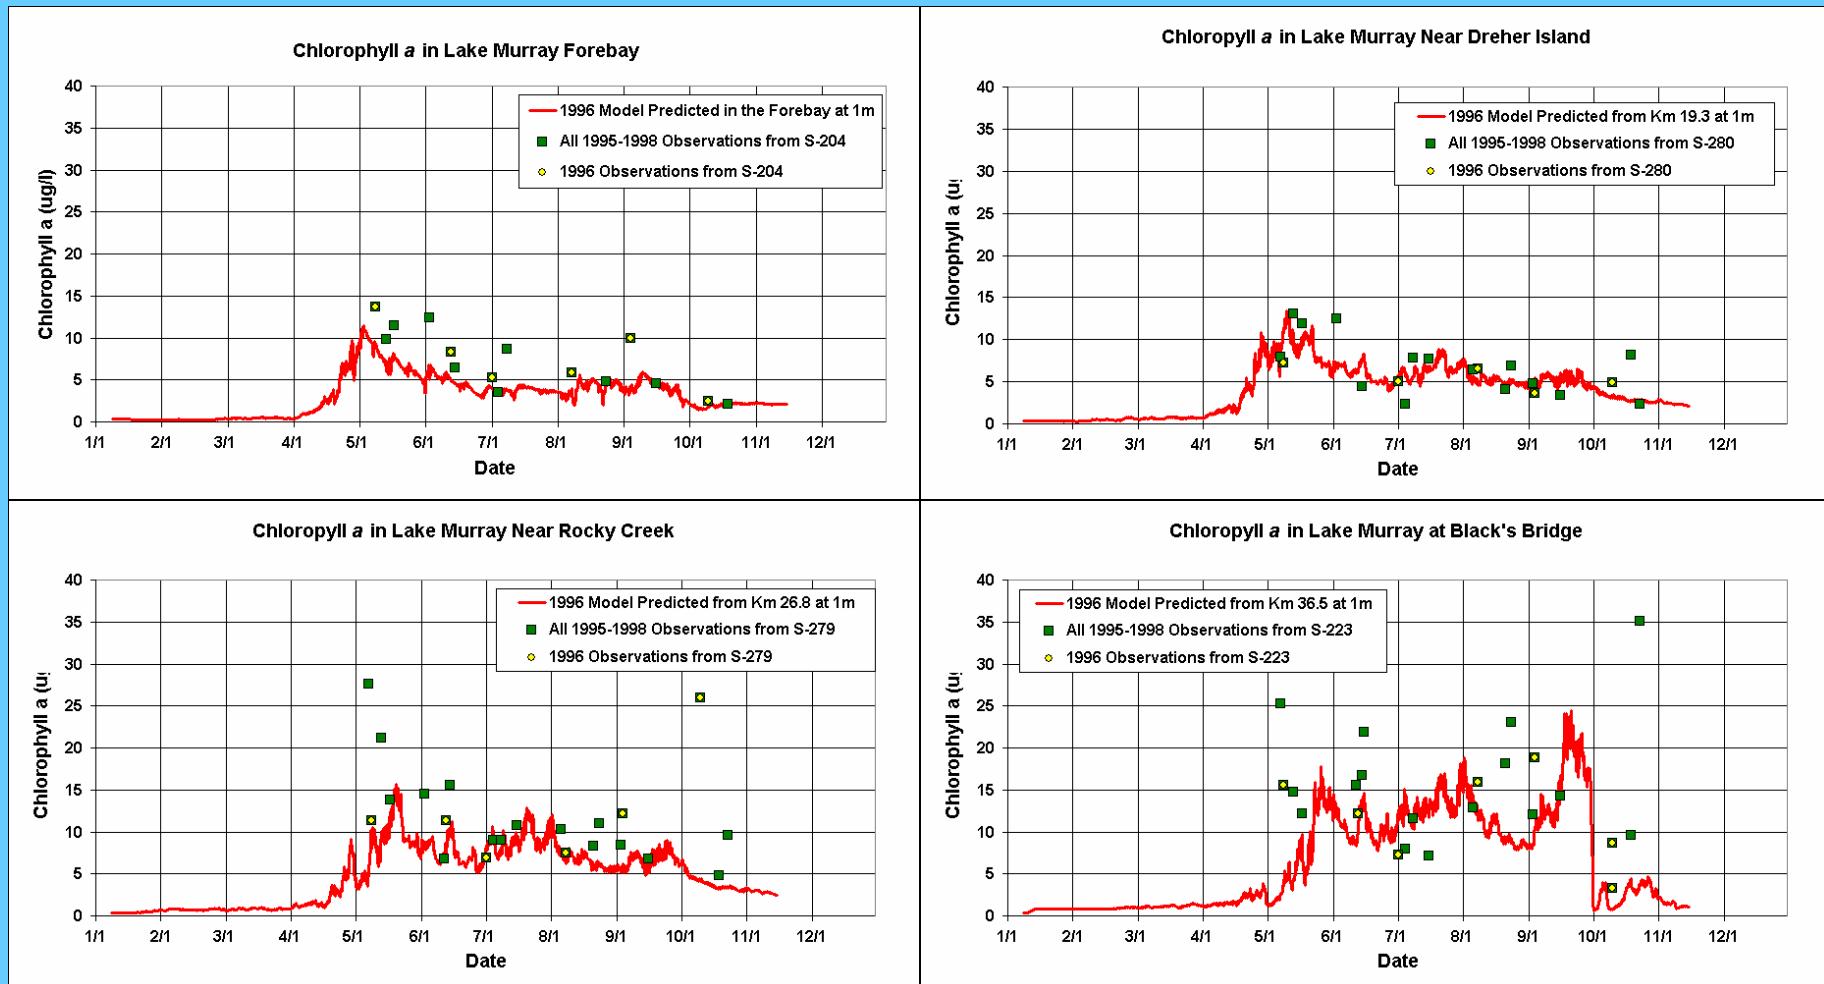


Comparison of Modeled Derived versus Measured Total Phosphorus for 1996 at Four Locations in Lake Murray

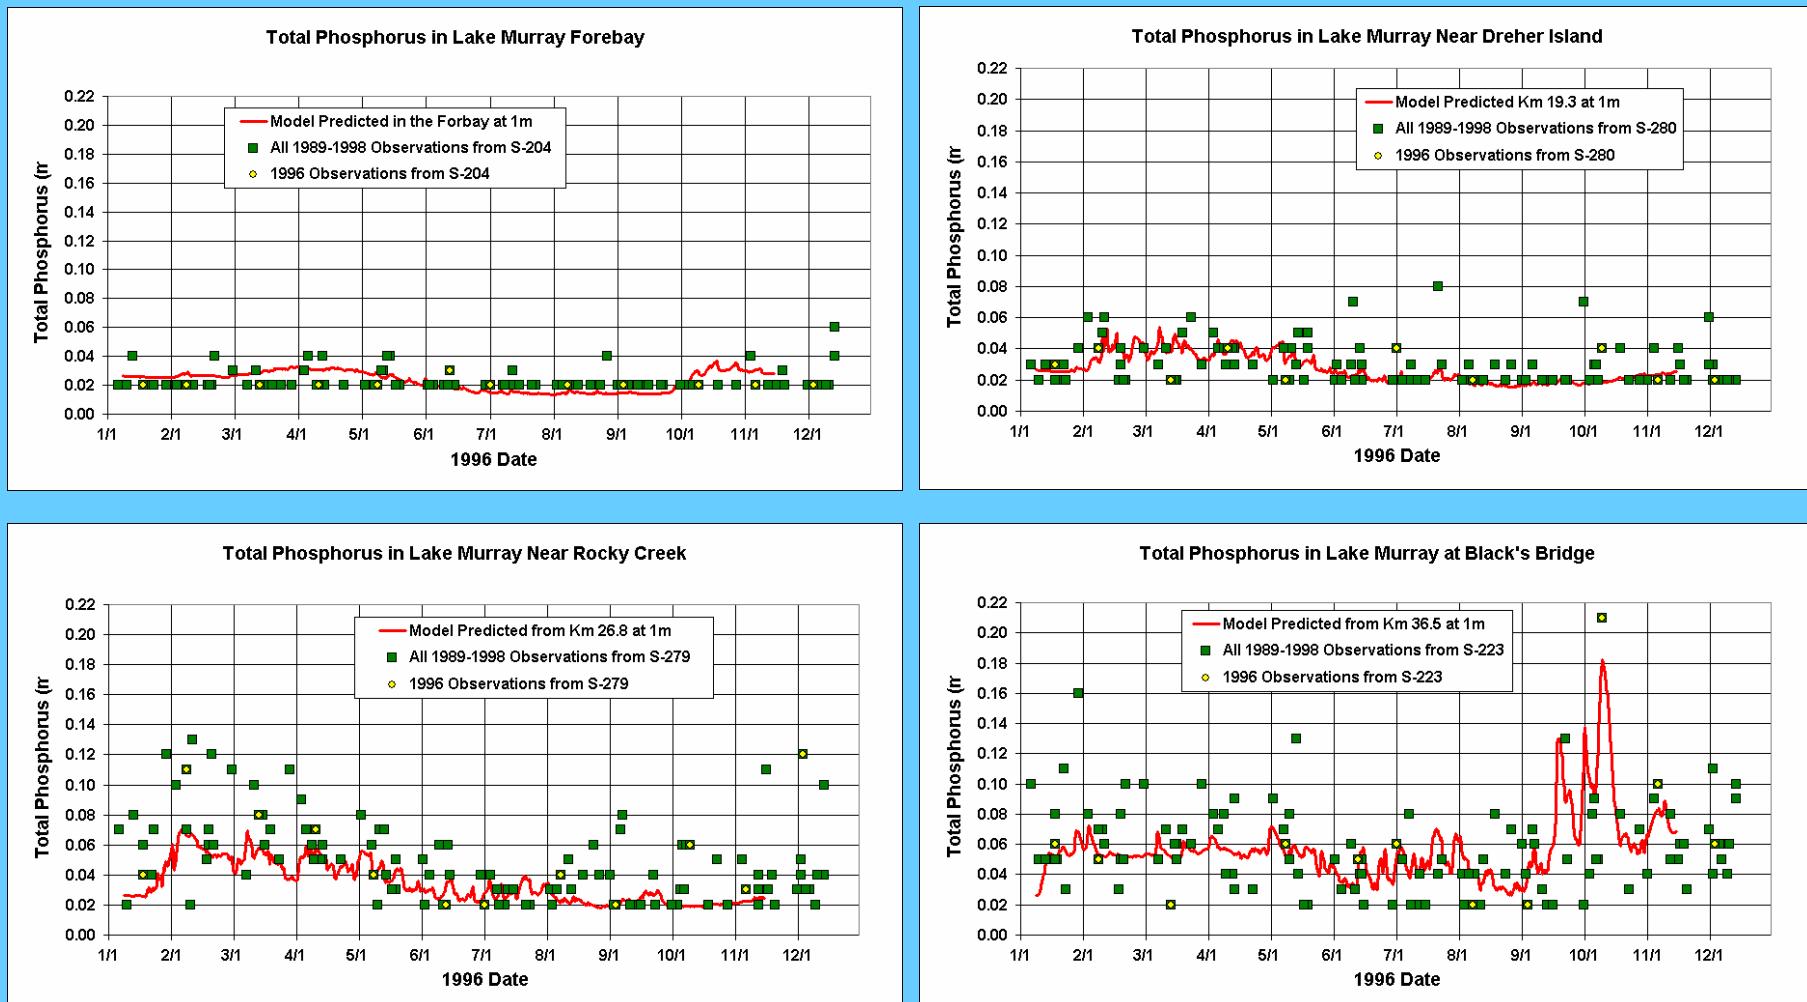









Comparison of Modeled versus Measured Nitrate for 1996 at Four Locations in Lake Murray

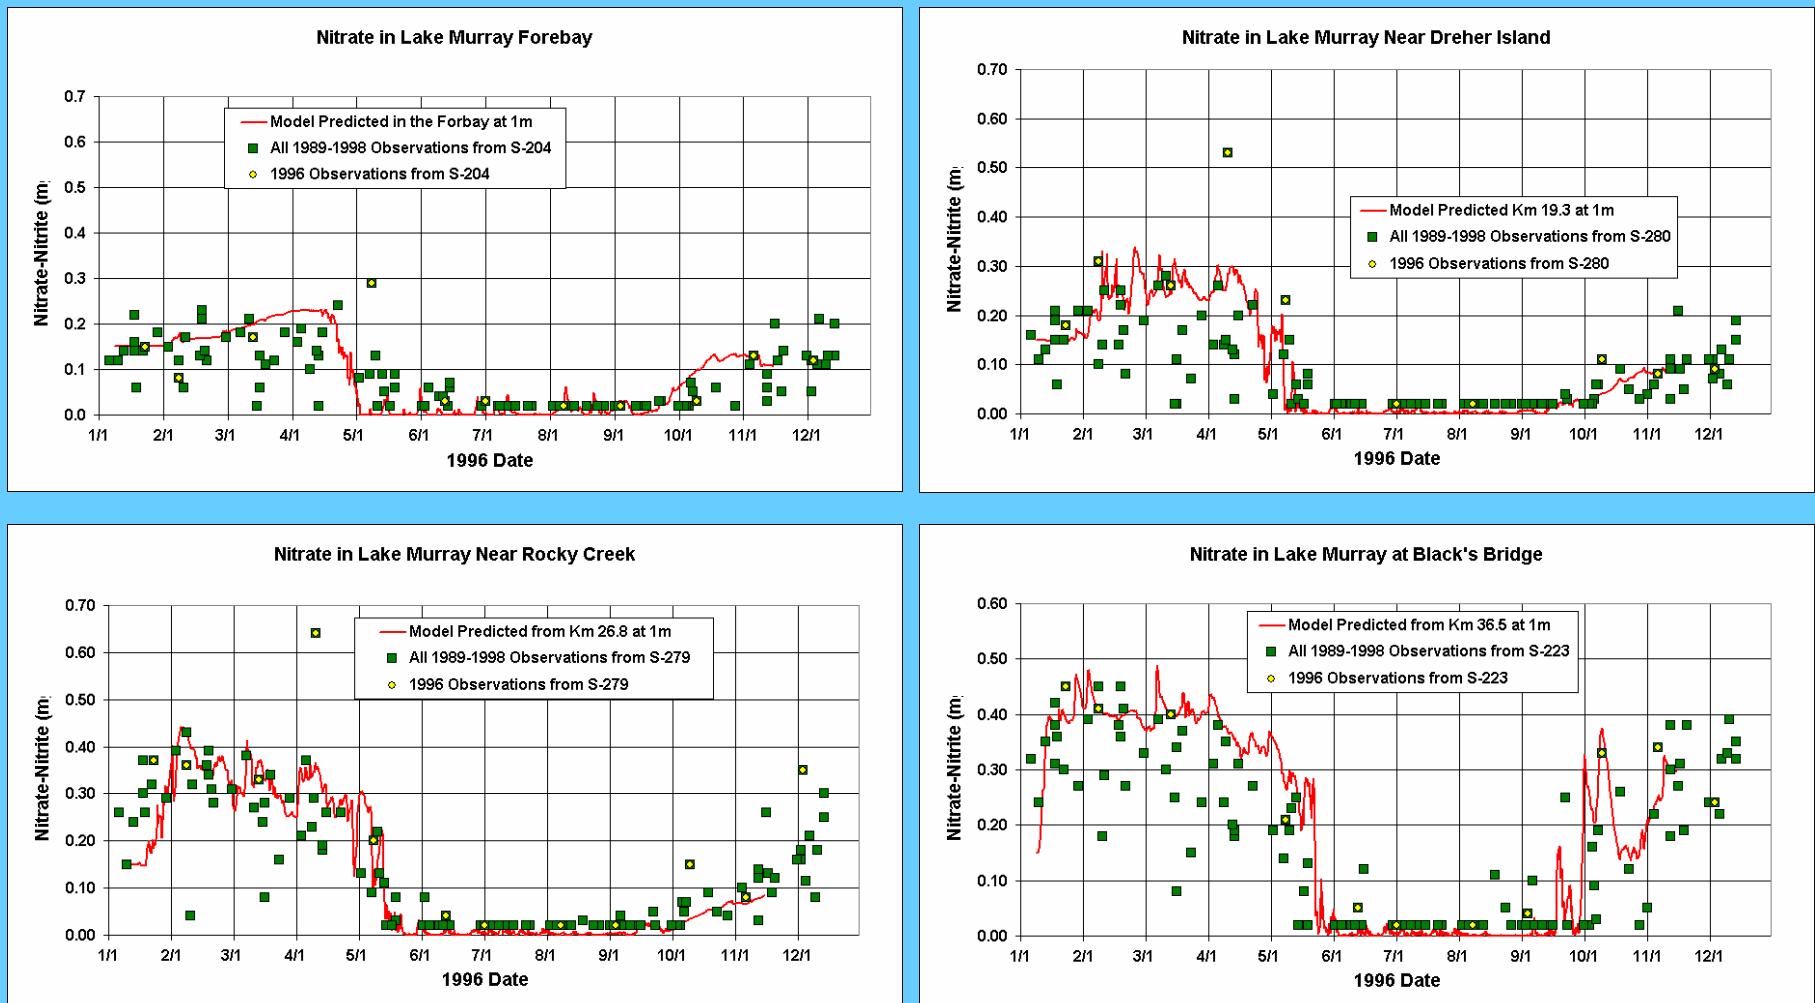


1996 Lake Murray Forebay DO Profiles Model vs. Data

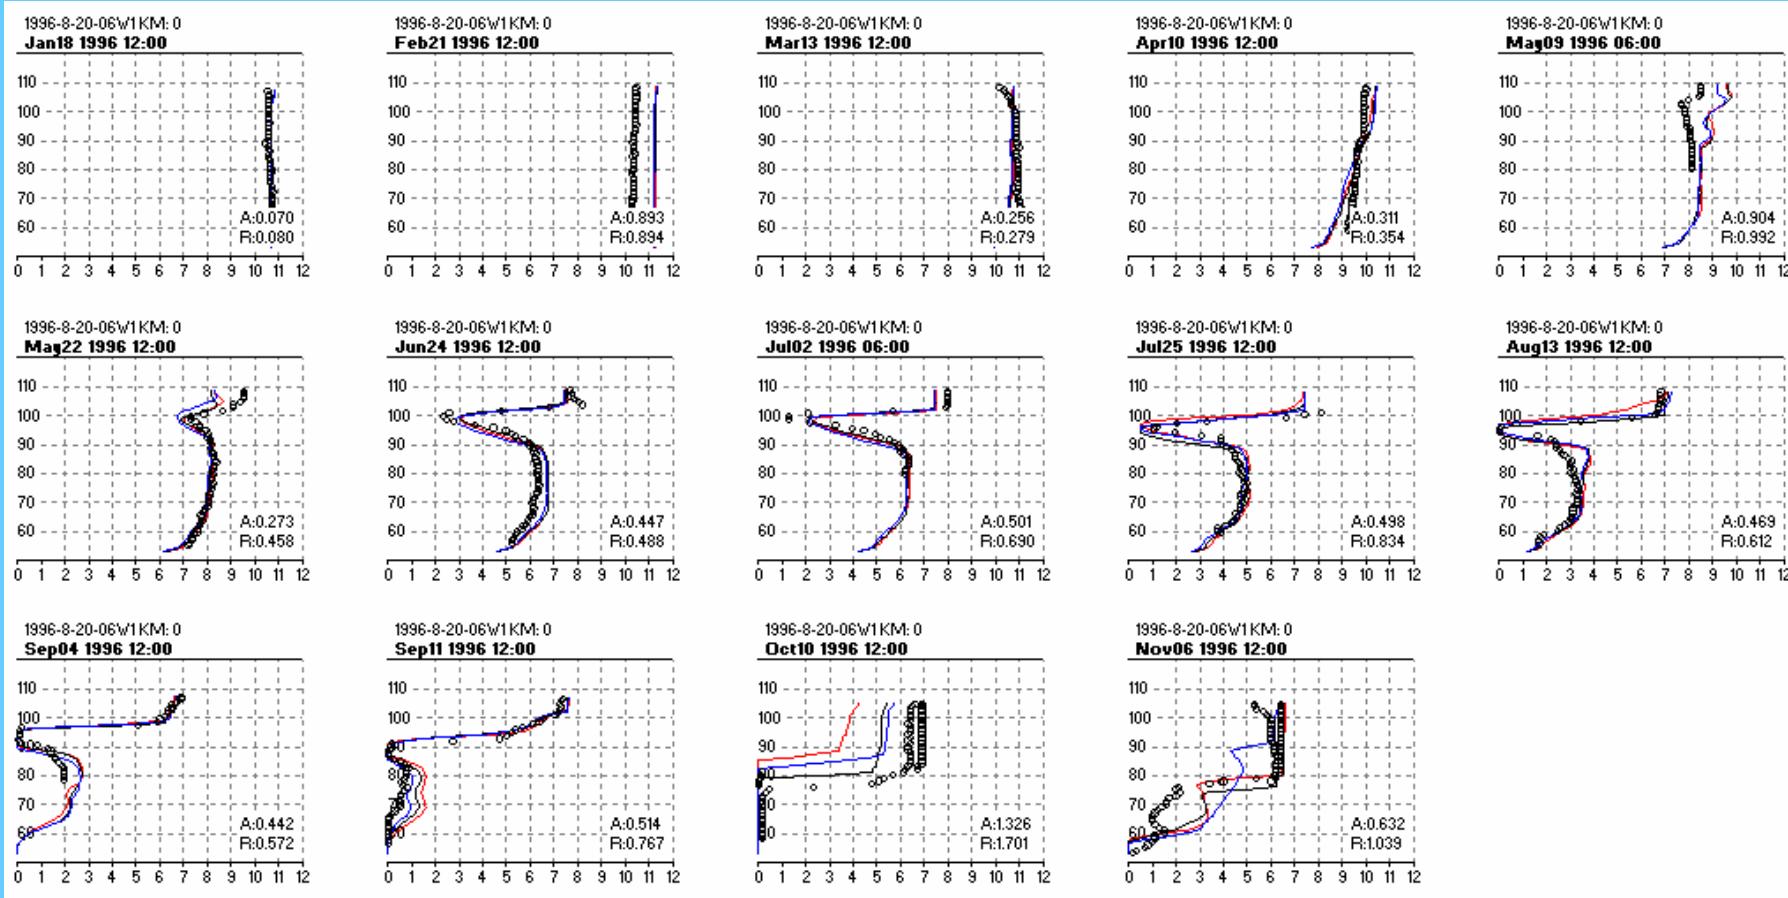


1996 Lake Murray DO Profiles – 6 Km Upstream of Dam Model vs. Data

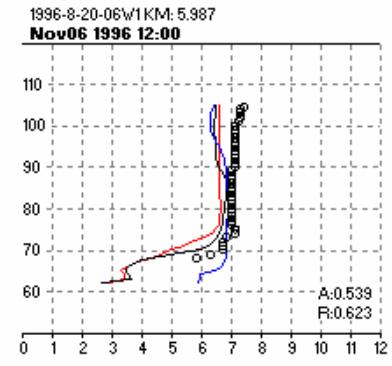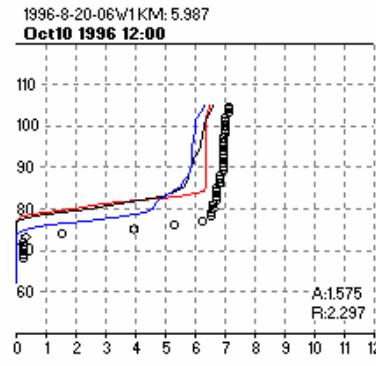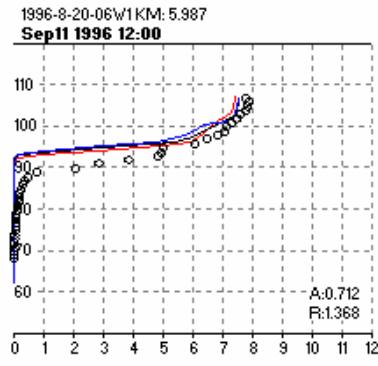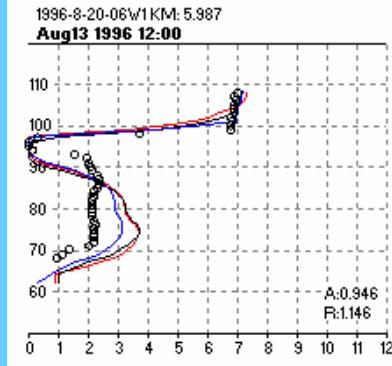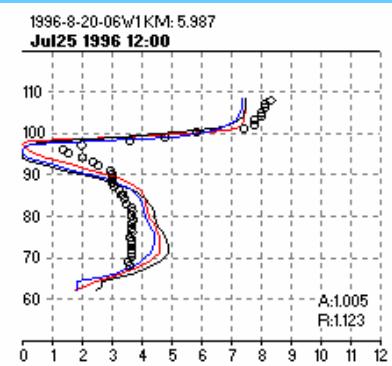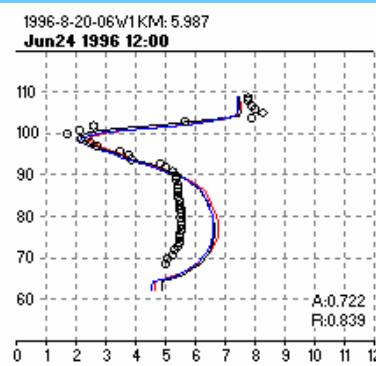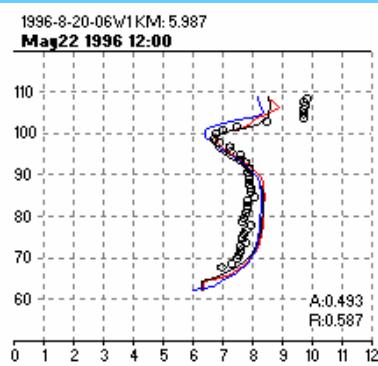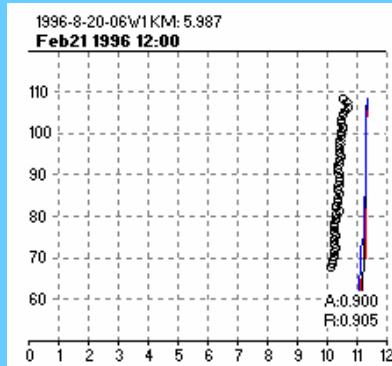

1996 Lake Murray DO Profiles – 19 Km Upstream of Dam Model vs. Data

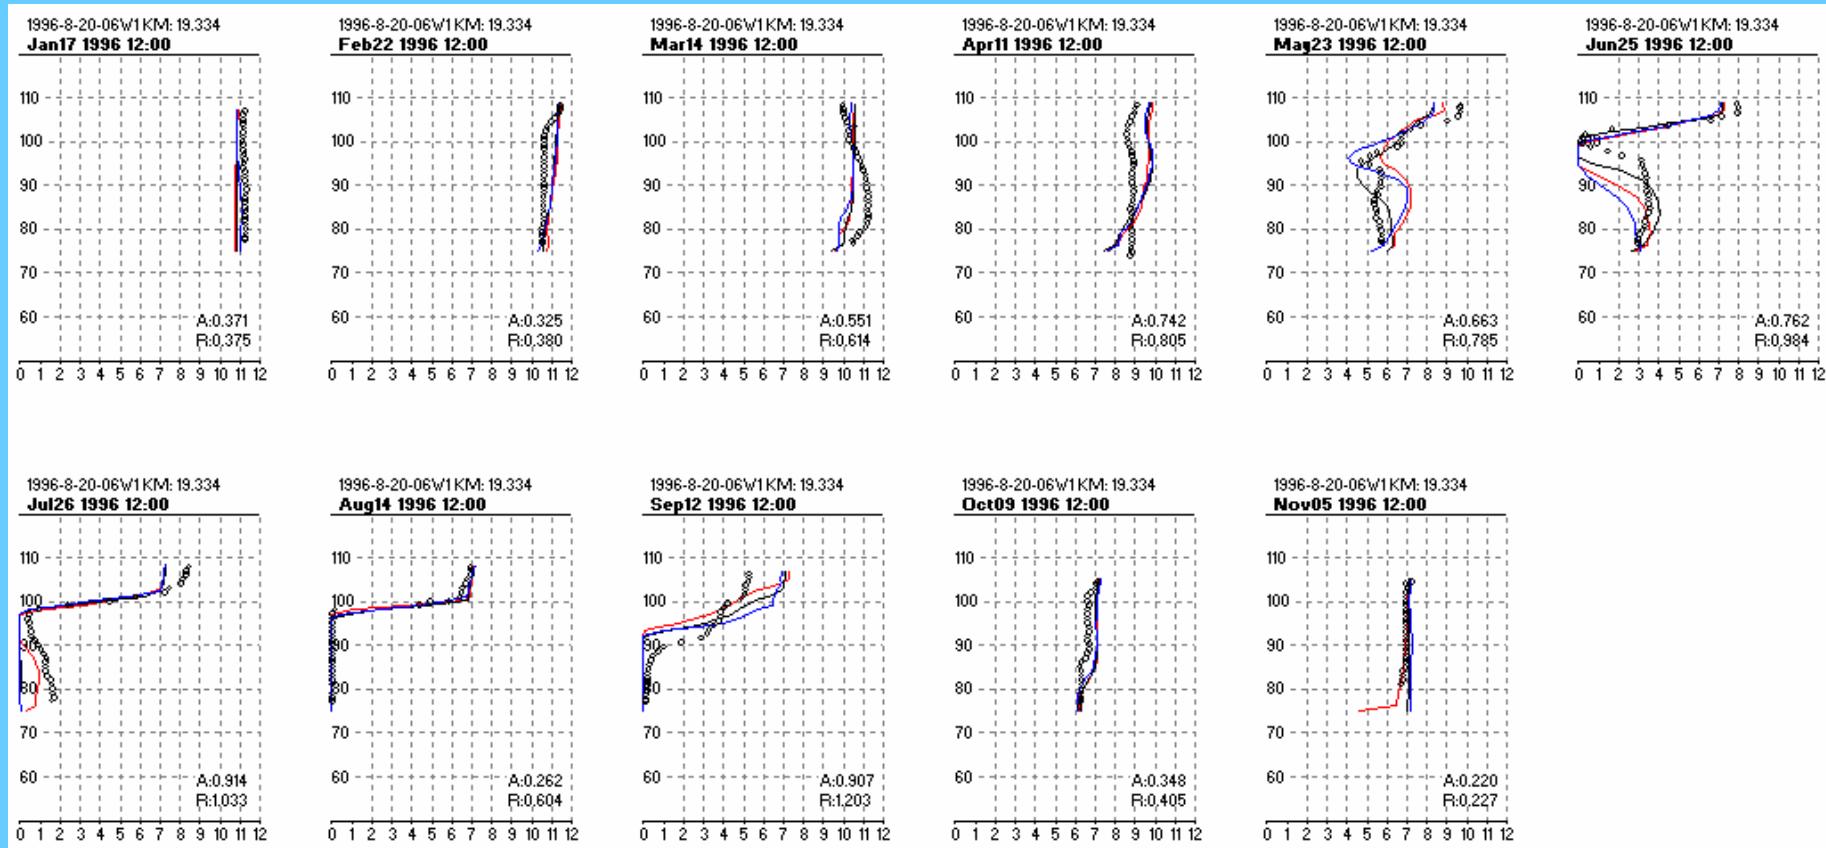


1996 Lake Murray DO Profiles – 27 Km Upstream of Dam Model vs. Data

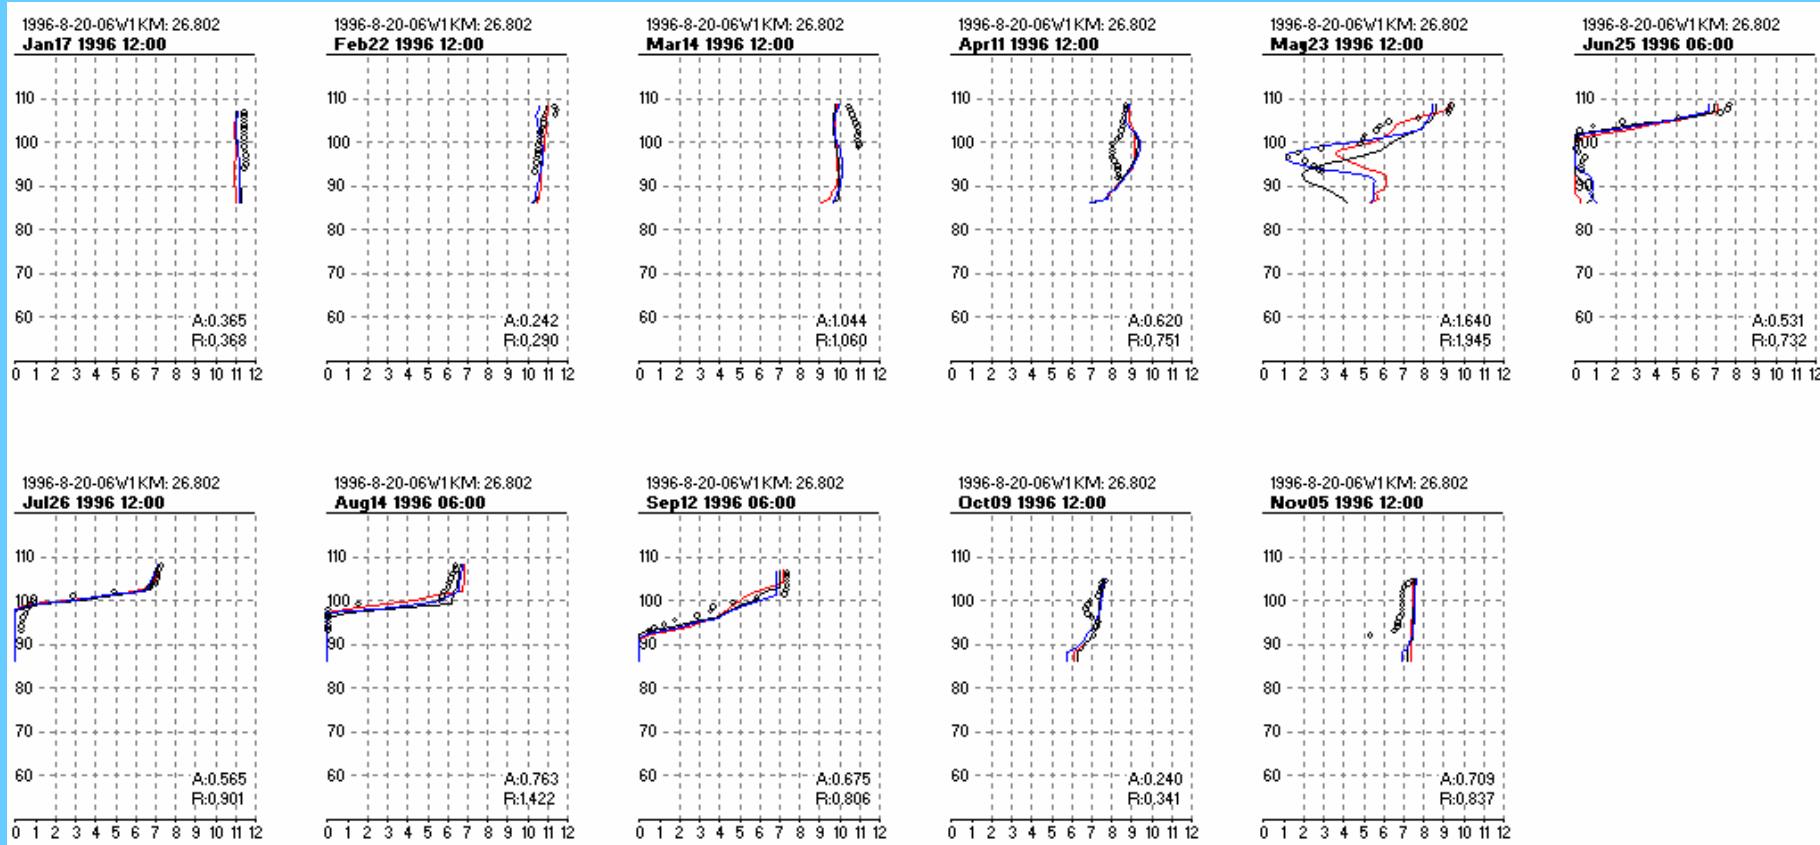


1996 Statistics

	Kilometers From Dam									
	0.0		6		19		27		Overall	
	AME	RMS	AME	RMS	AME	RMS	AME	RMS	AME	RMS
Temperature	0.49	0.67	0.57	0.80	0.63	0.84	0.94	1.28	0.66	0.90
DO	0.56	0.86	0.86	1.21	0.56	0.75	0.68	0.99	0.67	0.95


1996 Comparison of Modeled versus Measured Saluda Release DO

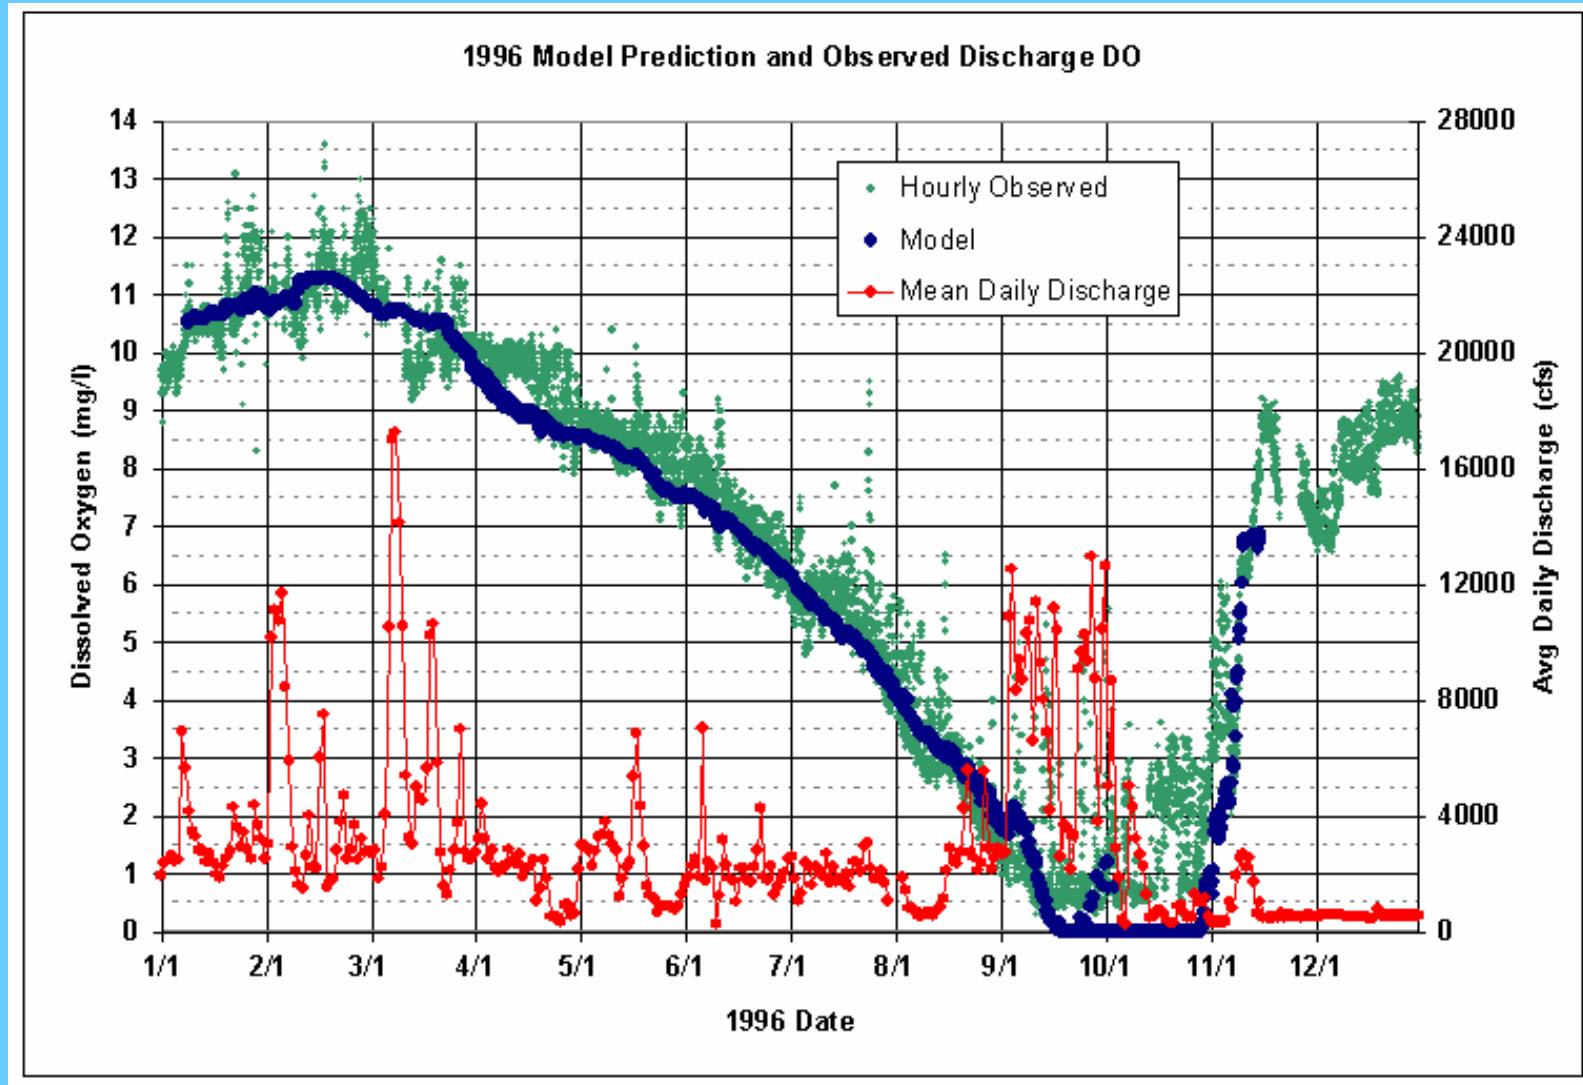


1992 Comparison of Modeled versus Measured Saluda Release DO

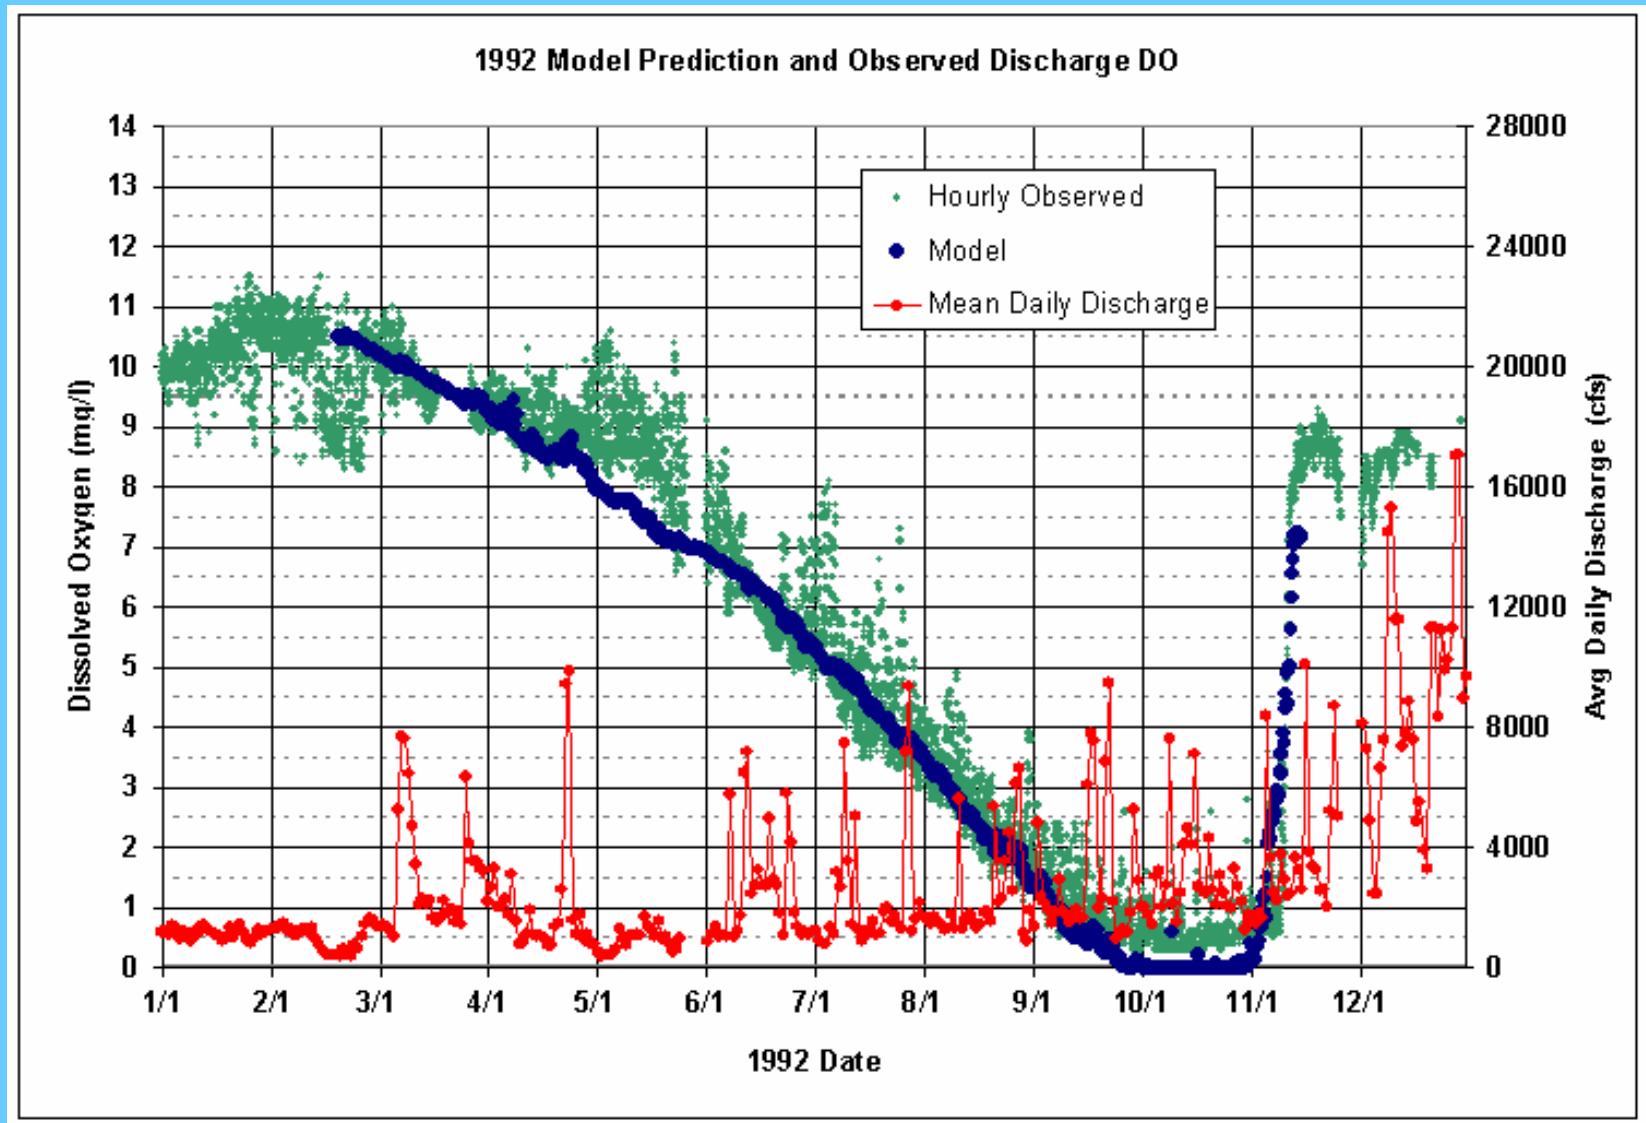


1997 Comparison of Modeled versus Measured Saluda Release DO

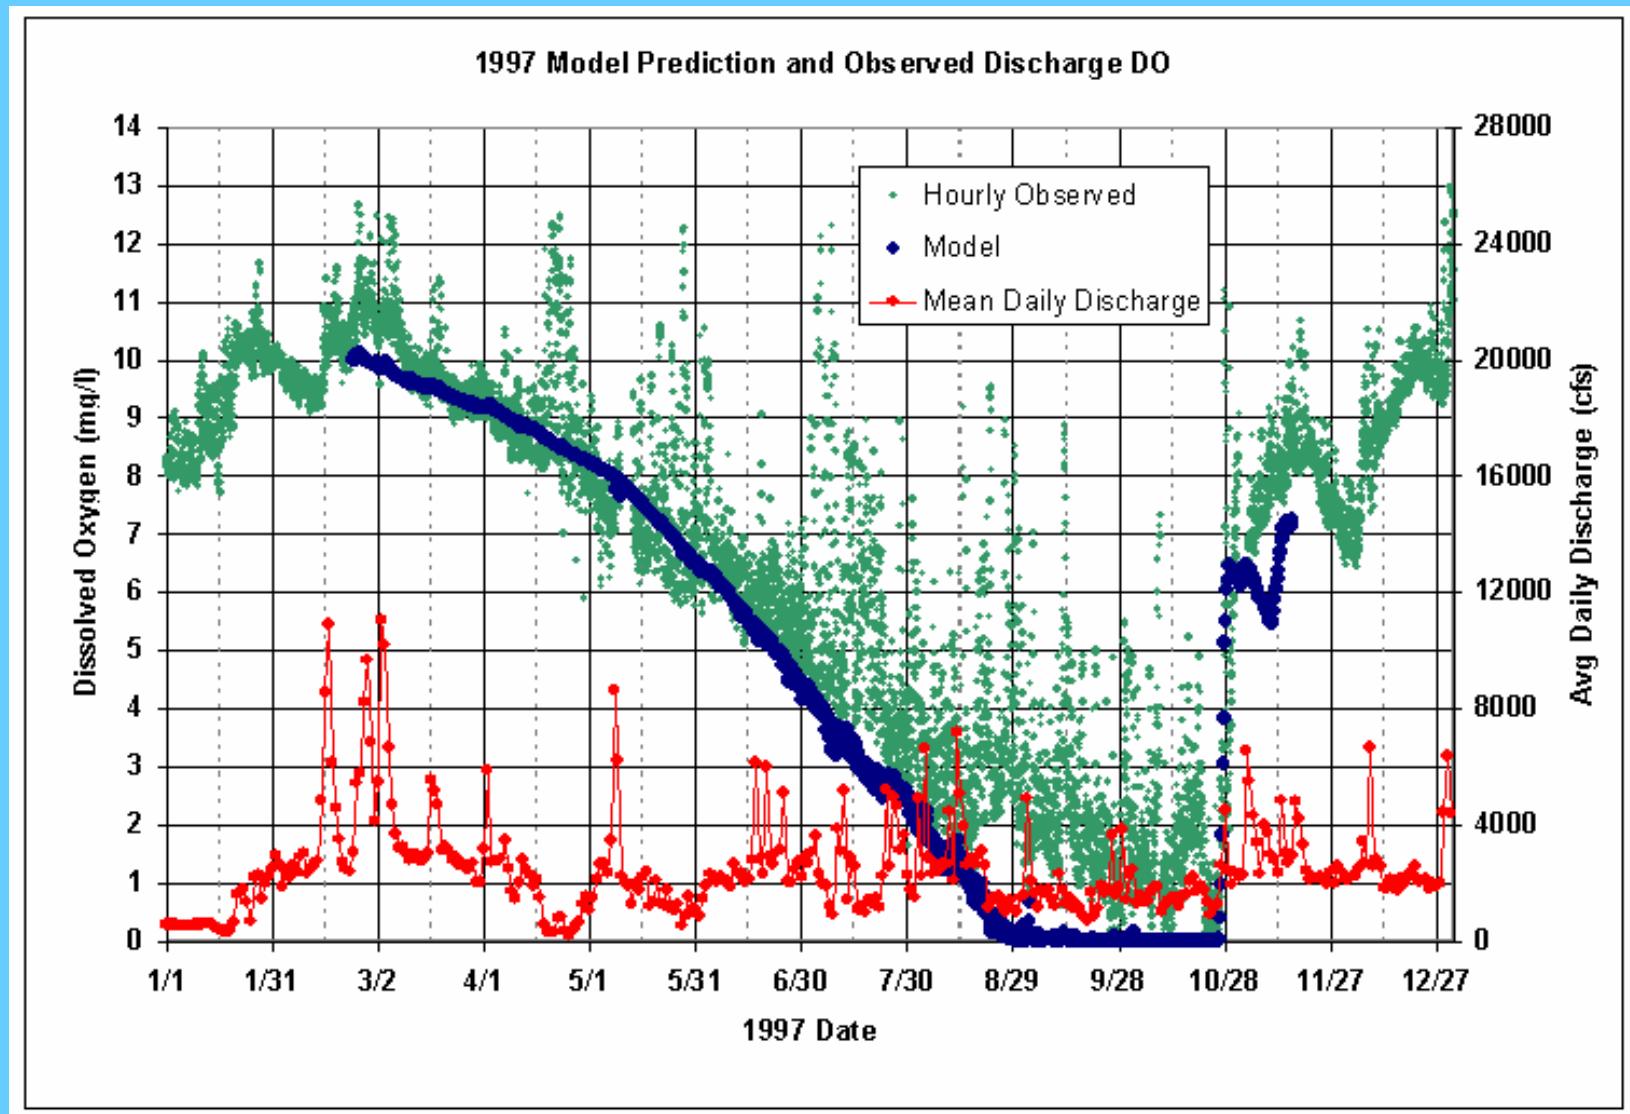


1996 Modeled versus Measured DO at the level of the Unit 5 Intake

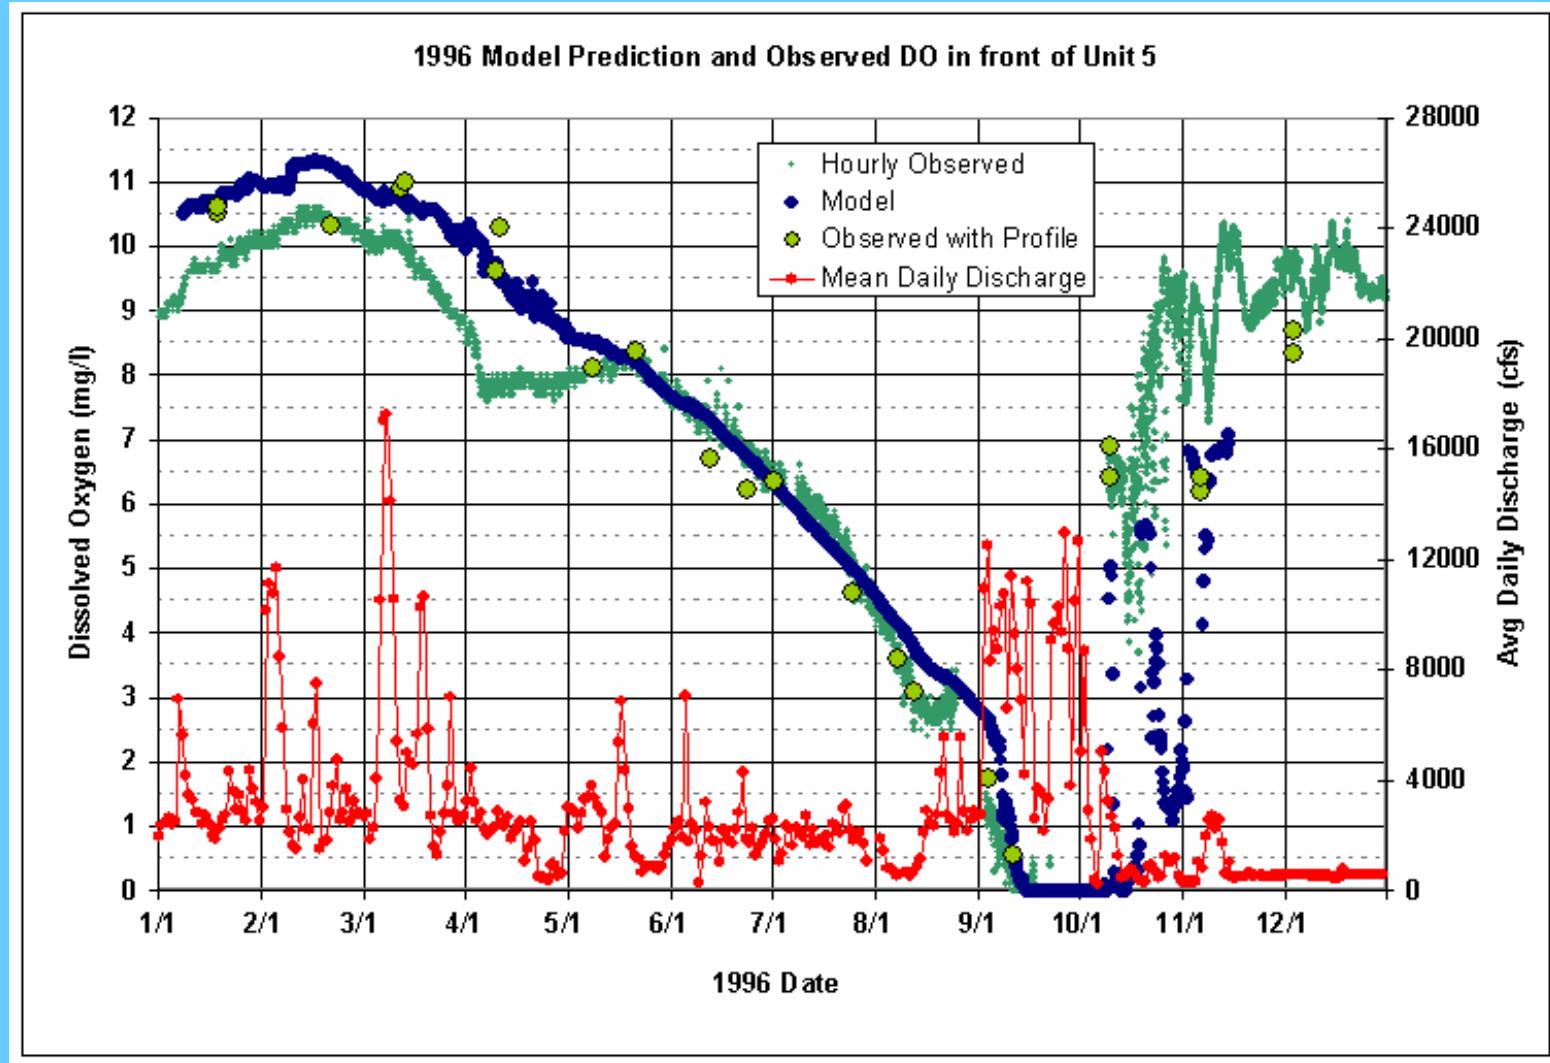

1992 Modeled versus Measured DO at the level of the Unit 5 Intake

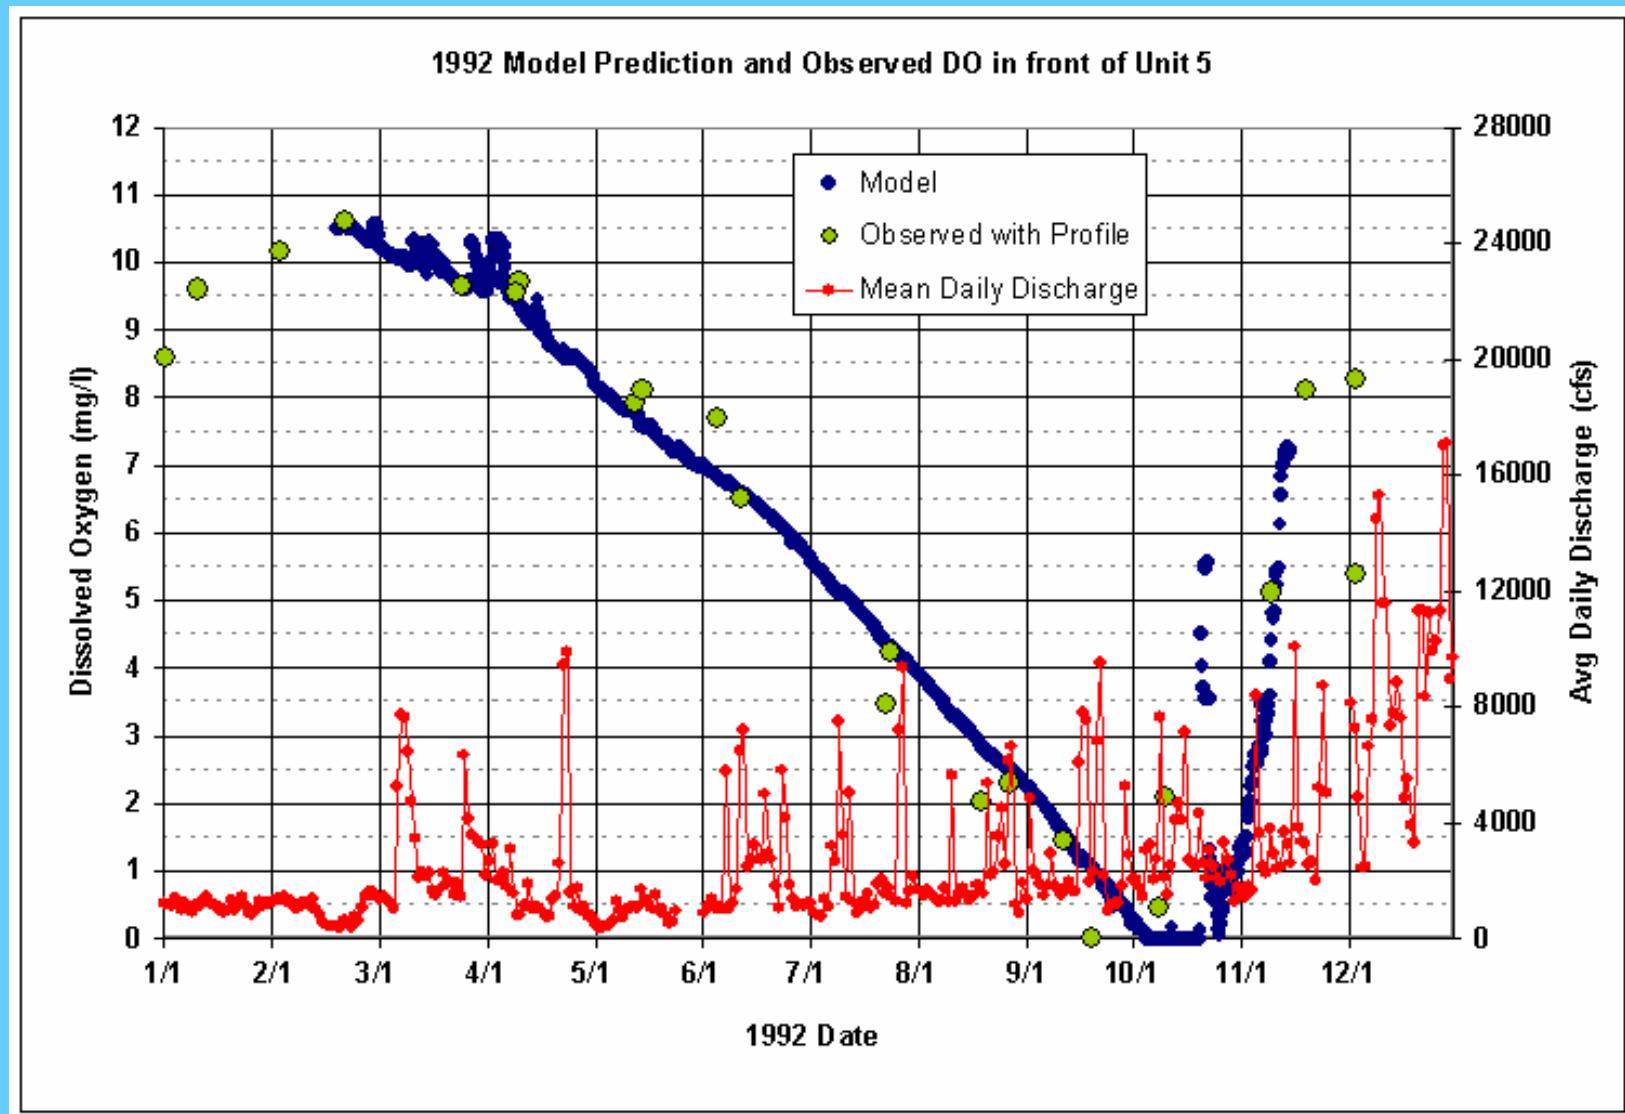


1997 Modeled versus Measured DO at the level of the Unit 5 Intake

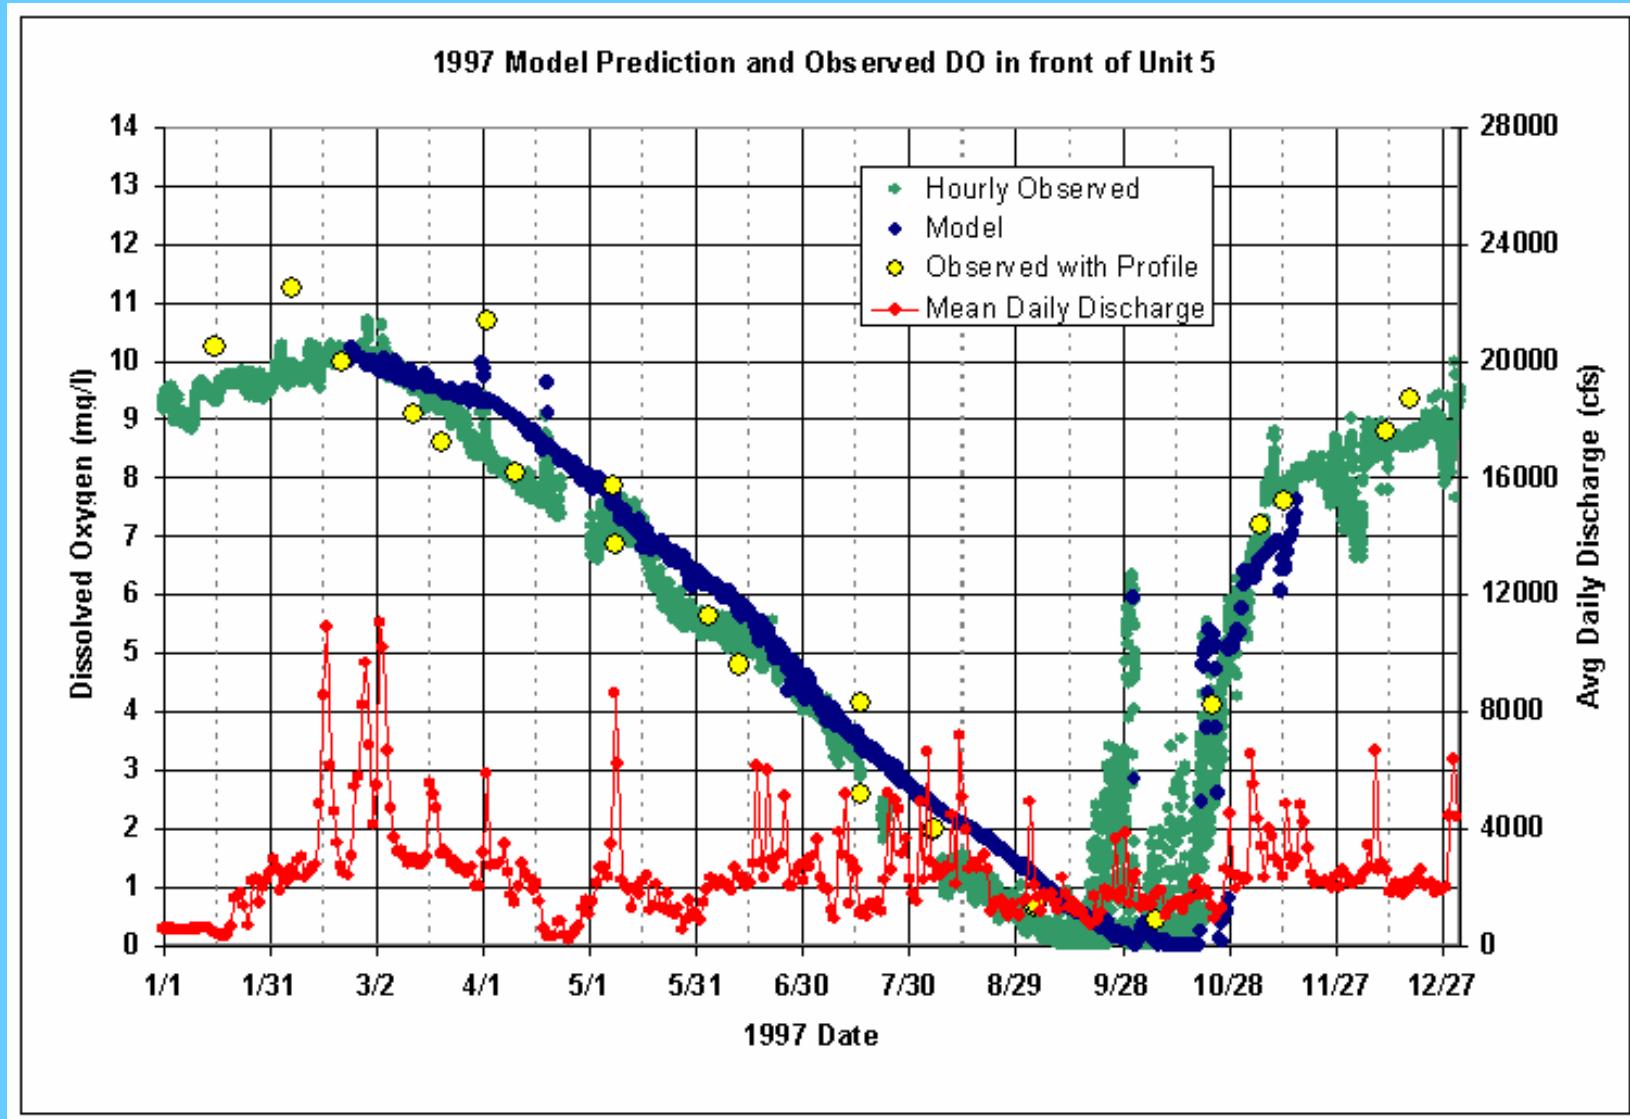

Distribution of TP Loads to the Upper Region of Lake Murray


Current

% Distribution for Current TP Inflows to Upper Region of Lake Murray

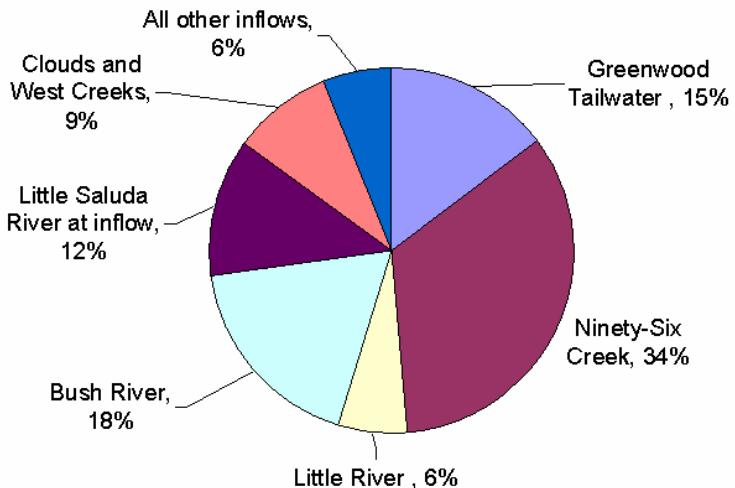


Assumed Reductions in TP





% Distribution for Reduced TP Inflows to Upper Region of Lake Murray

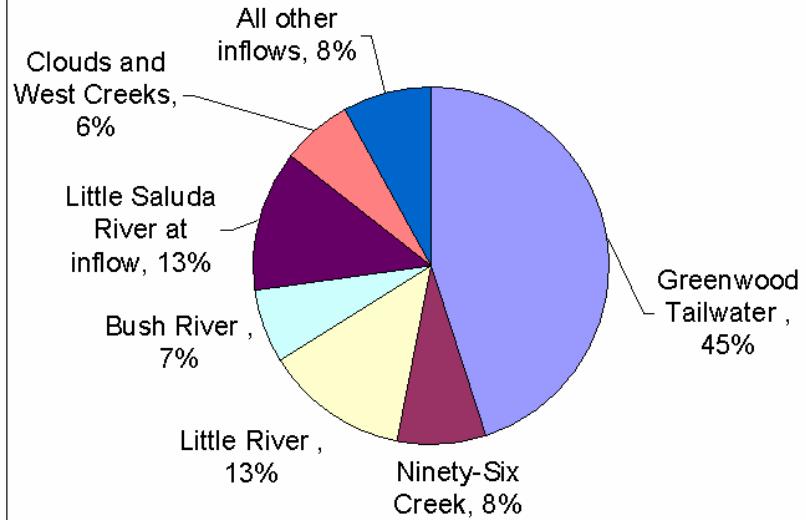


Comparison of Water Surface Elevations for Various Years at Lake Murray

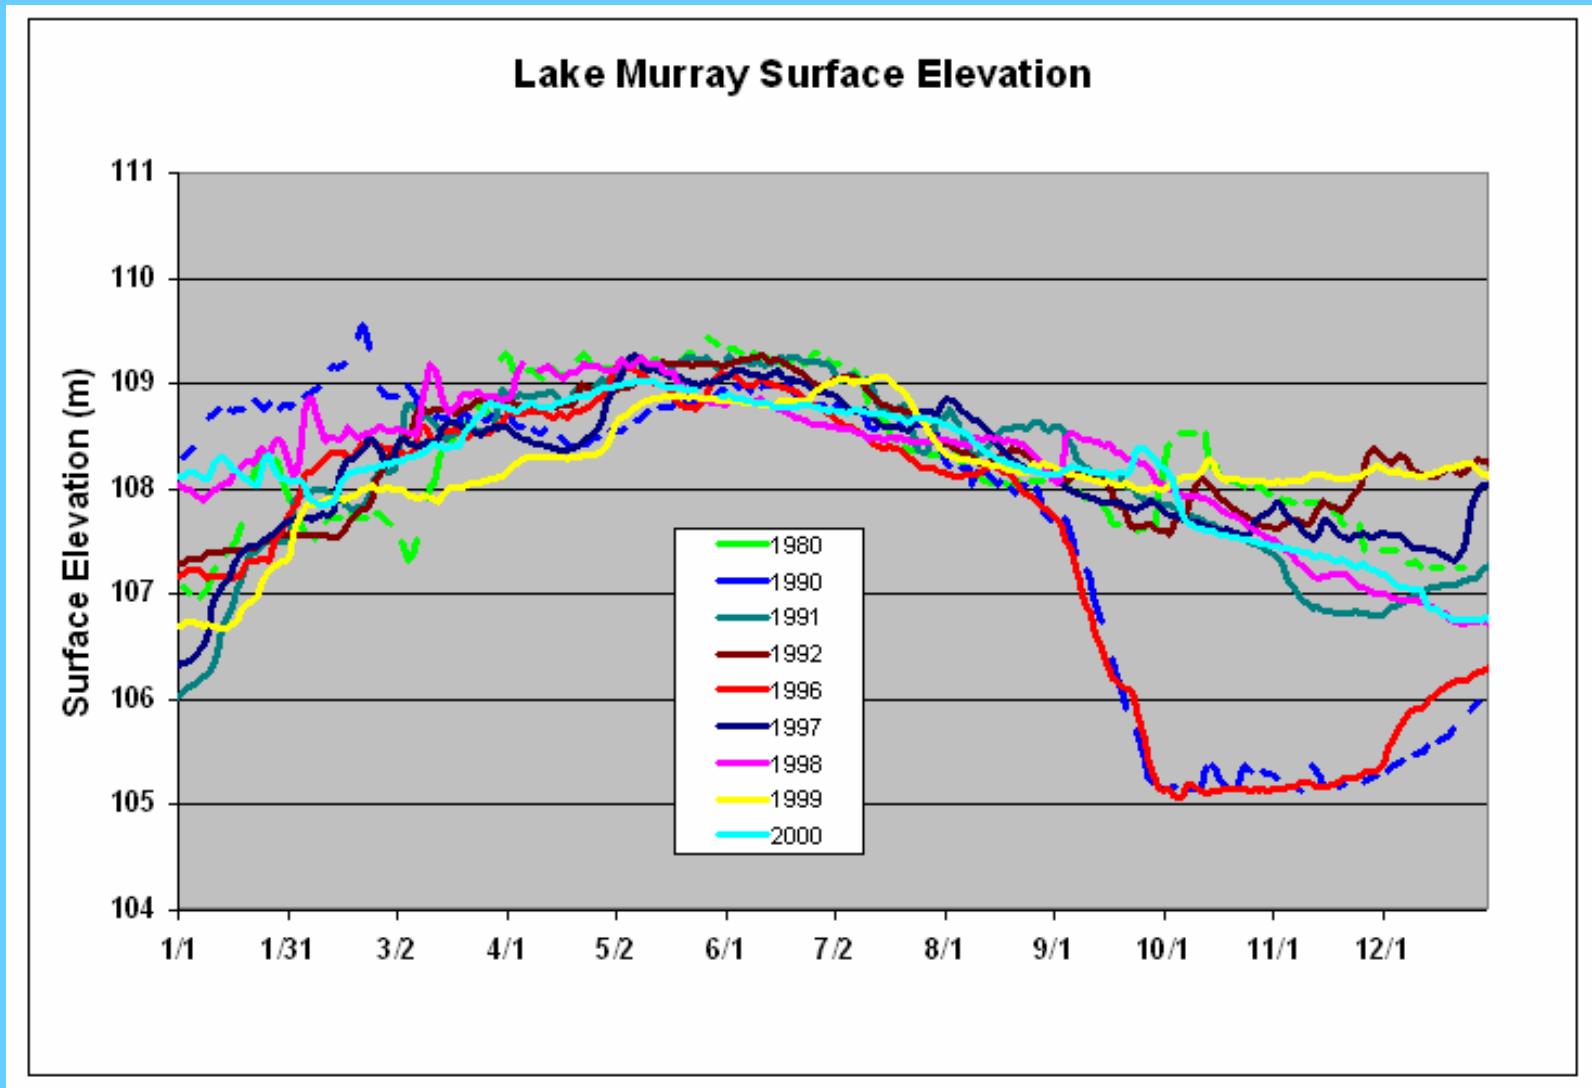


Comparison of 1996 Current and Reduced Phosphorus Predictions of Chlorophyll a at 1 Meter Depth at Four Locations in Lake Murray

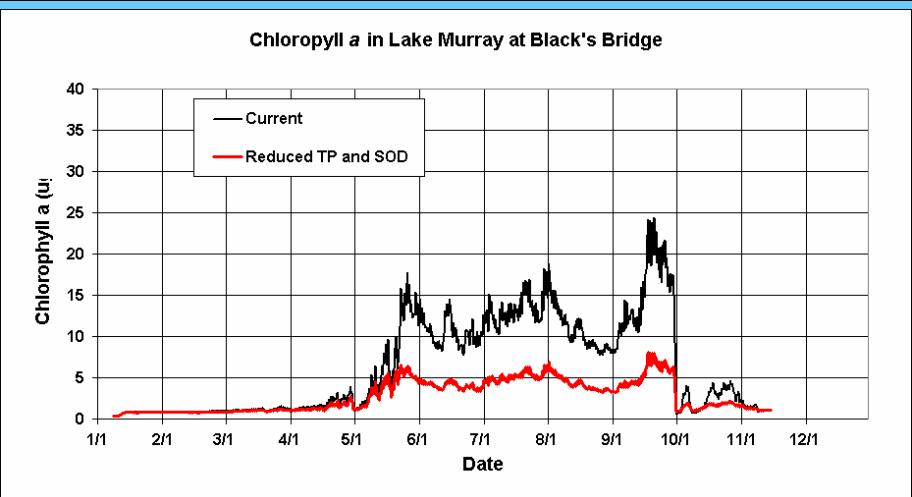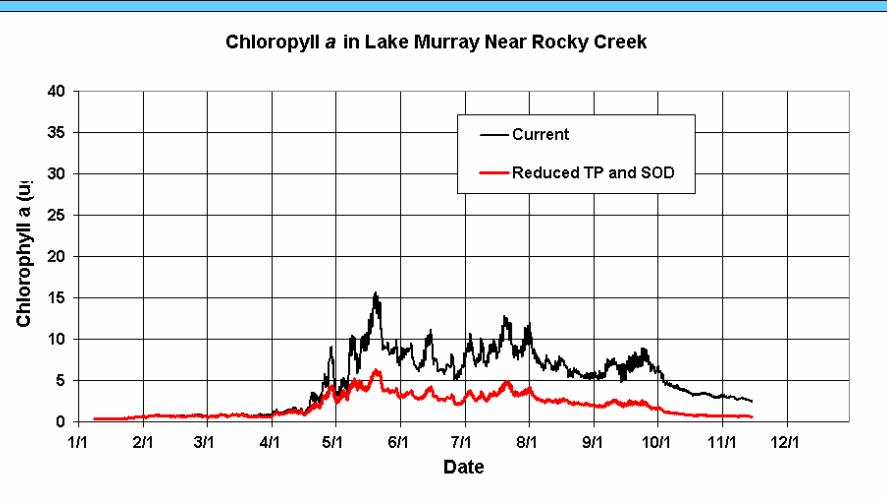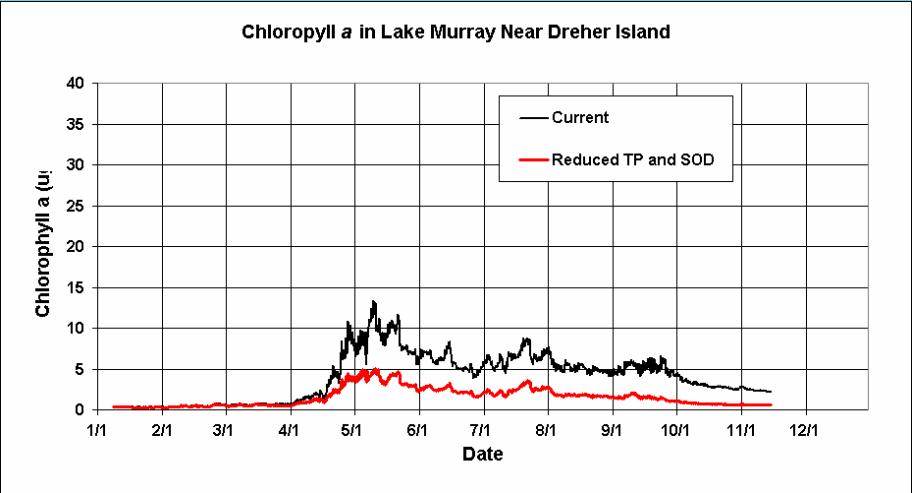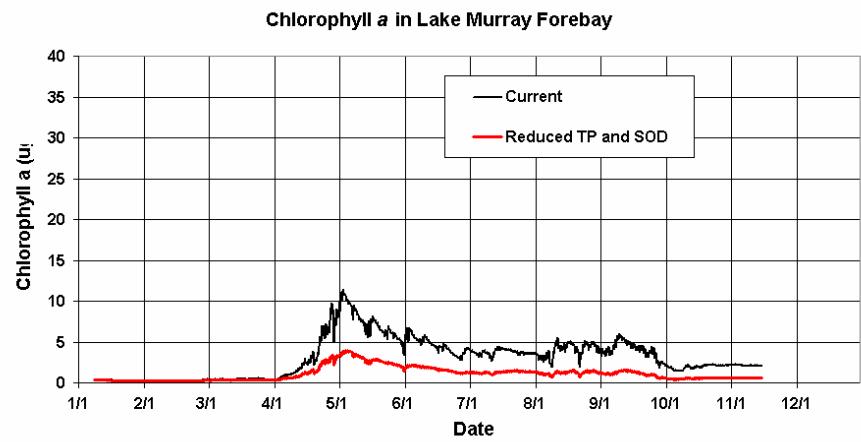


1996 Discharge DO for Current and Reduced Phosphorus, and without the Special Drawdown

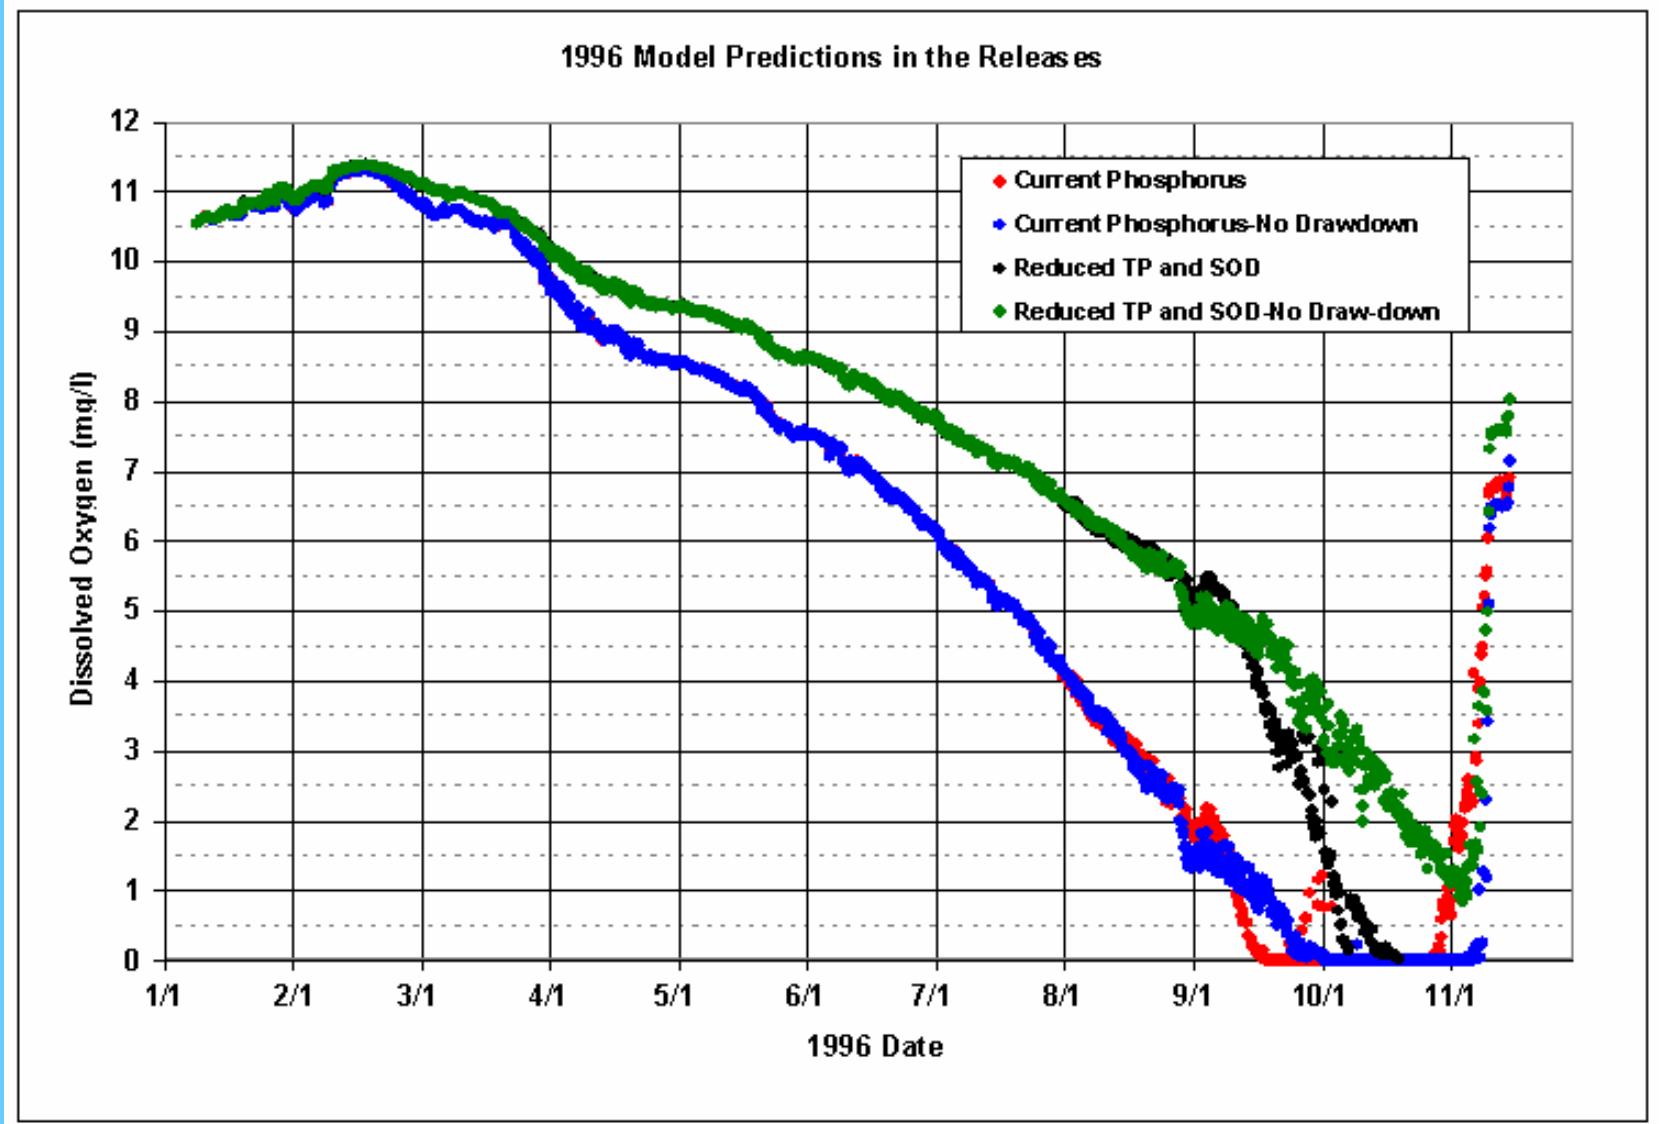


1992 Discharge DO for Current and Reduced Phosphorus

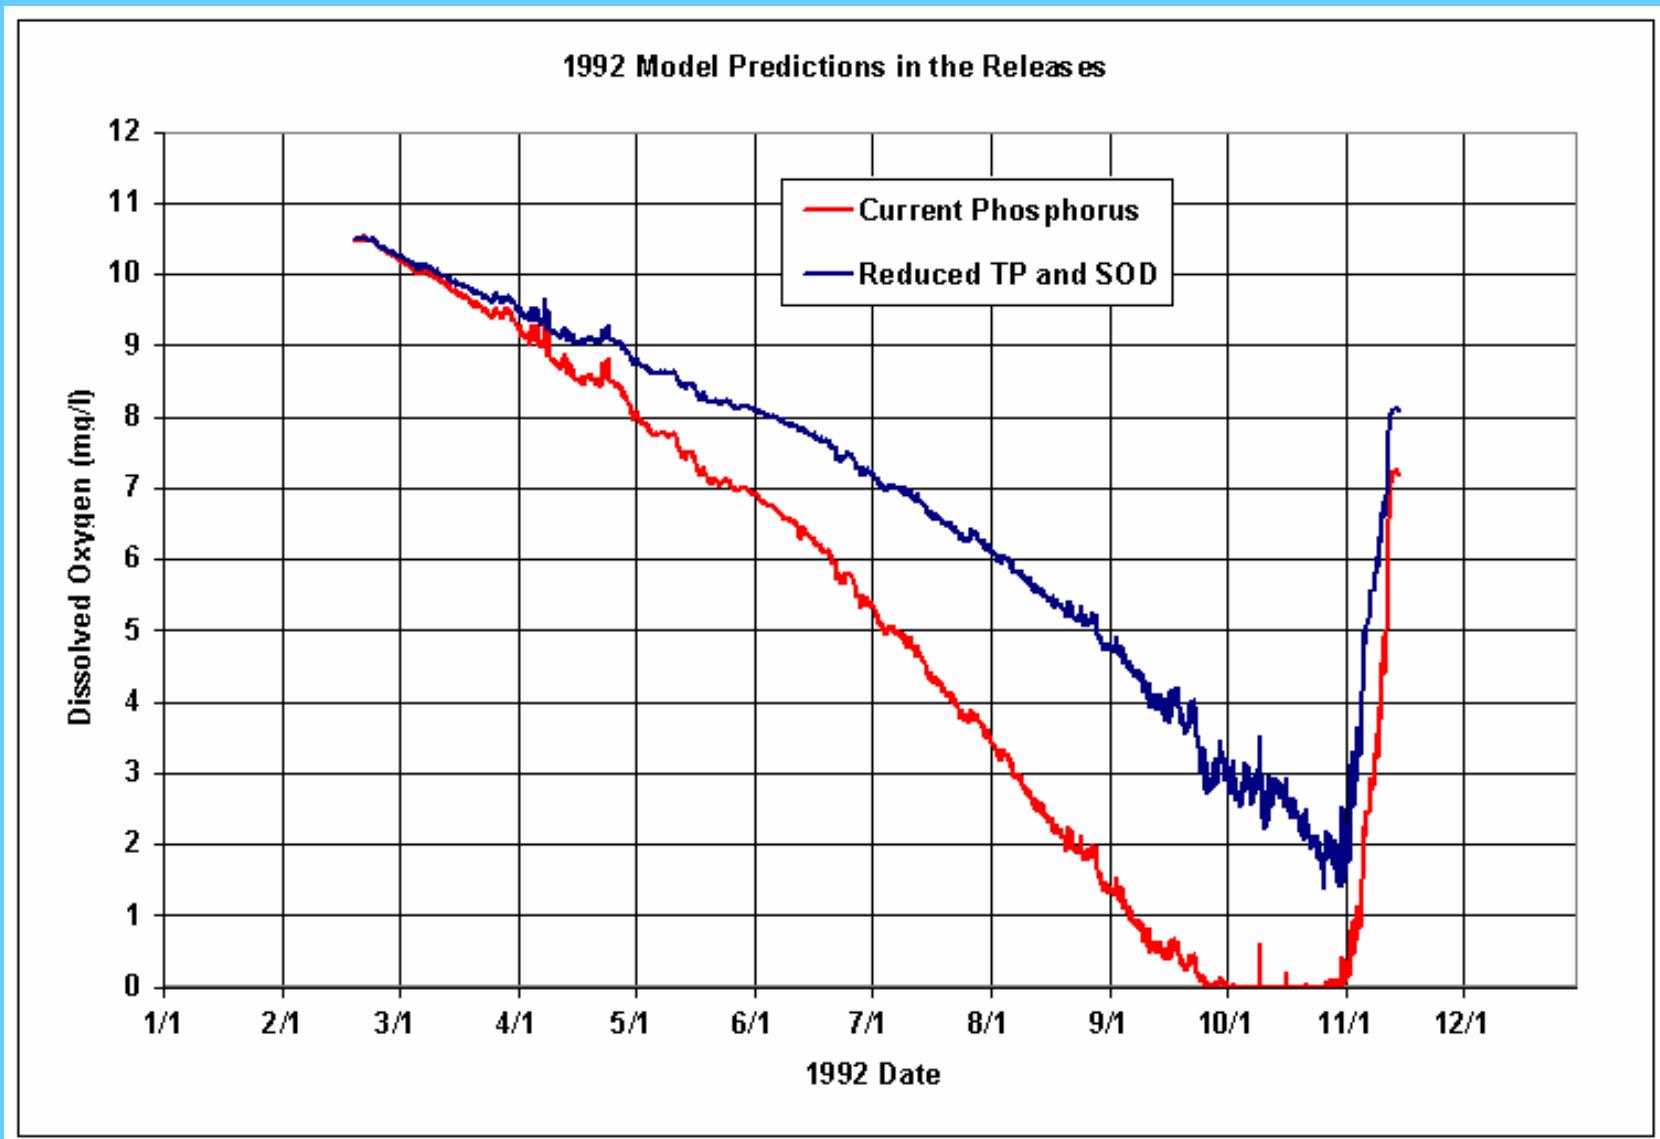


1997 Discharge DO for Current and Reduced Phosphorus

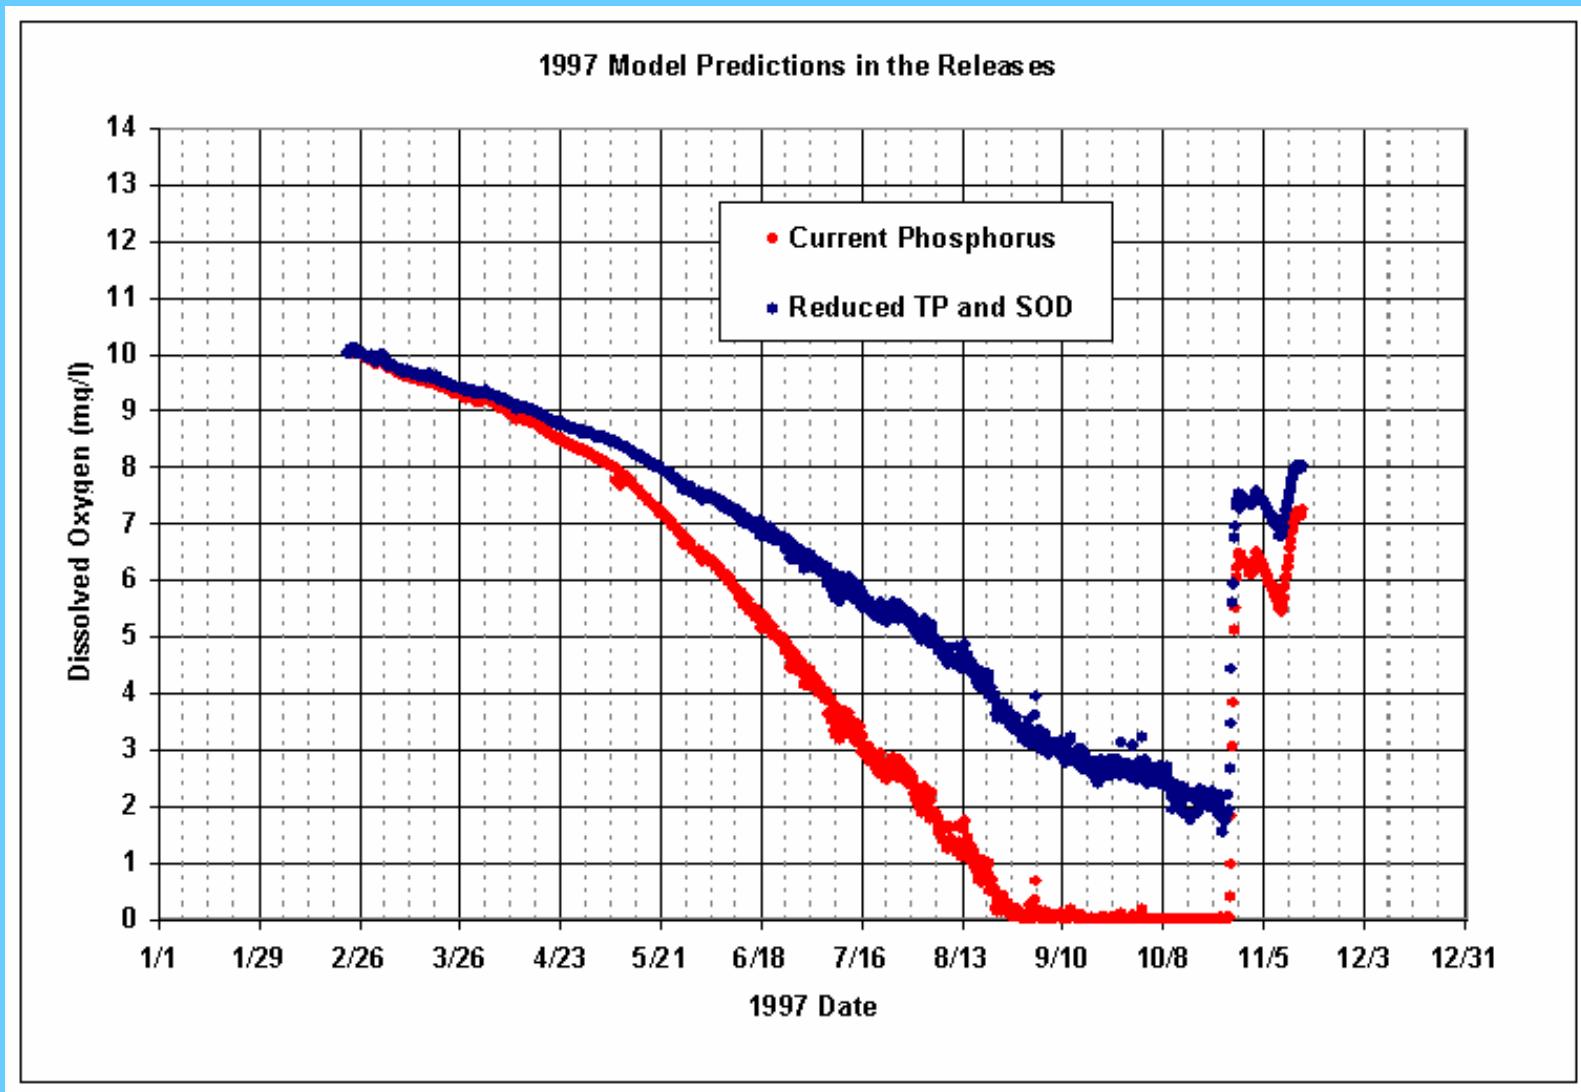


1996 DO at the Elevation of the Unit 5 Intake for Current and Reduced Phosphorus, and without the Special Drawdown

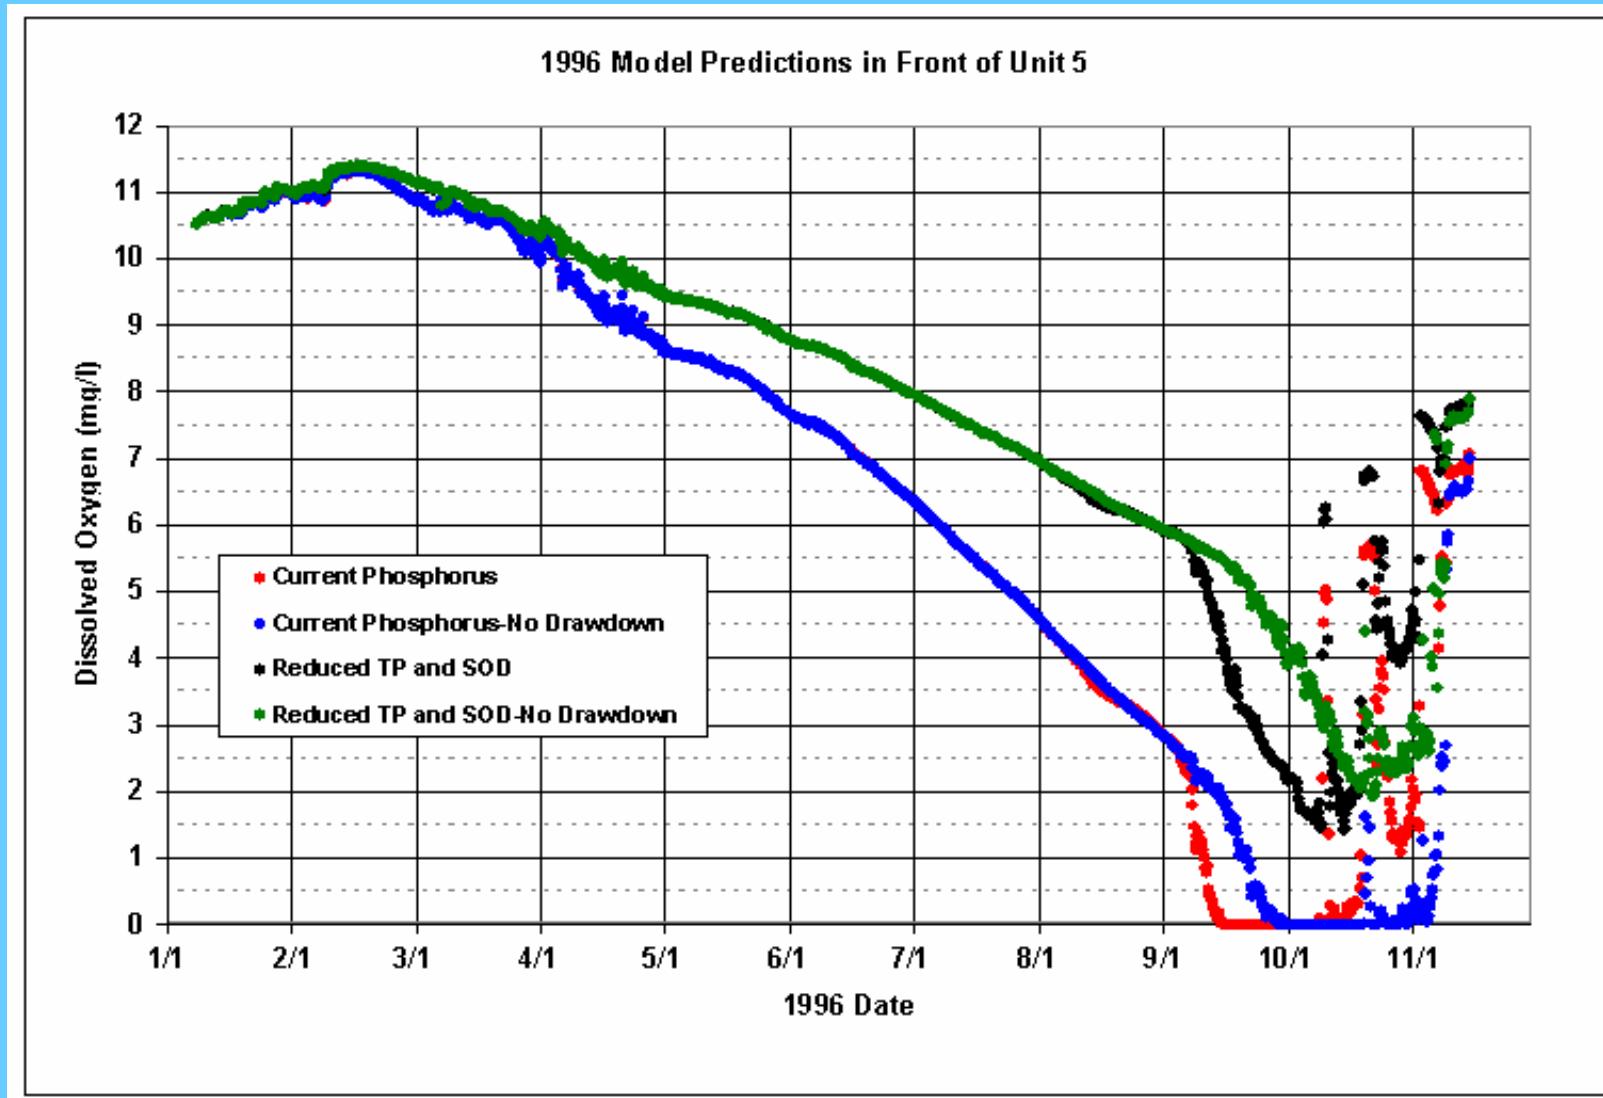

1992 DO at the Level of the Unit 5 Intake for Current and Reduced Phosphorus



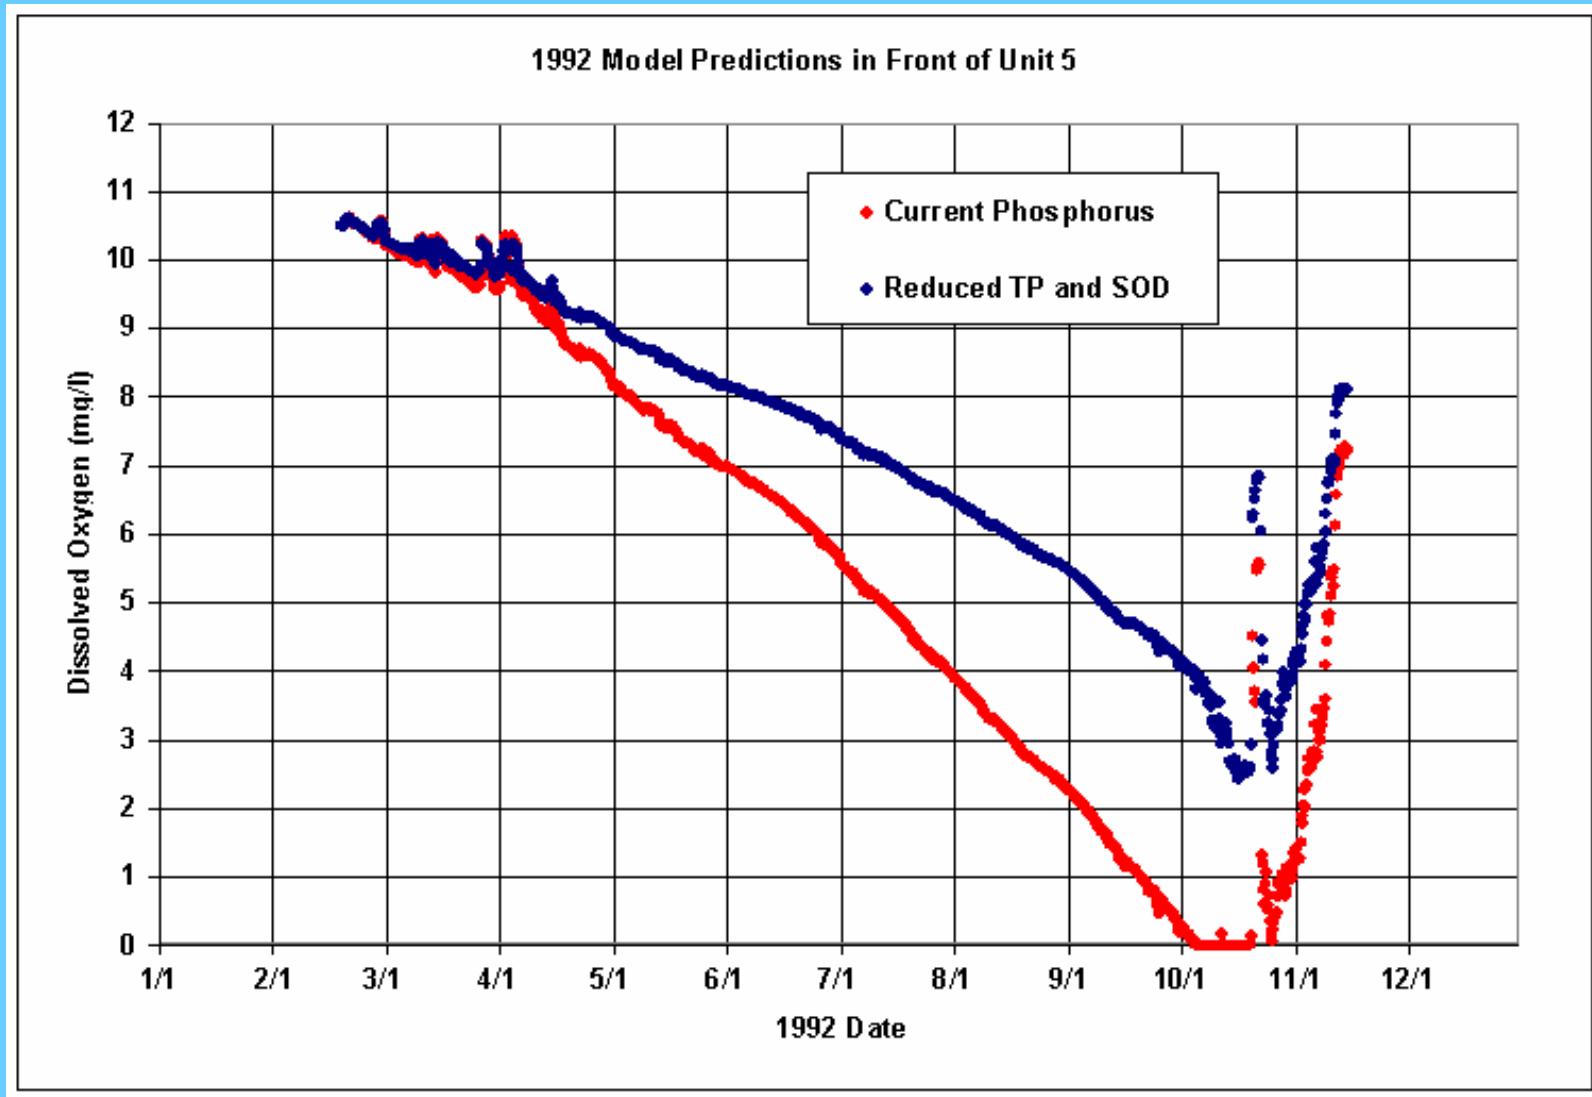


1997 DO at the Level of the Unit 5 Intake for Current and Reduced Phosphorus

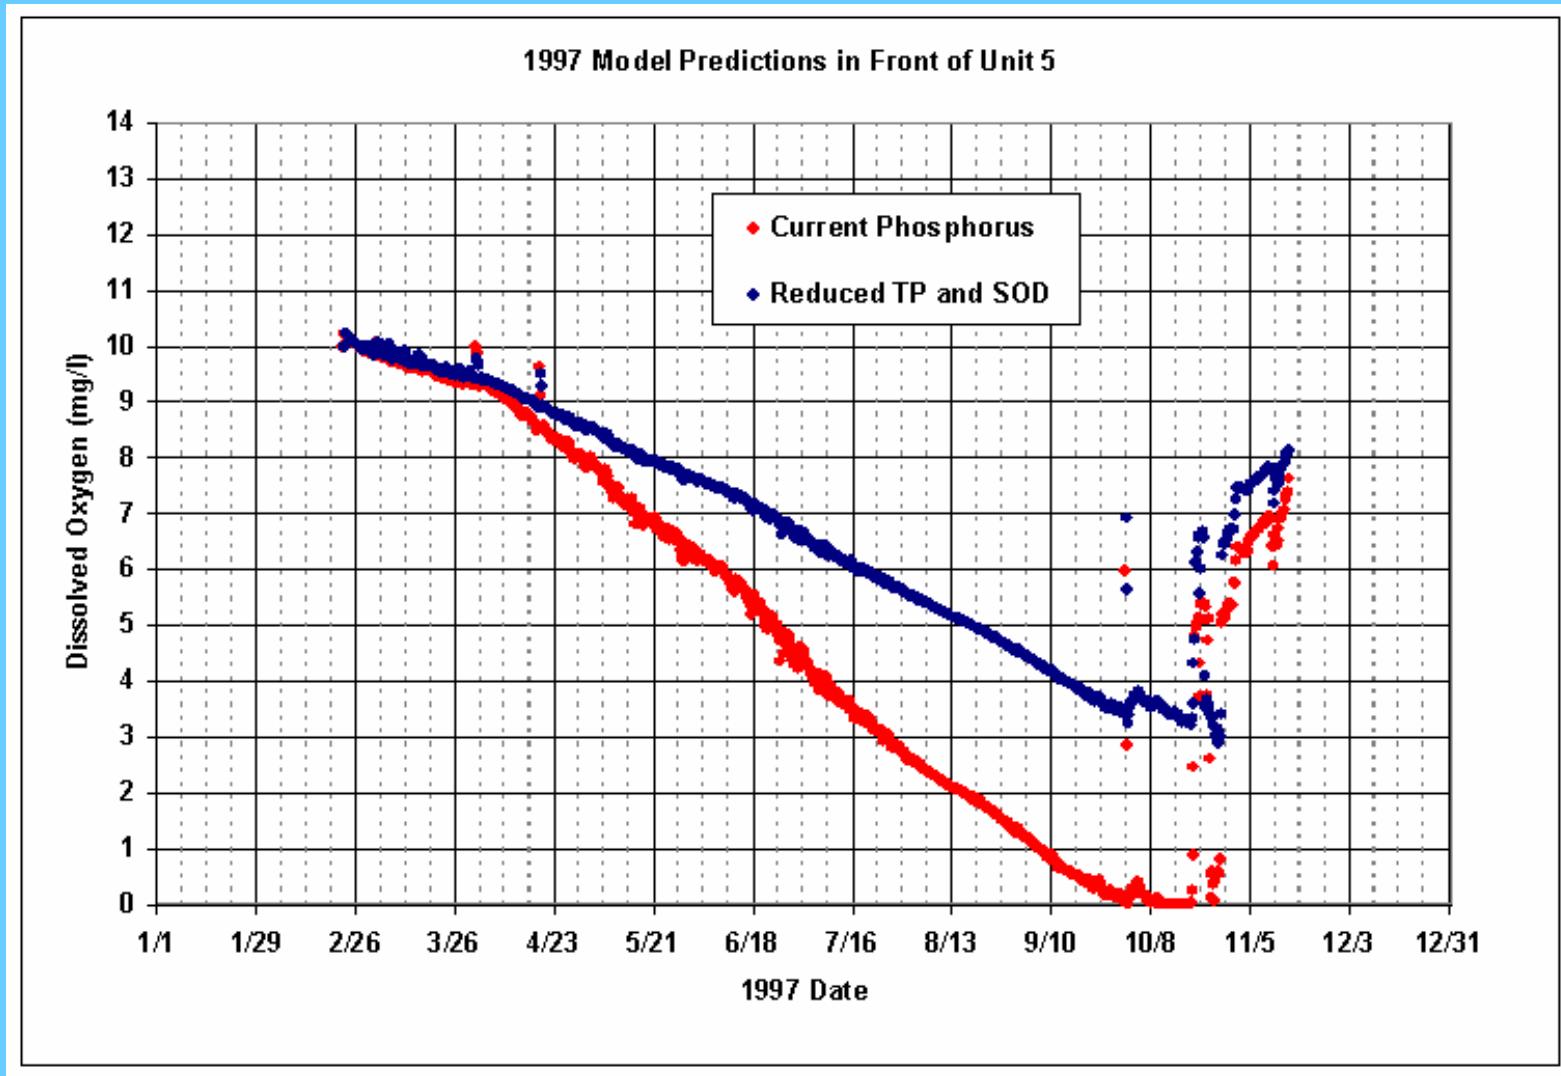


Temperature, DO, Age and Chlorophyll a Animation




Temp < 27 and DO > 2

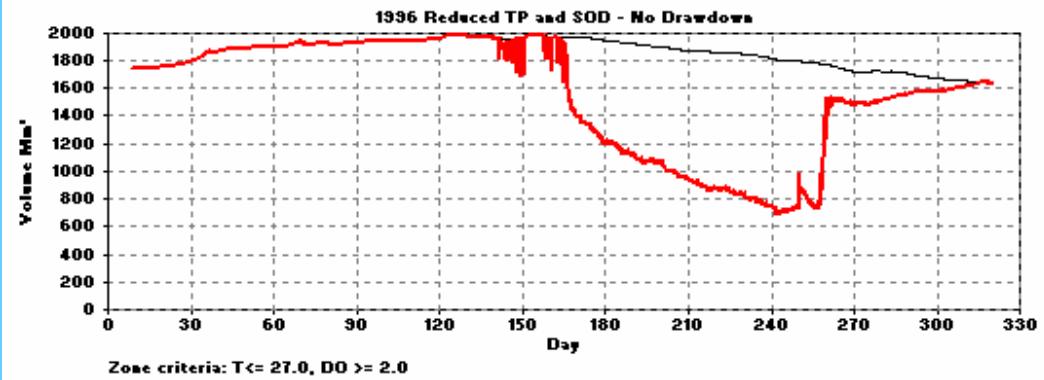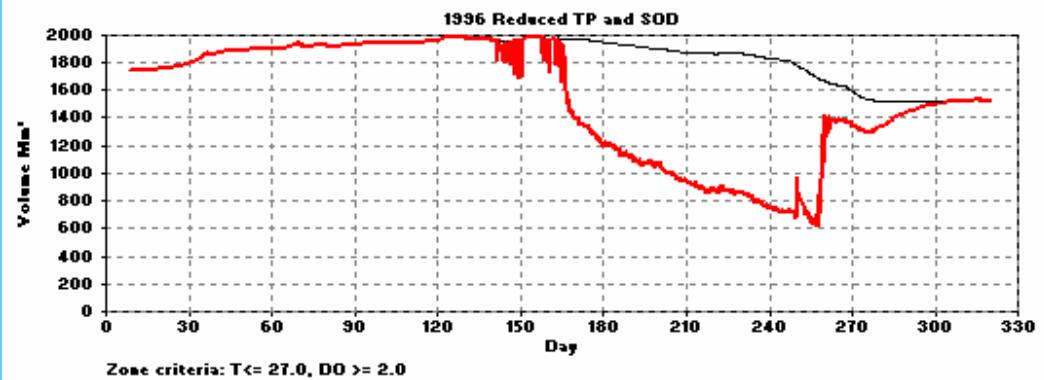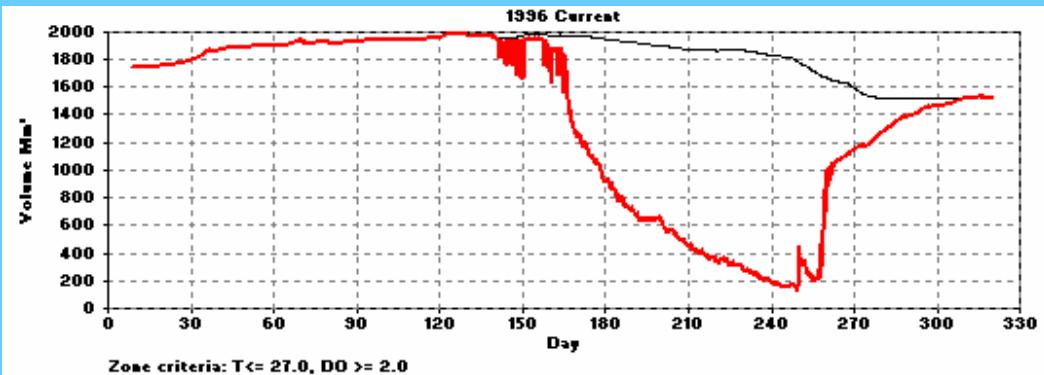

Temp < 25 and DO > 2

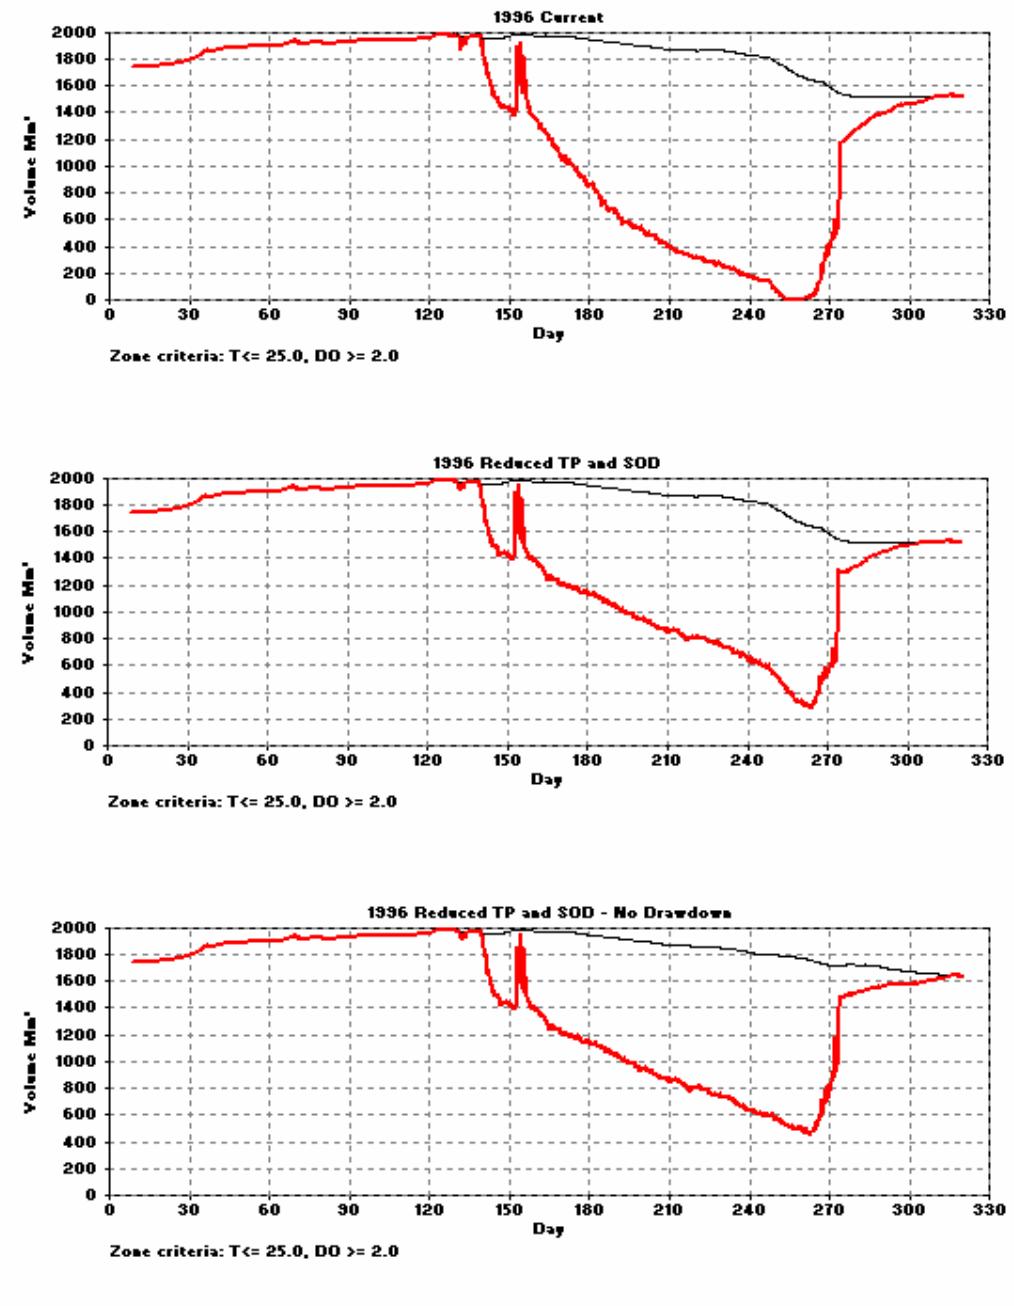

Temp < 25 and DO > 3

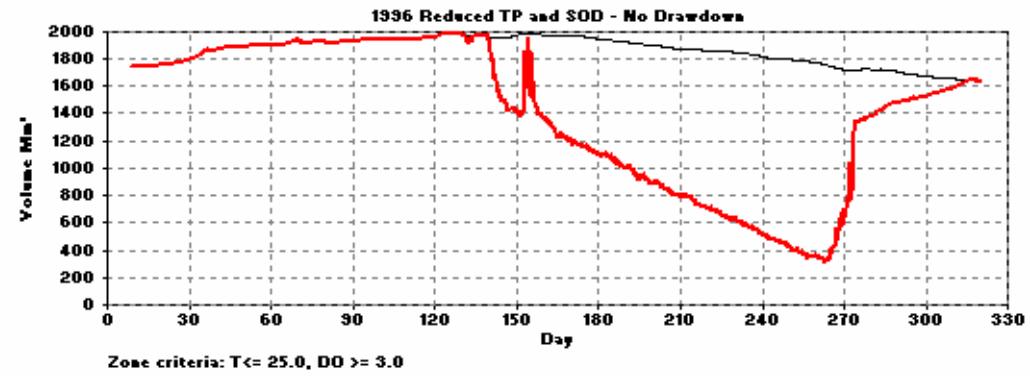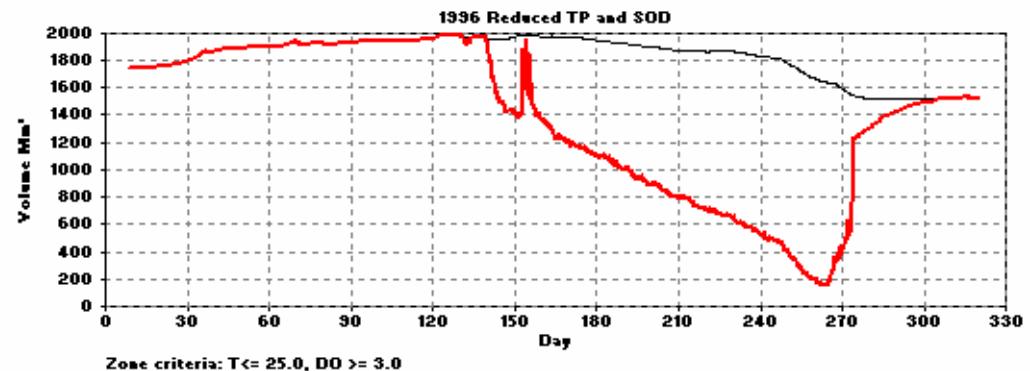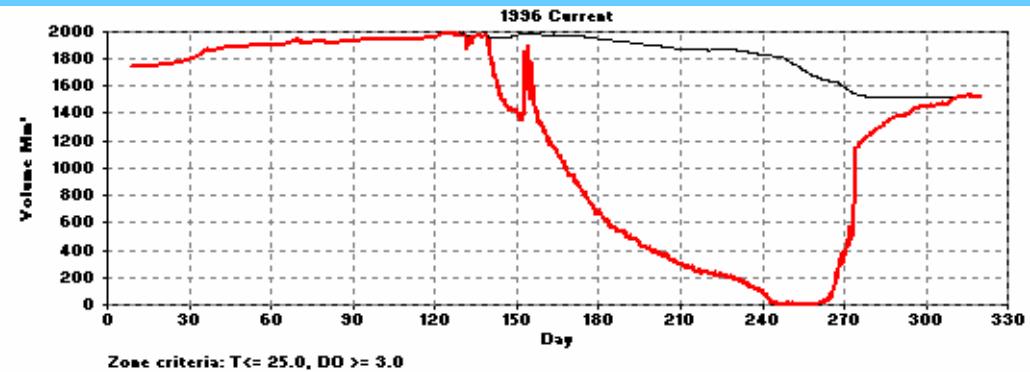

METRICS – Murray 1996	Current	Current-No Drawdown	Reduced TP and SOD	Reduced TP and SOD-No Drawdown
MEAN TOTAL RESERVOIR VOLUME (MMB)	2684	2738	2684	2738
SUM OF VOLUME-DAYS (MMB-DA) WITH DO > 5 MAY-OCT	336403	340241	411162	415248
SUM OF VOL-DAYS (MMB-DA) WITH DO > 5 MAY-OCT AS % OF TOTAL VOL-DAYS MAY-OCT	69%	68%	84%	82%
MINIMUM VOLUME (MMB) WITH DO > 5 MG/L	1267	1263	1581	1689
MINIMUM %VOLUME WITH DO > 5 MG/L	47%	47.30%	65.60%	64.10%
SUM OF VOLUME-DAYS (MMB-DA) WITH DO > 4 MAY-OCT	361968	365365	436548	442955
SUM OF VOL-DAYS (MMB-DA) WITH DO > 4 MAY-OCT AS % OF TOTAL VOL-DAYS MAY-OCT	74%	73%	89%	88%
MINIMUM VOLUME (MMB) WITH DO > 4 MG/L	1345	1352	1714	1881
MINIMUM %VOLUME WITH DO > 4 MG/L	50%	51%	72%	75%
SUM OF VOLUME-DAYS (MMB-DA) WITH DO < 1 MG/L	70304	80120	9810	9901
SUM OF VOL-DAYS (MMB-DA) WITH DO < 1 AS % OF TOTAL VOL-DAYS	8.4%	9.4%	1.1%	1.2%
MAXIMUM VOLUME (MMB) WITH DO < 1 MG/L	926	916	181	170
MAXIMUM %VOLUME WITH DO < 1 MG/L	35%	35%	8%	7%
Striper Preferred Habitat				
SUM OF VOLUME-DAYS (MMB-DA) WITH T<20 AND DO>4 MAY-OCT	109194	117674	154380	166211
SUM OF VOL-DAYS (MMB-DA) WITH T<20 AND DO>4 AS % OF TOTAL VOL-DAYS MAY-OCT	22%	23%	32%	33%
MINIMUM VOLUME (MMB) WITH T<20 AND DO>4	0	0	0	61
MINIMUM %VOLUME WITH T<20 AND DO>4	0.0%	0.0%	0.0%	2.4%
Striper Maximum Tolerable Habitat				
SUM OF VOLUME-DAYS (MMB-DA) WITH T<27 AND DO>2 MAY-OCT	276016	279486	340103	362189
SUM OF VOL-DAYS (MMB-DA) WITH T<27 AND DO>2 AS % OF TOTAL VOL-DAYS MAY-OCT	56%	56%	69%	70%
MINIMUM VOLUME (MMB) WITH T<27 AND DO>2	154	136	806	870
MINIMUM %VOLUME WITH T<27 AND DO>2	6%	5%	33%	33%
SUM OF KM-DAYS WITH DO < 5 MG/L AT SURFACE	48	21	2	2
MAX CONTIG. DISTANCE (KM) WITH DO < 5 AT SURFACE	7.6	7.6	0.0	0.0
MAX CONTIG. DISTANCE (KM) WITH DO < 3 AT SURFACE	0	0	0	0
MINIMUM RELEASE DO (MG/L)	0.0	0.0	0.0	0.8
NUMBER OF DAYS WITH RELEASE DO < 5 MG/L	111	112	58	72
NUMBER OF DAYS WITH RELEASE DO < 3 MG/L	83	86	42	37
MAXIMUM CHL-A CONCENTRATION (UG/L)	29.4	27.2	14.7	10.4
MEAN SURFACE CHL-A CONCENTRATION (UG/L) APR-AUG	5.8	5.8	2.3	2.3



The End

Lower Saluda and Congaree Rivers Temperature Study: Update

Water Quality Technical Working
Committee Meeting

August 23, 2006

PAIRED TEMPERATURE SENSOR LOCATIONS IS

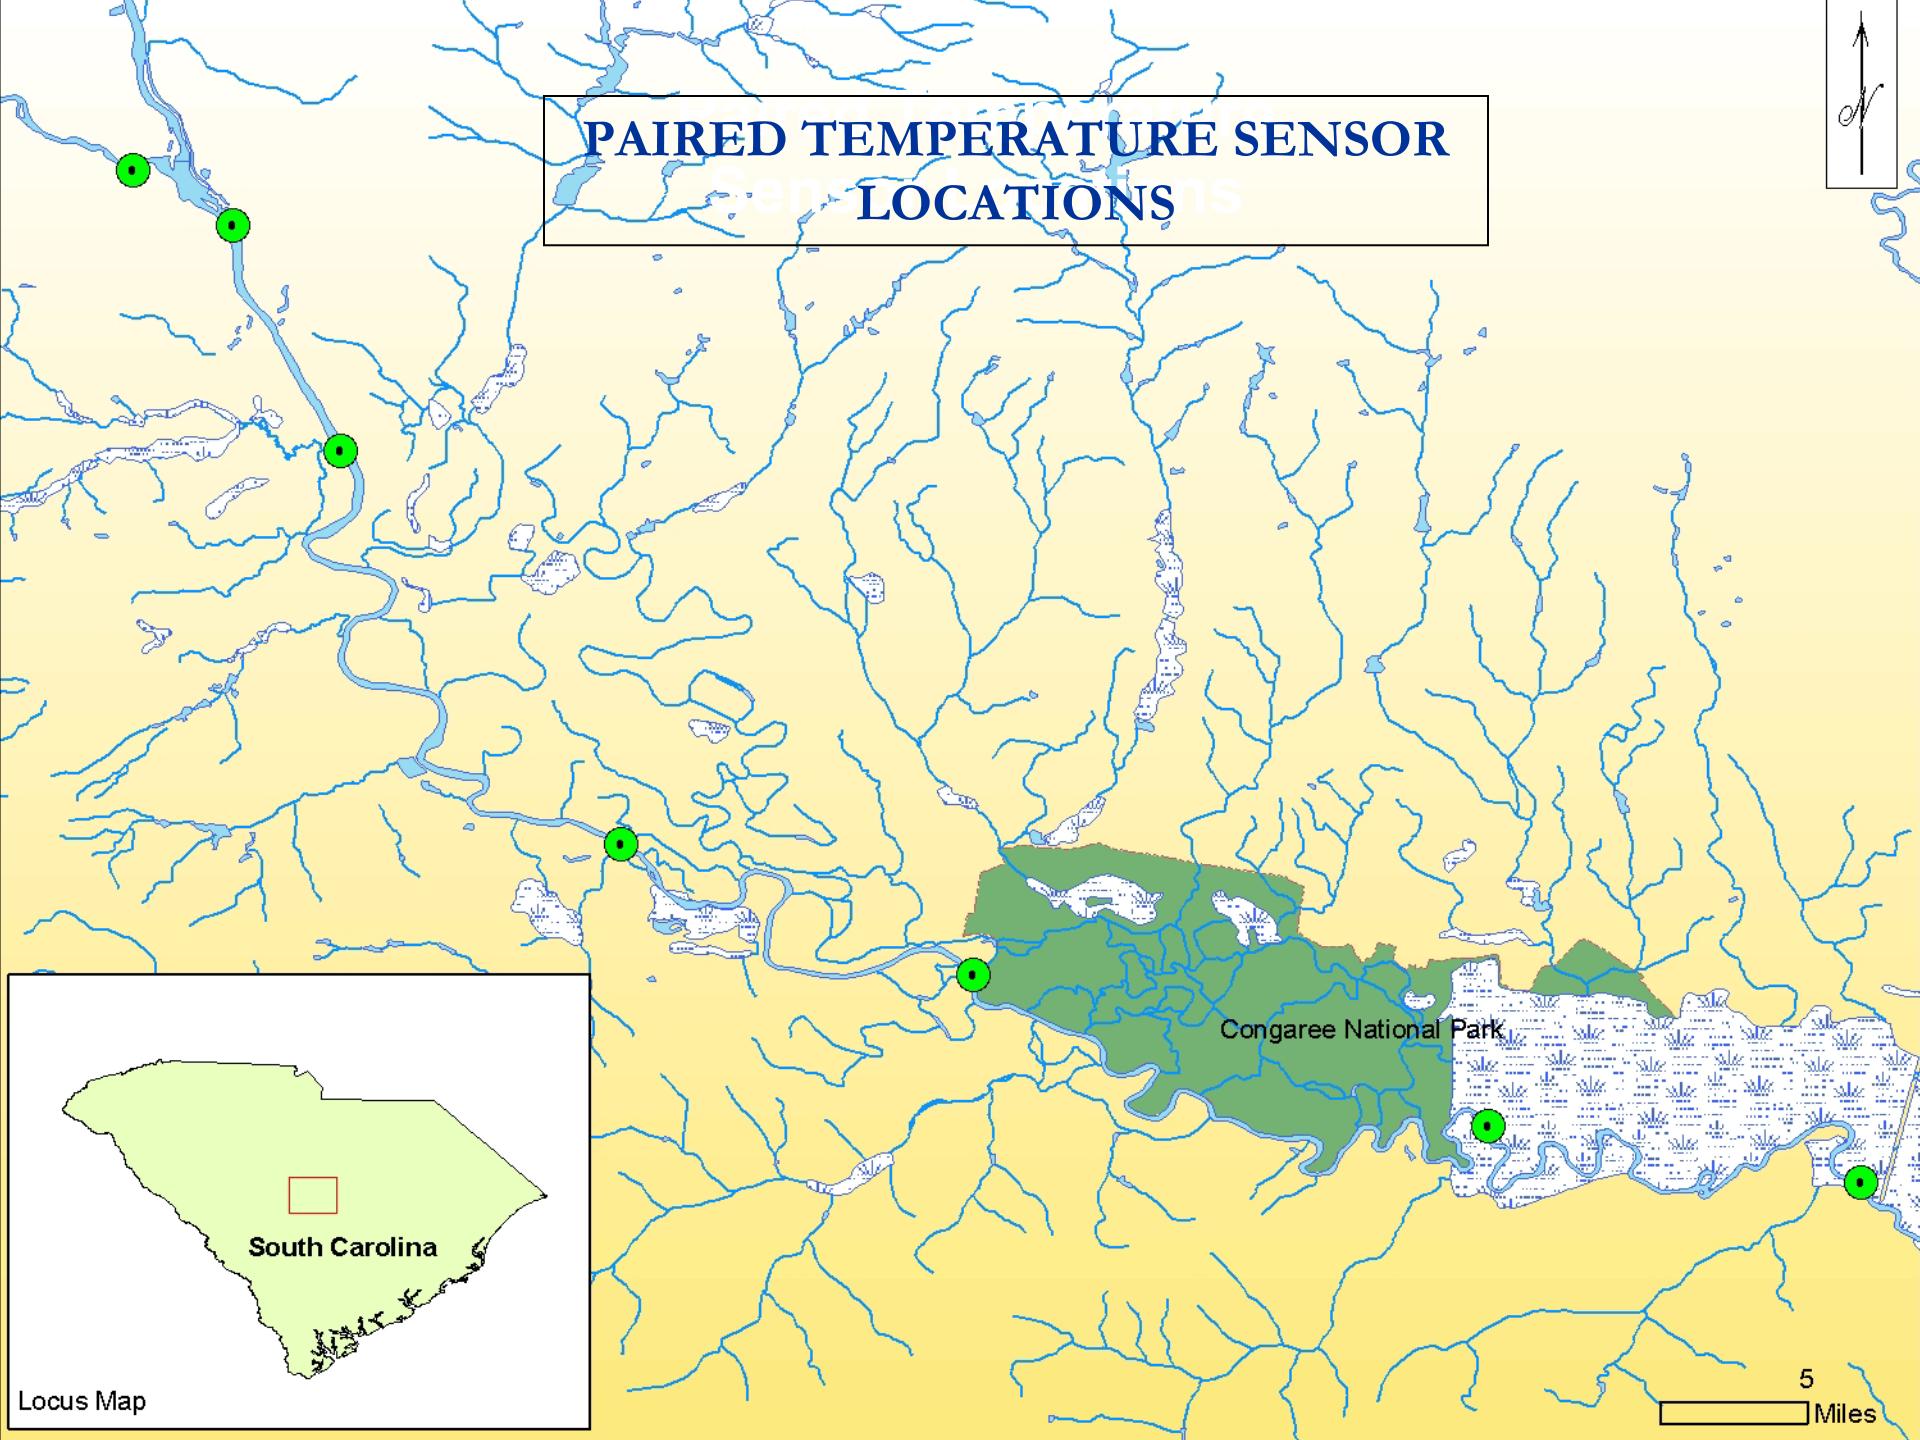


South Carolina

Locus Map


5

Miles


Lower Saluda Downstream of Zoo

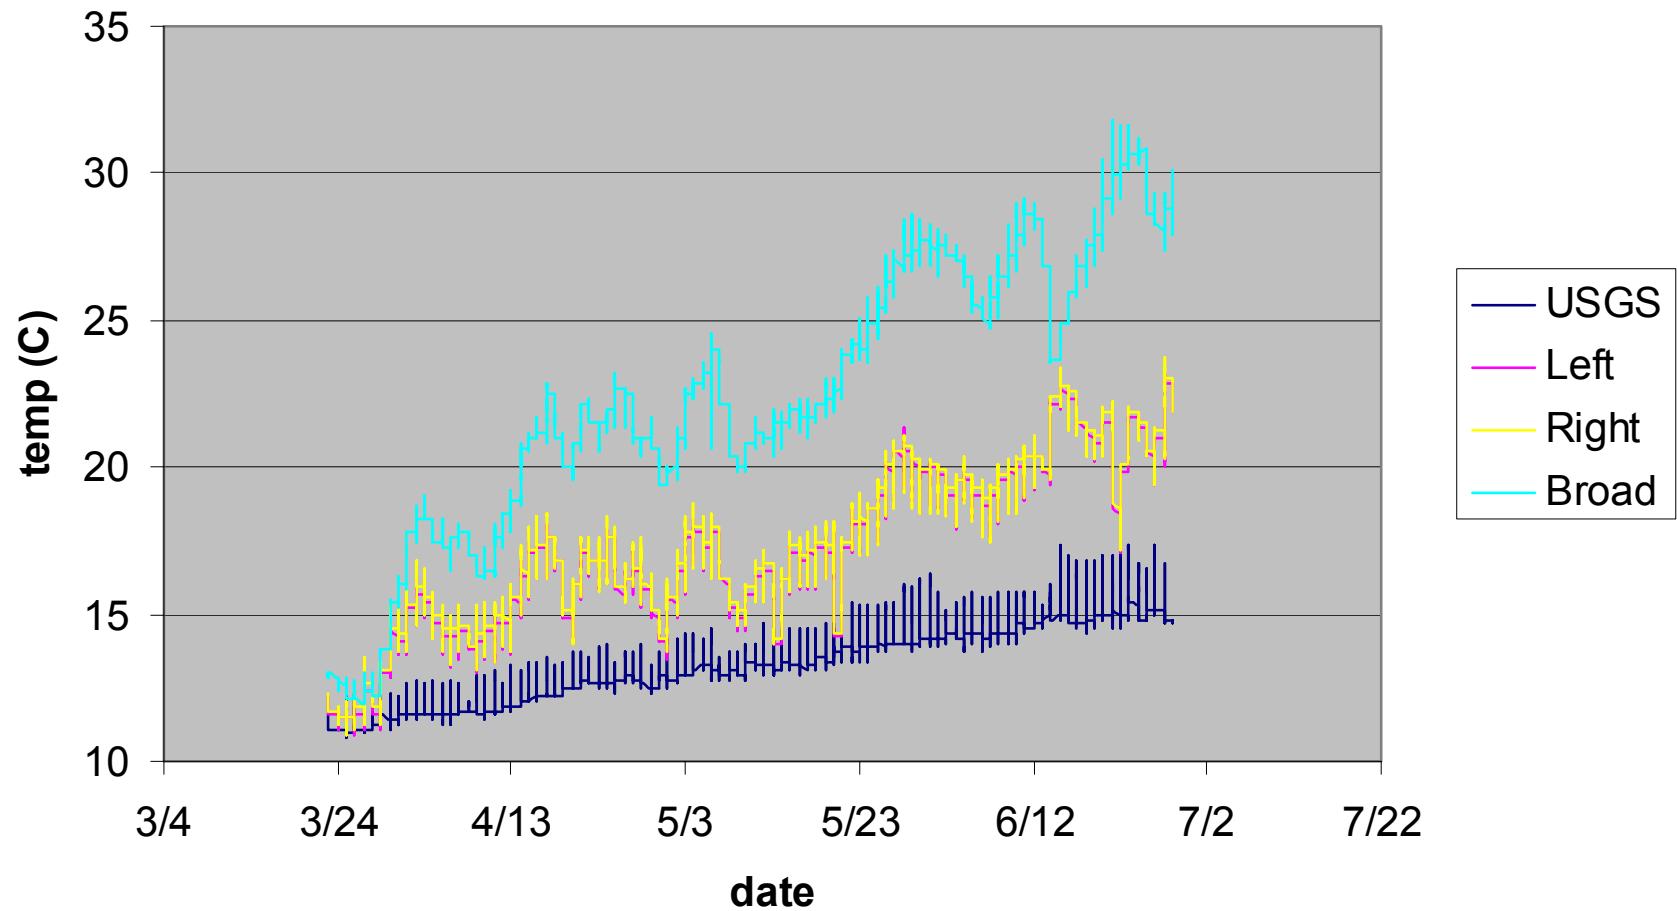


Congaree at Gervais St

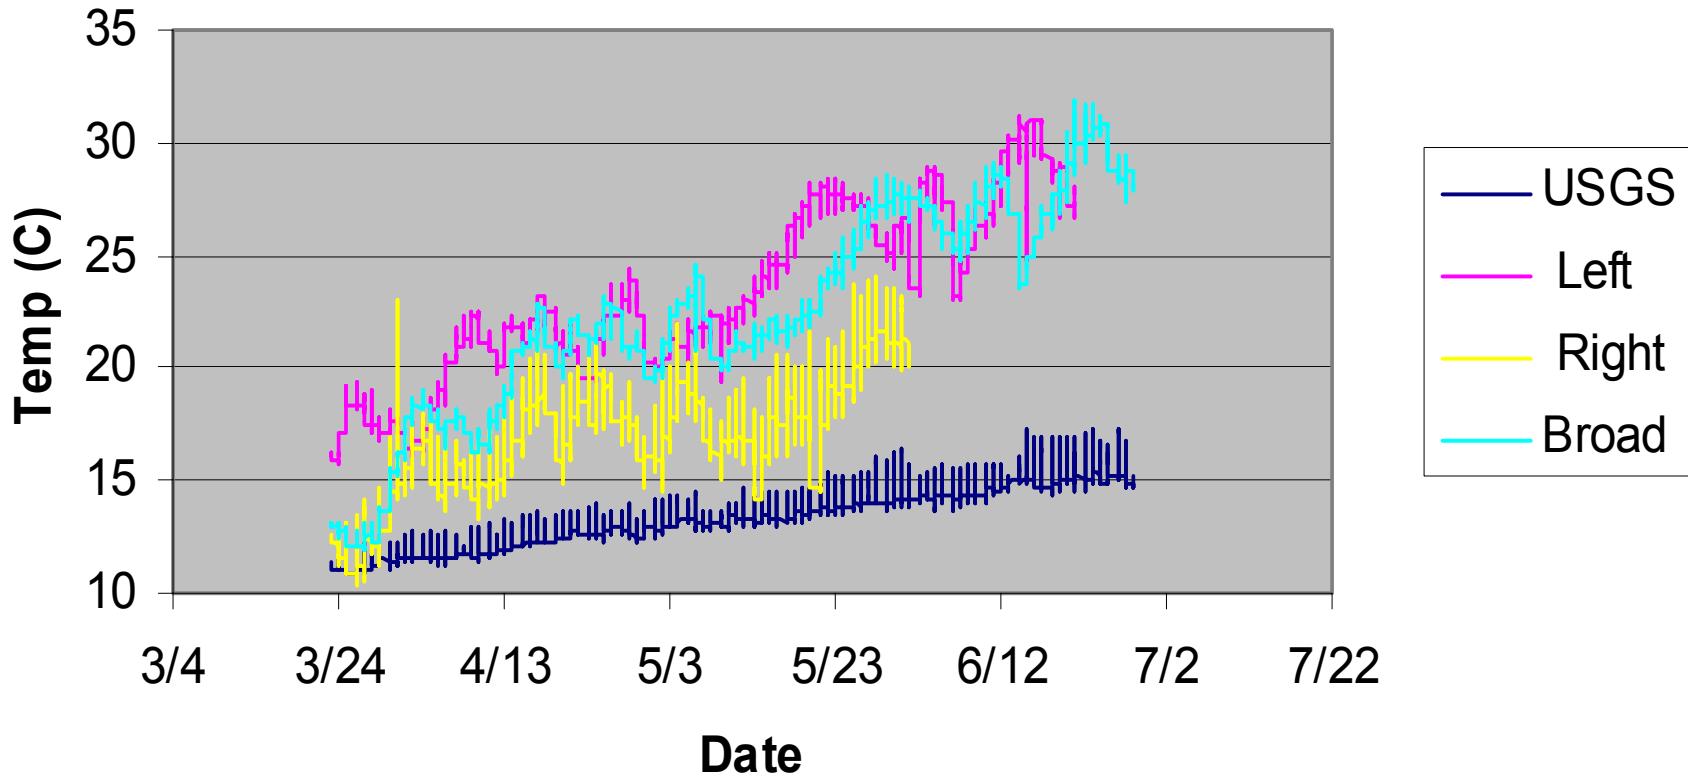


Congaree at I-77

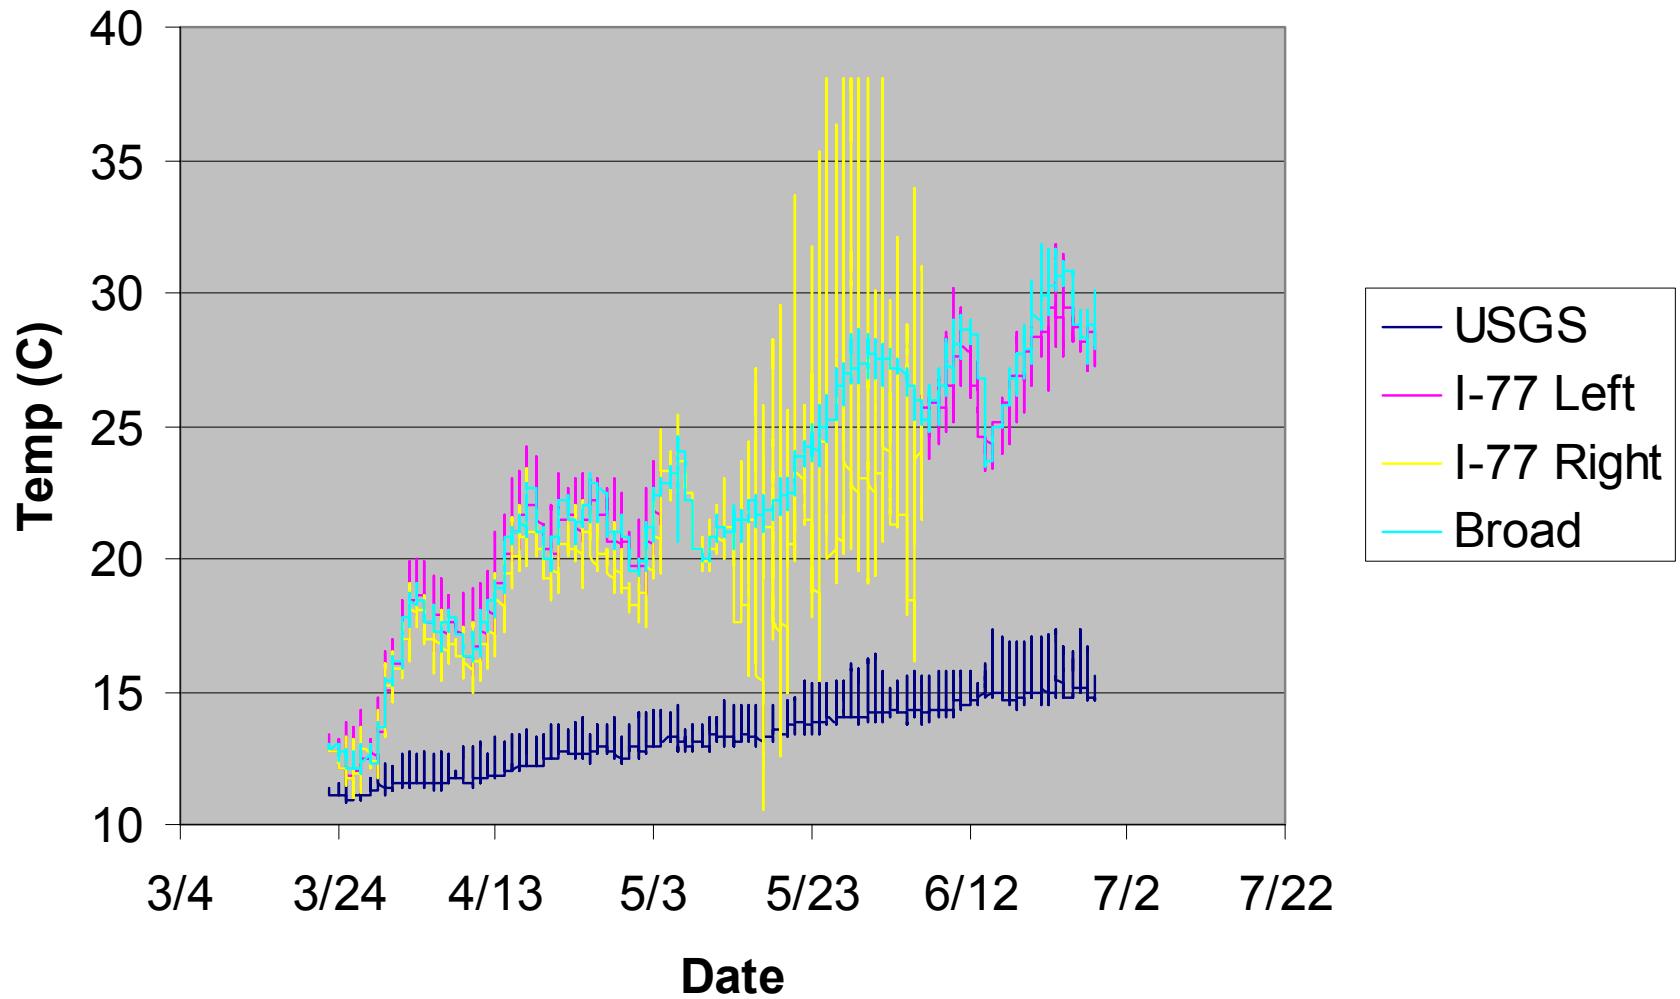


Between I-77 and CNP

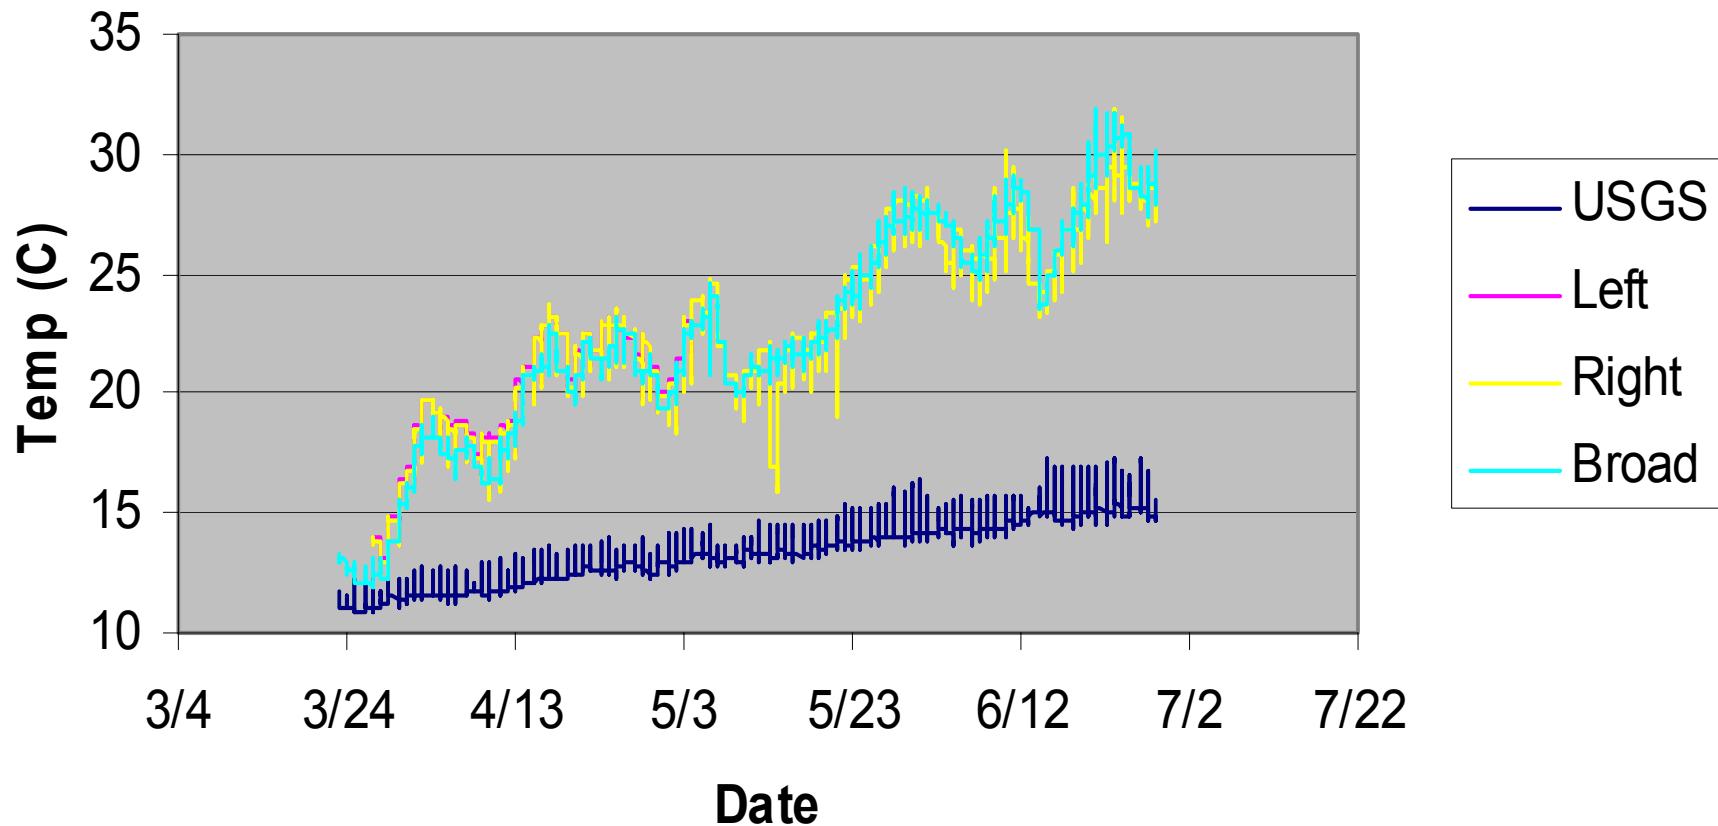


CNP - Upstream

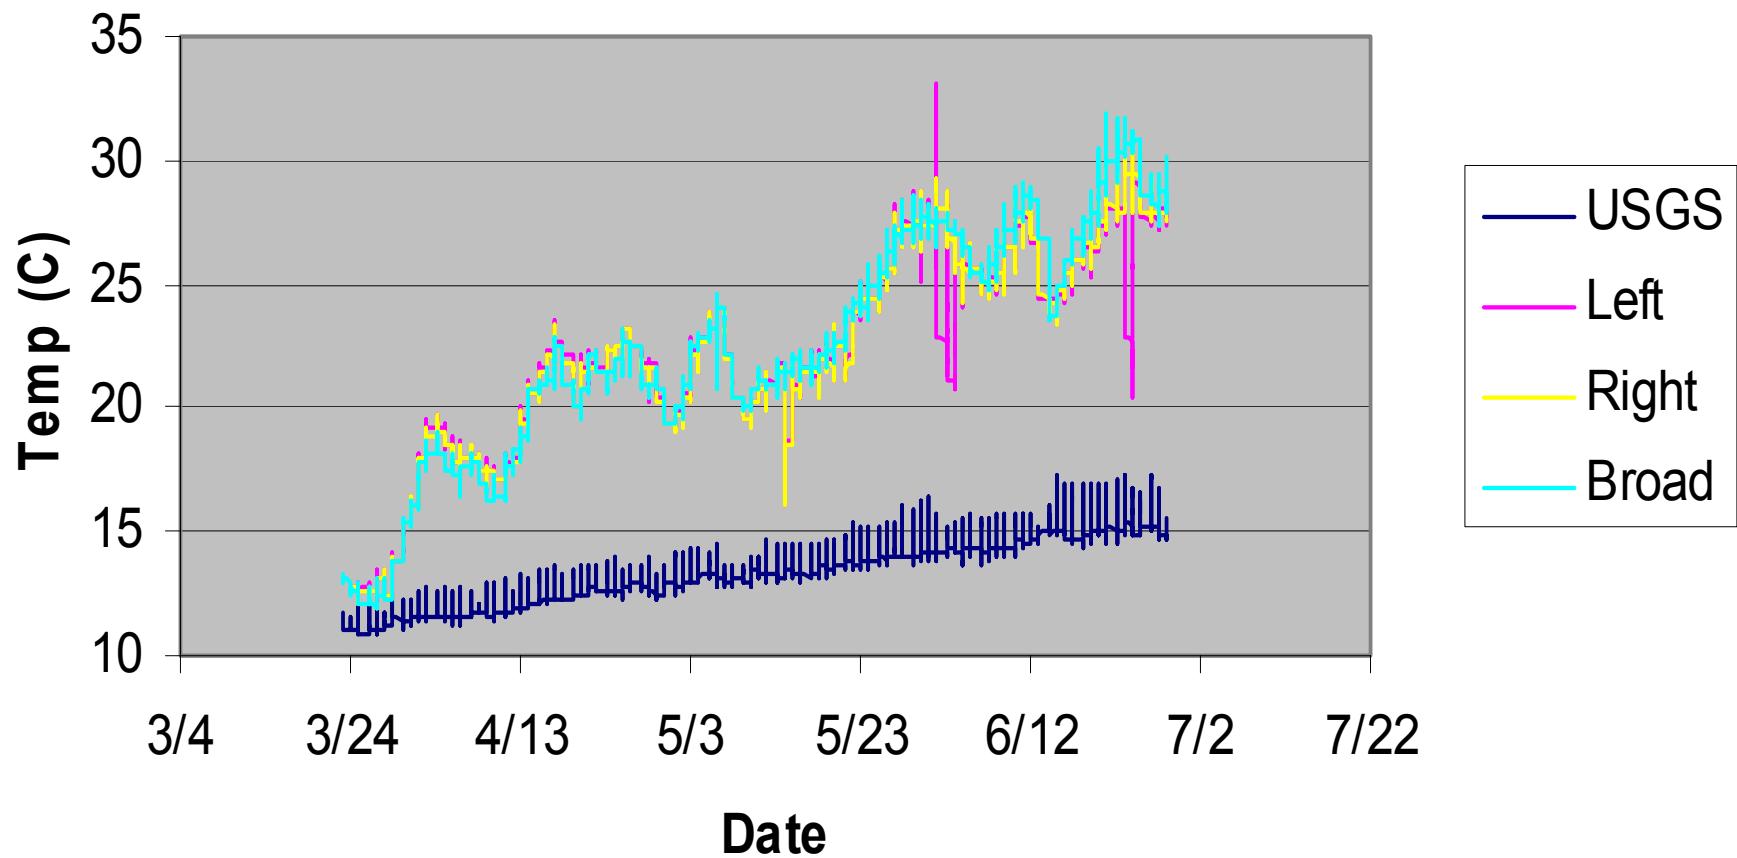

CNP - Midstream

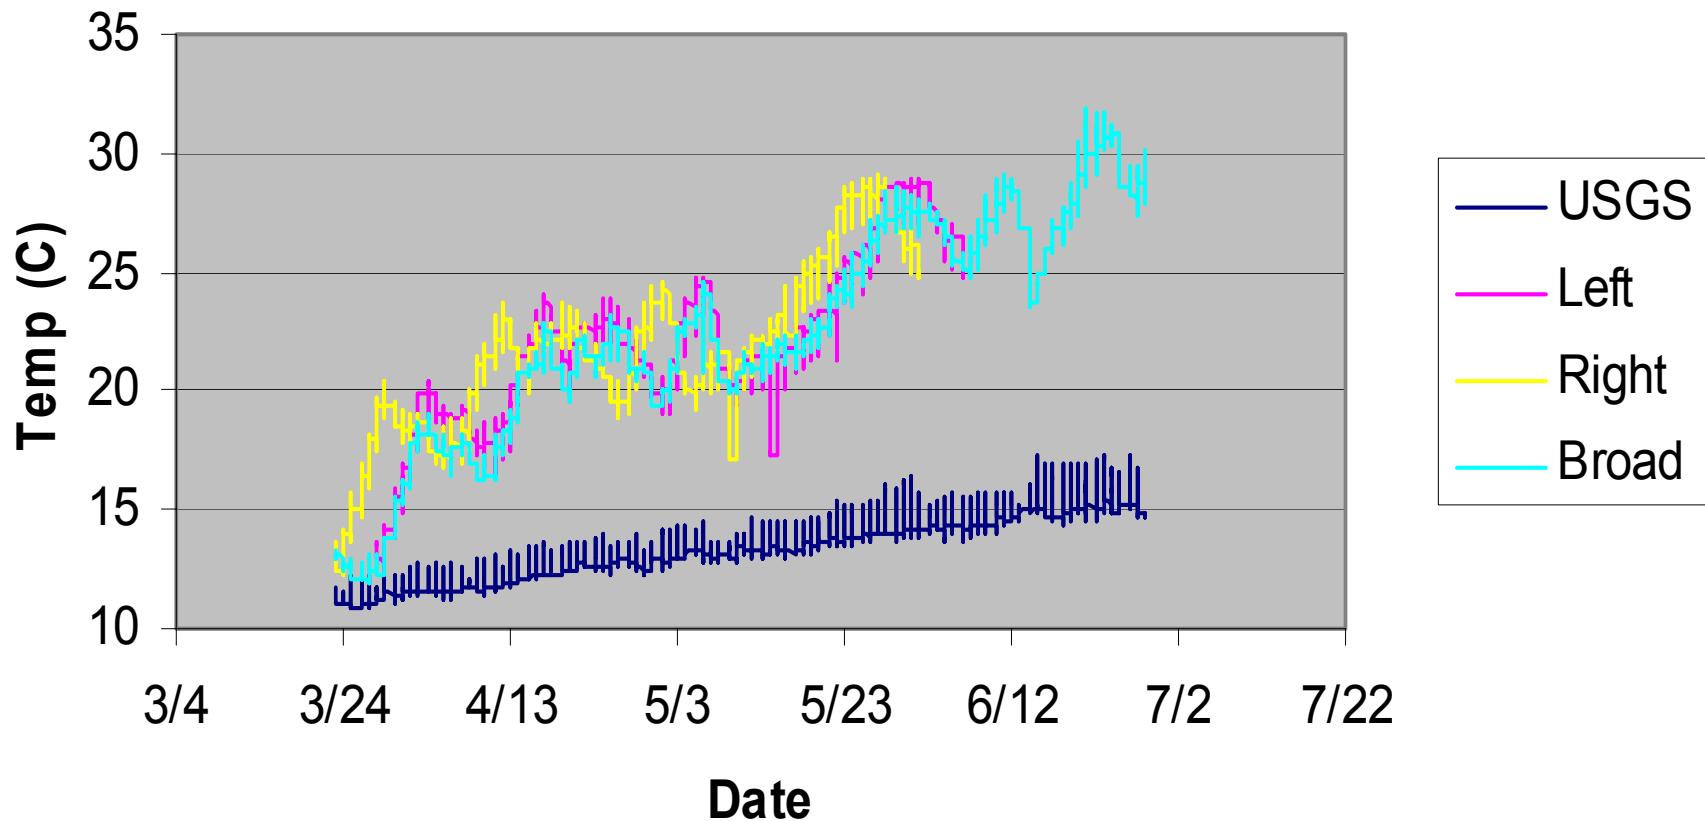

CNP - Downstream

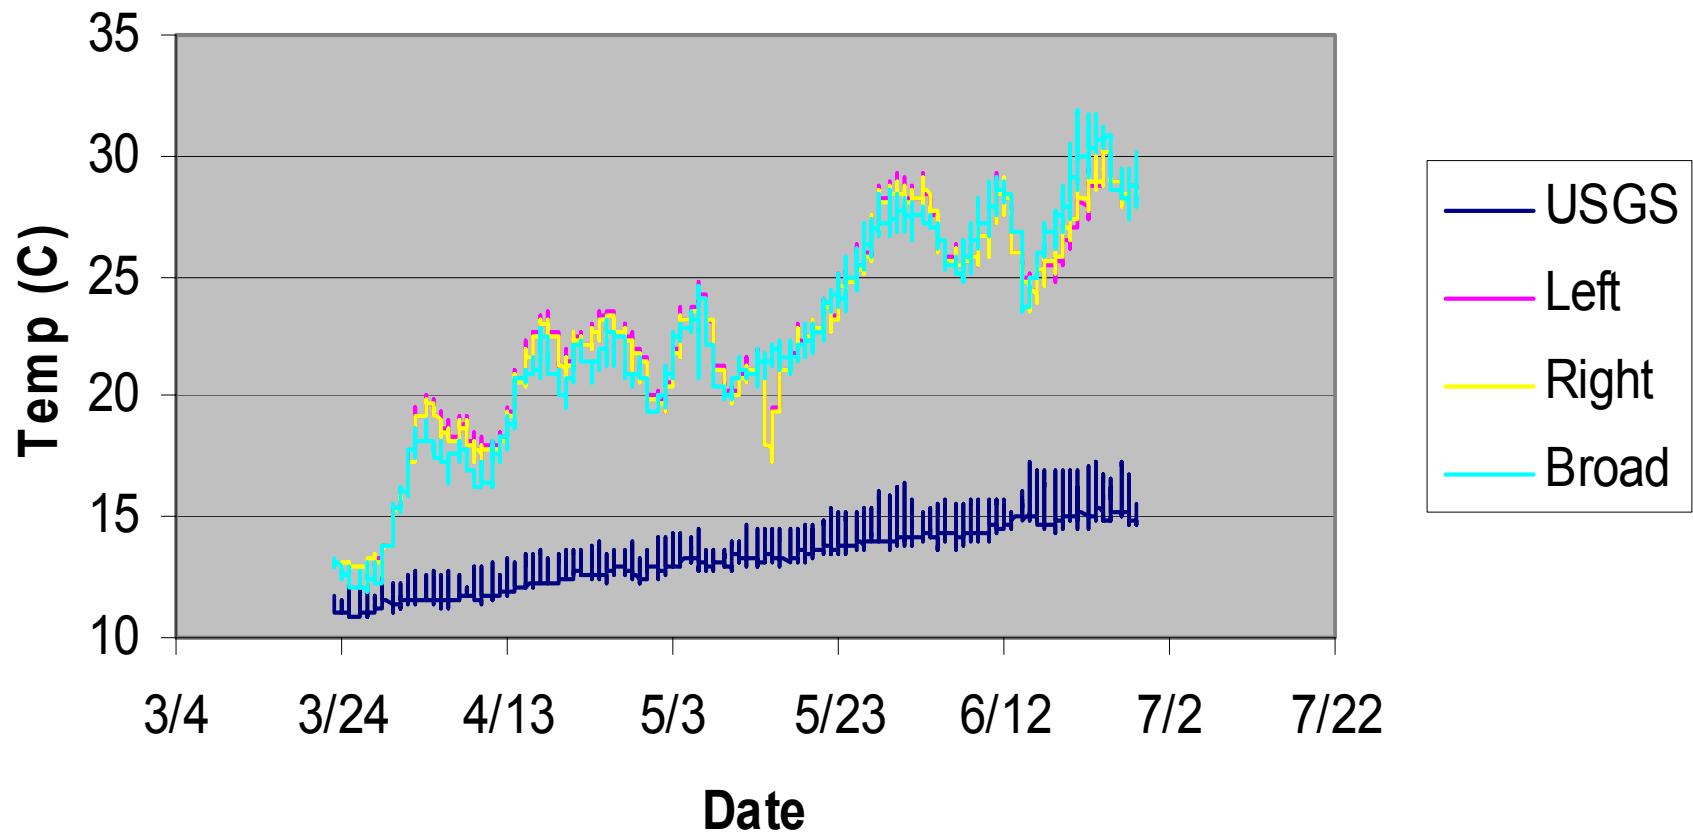

Conclusions

- Congaree and Broad diverge from Saluda in early April
- Cross-sectional temperatures vary below confluence
- To date, data suggests that influence extends at least to I-77 Bridge

Challenges

- Vandalism / Theft
- Breakoffs (corrosion / snags / high flows)
- Inaccessibility of instruments due to high flows

Future Needs

- Gather additional data through October 2007
- Evaluate temperature impacts under varying flow conditions (i.e. varying inflows/operations, normal precipitation)
- Appropriate statistical analysis methods
 - missing values
 - How to deal with errors (i.e. due disturbance of probe, etc.)

LMA WATER QUALITY MONITORING PROGRAM

- Began planning process in early January 06
- Met with DHEC Jan. 18 to discuss & get ideas for formulating plan.
- Initially plans were to focus on monitoring for fecal coliform and total phosphorus in coves.
- Five different cove types were identified for monitoring.
- Nine coves are currently being monitored on a monthly basis.

COVE TYPES

- TYPE I: Densely populated cove on septic/drain fields.
- TYPE II: Reference cove undeveloped and sparsely populated.
- TYPE III: Cove with marina(s)
- TYPE IV: Agricultural watershed drains into cove.
- TYPE V: Cove targeted for multi unit housing with accompanying docks/marina.

SAMPLE COLLECTION


- LMA representative accompanied DHEC when they were collecting water samples to observe and learn from their sample collecting techniques.
- LMA developed a protocol for collecting water samples.
- Samples are placed on ice when collected & transported to the lab. within 6 hours of collection.
- Chain-of-custody forms are carefully filled out and go with the samples to the laboratory.
- Sample collection logs are maintained for each collection site.
- Samples are analyzed by Data Resources Inc., a DHEC certified laboratory.
- We maintain frequent contact with DHEC and share our results with them.

FECAL COLIFORM

COVES	May 30	June 26	July 27
LMA 0101	BDL	8	25
LMA 0102	2 est.	23	BDL
LMA 0103	4 est.	133	10
LMA 0104	7	14 est.	4 est.
LMA 0201	BDL	Not Sampled	Not Sampled
LMA 0301	BDL	40	23
LMA 0302	38	4 est.	10
LMA 0401	10 est.	5	5
LMA 0501	7	4 est.	40

BDL = Below Detectable Level

FECAL COLIFORM

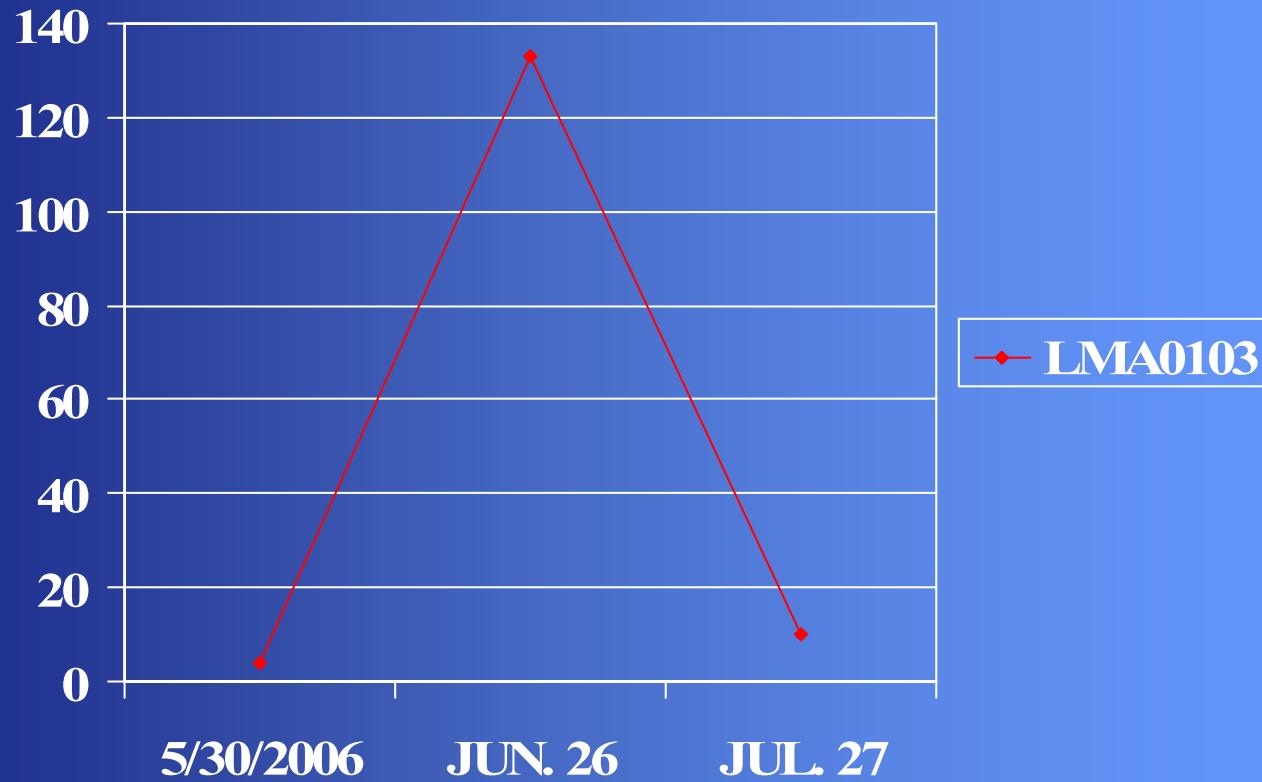



TOTAL PHOSPHORUS mg/l

COVES	May 30	June 26	July 27
LMA 0101	BDL	BDL	0.53
LMA 0102	BDL	BDL	0.11
LMA 0103	BDL	BDL	0.05
LMA 0104	BDL	BDL	0.15
LMA 0201	BDL	Not Sampled	Not Sampled
LMA 0302	BDL	BDL	0.10
LMA 0301	BDL	BDL	0.47
LMA 0401	BDL	0.14	0.10
LMA 0501	BDL	BDL	0.07

BDL = Below Detectable Level

DISSOLVED OXYGEN

- Nothing brings more concern about water quality than fish kills.
- Summer/late summer fish kills are often the result of insufficient dissolved oxygen.
- There is good documentation that high phosphorus levels contribute to low dissolved oxygen levels.
- Phosphorus contributes to algae growth.
- In deep water algae die and decompose lowering oxygen levels.

LAKE ERIE PHOSPHORUS/DO RELATIONSHIPS

1 “In general, less phosphorus in the water in the spring will result in fewer algae growing, which in turn means less organic matter to decompose. Less decomposition activity would take less dissolved oxygen from the water. As a result of phosphorus control programs, we could expect that the severity of oxygen depletion, the duration of the minimum oxygen levels and the amount of the Central Basin area affected would all be reduced.”

LMA's DESIRE IS TO LOWER POLLUTANTS COMING INTO THE LAKE

- Identify most prominent entry points and contributors to **ABOVE STANDARD** phosphorus levels.
- Educate home owners on proper lawn fertilization.
- In general, centipede lawns do not need phosphorus.
- Educate home owners on the need to establish buffer zones between the lake and maintained landscape.

LMA NEEDS TO EXPAND OUR WATER QUALITY MONITORING PROGRAM

- We will begin monitoring for chlorophyll-a at all sample sites where phosphorus exceeds the freshwater standard of 0.06 mg/l.
- We would like to purchase 3 Eureka Multiprobes which will allow us to monitor for:
 - Temperature
 - Dissolved Oxygen
 - PH
 - Conductivity
 - Depth

Water Quality Data Analysis and CE-QUAL-W2 Modeling for Lake Murray

Presented by Andy Sawyer and Jim Ruane

Reservoir Environmental Management, Inc

December 7, 2005


Overview of Presentation

- Review water quality data, especially for dominant constituents that affect water quality in Lake Murray and its releases
- Present the calibration of the CE-QUAL-W2 model that's used to simulate water quality in Lake Murray
- Illustrate use of the model to explore management strategies for improving water quality and uses of the lake


Preliminary Assessment of Historical Data through 1998


- This assessment was conducted in preparation for relicensing, using the available data at the time of the assessment in 2001
- Available data were organized using the DASLER software program
- Also, reports on water quality were reviewed: ERC report, prepared for relicensing in 1975; and DHEC reports in 1995 and 1998
- Some of the key findings will be presented in the first part of this presentation

Lake Murray Watershed

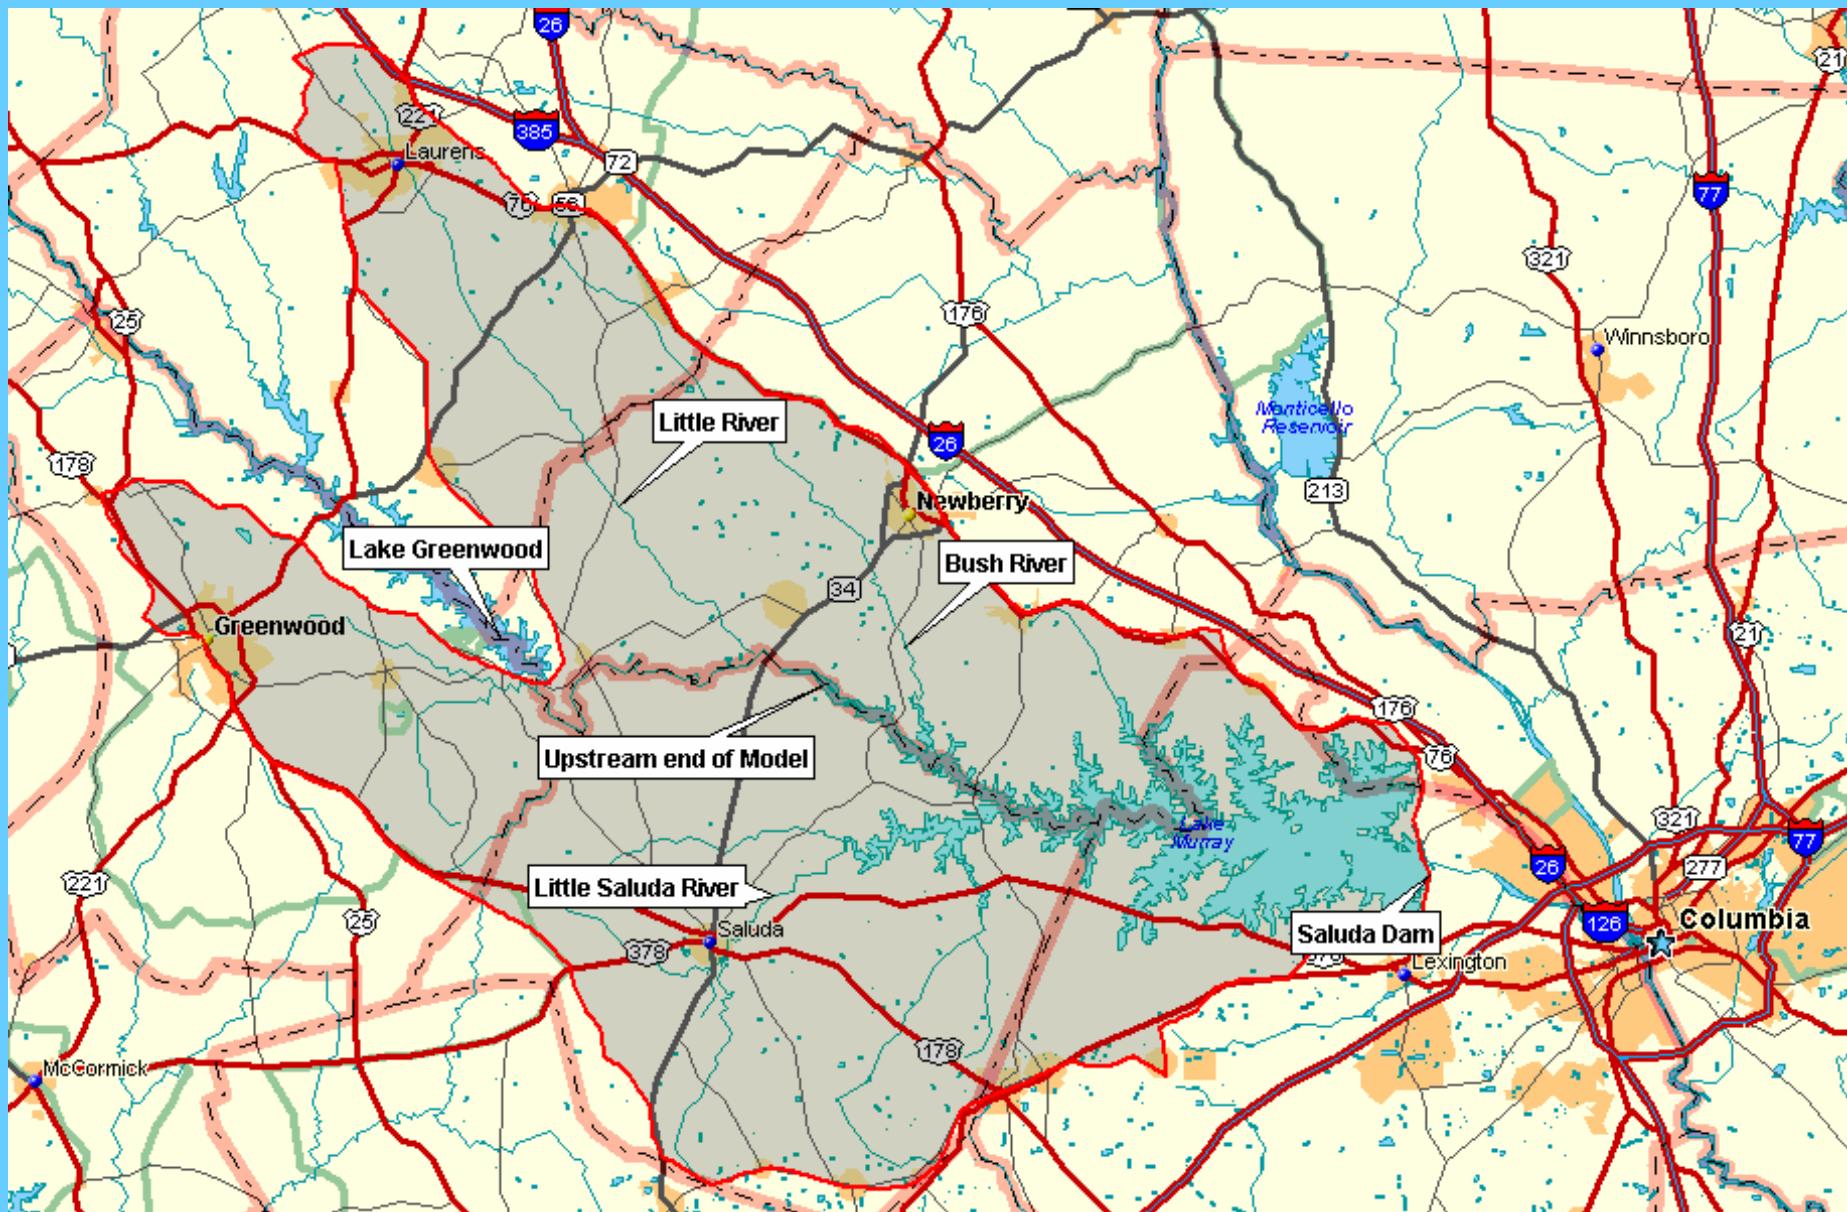

Primary SCDHEC and SCE&G Monitoring Stations used for Lake Murray Water Quality Analyses

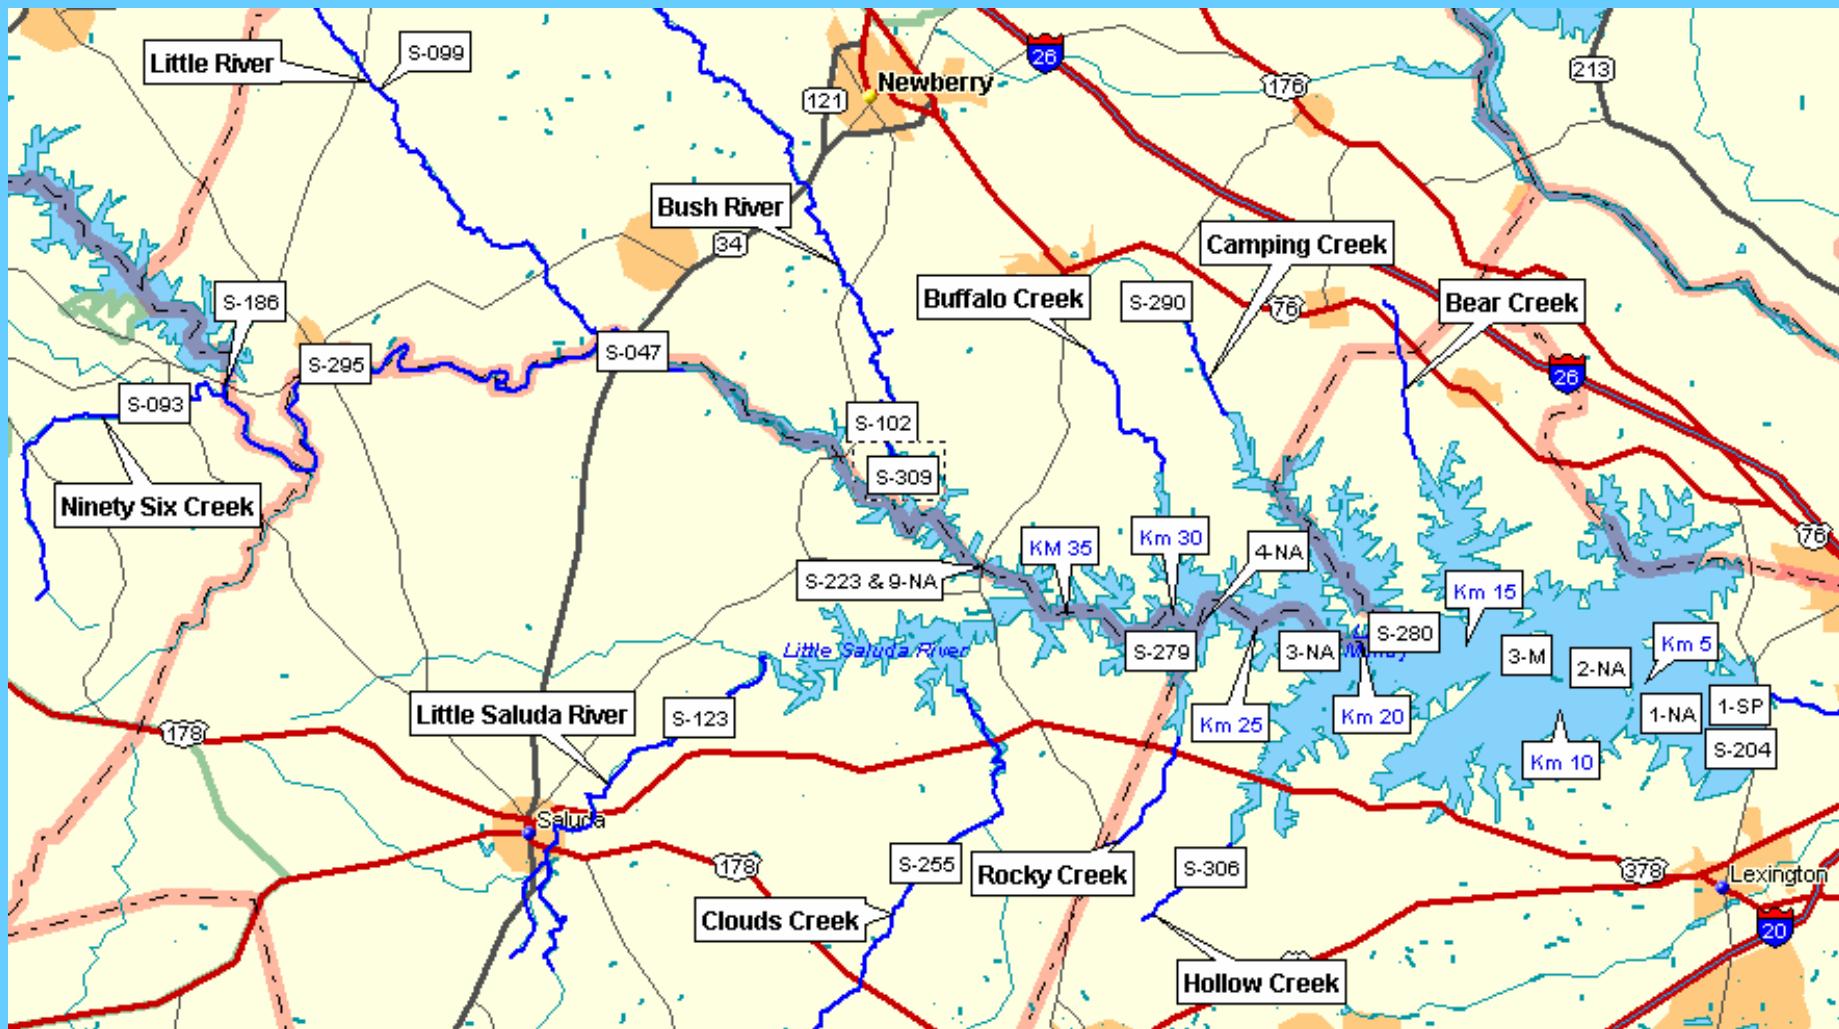


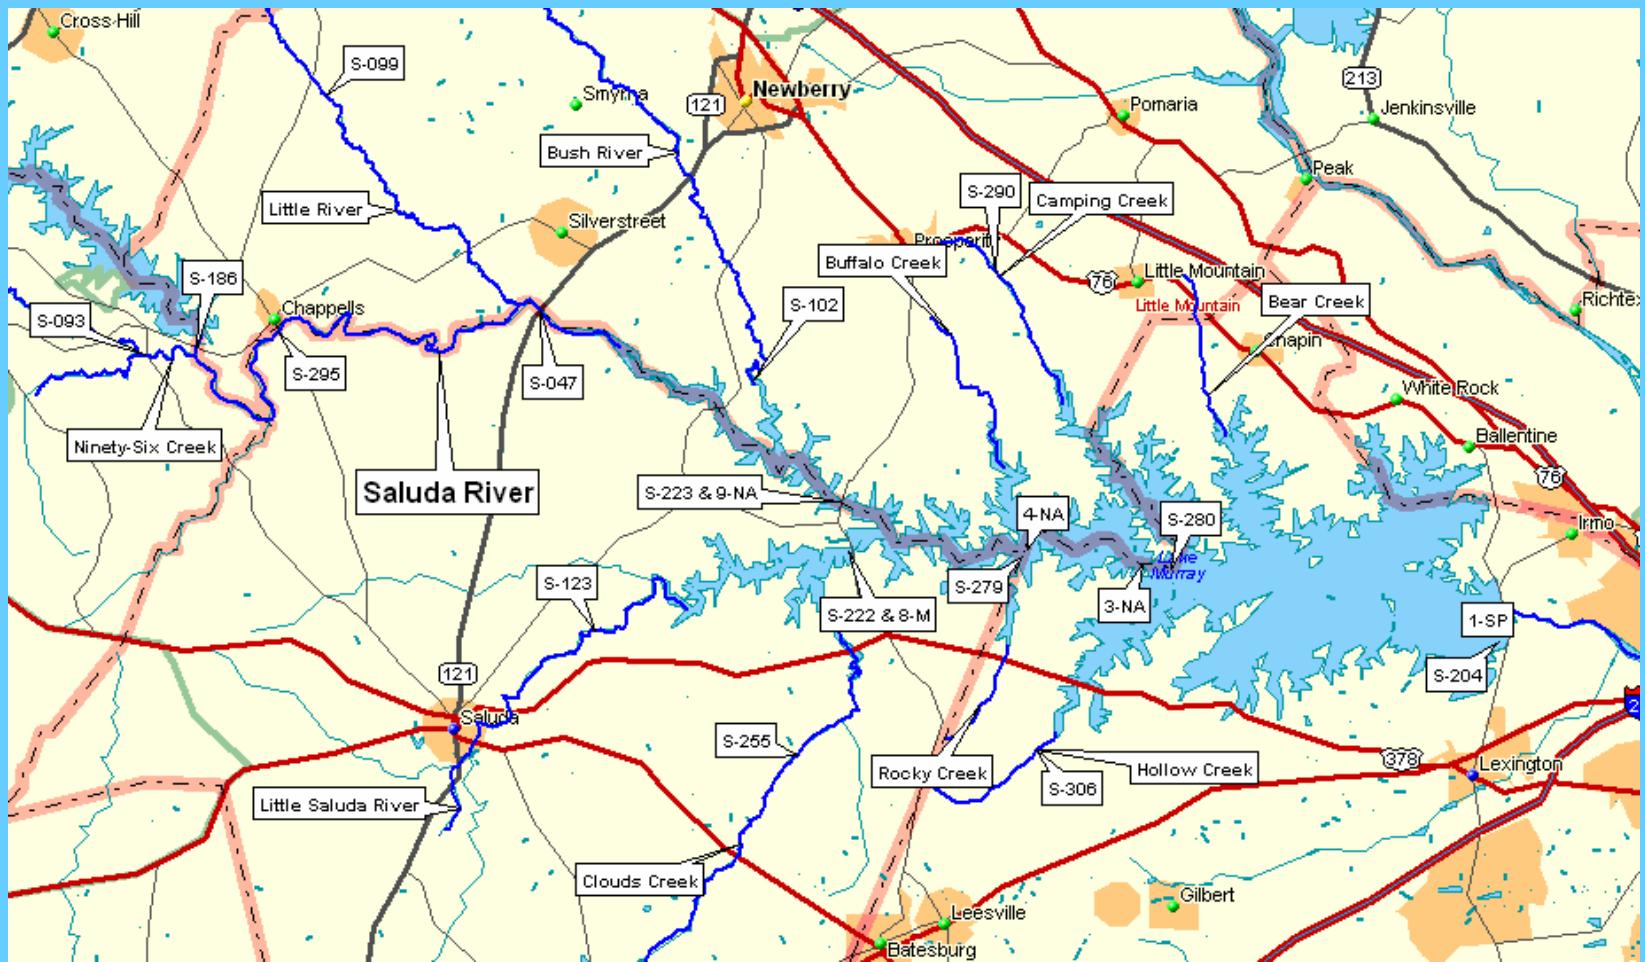


Stations with "S" prefix are SCDHEC monitoring stations

Others are SCE&G Monitoring Stations


Map of Lake Murray Watershed Showing Location of USGS Monitors

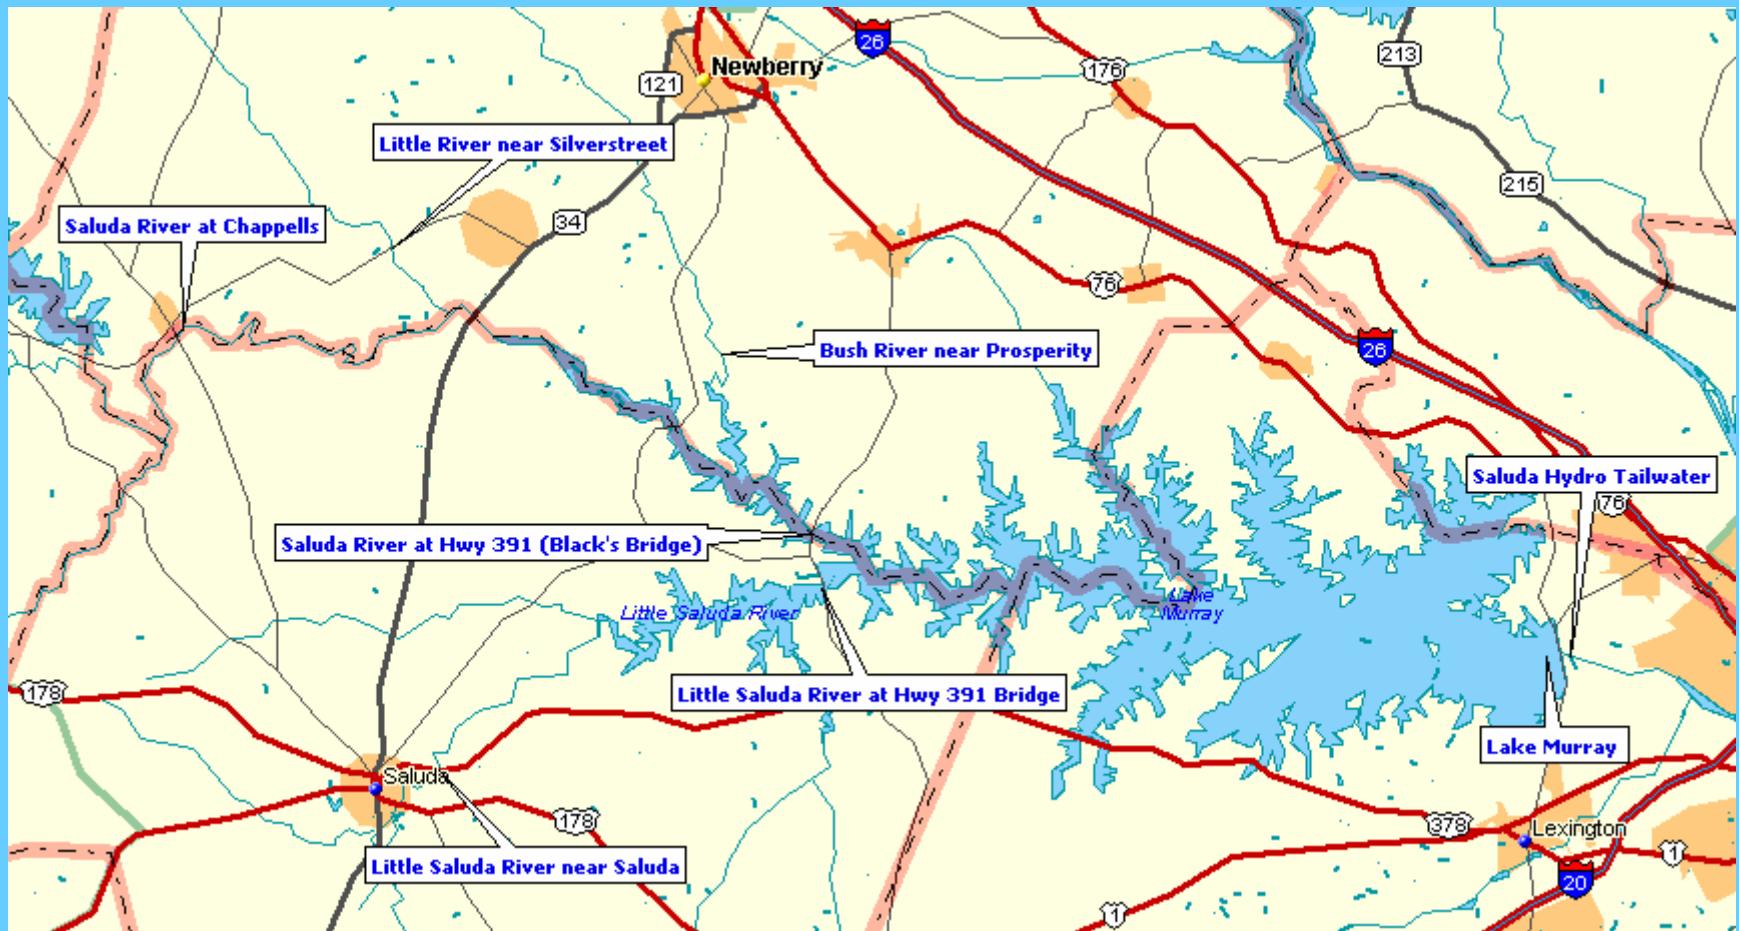


**Total Phosphorus (mg/l as P), collected at S-186
(Saluda River Below Greenwood Dam - 55.3 miles above Saluda Dam)**

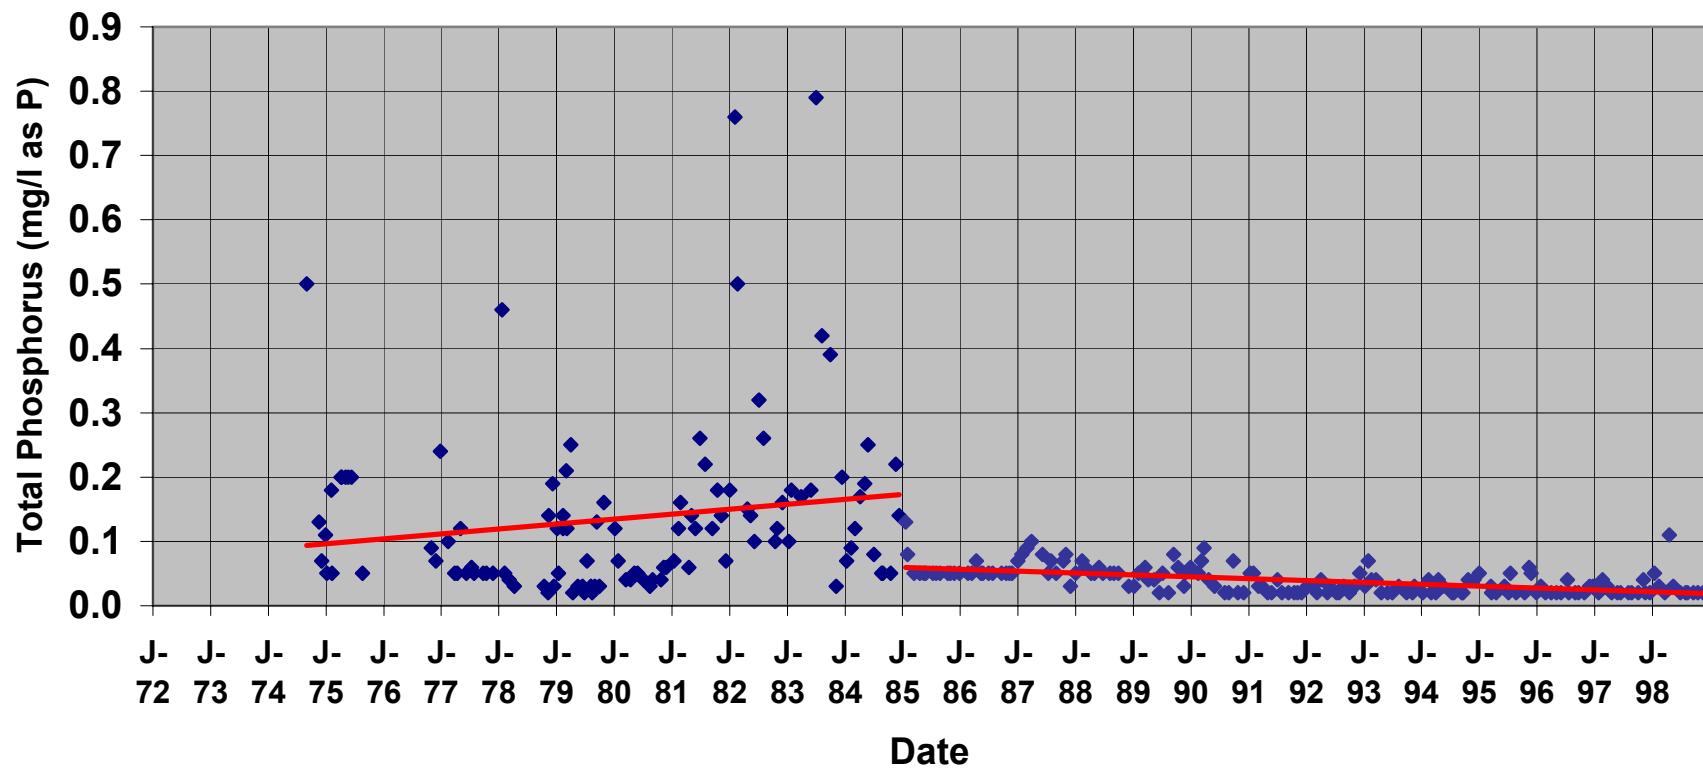


BOD, 5-Day (mg/l), collected at S-186
(Saluda River Below Greenwood Dam - 55.3 miles above Saluda Dam)

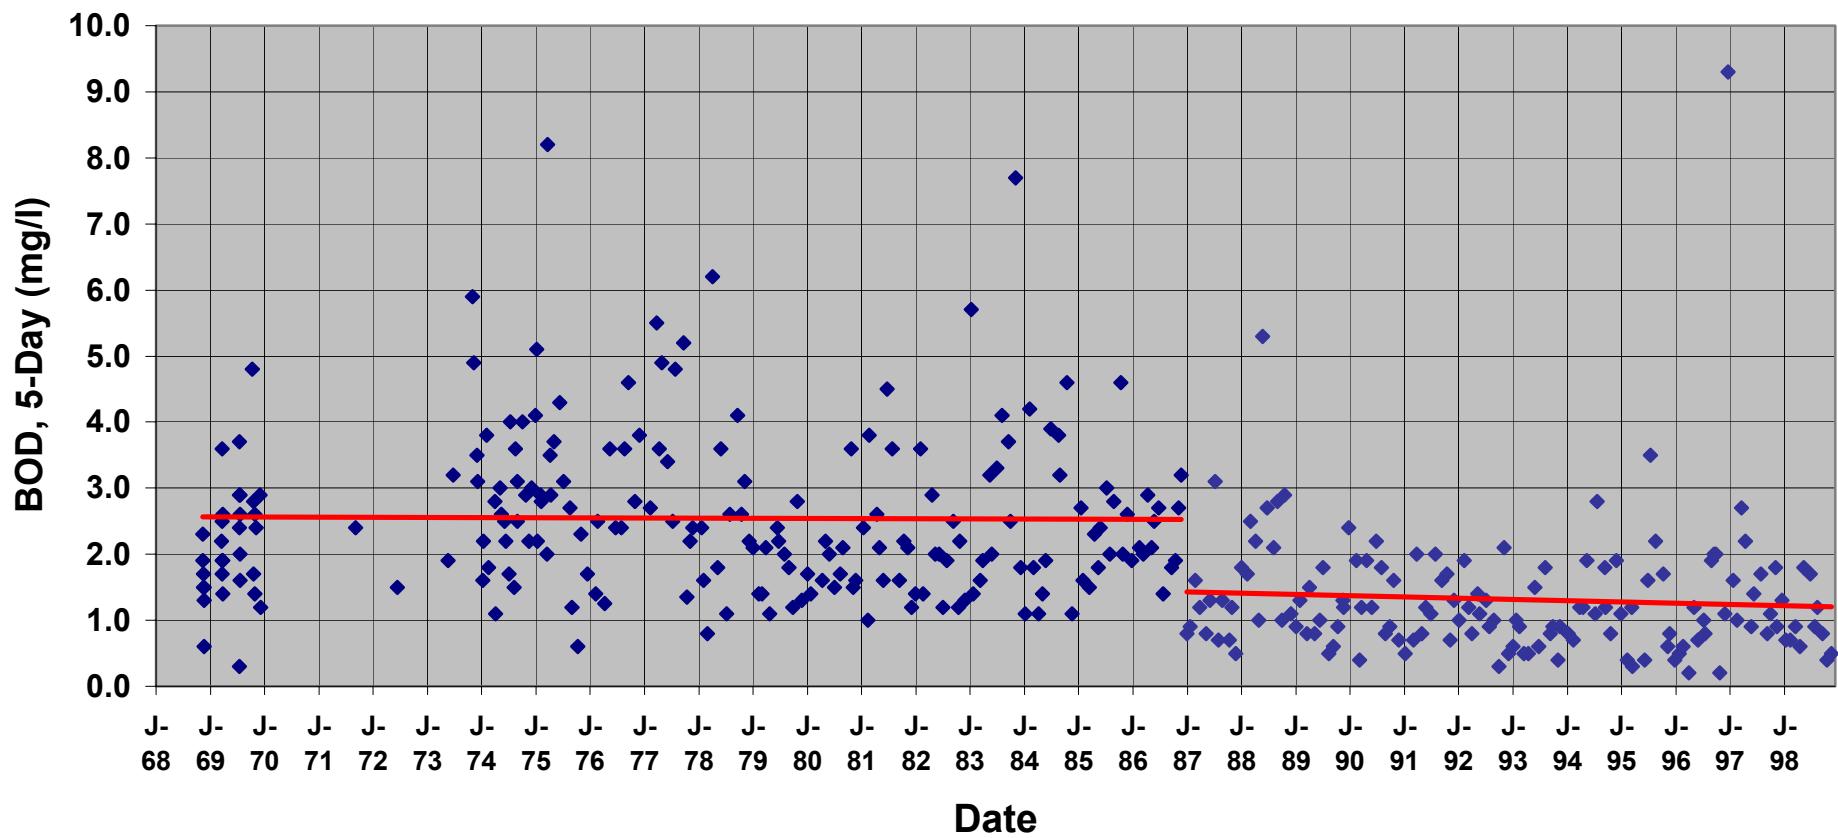


**Nitrate + Nitrite as N (mg/l), collected at S-186
(Saluda River Below Greenwood Dam - 55.3 miles above Saluda Dam)**

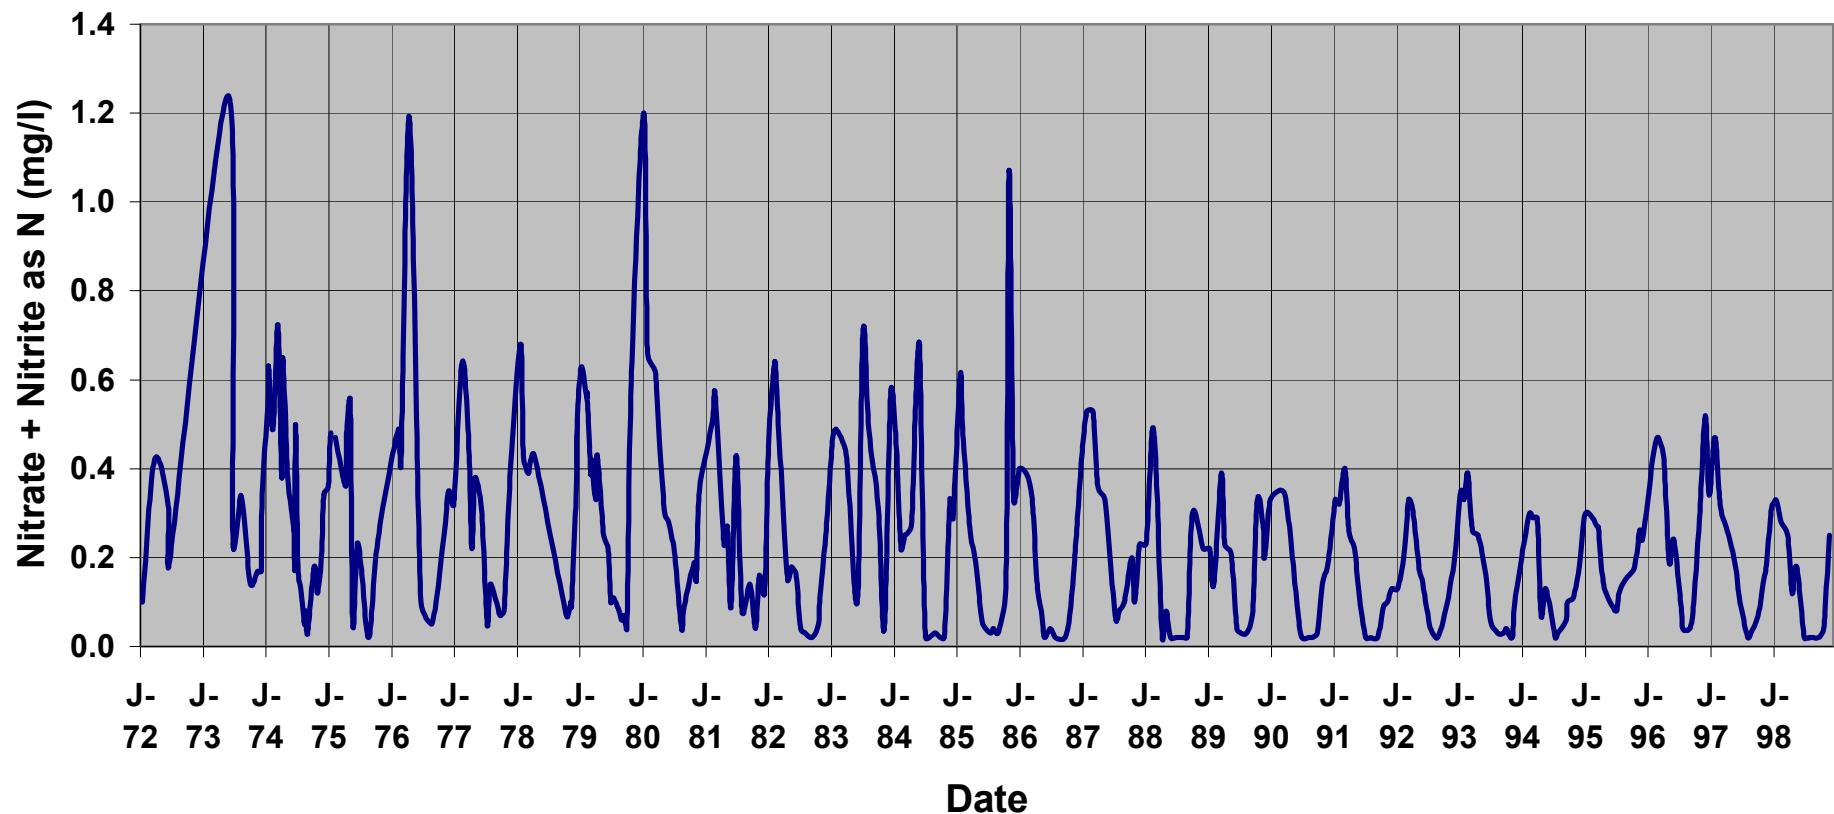


**Total Phosphorus (mg/l as P), collected at S-093, Summer Data Only
(Ninety-Six Creek-approx. 2 miles upstream of Saluda R.)**

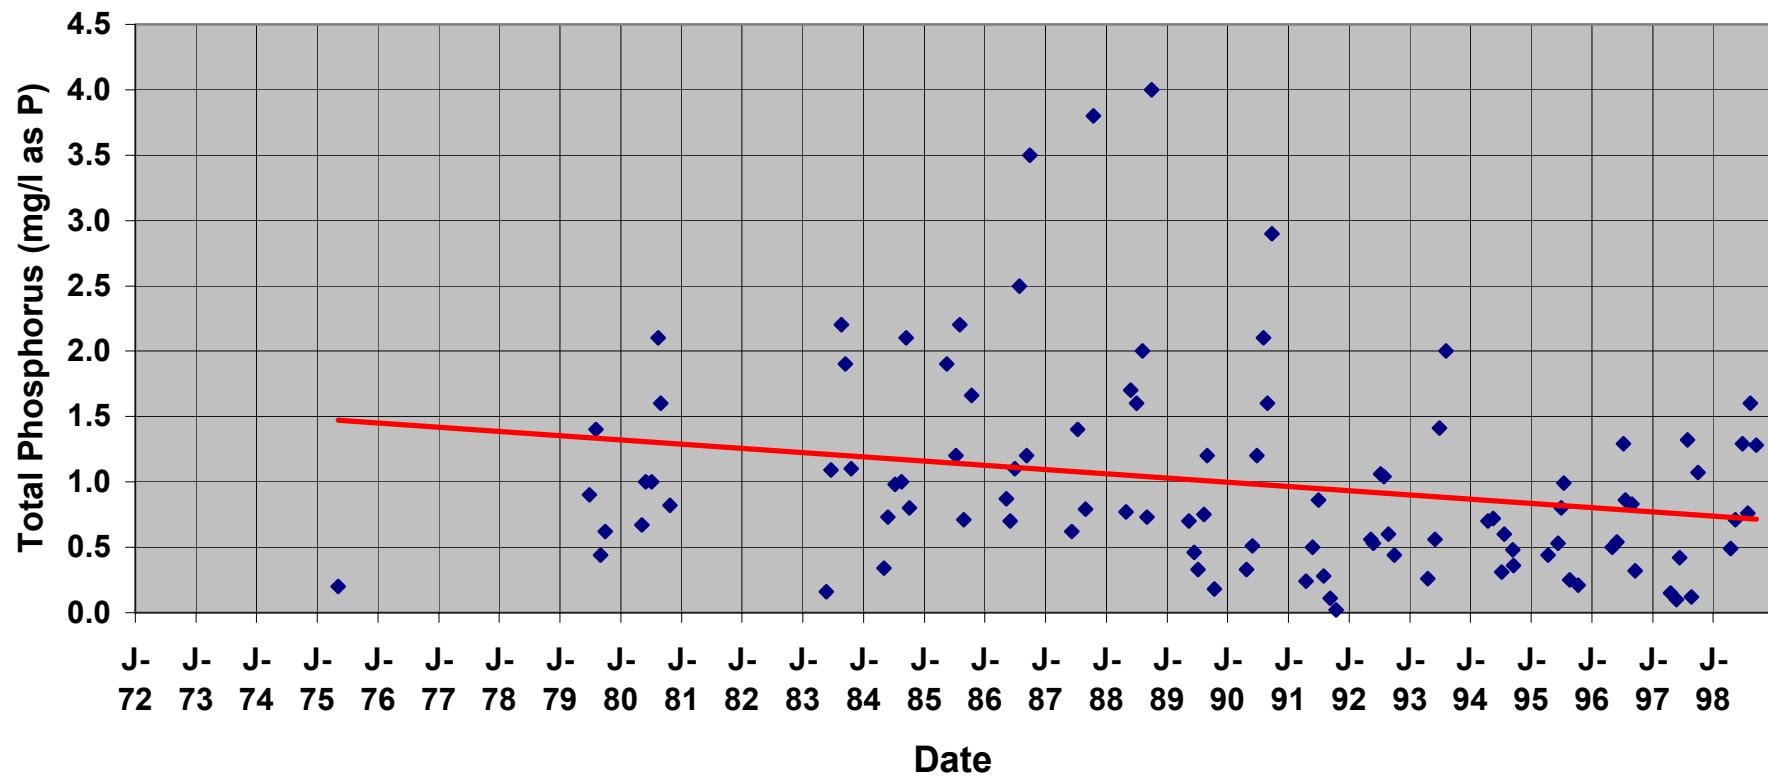


**Total Phosphorus (mg/l as P), collected at S-295
(Saluda River - 48.4 miles above Saluda Dam)**

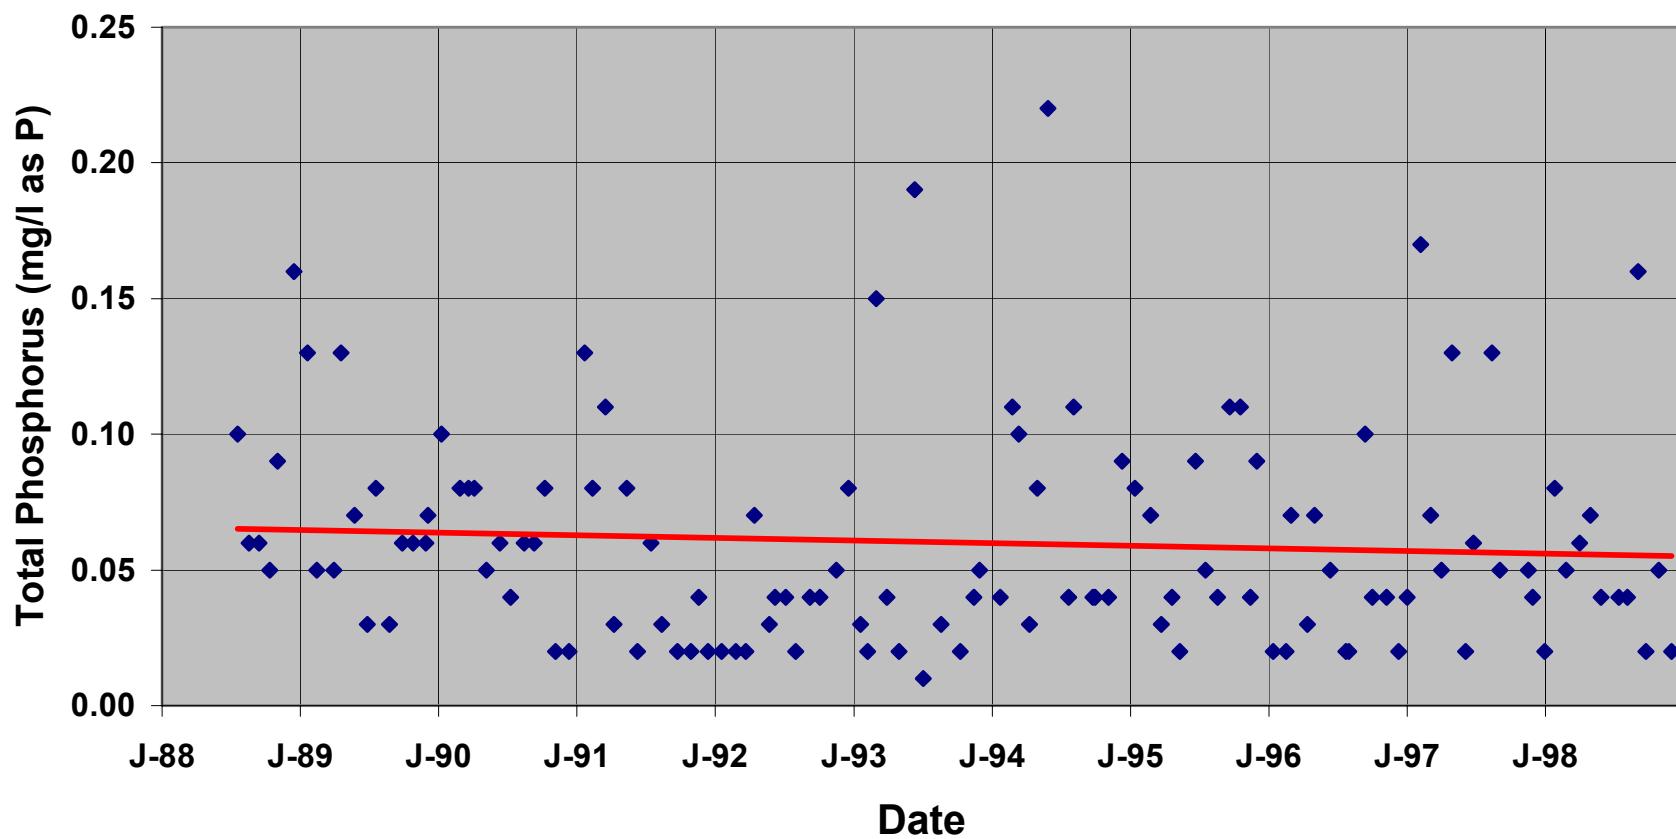


**Total Phosphorus (mg/l as P), collected at S-102, Summer Data Only
(Bush River, 3.5 miles upstream from Saluda River)**

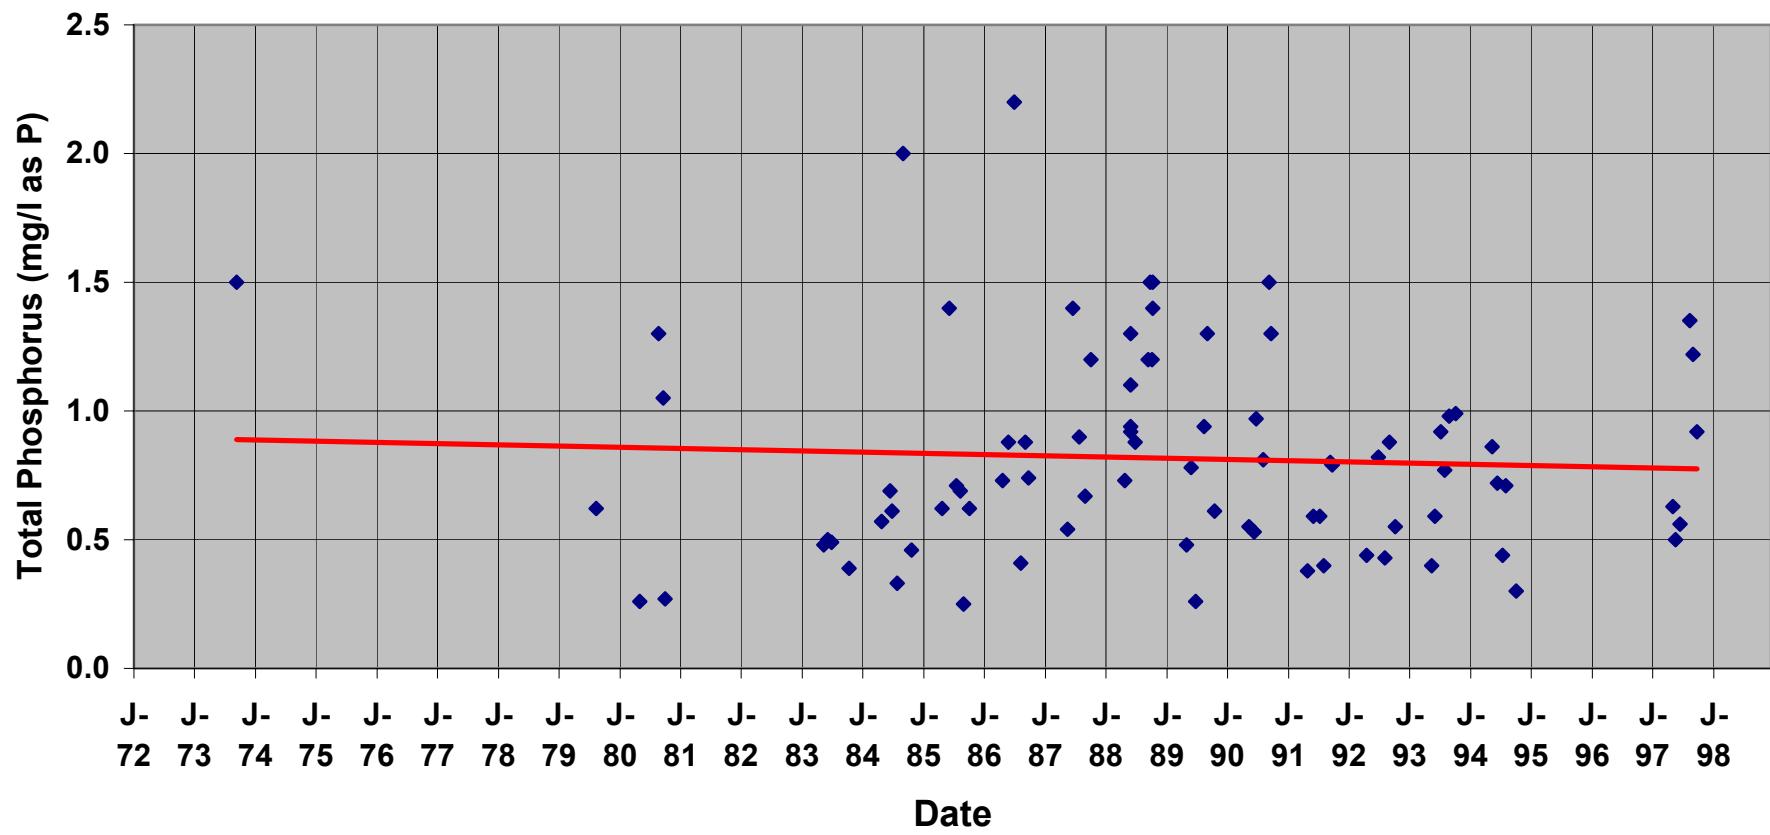


**Total Phosphorus (mg/l as P), collected at S-223
(Saluda River at Black's Bridge - 24.6 miles above Saluda Dam)**

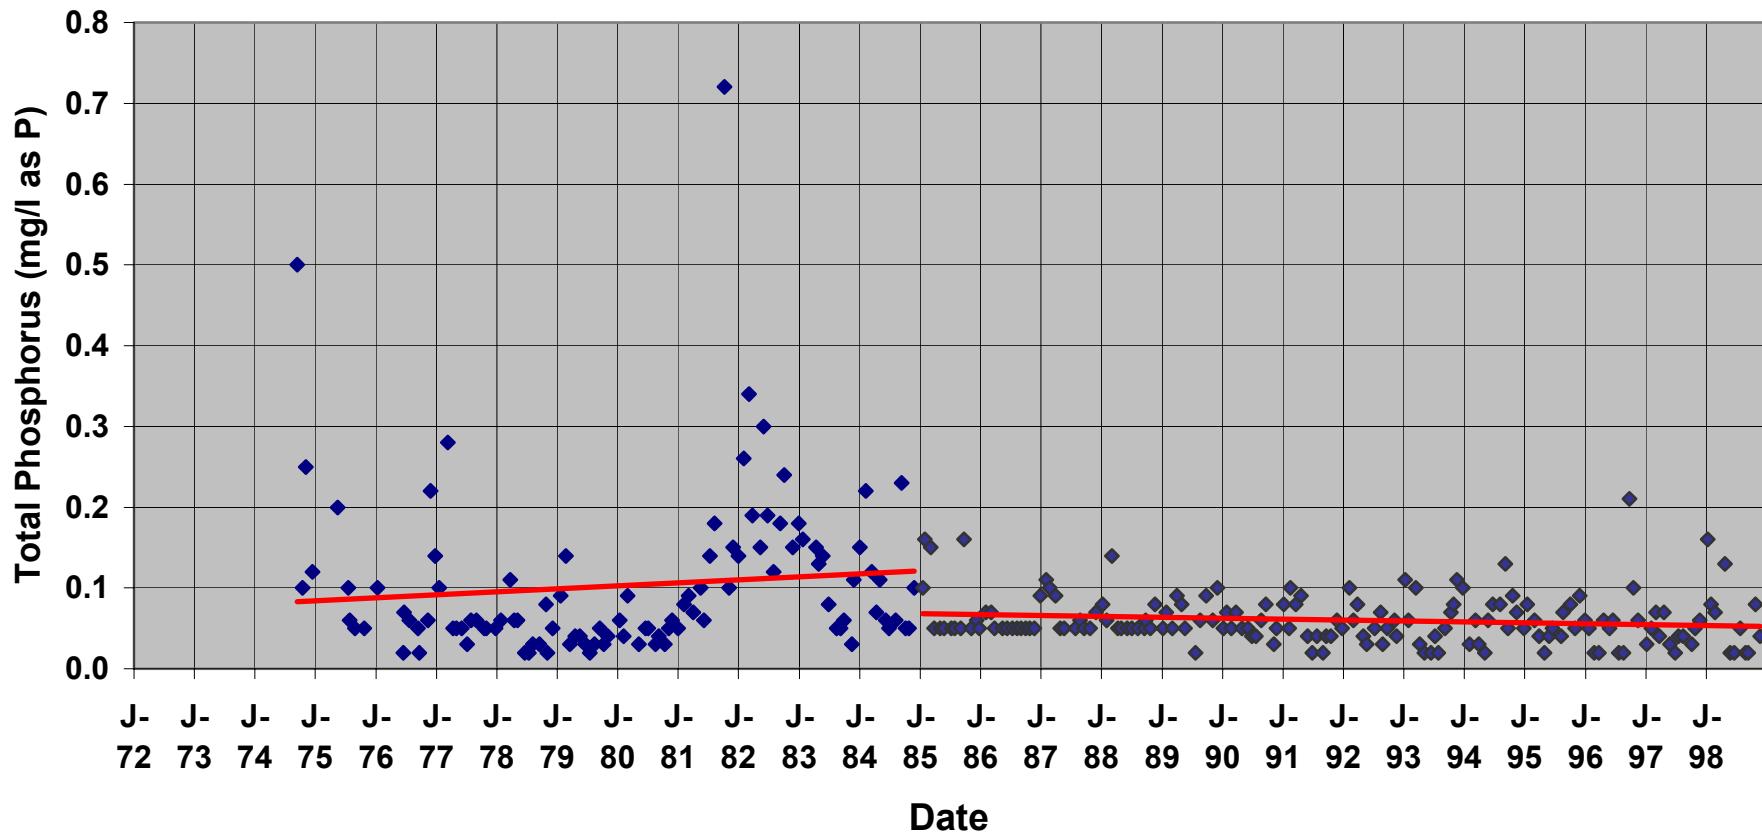


TP Measured in the Little Saluda River (SCDHEC Station S-123)

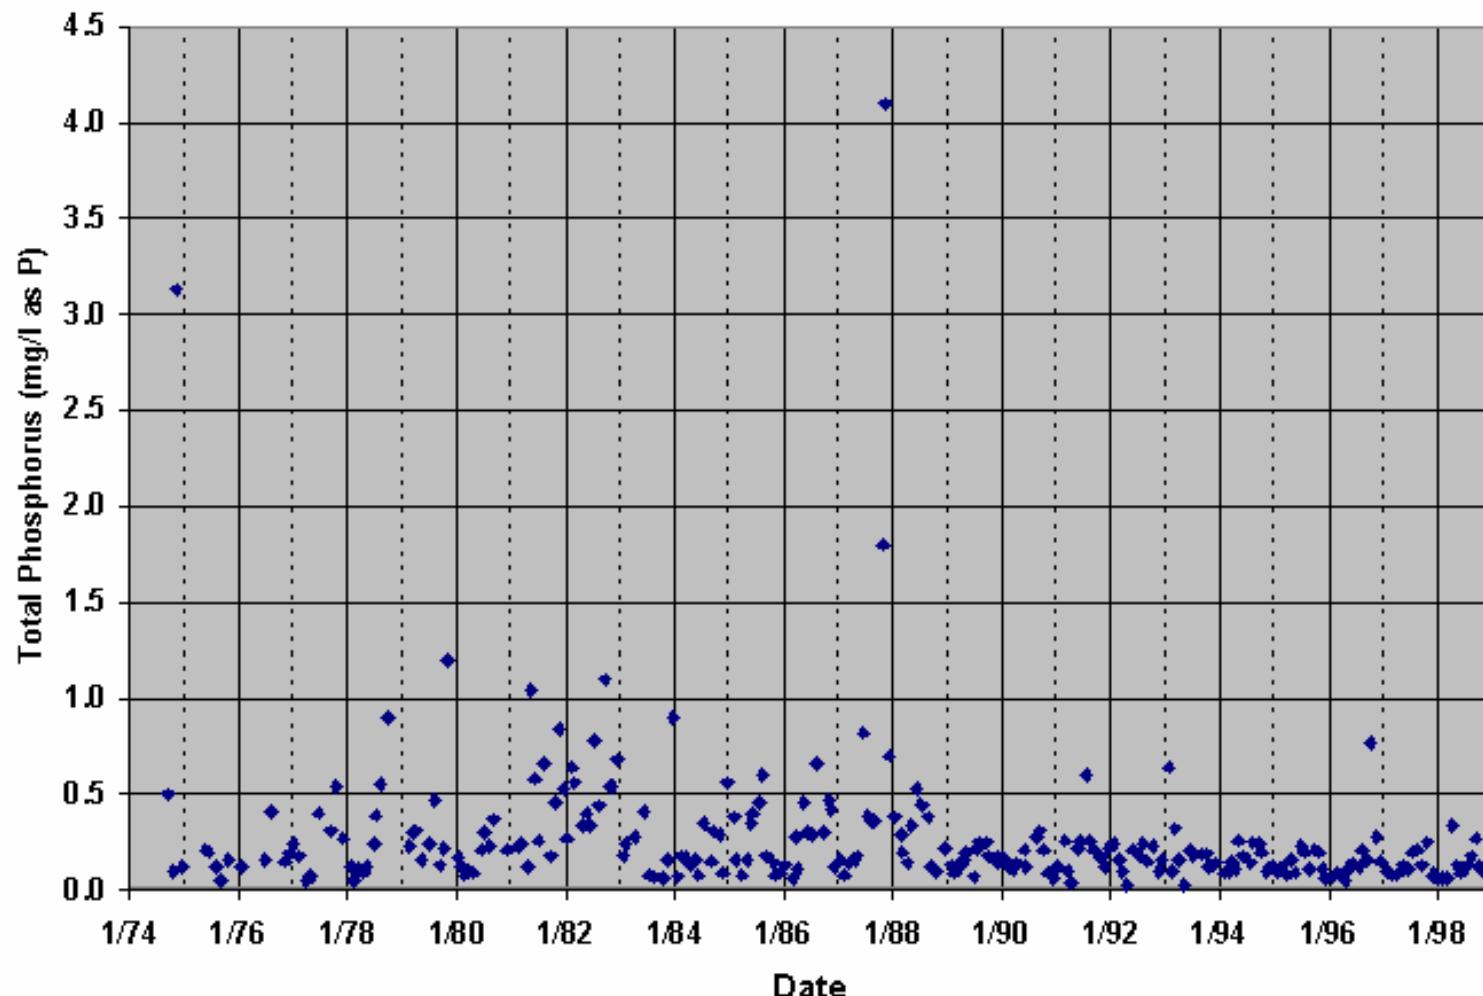


TP Measured in Clouds Creek (SCDHEC Station S-255)

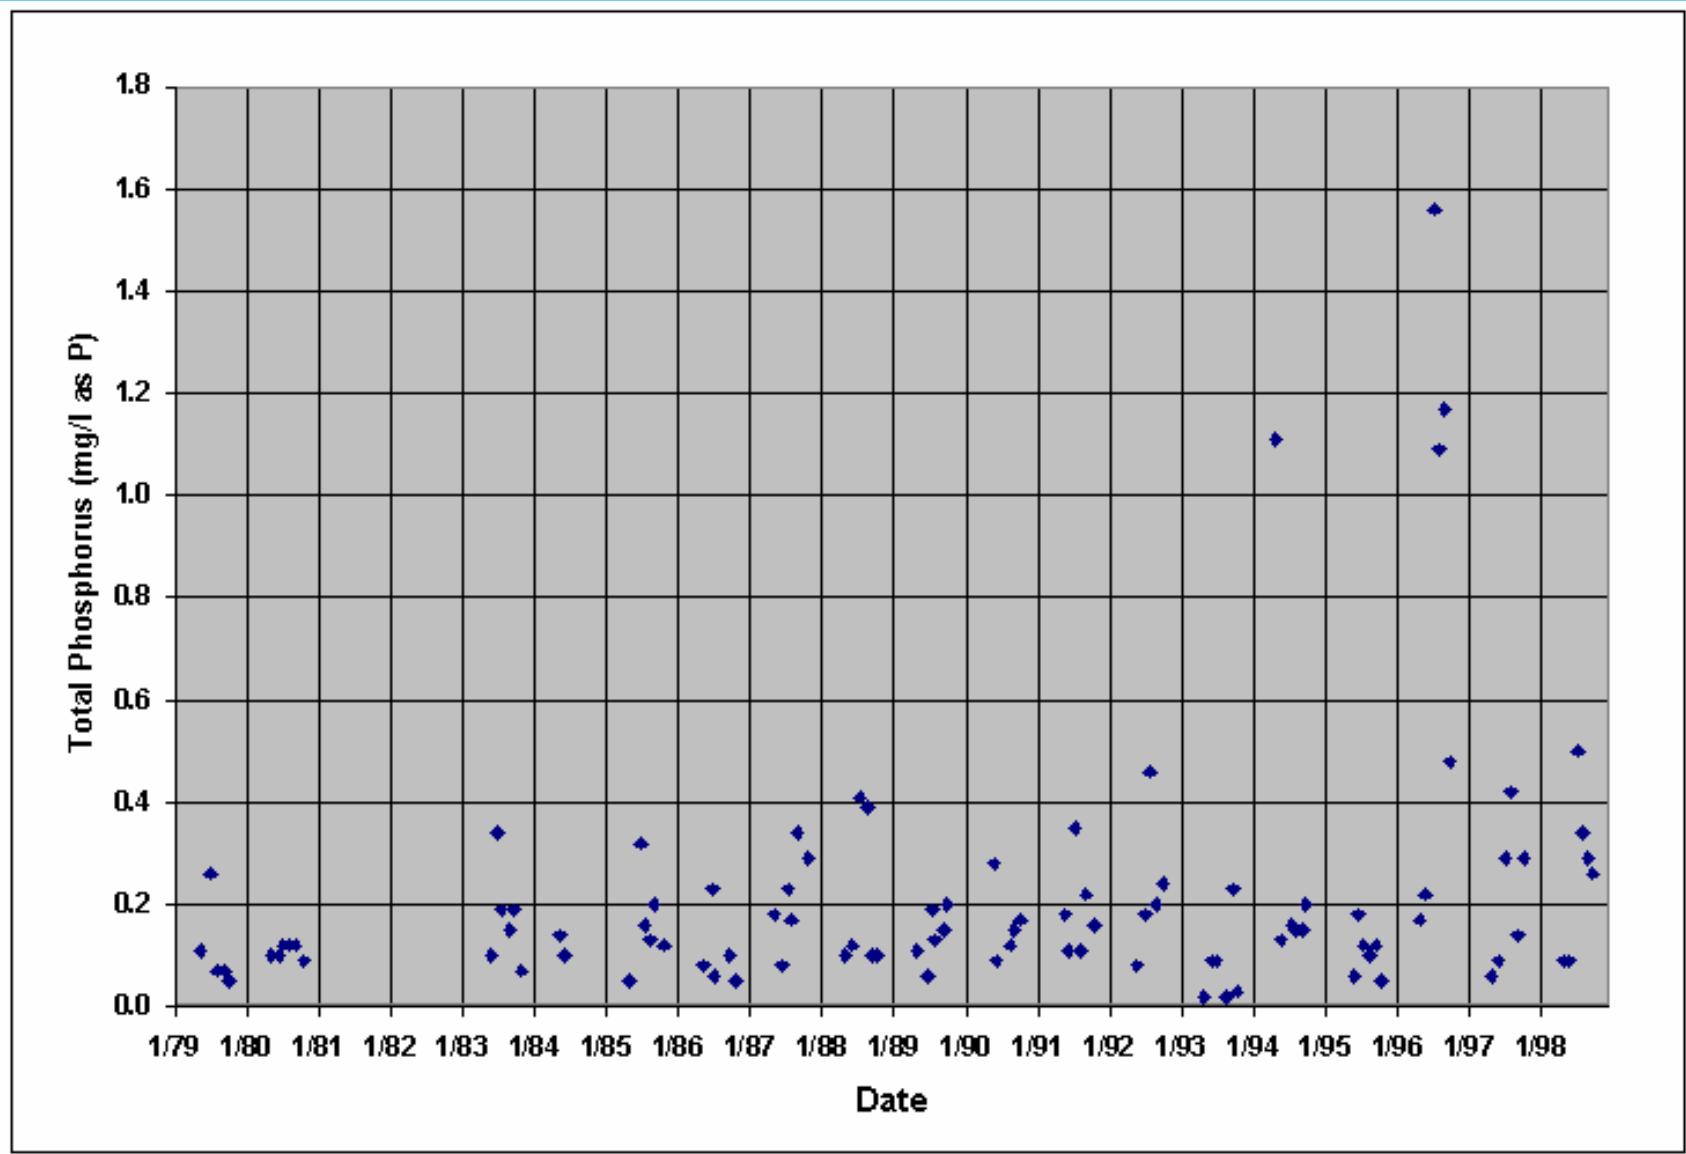


**Total Phosphorus (mg/l as P), collected at S-279
(Main Channel, 18 miles upstream of dam)**

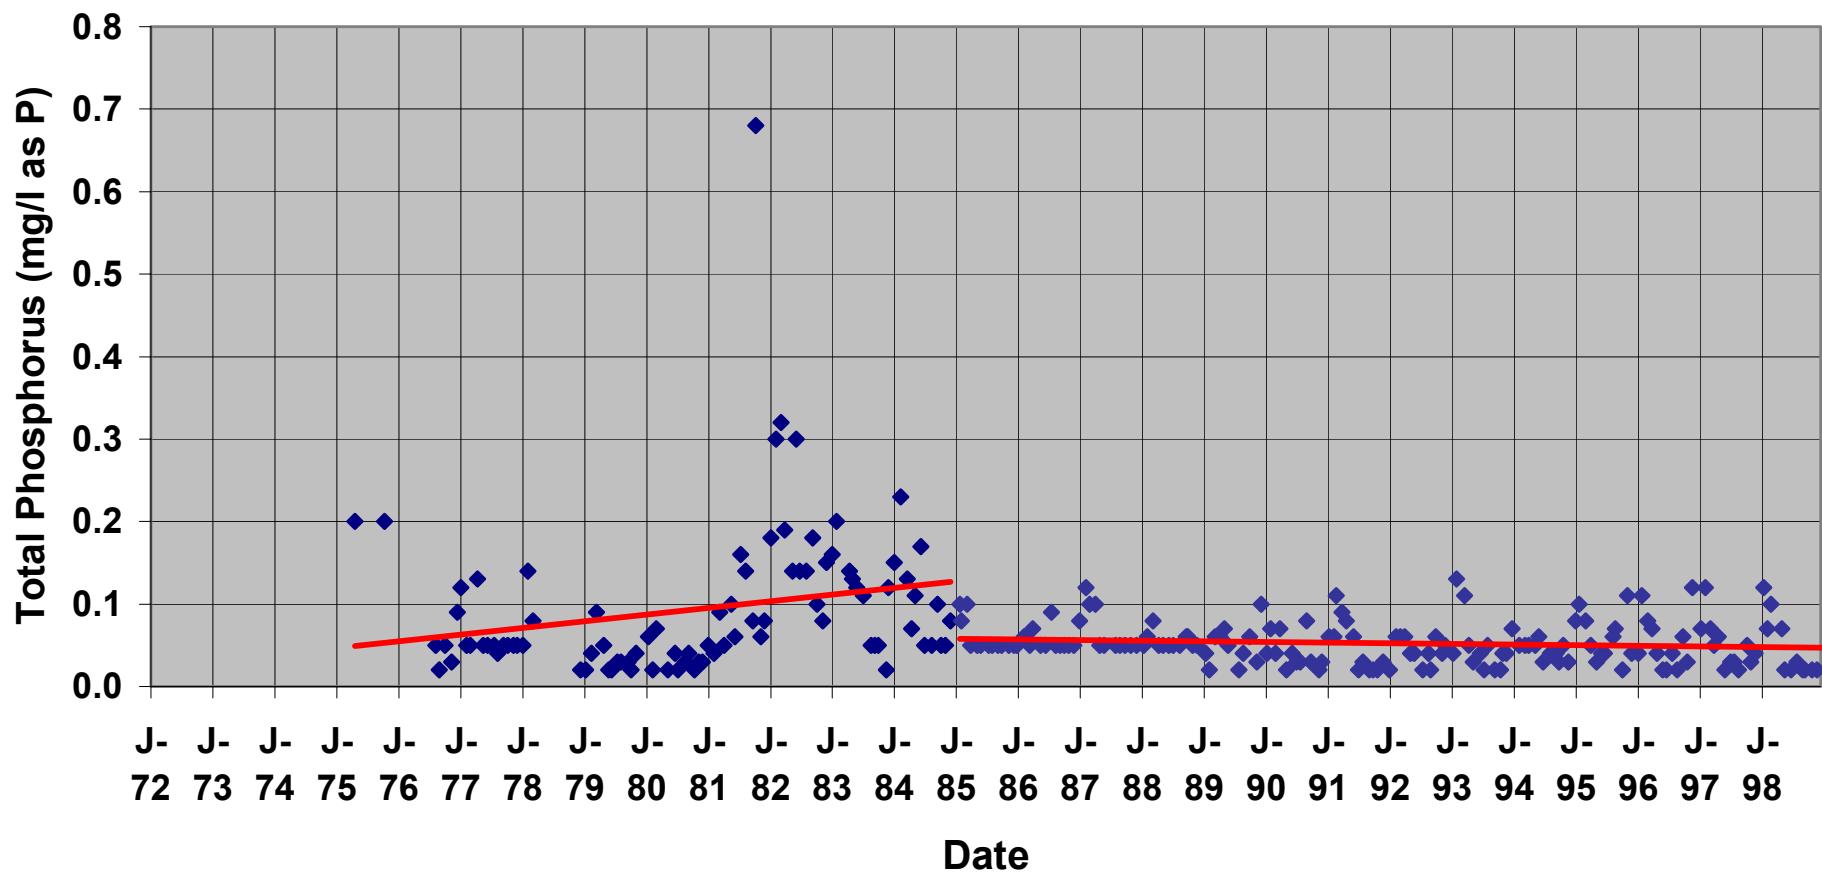

Total Phosphorus (mg/l as P), collected at S-204 (Lake Murray Forebay)


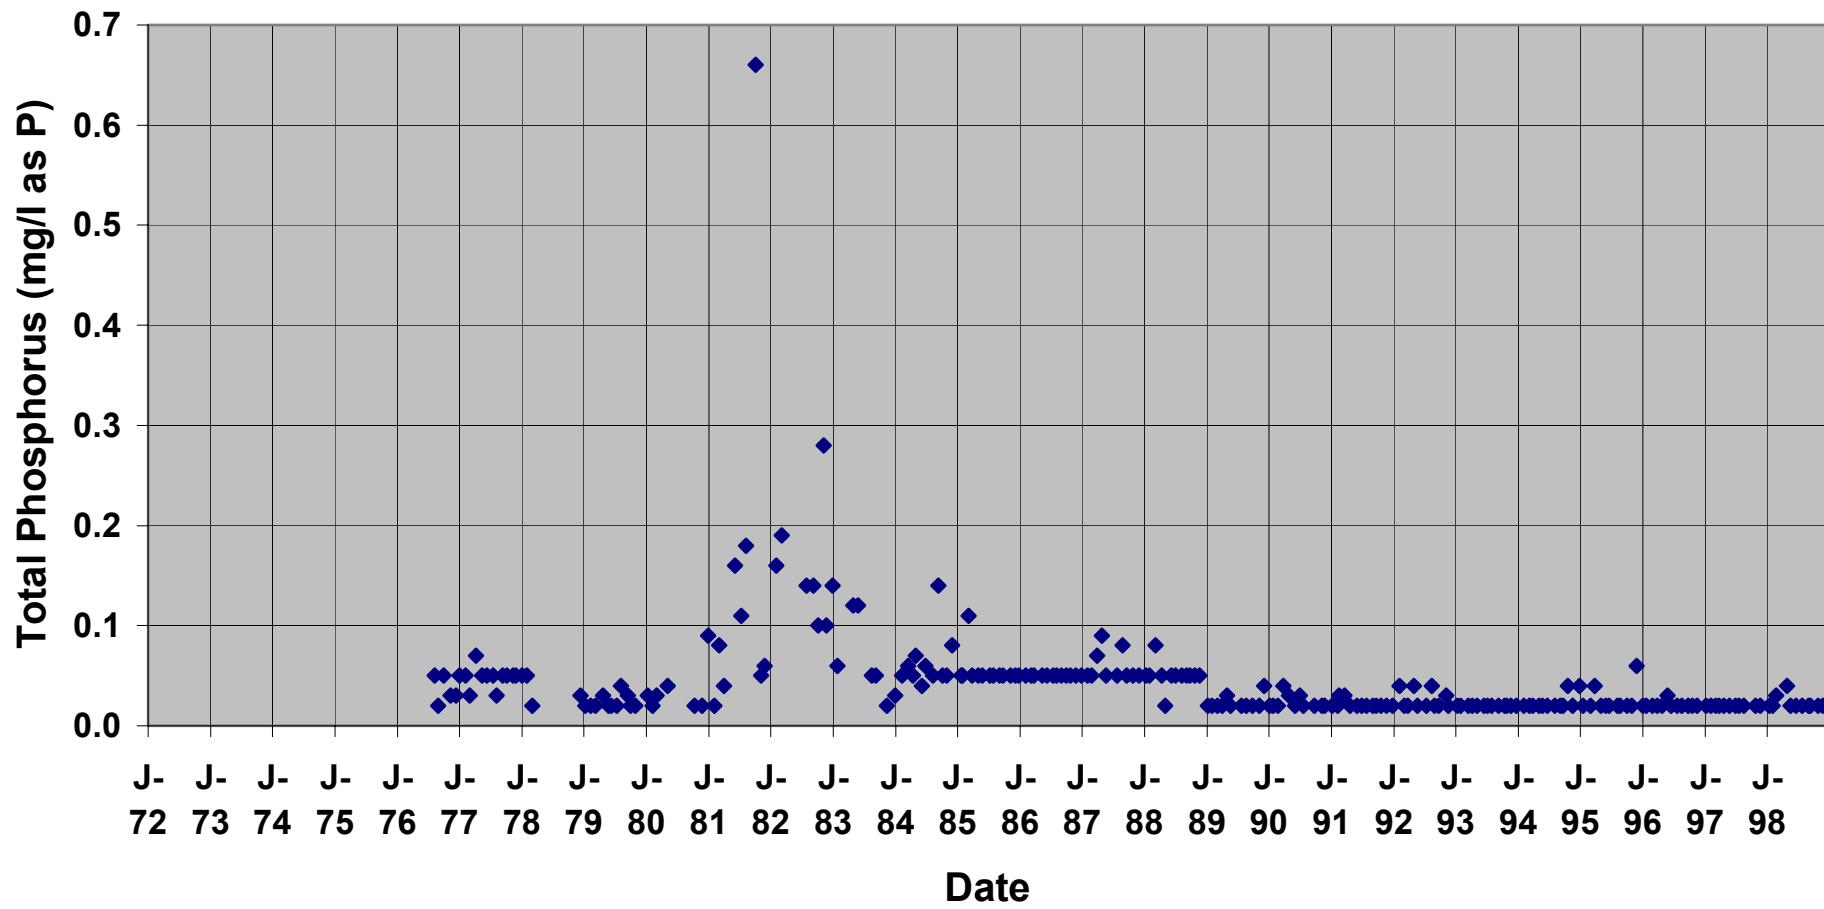


May-October Means of TP Measured at SCDHEC Stations Located in the Inflows to Lake Murray

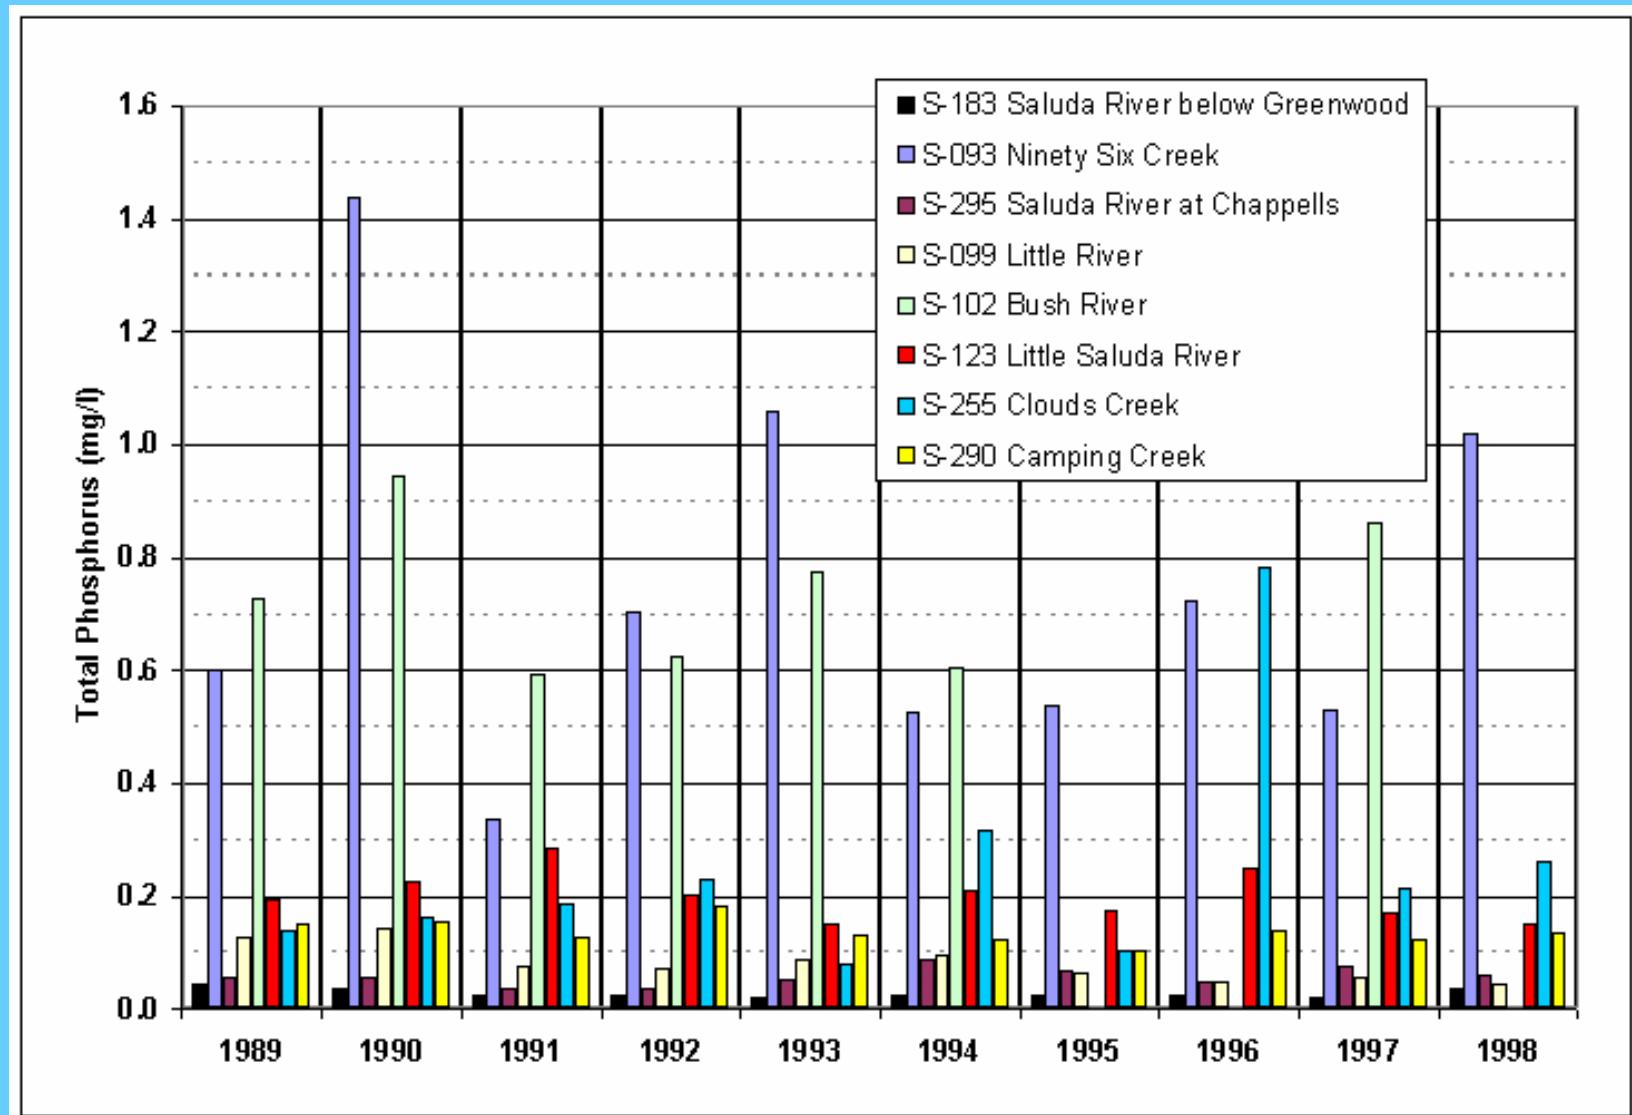

	Mean Streamflow (cfs)	Percent of Total Flow
Saluda Hydro	2683	100
Lake Murray Direct Inflows		
Saluda River at inflow	2098	78.2
Bush River	92	3.4
Little Saluda River	180	6.7
Clouds and West Creek	89	3.3
Beaver Dam Creek	26	1.0
Camping Creek	31	1.2
Hollow and Horse Creeks	39	39
all other local drainage	129	4.8
Between inflow and Saluda Dam	585	21.8
Upstream Inflows		
96 Creek	115	
Little River	182	

Inflow and Phosphorus Loads to Upper Regions of Lake Murray

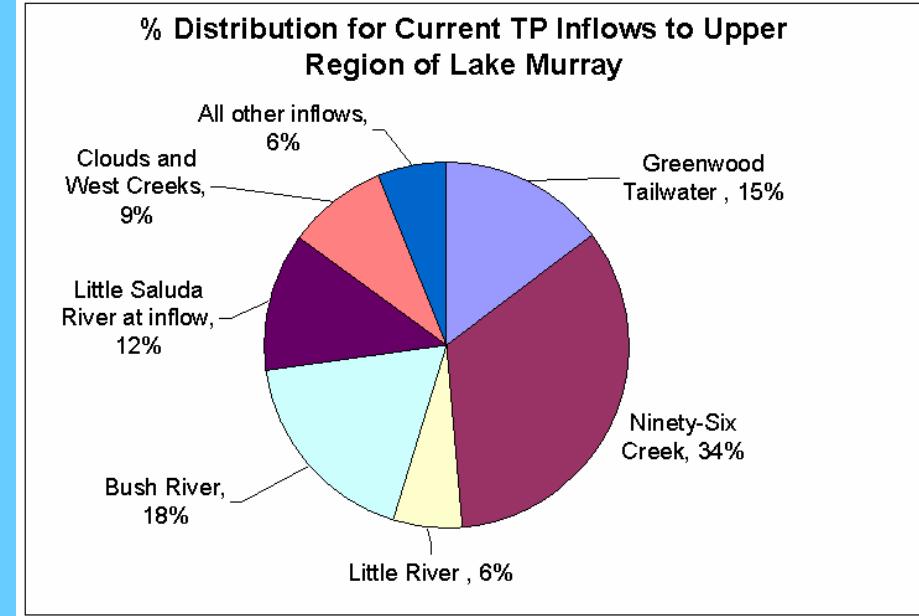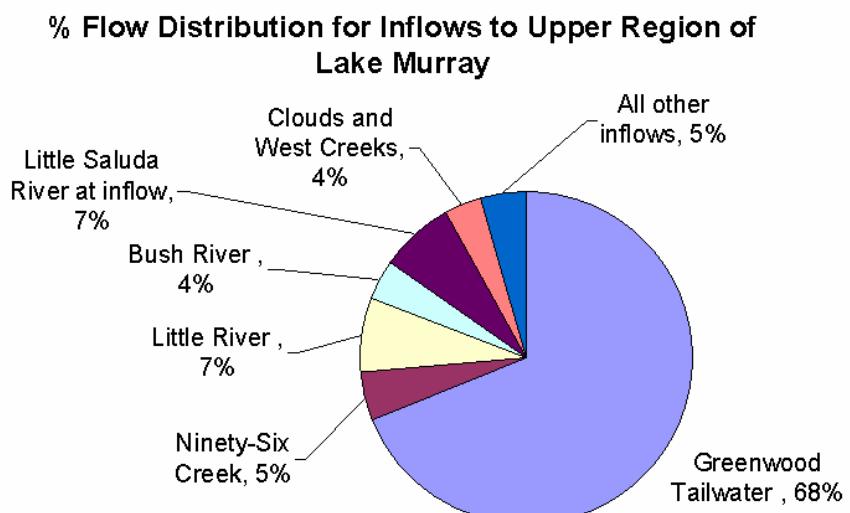

Percent contributions to the upper regions of Lake Murray of total phosphorous loadings and mean stream flows

Lake Murray Tributary	Mean Streamflow %	Phosphorus Load %	Ratio of Phosphorus Load to Flow
Bush River	4	18	4.5
Little Saluda River	7	12	1.7
Clouds and West Creeks	4	9	2.2
Ninety-Six Creek	5	34	6.8
Little River	7	6	0.9
Saluda River	68	15	0.2
All other flows	5	6	1.2


Summary of TP, chlorophyll *a*, and secchi depth conditions at various locations in the inflows and Lake Murray – Includes DHEC data only

	Total Phosphorus (mg/l)	Chlorophyll <i>a</i> (µg/l)	Secchi depth (m)
Greenwood Dam (S-186)	0.022	No data	No data
Ninety-Six Creek (S-093)	0.74	No data	No data
Little River (S-099)	0.08	No data	No data
Bush River Embayment (S-309)	0.12	28.6	0.7
Clouds Creek (S-255)	0.25	No data	No data
Blacks Bridge (S-223)	0.06	14.77	1.01
Rocky Creek (S-279)	0.05	11.9	1.4
Dreher Island (S-280)	0.03	6.5	2.0
4.2 Miles from Saluda Dam (S-273)	0.02	5.5	2.8
Ballentine Embayment (S-274)	0.02	5.7	2.4
Forebay (S-204)	0.02	7.3	2.7


Summary of DO conditions at 14 reservoirs with residence times similar to Lake Murray and various inflow phosphorus conditions




Relationship Between Low DO and Phosphorus for Hydropower Reservoirs with Residence Times of About 400 Days											
Name of dam	River	Max. depth, ft	Normal storage, ac-ft	Surf. area, ac	Drain. area, sq mi	Mean flow, cfs	Residence Time	Zero DO in releases, annually?	COMMENTS		
BEAVER, AR	White	218	1,652,000	28,220	1186	1898	439	No	Low TP (0.02-0.04), but impacted by Fayetteville		
BROKEN BOW, OK	Mountain Fork	175	920,000	14,200	754	1350	341	No	Low TP (0.03-0.04)		
BURTON, GA	Tallulah		108,000	2,775	118	142	385	No	Low TP (~ < 0.04)		
DEGRAY, AR	Caddo	171	654,700	13,400	453	725	455	No	Low TP (~ 0.02)		
HARTWELL, GA/SC	Savannah	185	2,550,000	55,950	2088	3670	347	Yes	low metalimnion DO in Seneca Arm, but not Tugaloo Arm; probably due to TP		TP load could be 80% of load to Lake Murray, and Hartwell has 56 days less residence time
LEWIS SMITH, AL	Sipsey Fork/Warrior R	264	1,390,000	21,200	944	1510	464	No	Low TP (0.02-0.03)		
NANTAHALA, NC	Nantahala R	210	138,000	1,605	108	173	399	No	Low TP (~ 0.01)		
NARROWS, AR	Little Missouri	132	279,700	7,200	237	379	372	No	Low TP (0.02-0.04)		
PHILPOTT, VA	Smith	180	166,200	2,880	212	254	327	No	Low TP (0.02-0.03)		
SALUDA, SC	Saluda	170	2,118,000	50,000	2420	2683	398	Yes	High TP (0.08-0.1)		
SOUTH HOLSTON, TN	South Holston	240	657,500	7,580	703	980	338	No	Low TP (0.03), but low DO in metalimnion, probably due to elevated orthoP in one inflow		
TENKILLER, OK	Illinois	187	654,100	12,900	1610	805	410	probably	zero DO on bottom of lake; < 1 ppm in releases in Aug '95		receives high nutrients: ~ 0.08 TP; 12 TMDL sites in watershed for org/low DO
THORPE, NC	West Fork Tuckasegee	110	71,000	1,462	37	100	355	No	Low TP (~ 0.01)		
WATAUGA, TN	Watauga	309	568,700	6,430	468	710	404	No	Low TP (0.03)		
Total projects where releases are greater than zero								11	79	%	
Total projects where releases have zero DO annually								3	21	%	
Total projects								14	100	%	

Daily DO and Temperature Data Collected at Hwy 391 Bridge

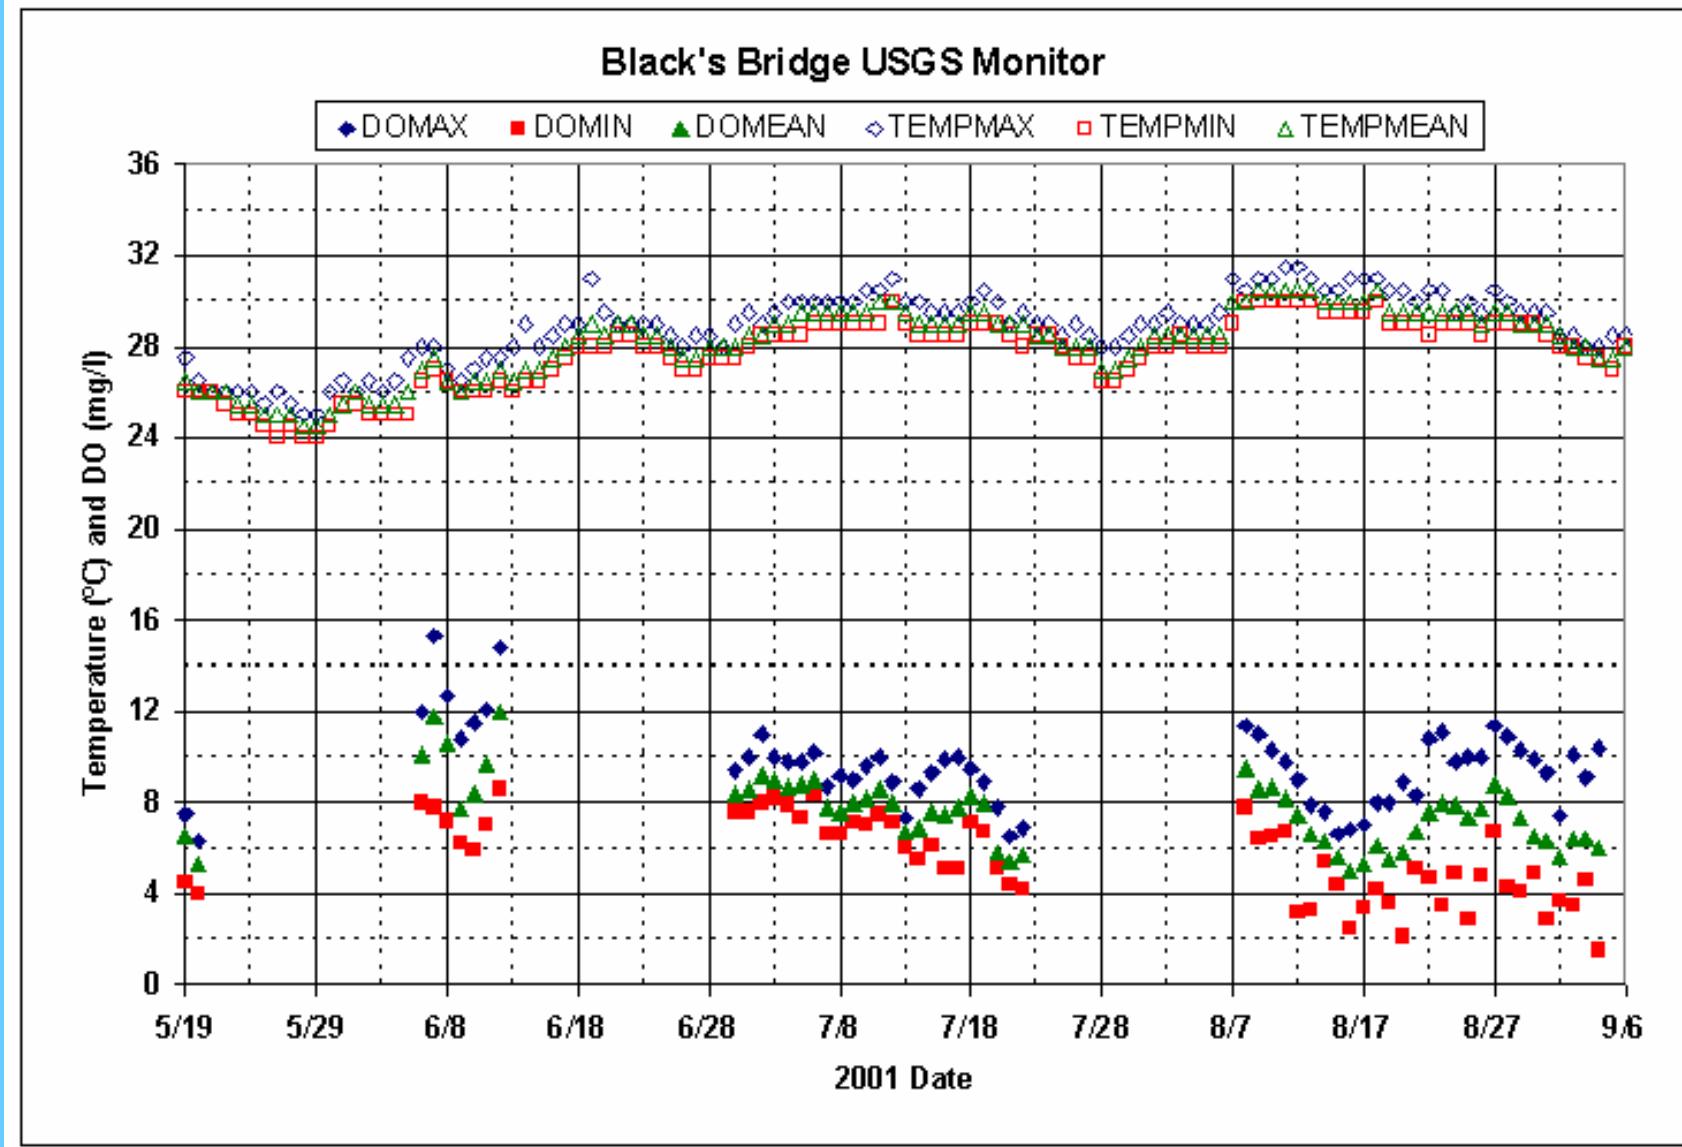


Daily DO and Temperature Data Collected on the Little Saluda River

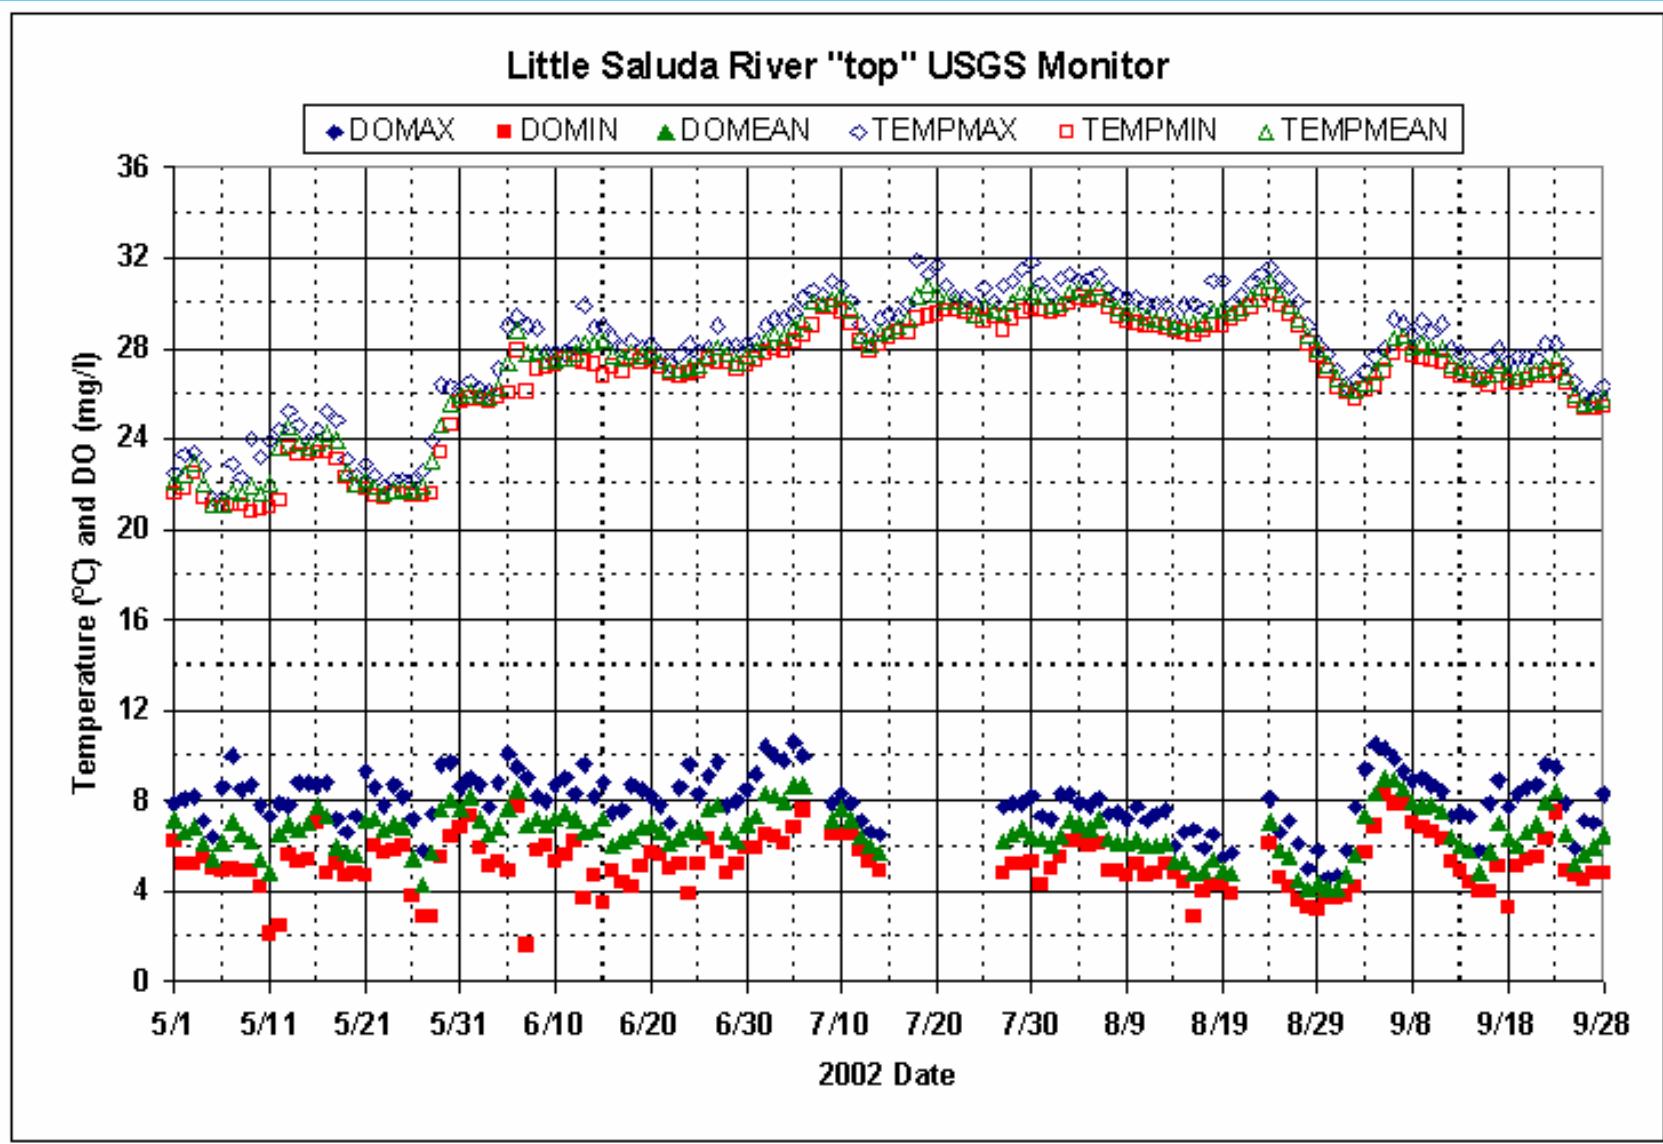

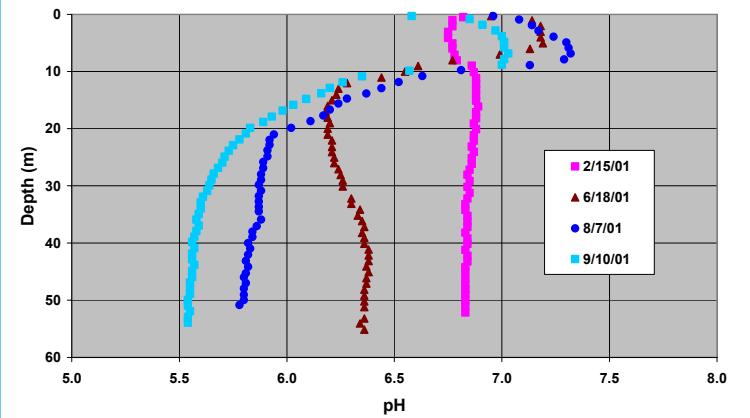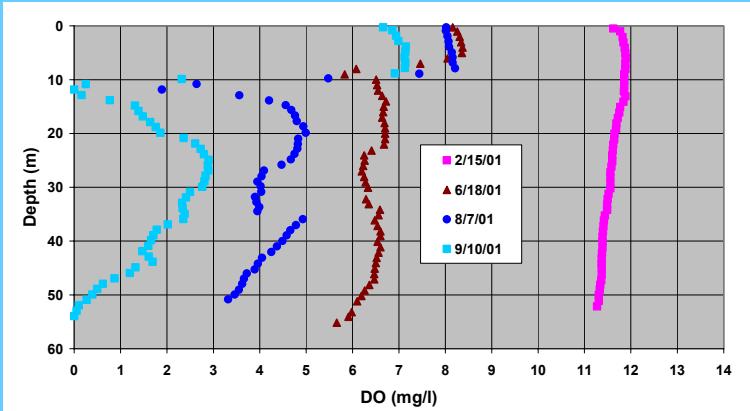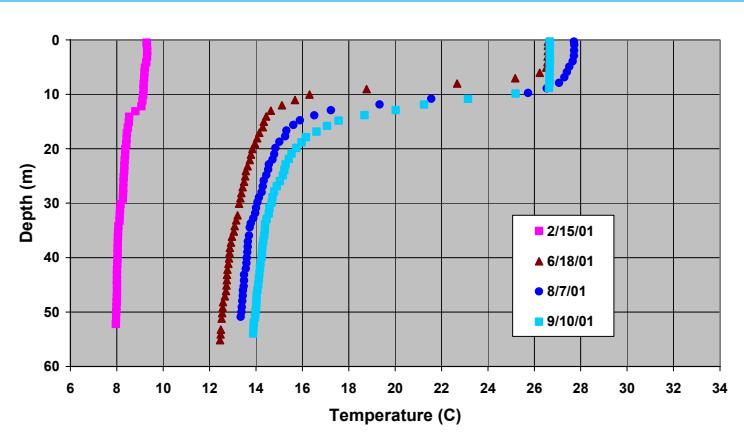


Temperature, DO, and pH profiles from 2001 showing the correlation between pH and low DO

Temperature Measured in the Saluda Hydro Tailrace in 1996

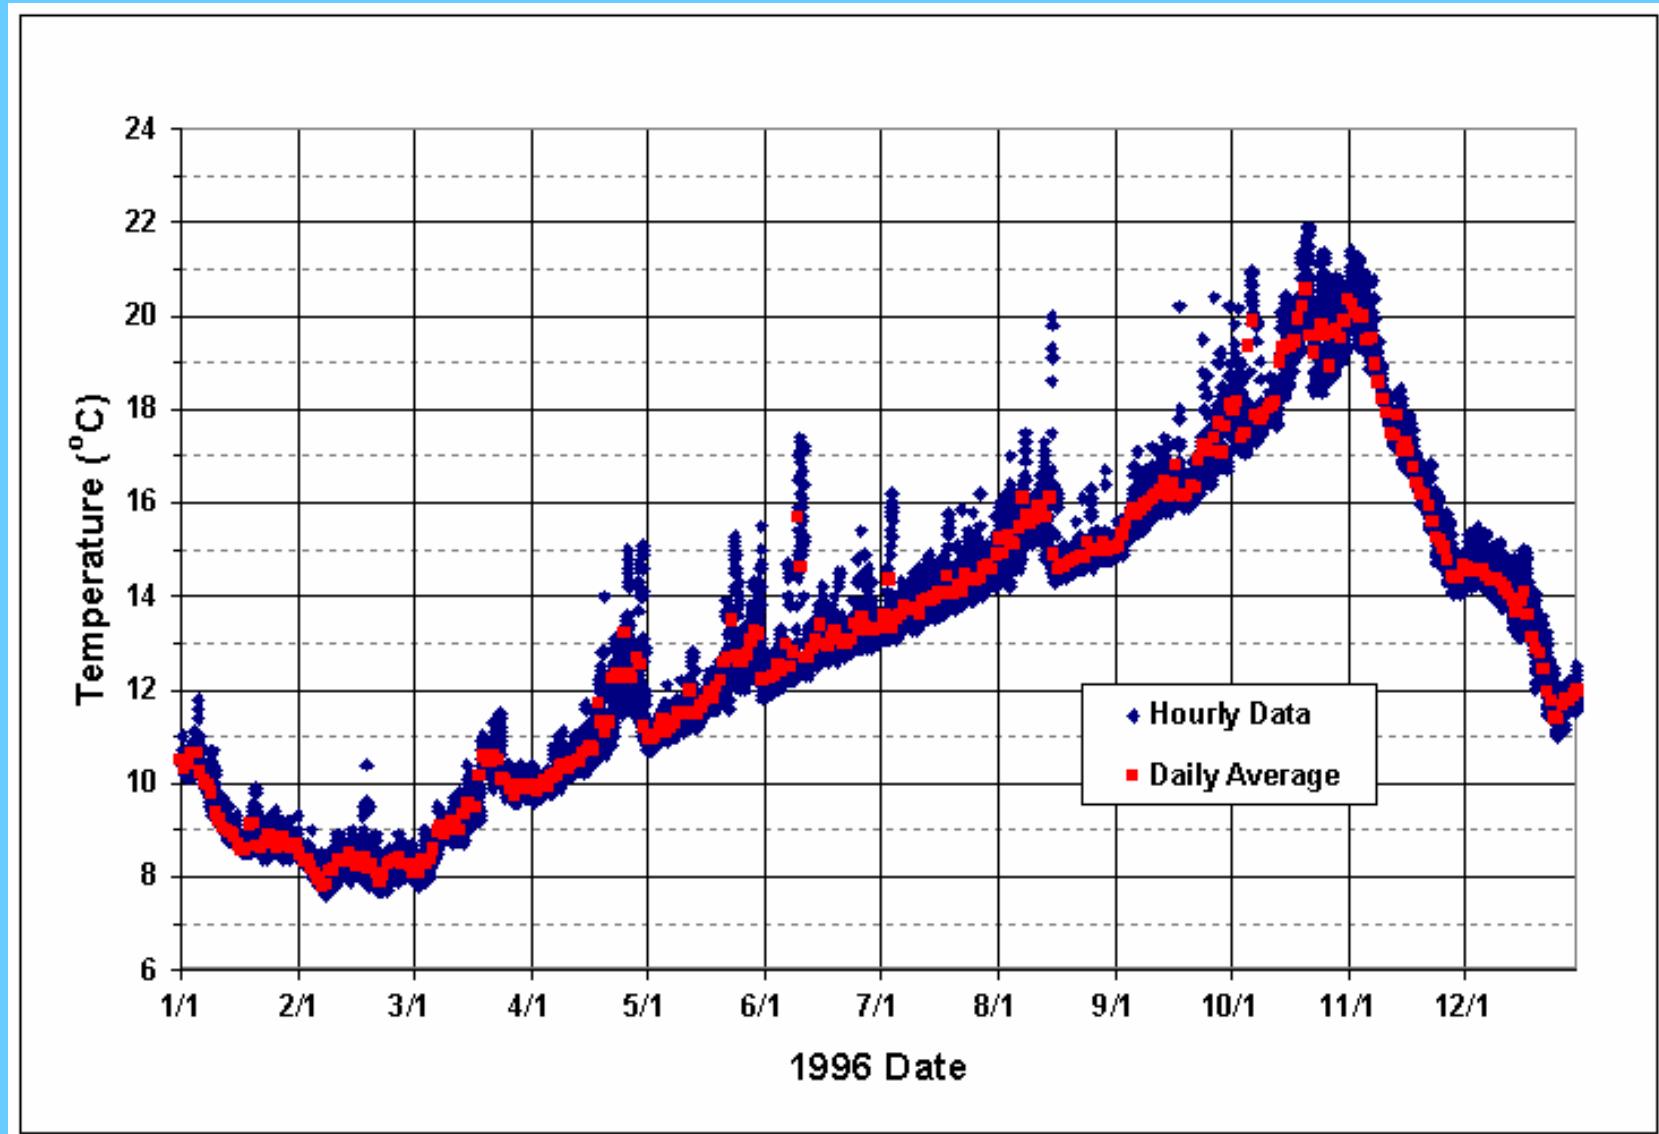

DO Measured in the Saluda Hydro Tailrace in 1996

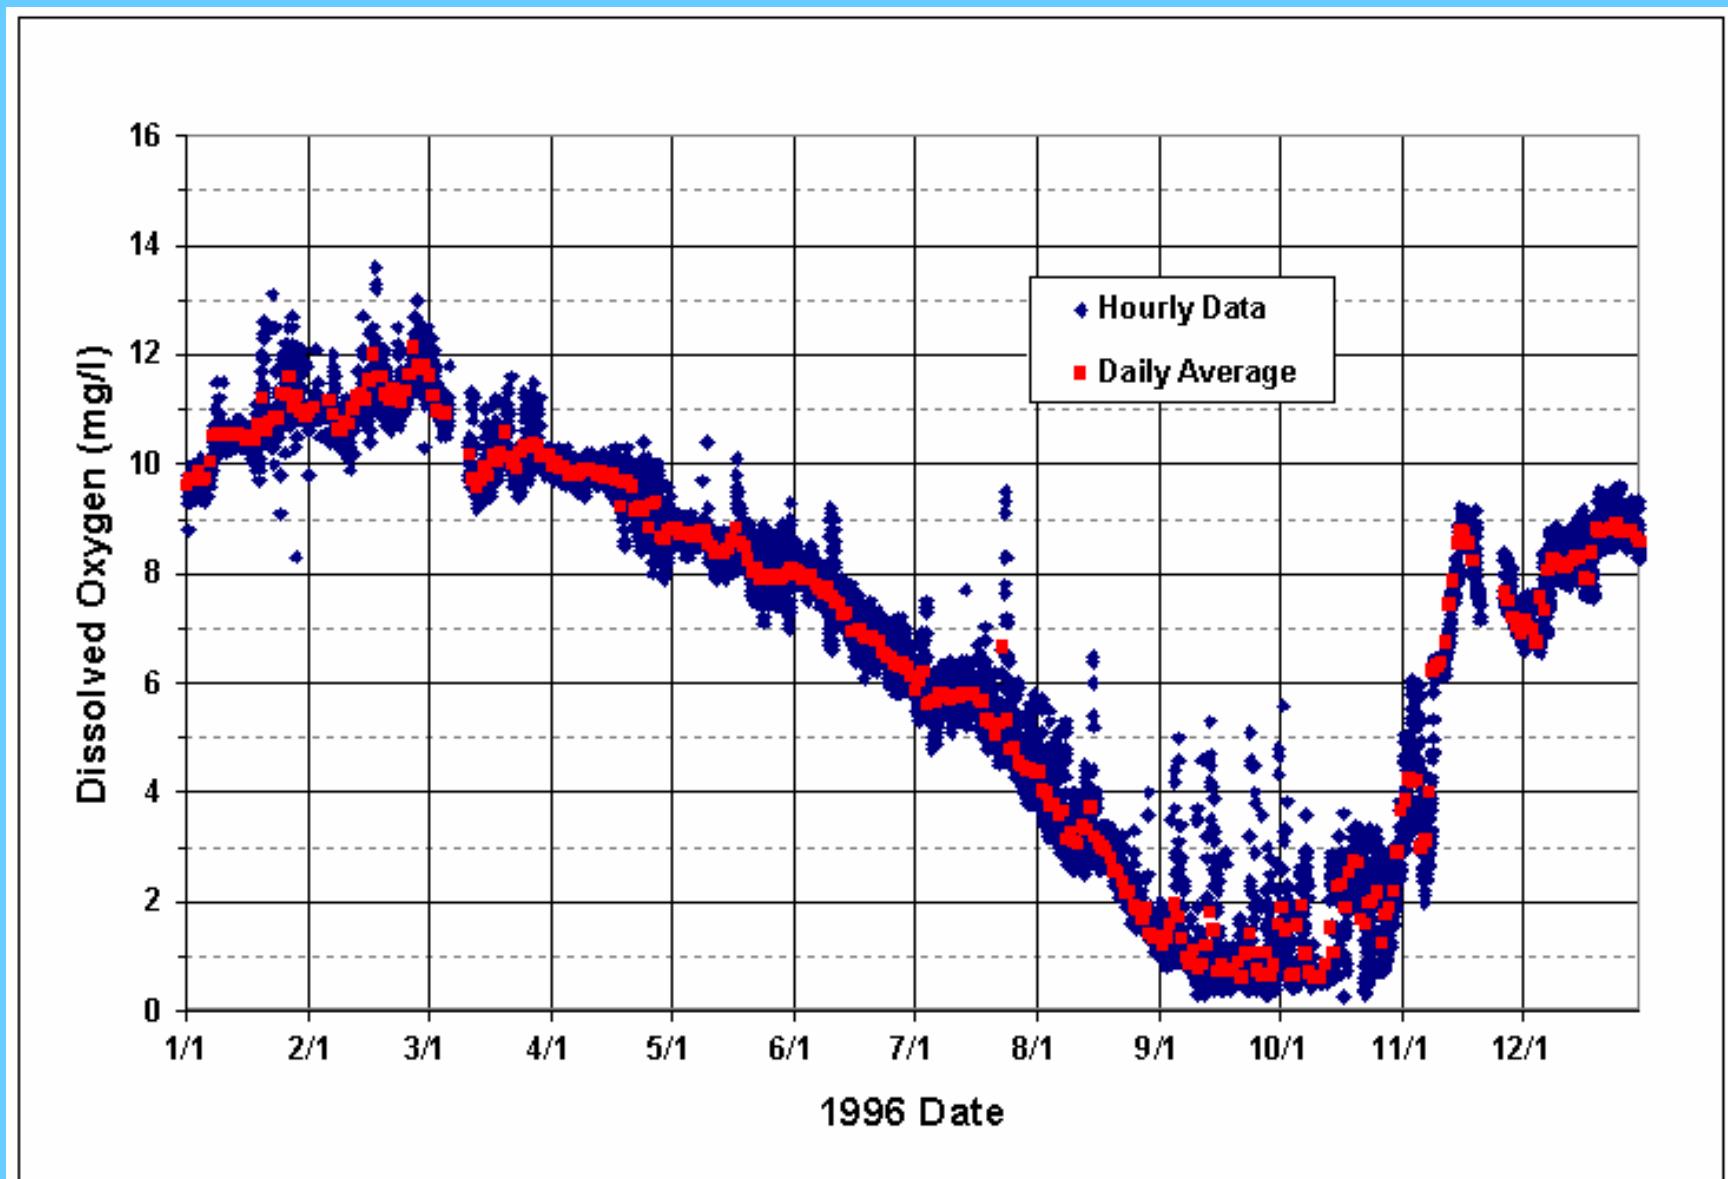


Summary of Key Issues at the Time of the 2001 Assessment and When the CE-QUAL-W2 Model Was Developed

- low DO in the releases from Saluda Hydro,
- restrictions for operating Unit 5 due to entrainment of blue-back herring,
- eutrophication in the upper regions of Lake Murray,
- DO less than the State standard in the inflow regions of the lake,
- reduced striped bass habitat in the lake due to low DO in the regions of the lake where their temperature preferences occur, and
- low pH in Lower Saluda River (LSR)
- Fecal coliforms were identified as an issue on several inflows to Lake Murray, but not on the lake itself
- Copper was identified as an issue, but this was State-wide

Lake thermal stratification

- Temperature affects the density of water, so lakes stratify—warmer water floats on top—most lakes stratify 5 to 10 months
- Significantly affected by meteorological conditions, inflow temperatures, residence time and outlet level, cooling water use
- Nominal residence times range from 1 day to 2 years
- Outlet levels range from the surface to the bottom
- Inflow temperature can be natural or affected by upstream reservoir releases and thermal discharges
- Temperature affects almost all other water quality issues

Physical processes

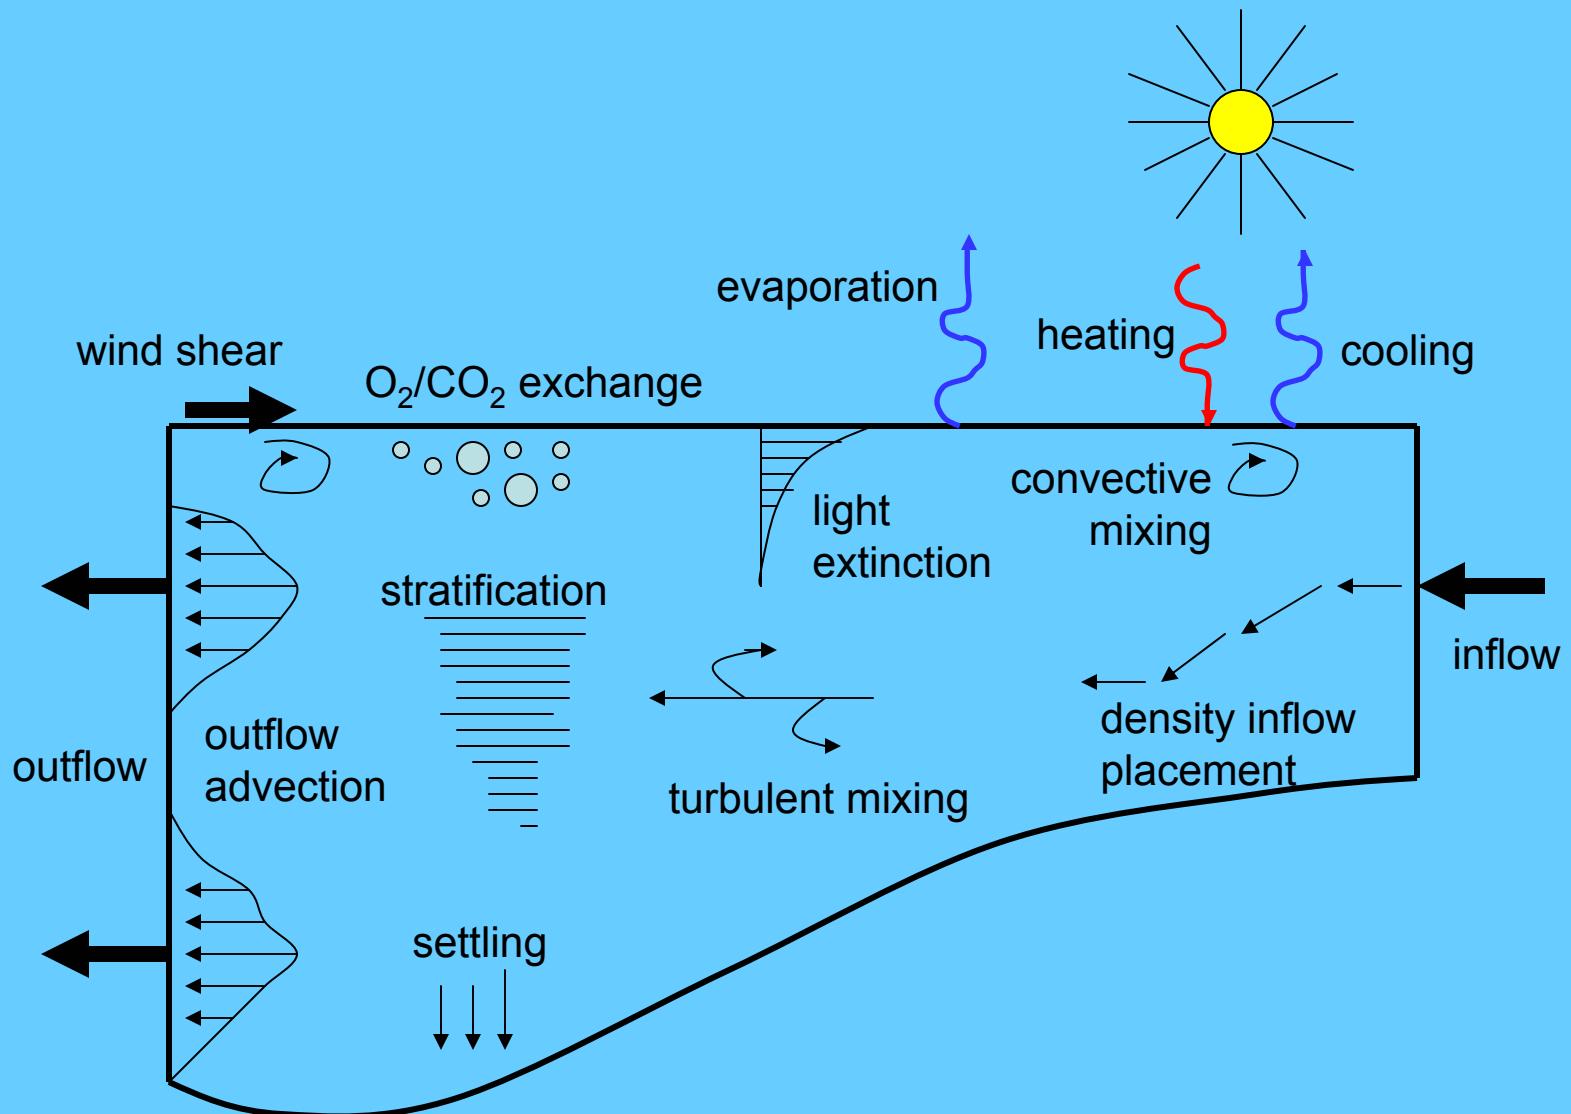

Focus: DO dynamics in water

DO in clean water is often near saturation with respect to the atmosphere; however, many other “sources and sinks” affect DO:

- Plant photosynthesis produces DO
- DO is consumed by plant respiration and decomposition of organic matter in wastewater discharges, sediments, and dead plants/algae
- DO is also consumed in the oxidation of ammonia, sulfide, dissolved organic matter, and reduced iron
- DO can be lost to the atmosphere when it is supersaturated in water


Focus: DO dynamics in reservoirs

- Thermal stratification affects contact of cooler water with the atmosphere and solar radiation; therefore, deeper water usually has lower DO
- Water currents affect the distribution of DO in reservoirs
- Algae grow in the surface layer and usually produce DO; then, they die and add organic matter to the deeper water where it is decomposed and DO is consumed
- Sediment oxygen demand also consumes DO
- Inflowing organic matter also decomposes and consumes DO
- Sediment releases of ammonia, sulfide, methane, and iron can also cause DO consumption
- Inflow DO
- Residence time, outlet levels/withdrawal zone, and water depth are significant variables that affect DO dynamics


Highly coupled constituents

NH_4 = constituent

reaeration = process

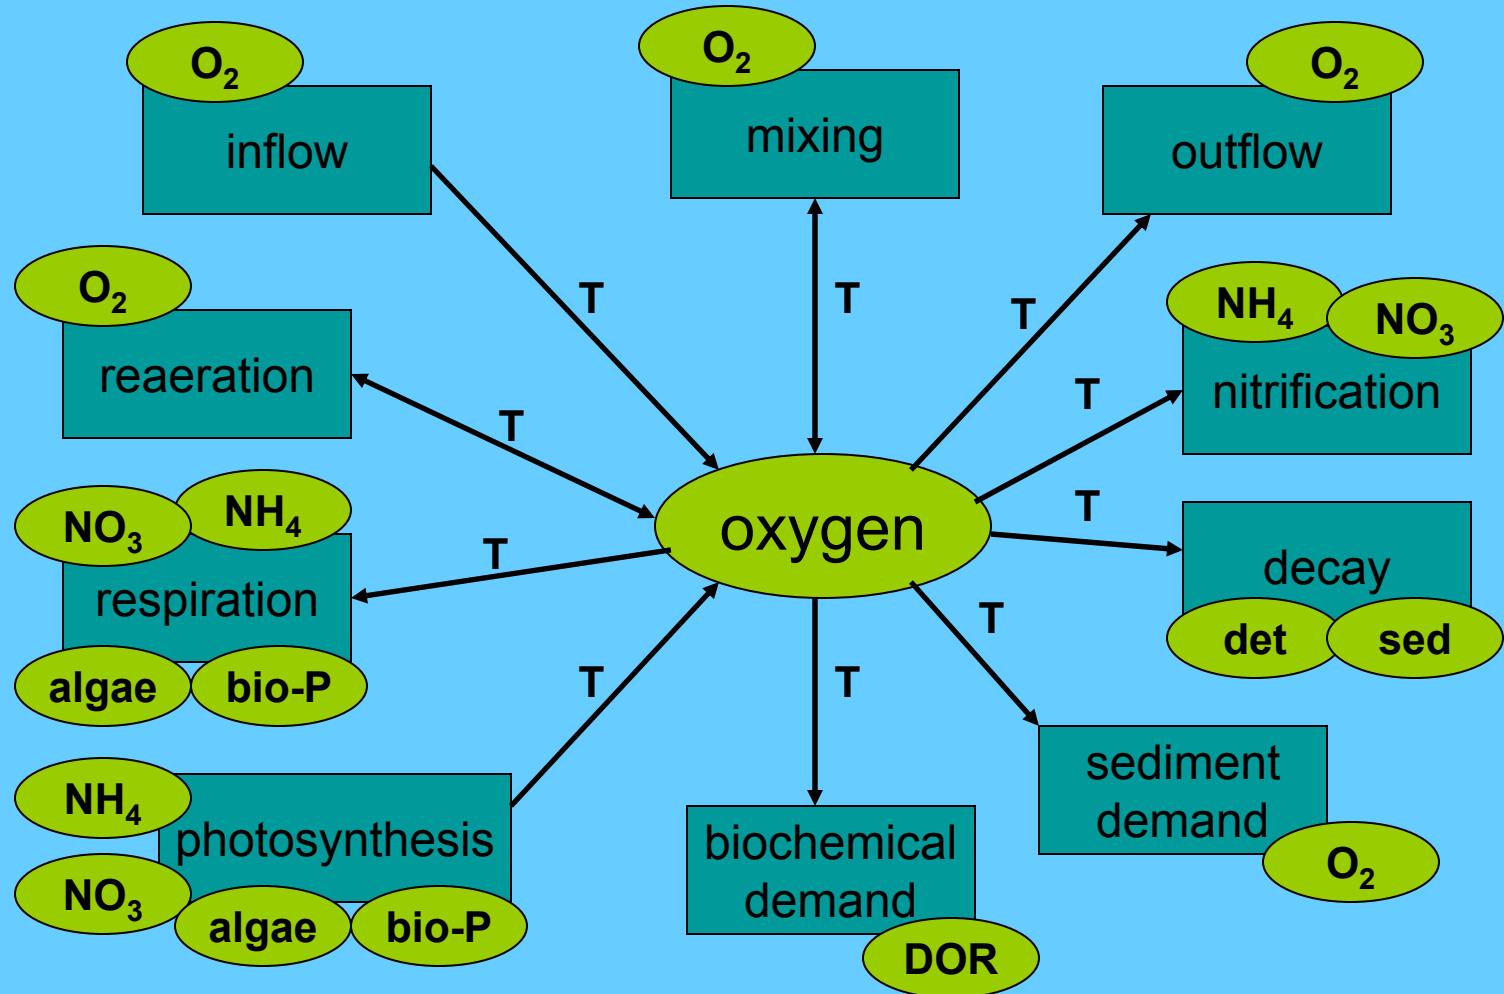

CE-QUAL-W2 model results using the DeGray model to see how DO in the releases responds to higher levels of TP—the upper curve is for low TP levels

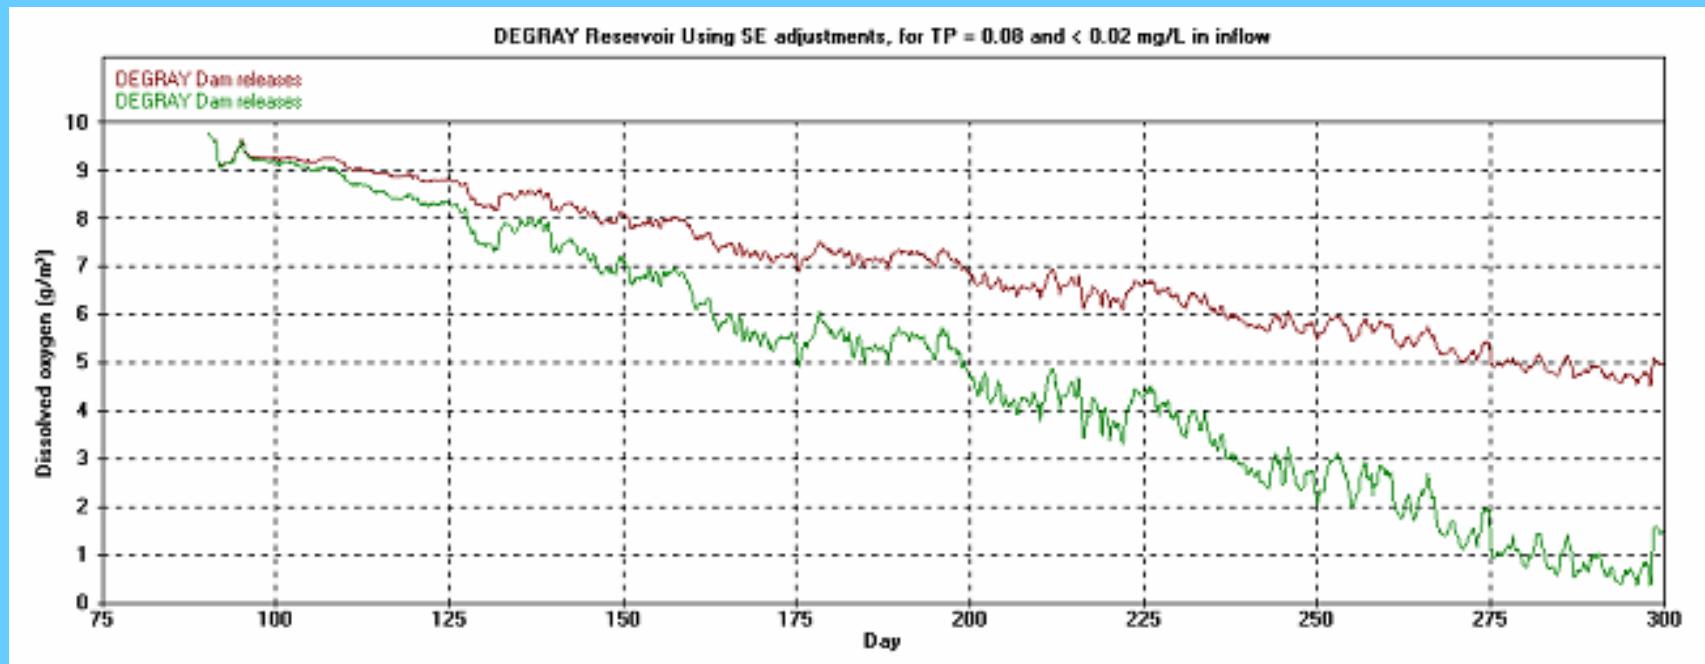


Issues Addressed by Focusing on Phosphorus and Using the CE-QUAL-W2 Two-Dimensional Water Quality Model


- low DO in the releases from Saluda Hydro,
- restrictions for operating Unit 5 due to entrainment of blue-back herring,
- eutrophication in the upper regions of Lake Murray,
- DO less than the State standard in the inflow regions of the lake,
- reduced striped bass habitat in the lake due to low DO in the regions of the lake where their temperature preferences occur, and
- low pH in Lower Saluda River (LSR)

Temperature, DO, Age and Chlorophyll a Animation

Lake Murray Watershed

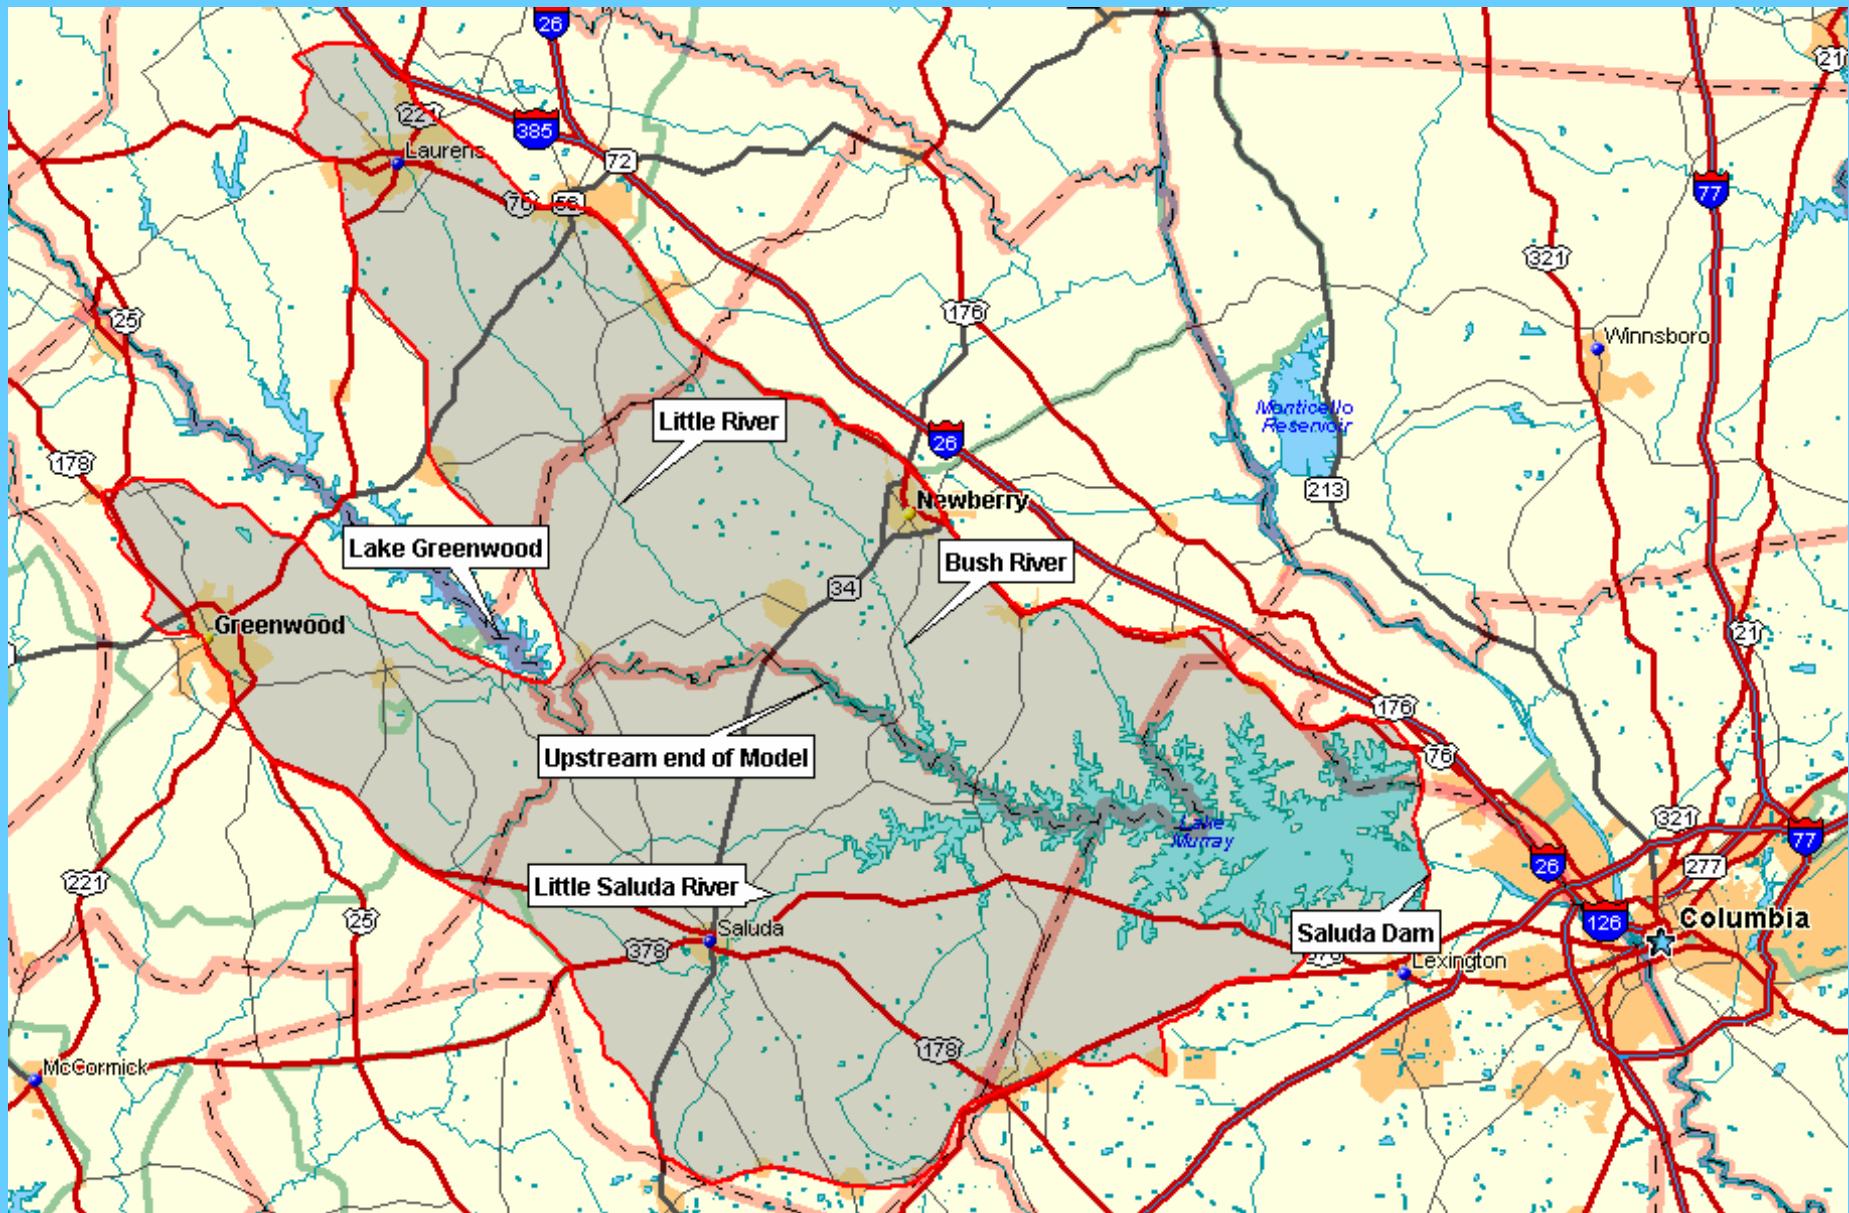


Primary SCDHEC and SCE&G Monitoring Stations used for Lake Murray Water Quality Analyses

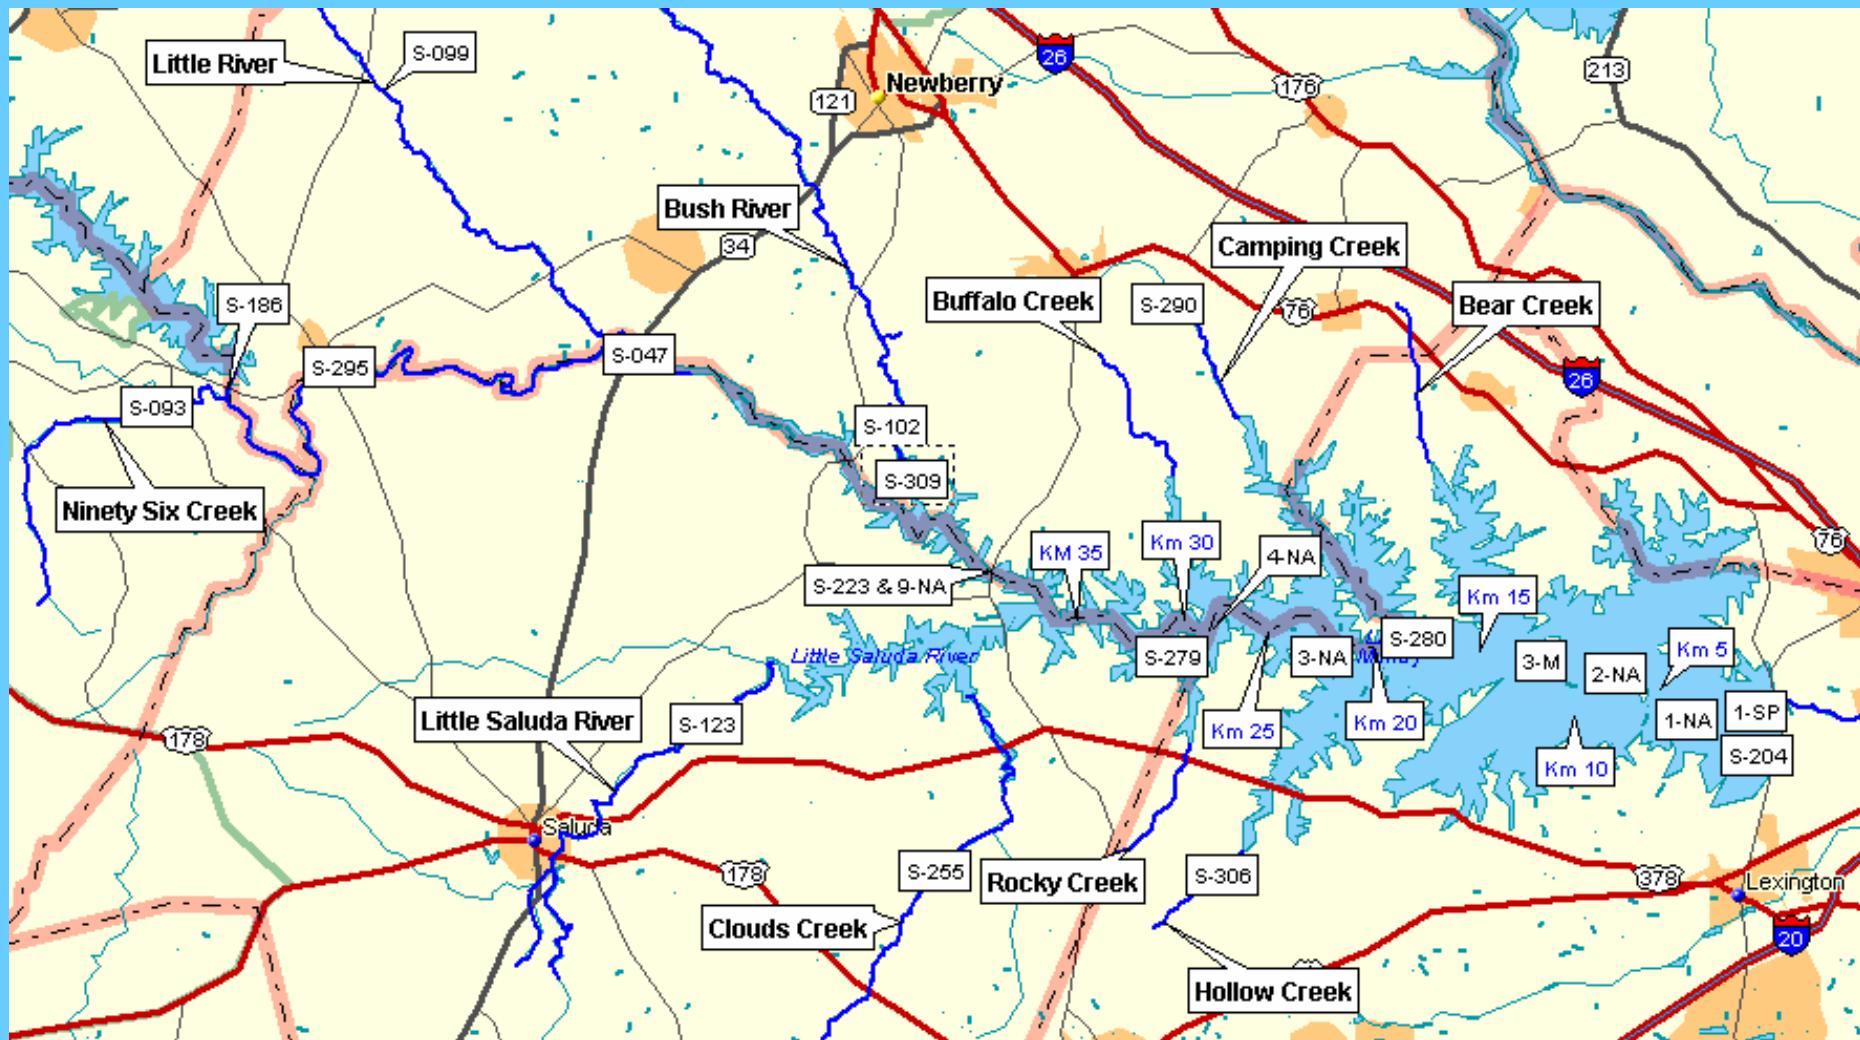


Physical Characteristics of Lake Murray

	U.S. Customary System	Metric System
Maximum depth	175 feet	53.3 m
Total lake volume	2,317,000 ac-ft	2,636 hm³
Average Annual Flow	2778 cfs	78.7 cms
Nominal Residence Time	417 days	417 days
Depth of outlets, Units 1-4	175 feet	53 m
Depth of outlets, Unit 5	110 feet	33.5 m
Flow Capacity - Units 1-4	3000 cfs	85 cms
Flow Capacity, Unit 5	6000 cfs	170 cms

Plan view of Lake Murray with all Branches and Tributaries that are Included in the Model


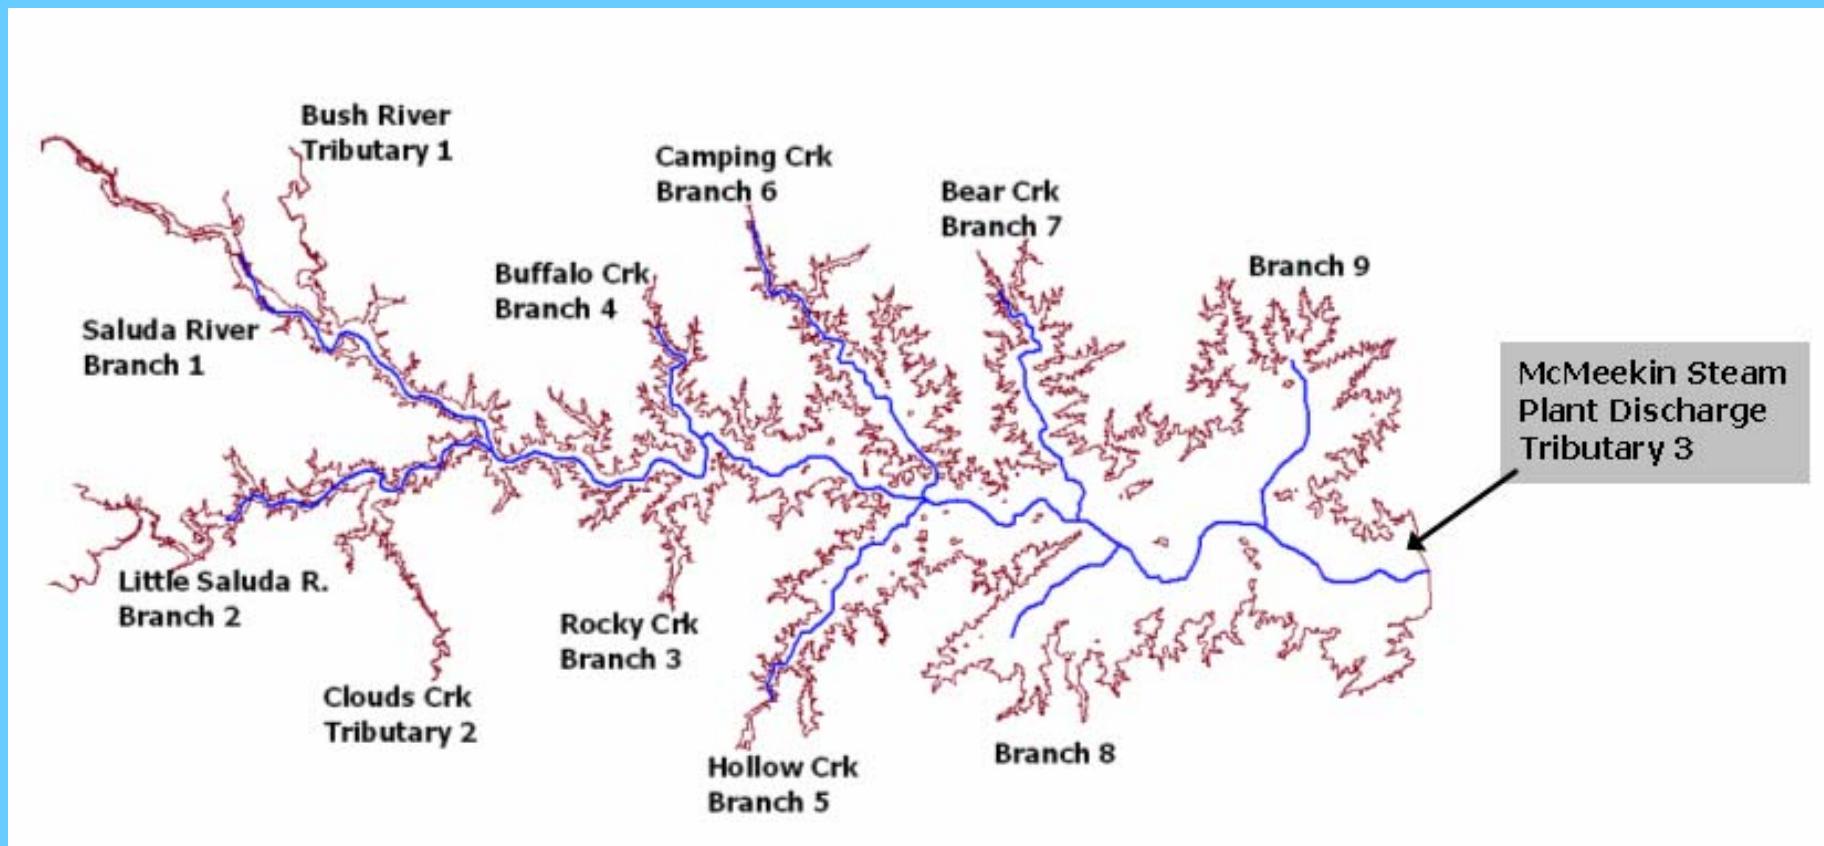


Plan View of Lake Murray Showing CE-QUAL-W2 Segmentation

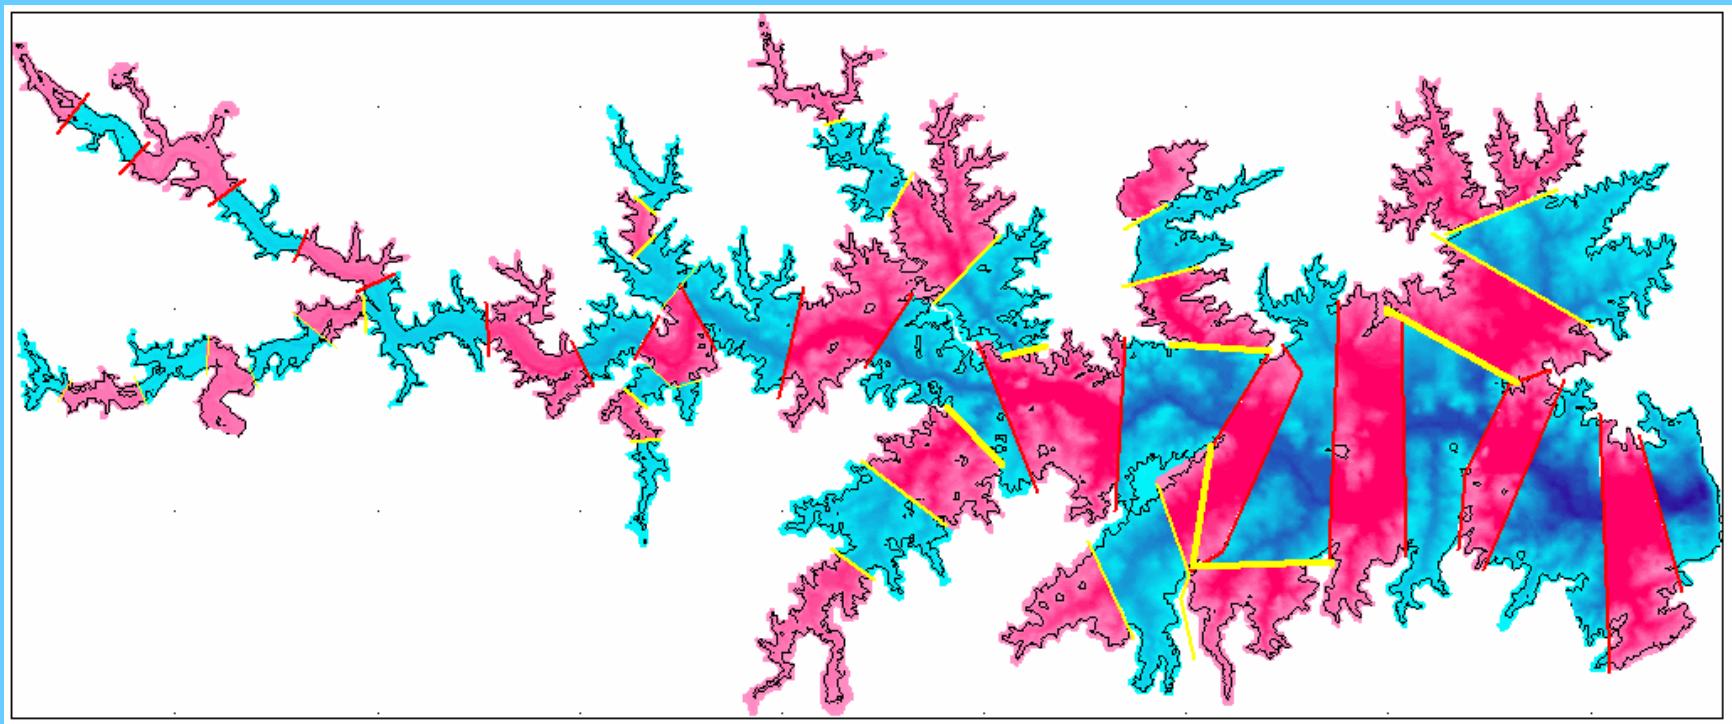


CE-QUAL-W2


Bathymetry for the Main Branch (Branch 1) of Lake Murray

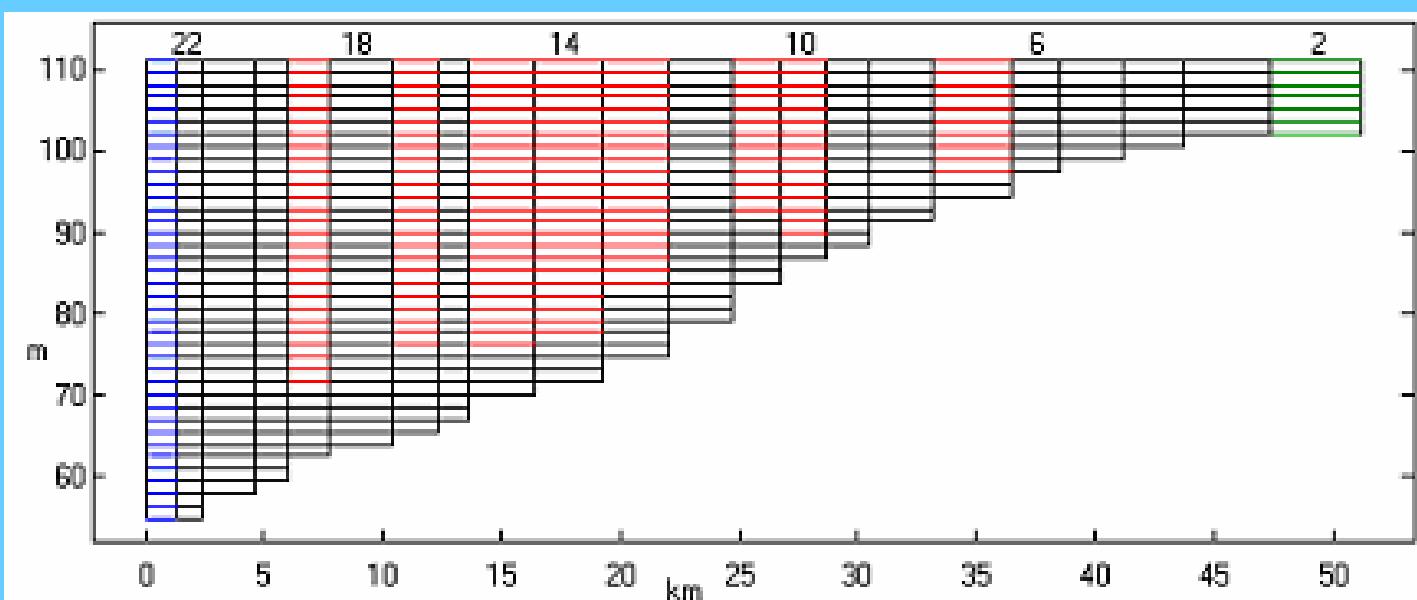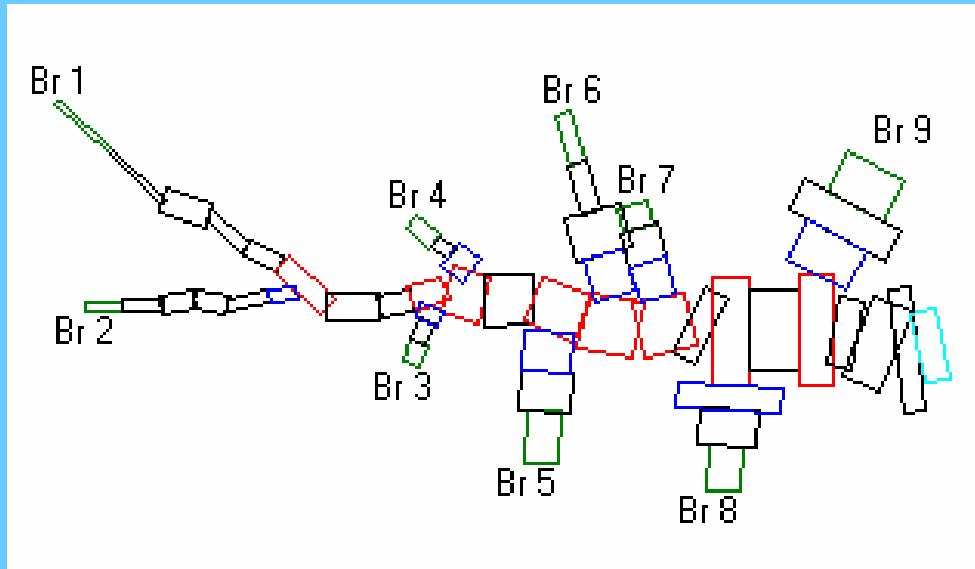


Map of Subwatershed Drainage Area Boundaries

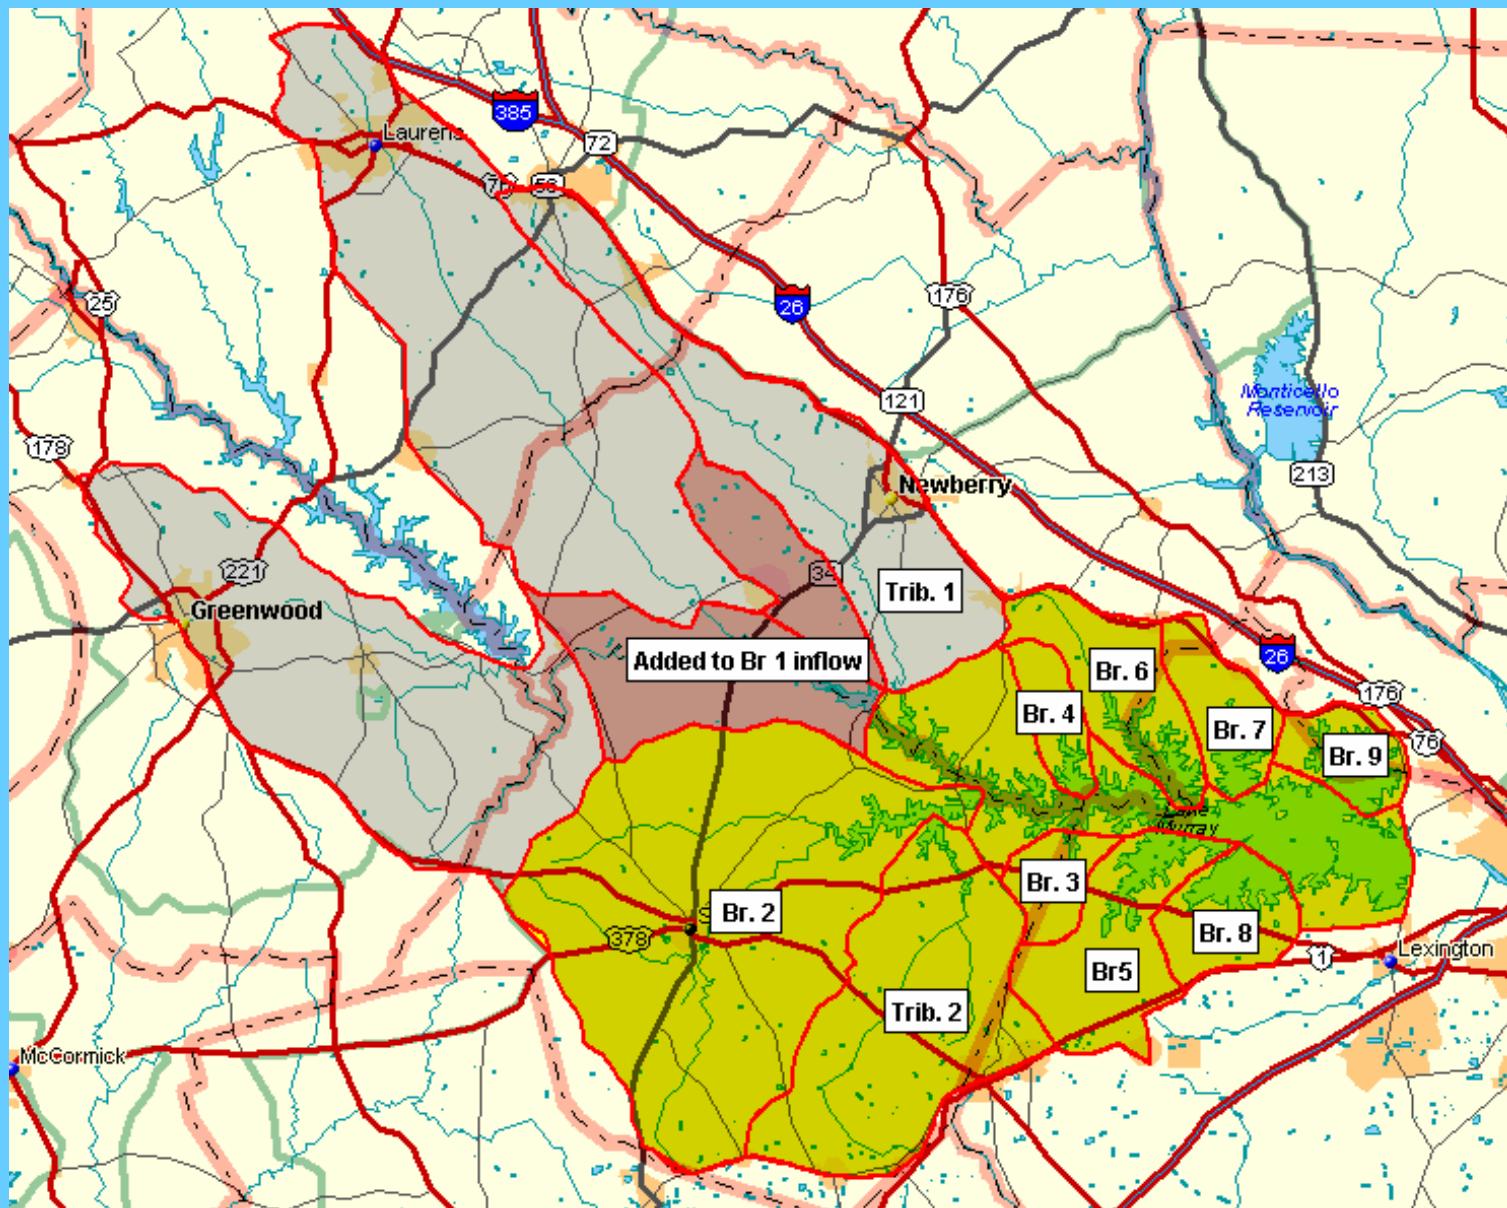


Phosphorus versus Flow Relationship found in the Bush River (Station S-102) using 1997 data

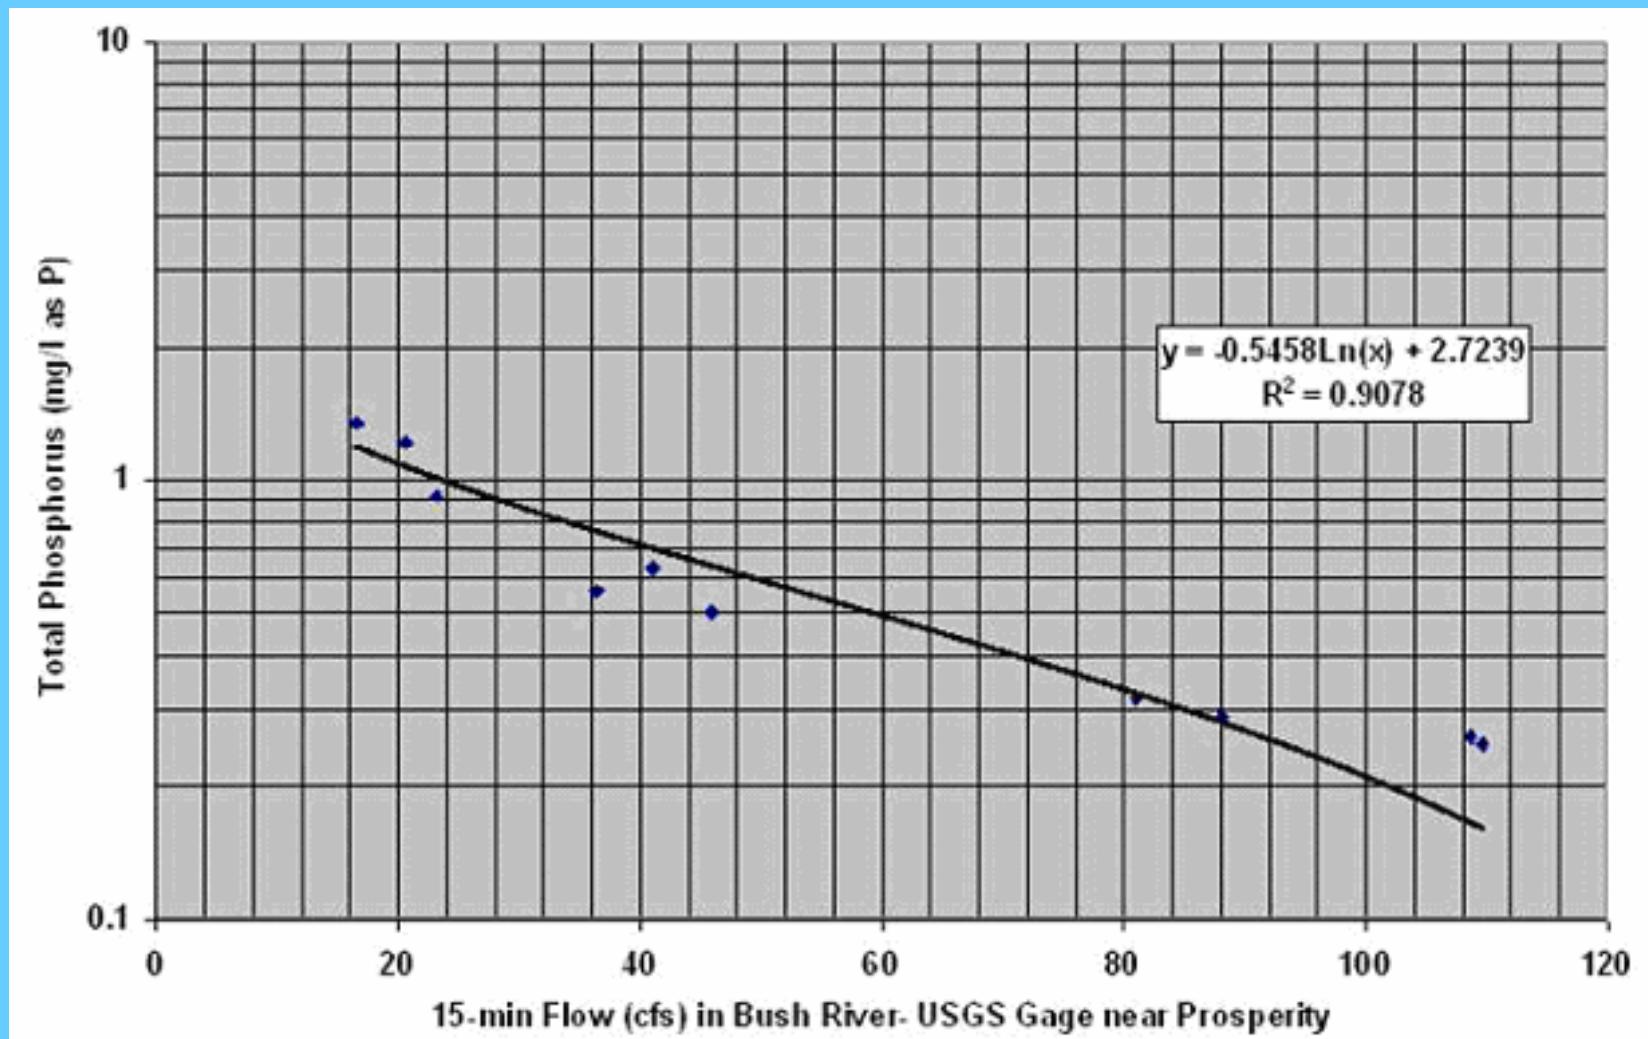


1996 Inflow Phosphorus Analysis for Bush River Inflow to Lake Murray

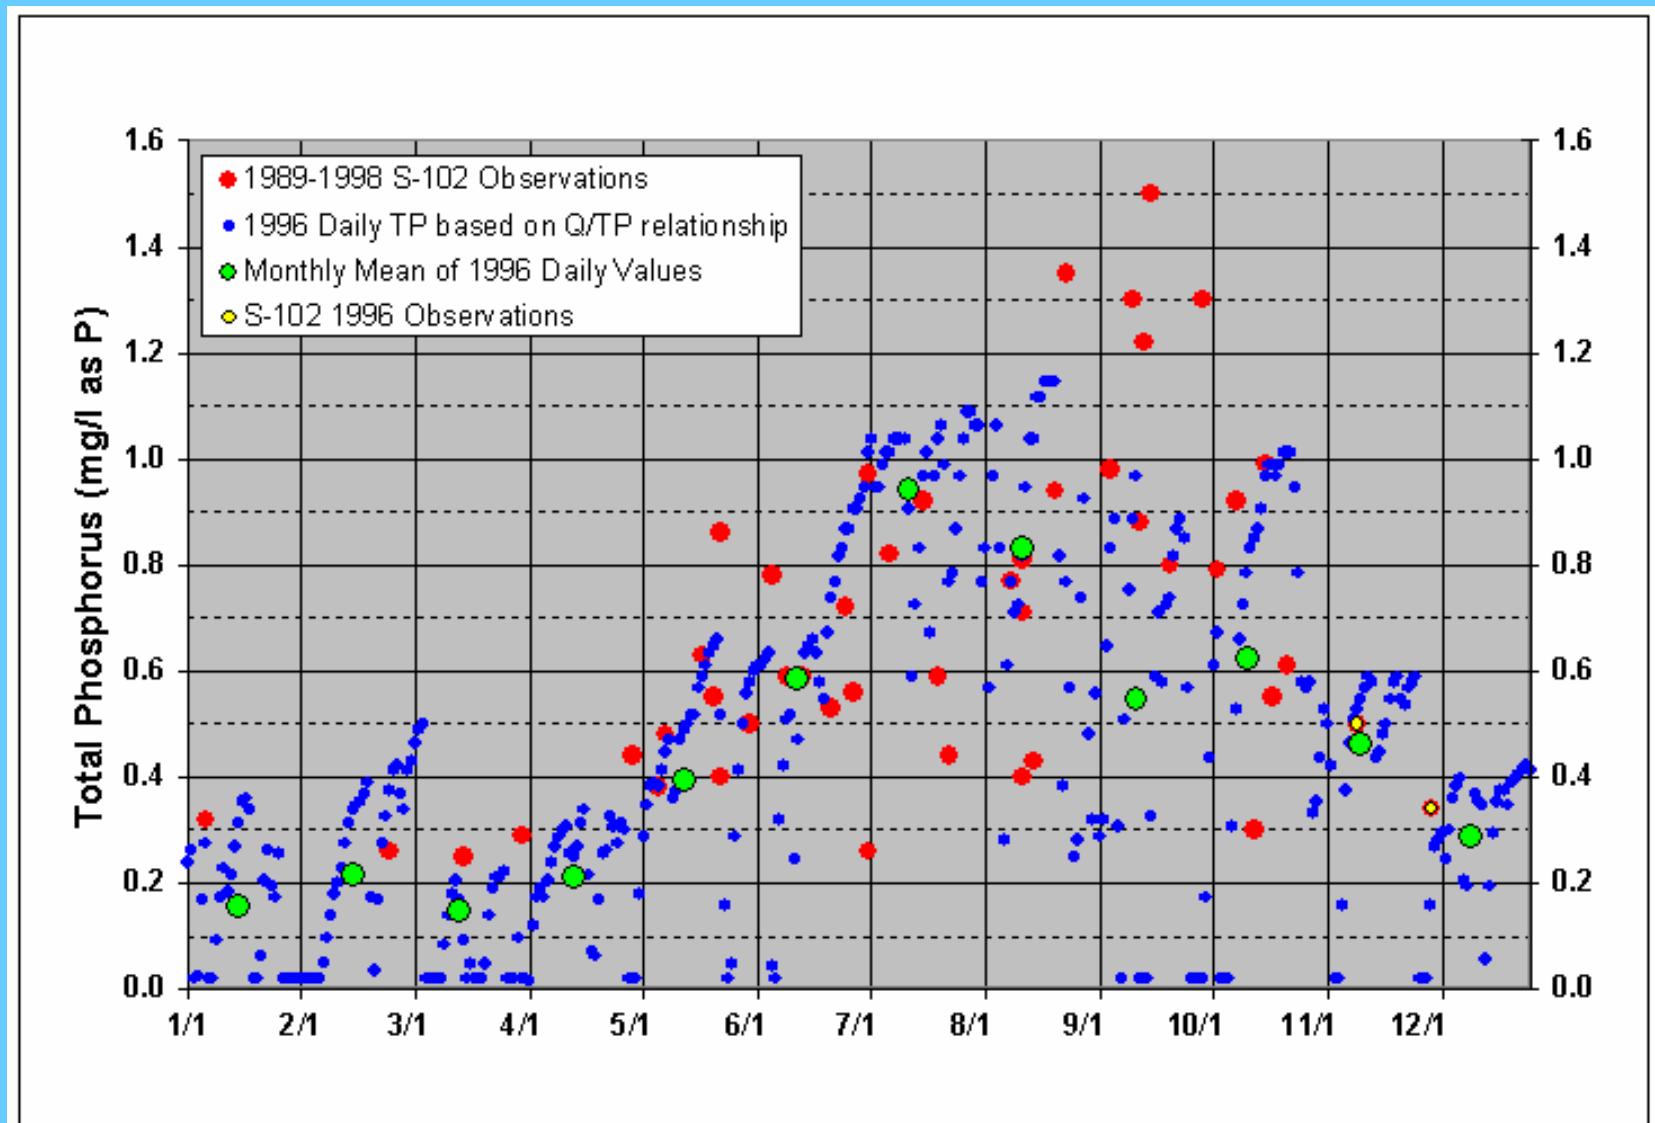


Total Phosphorus in the Little Saluda River

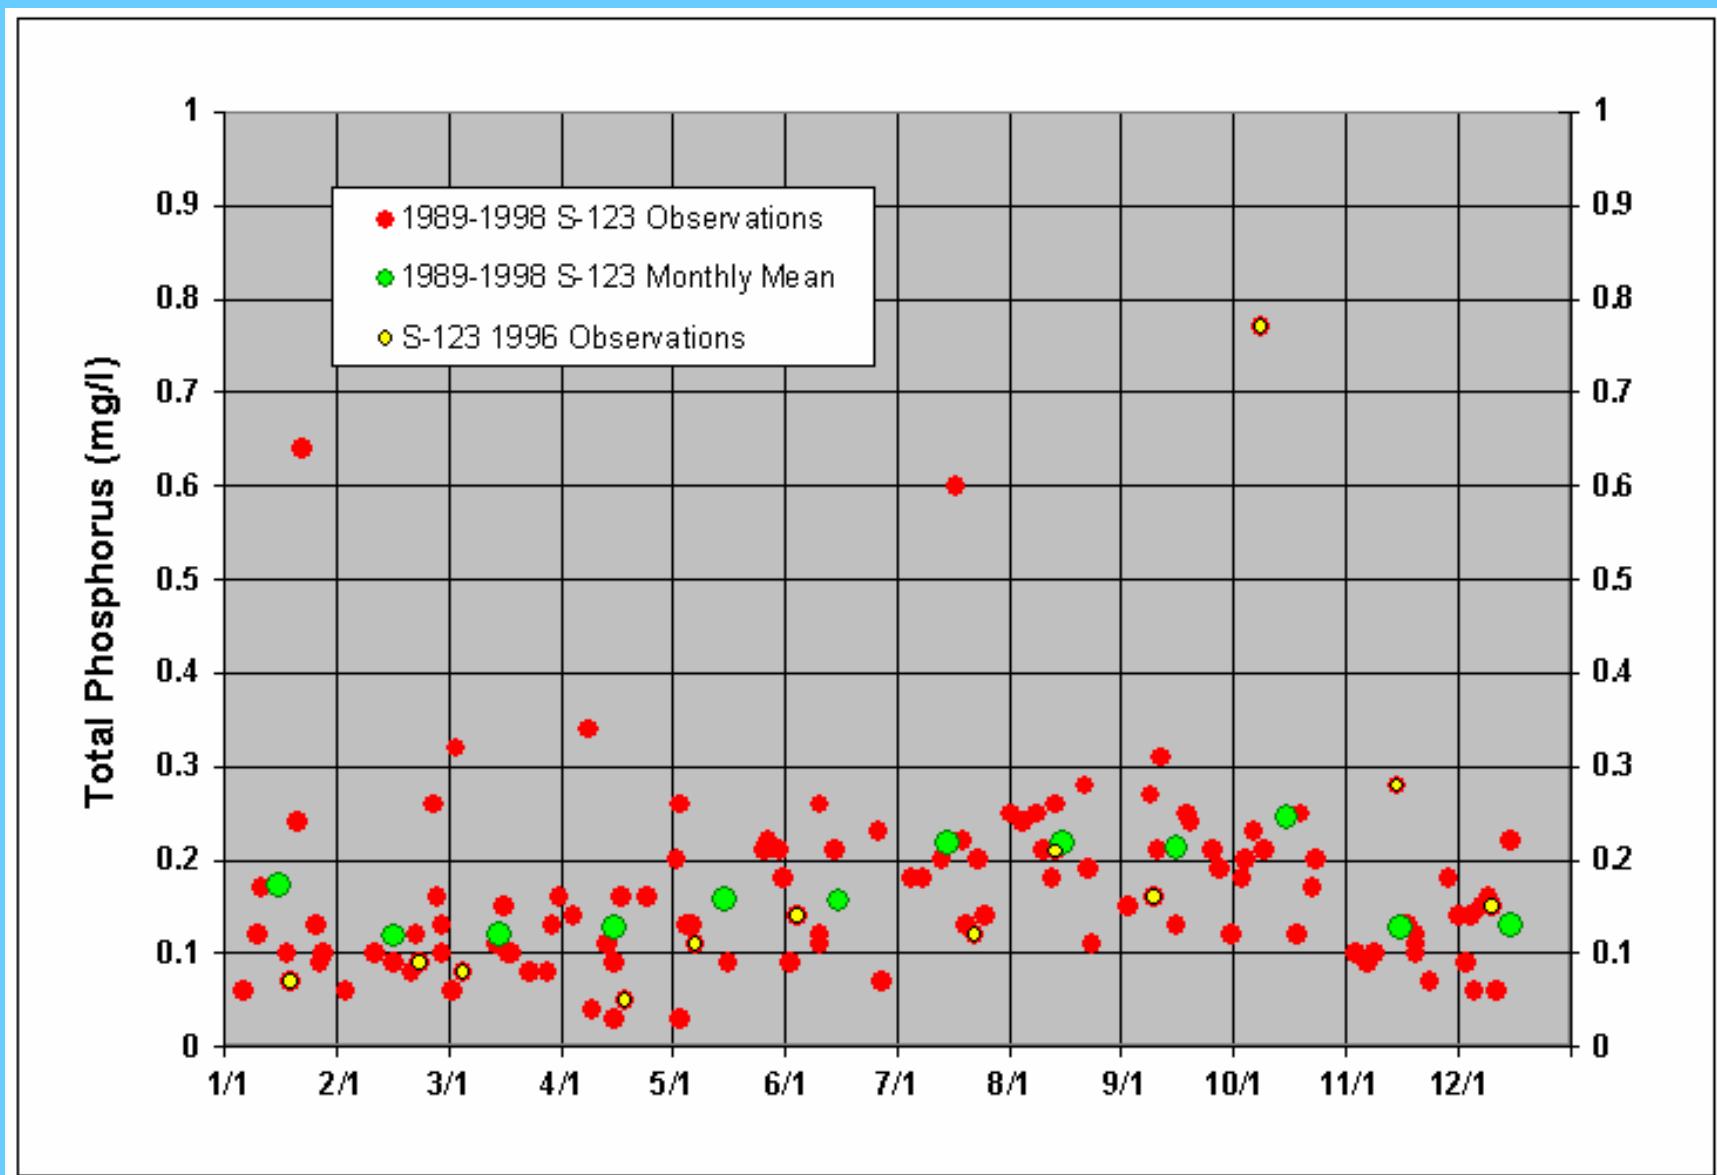


Total Phosphorus Clouds Creek

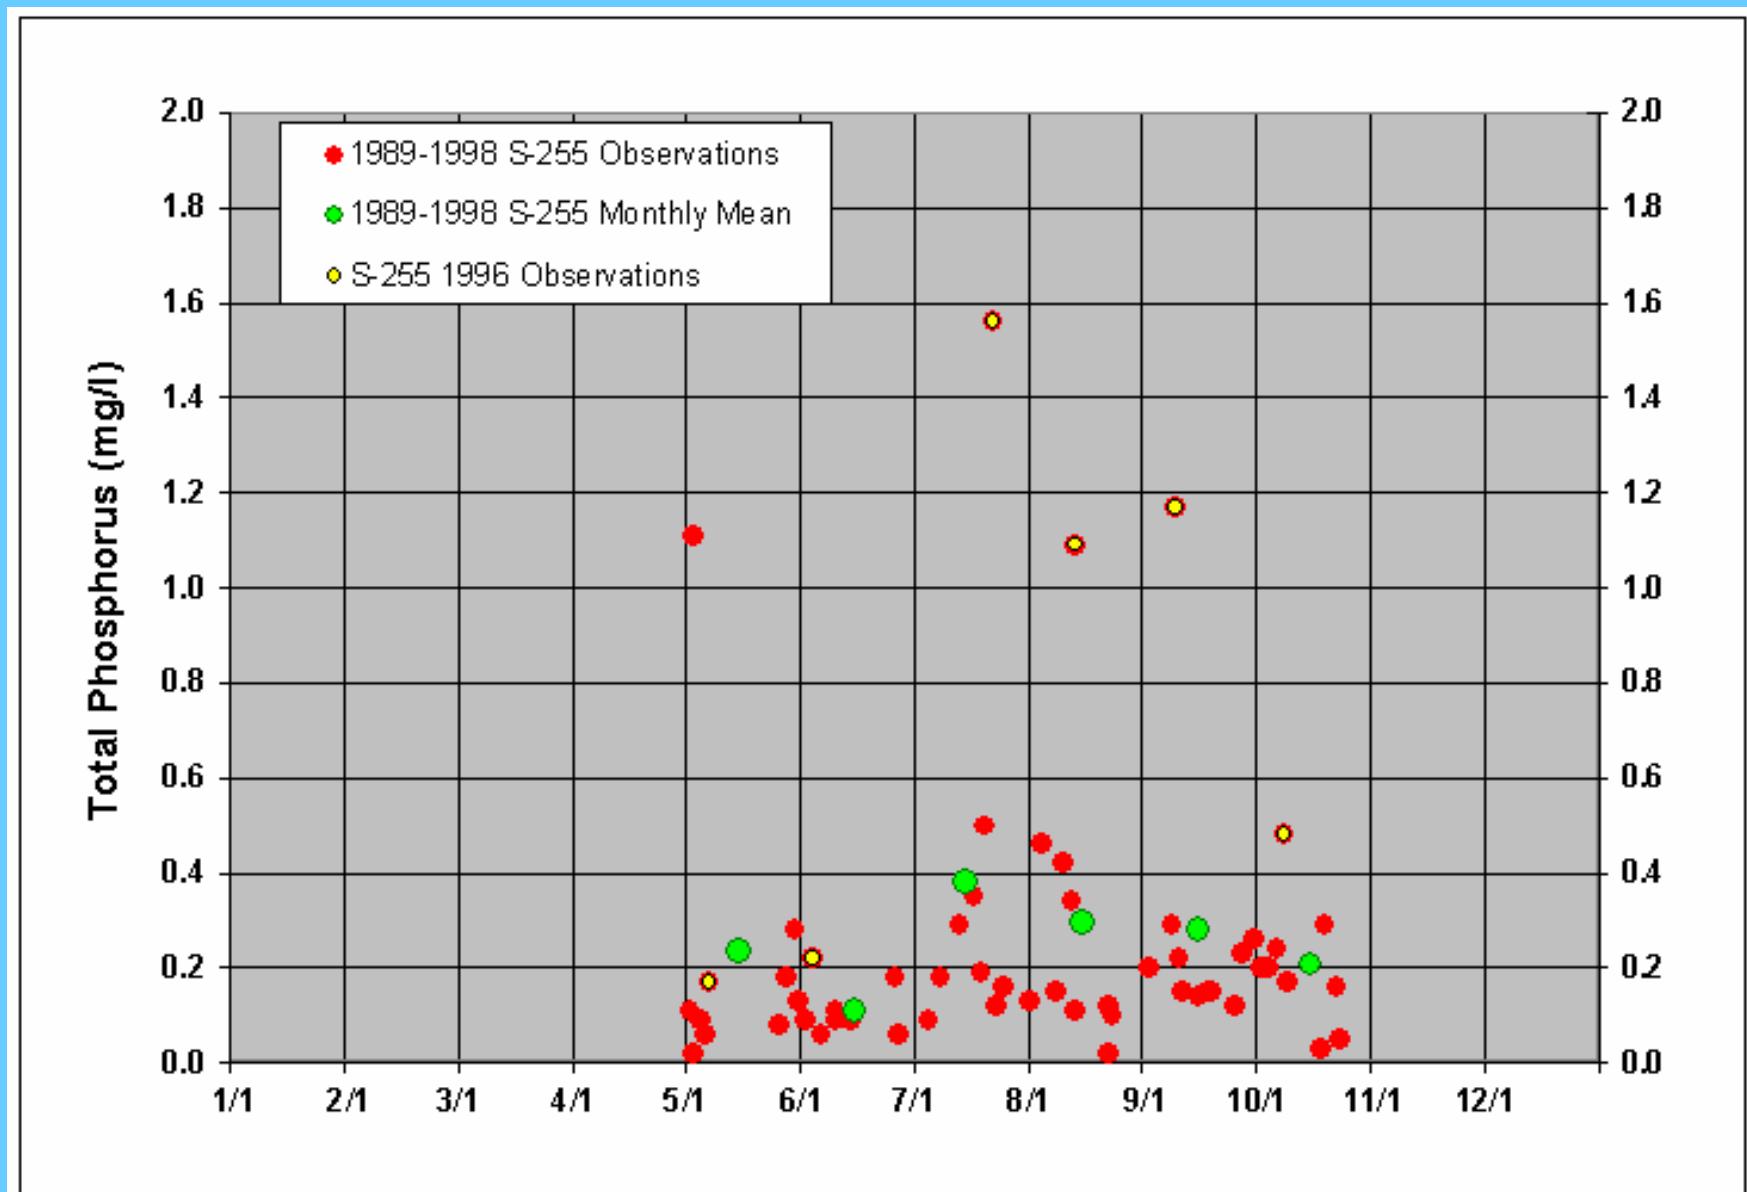

Total Phosphorus in Camping Creek

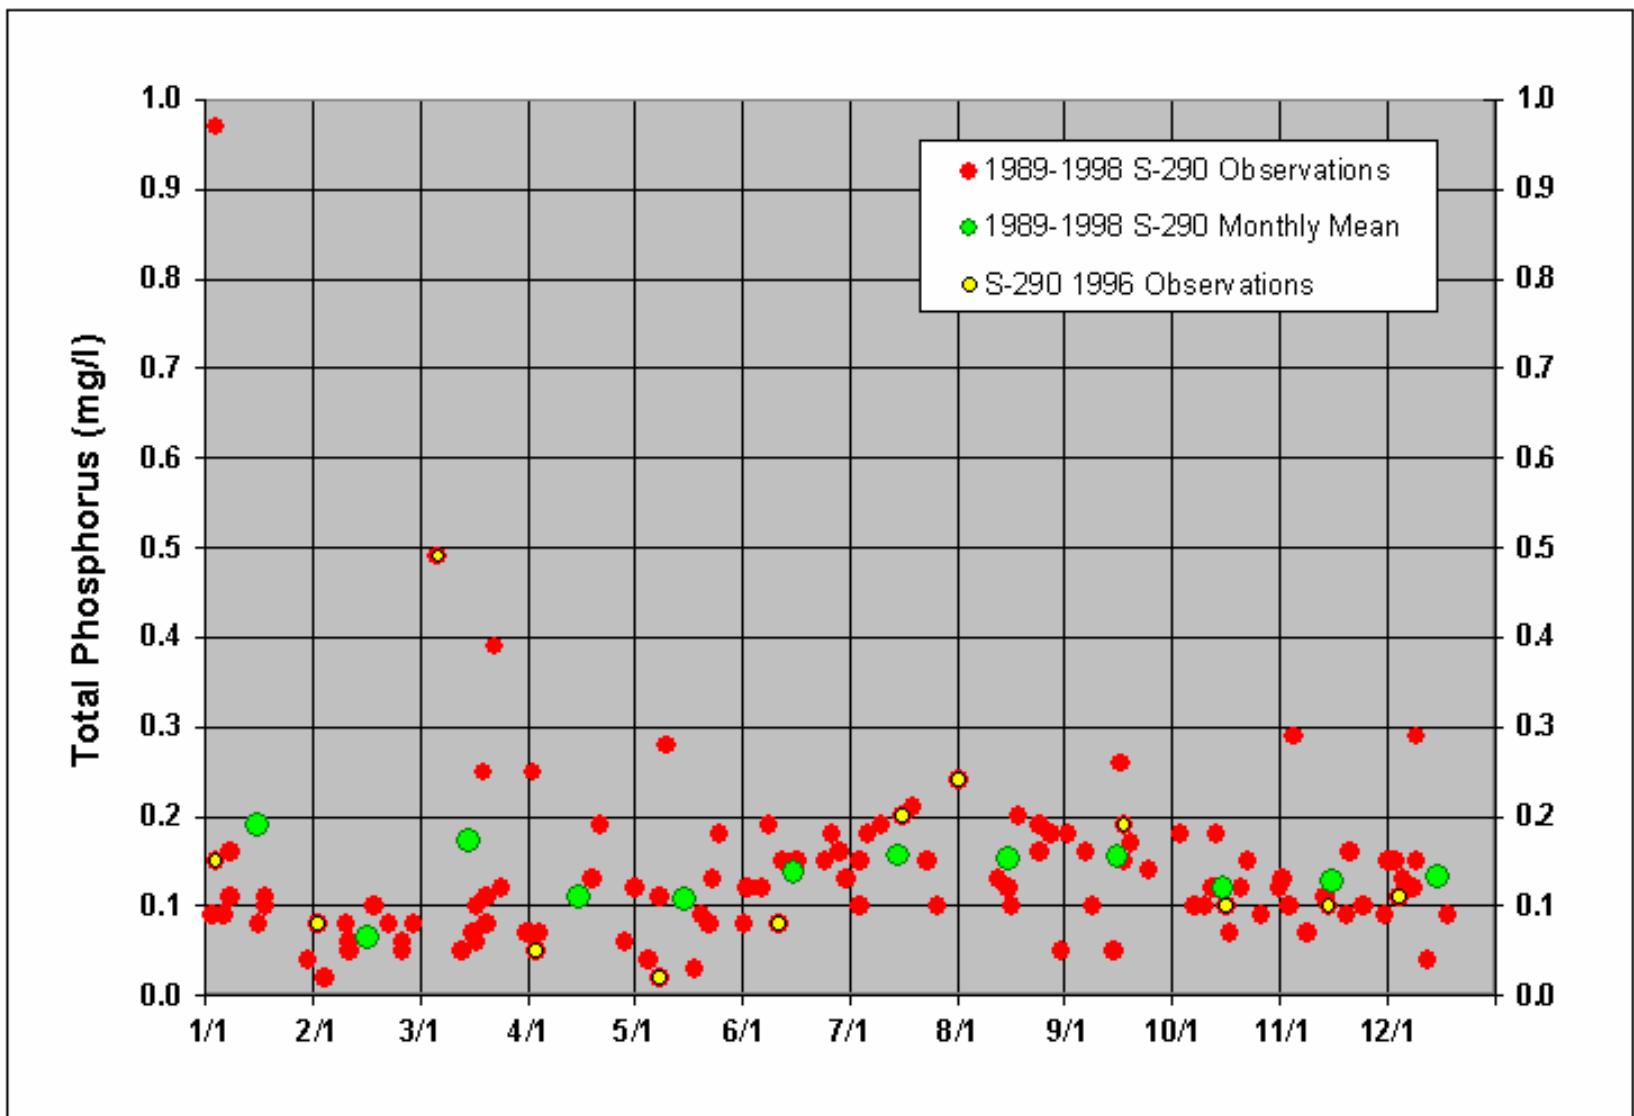


Inflow Dissolved Phosphorus Concentrations for Model Inflows to Lake Murray

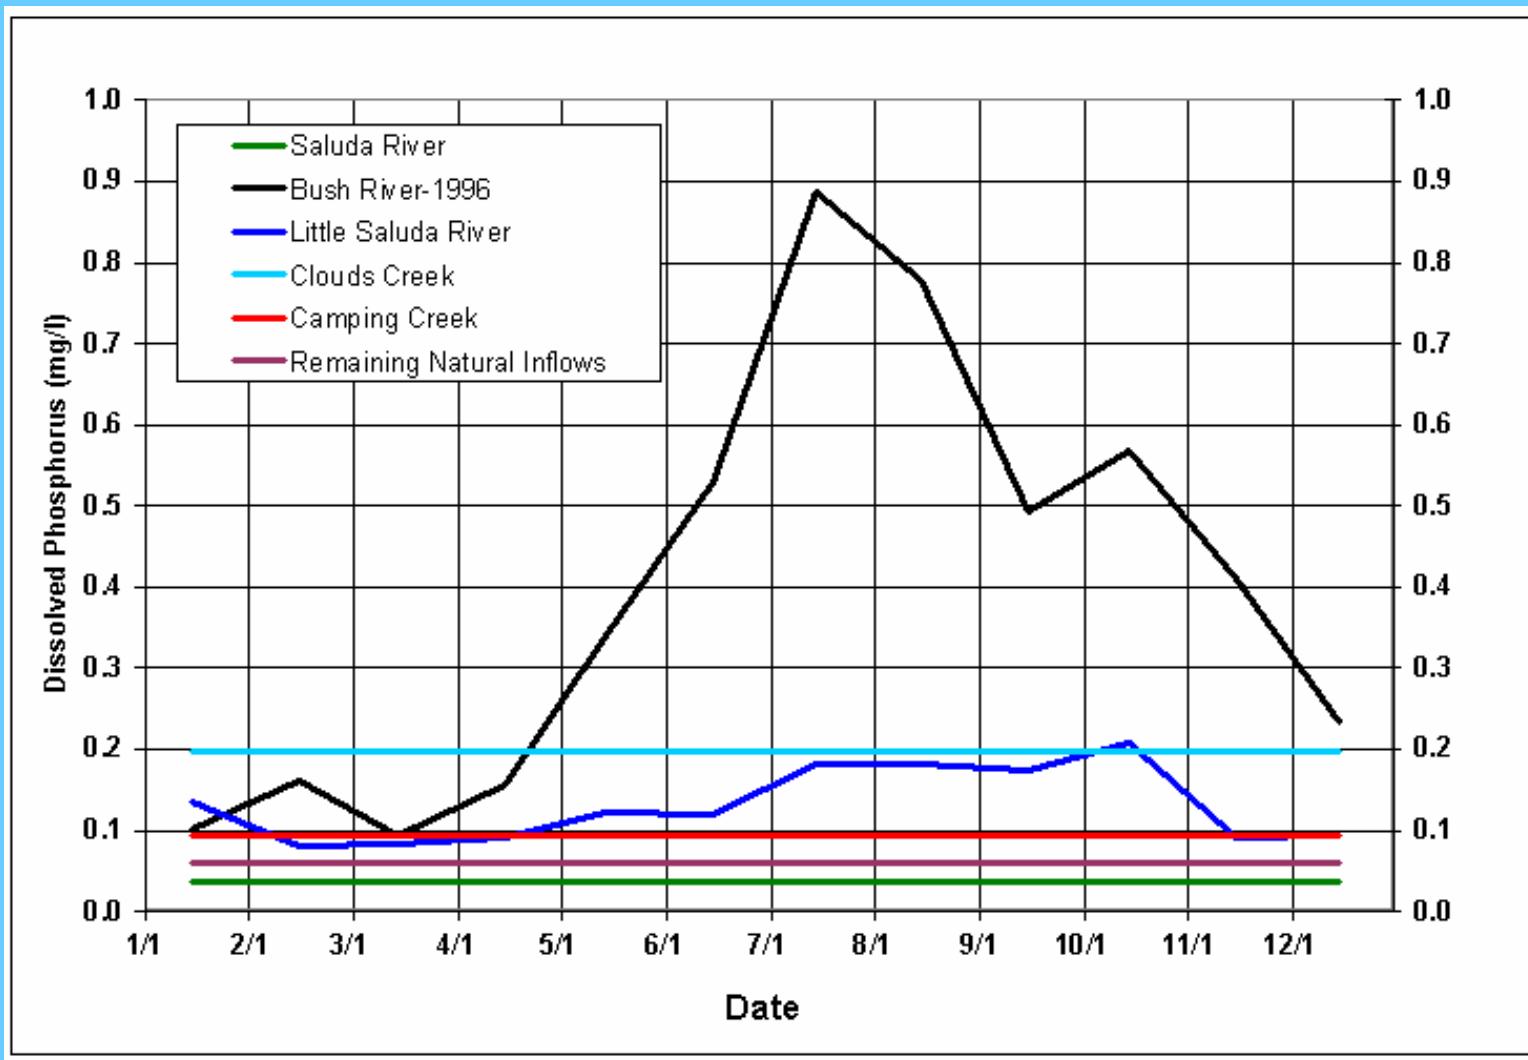


Nitrate Concentrations in the Inflows to the Lake


Murray CE-QUAL-W2 Model

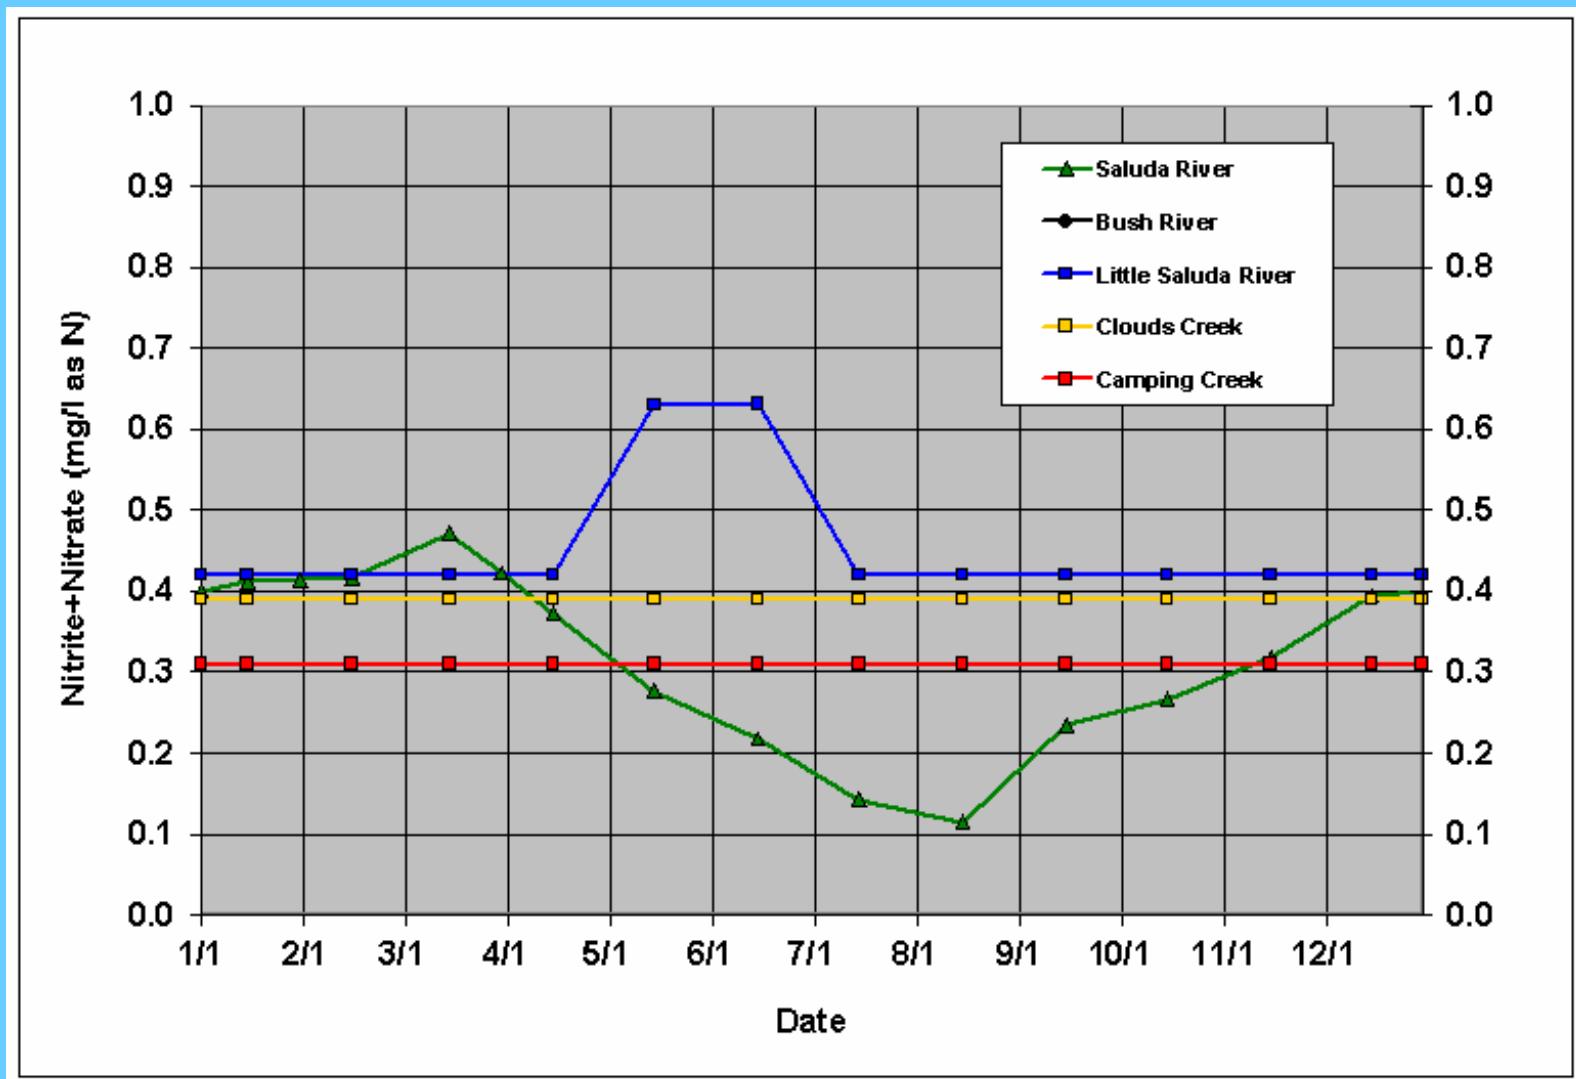


Ammonium Concentrations in the Inflows to the Lake Murray CE-QUAL-W2 Model

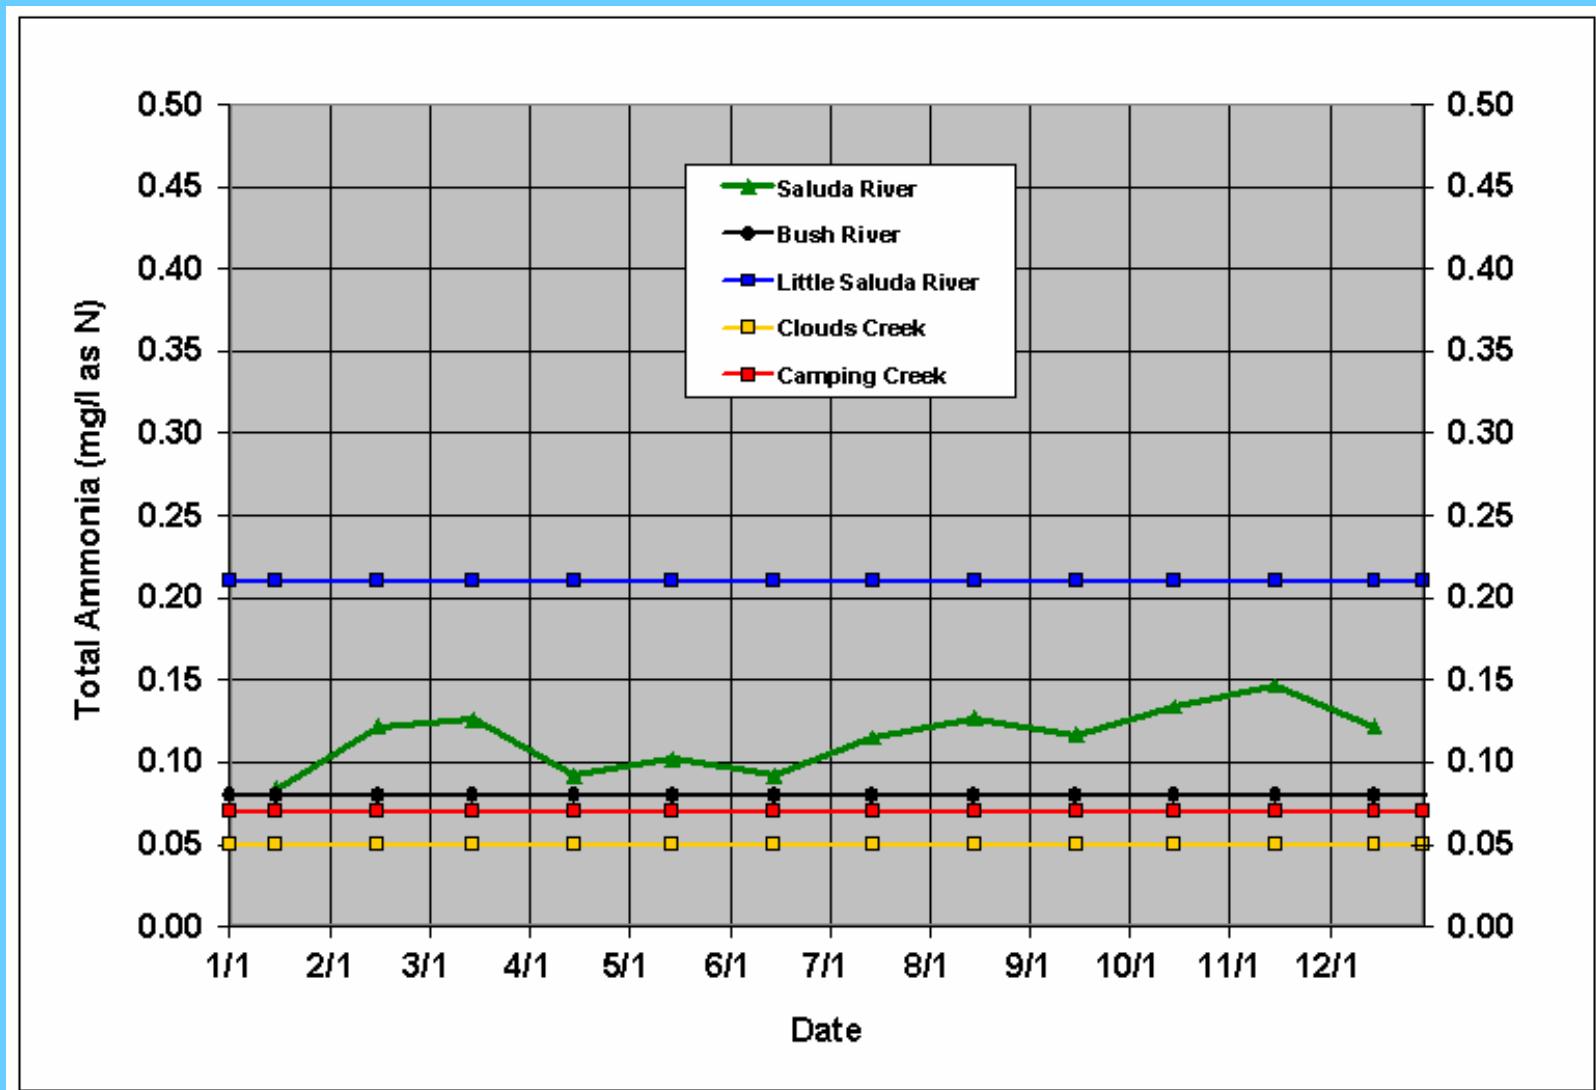


1992 Modeled and Measured Lake Murray Headwater Elevations

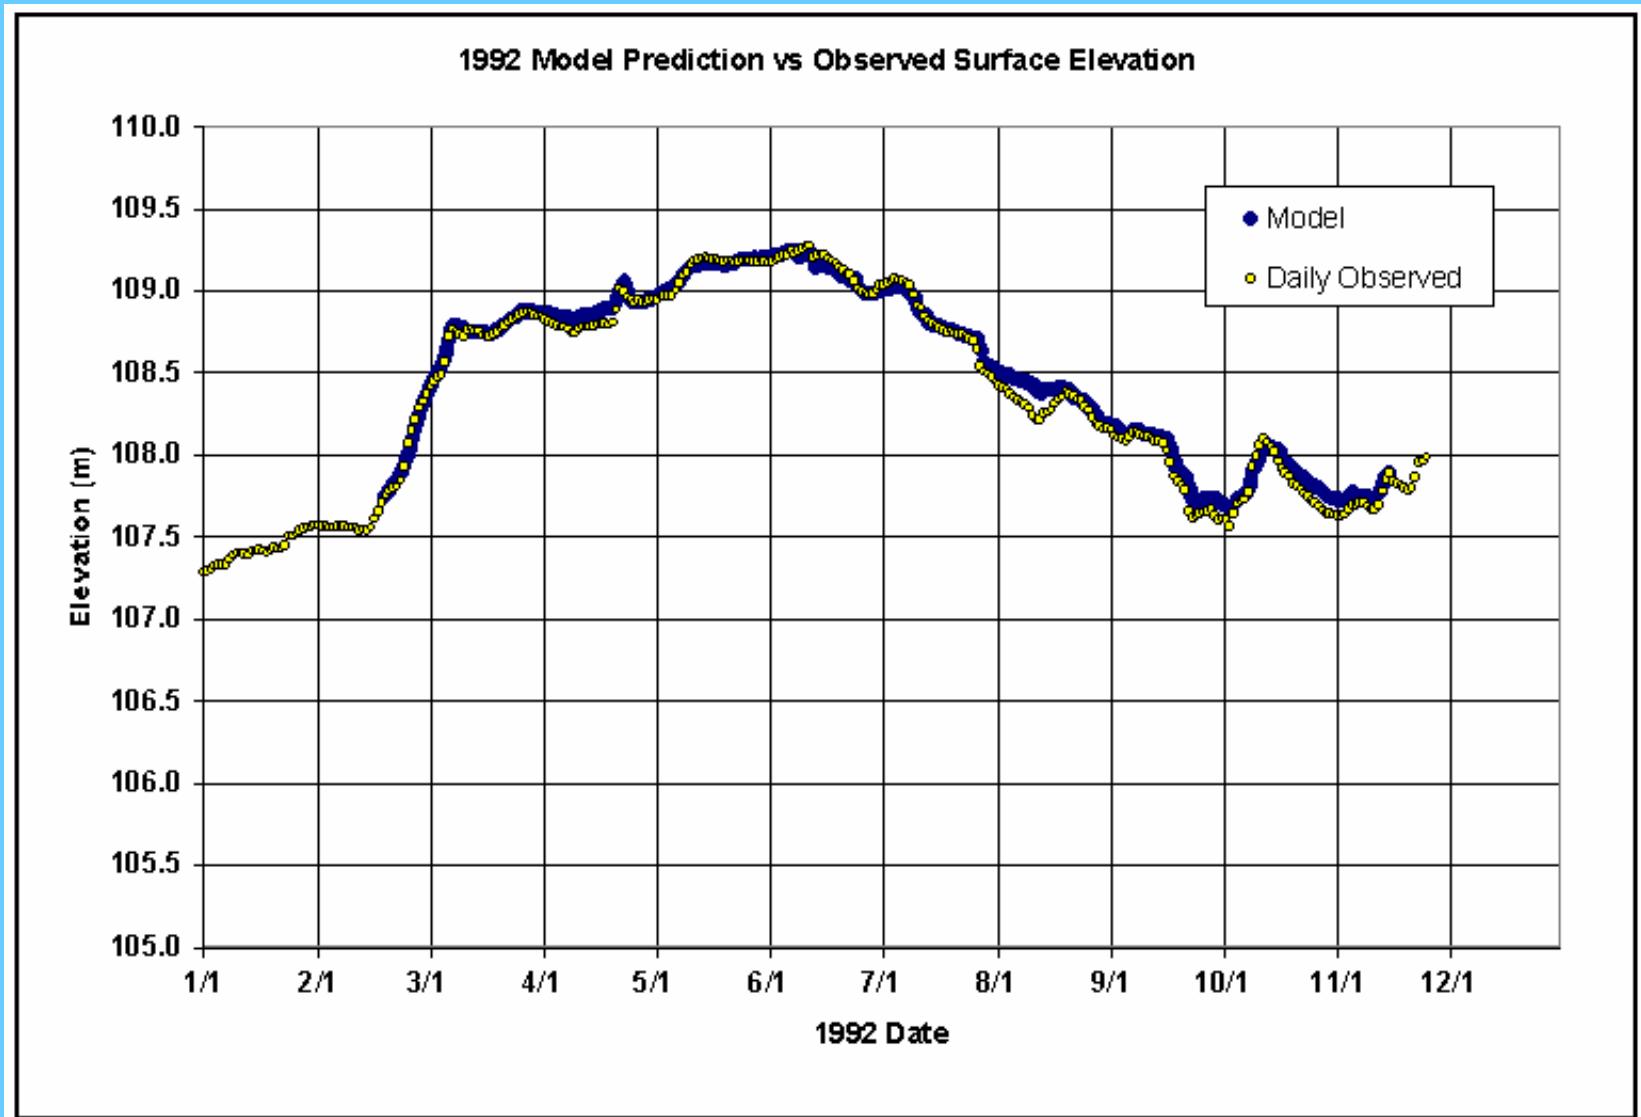


1996 Modeled and Measured Lake Murray Headwater Elevations

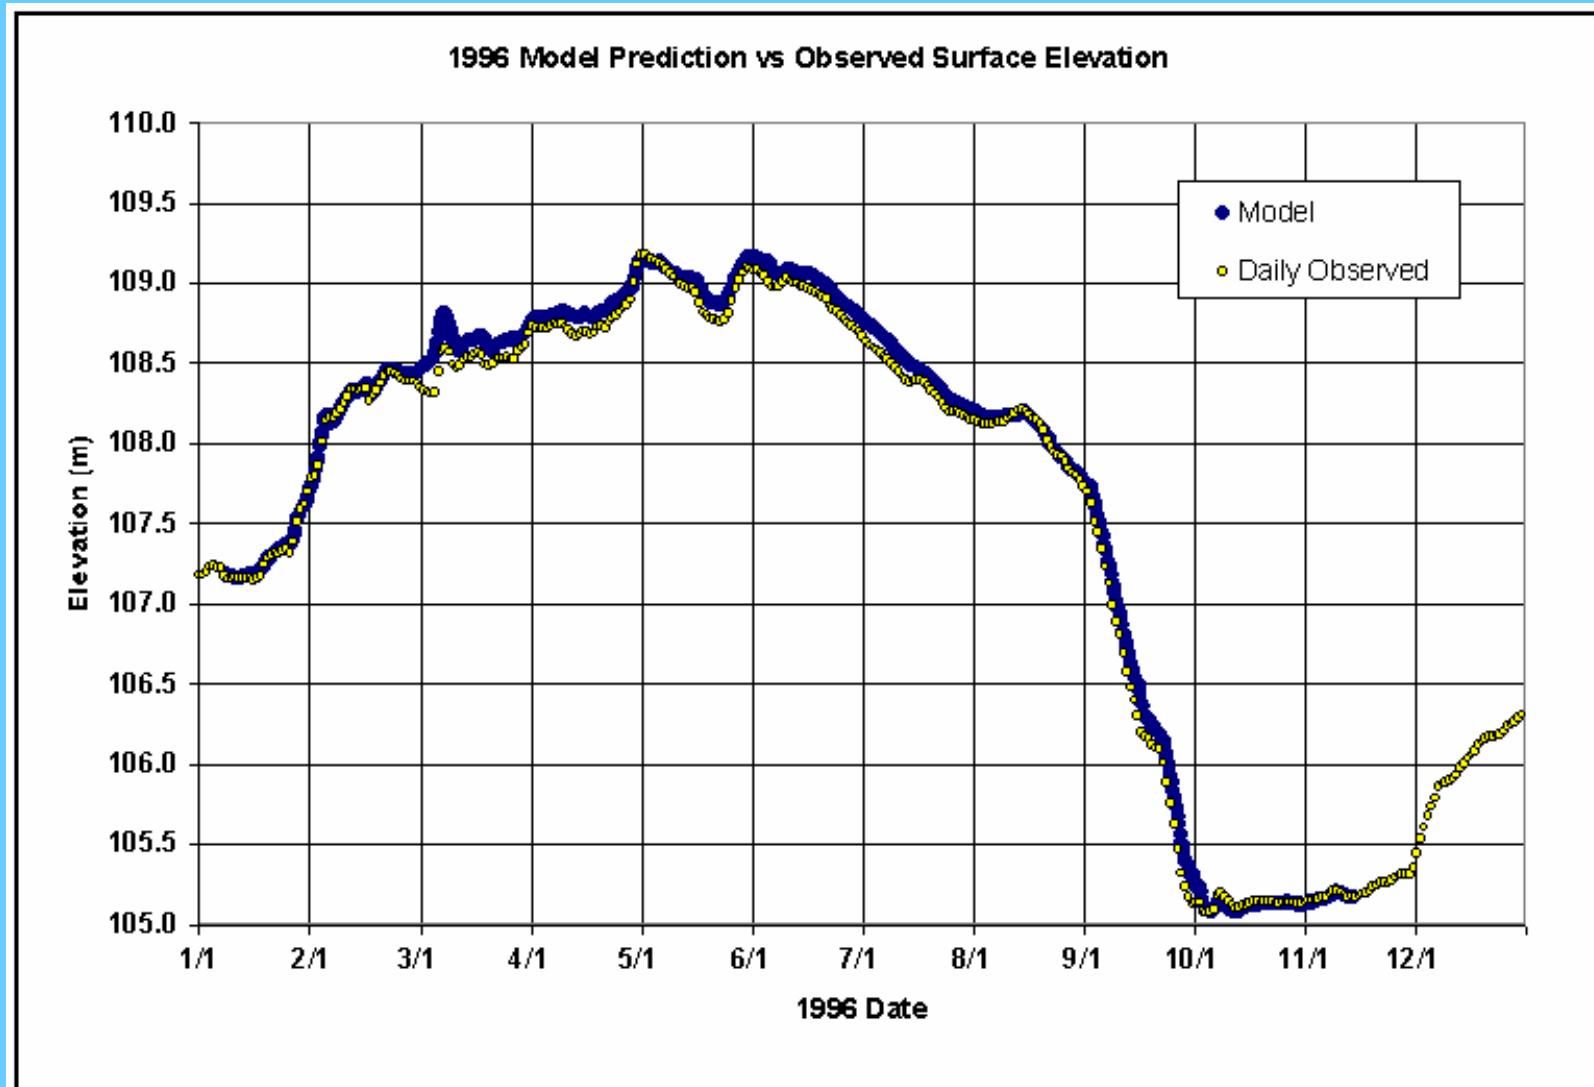















1997 Modeled and Measured Lake Murray Headwater Elevations

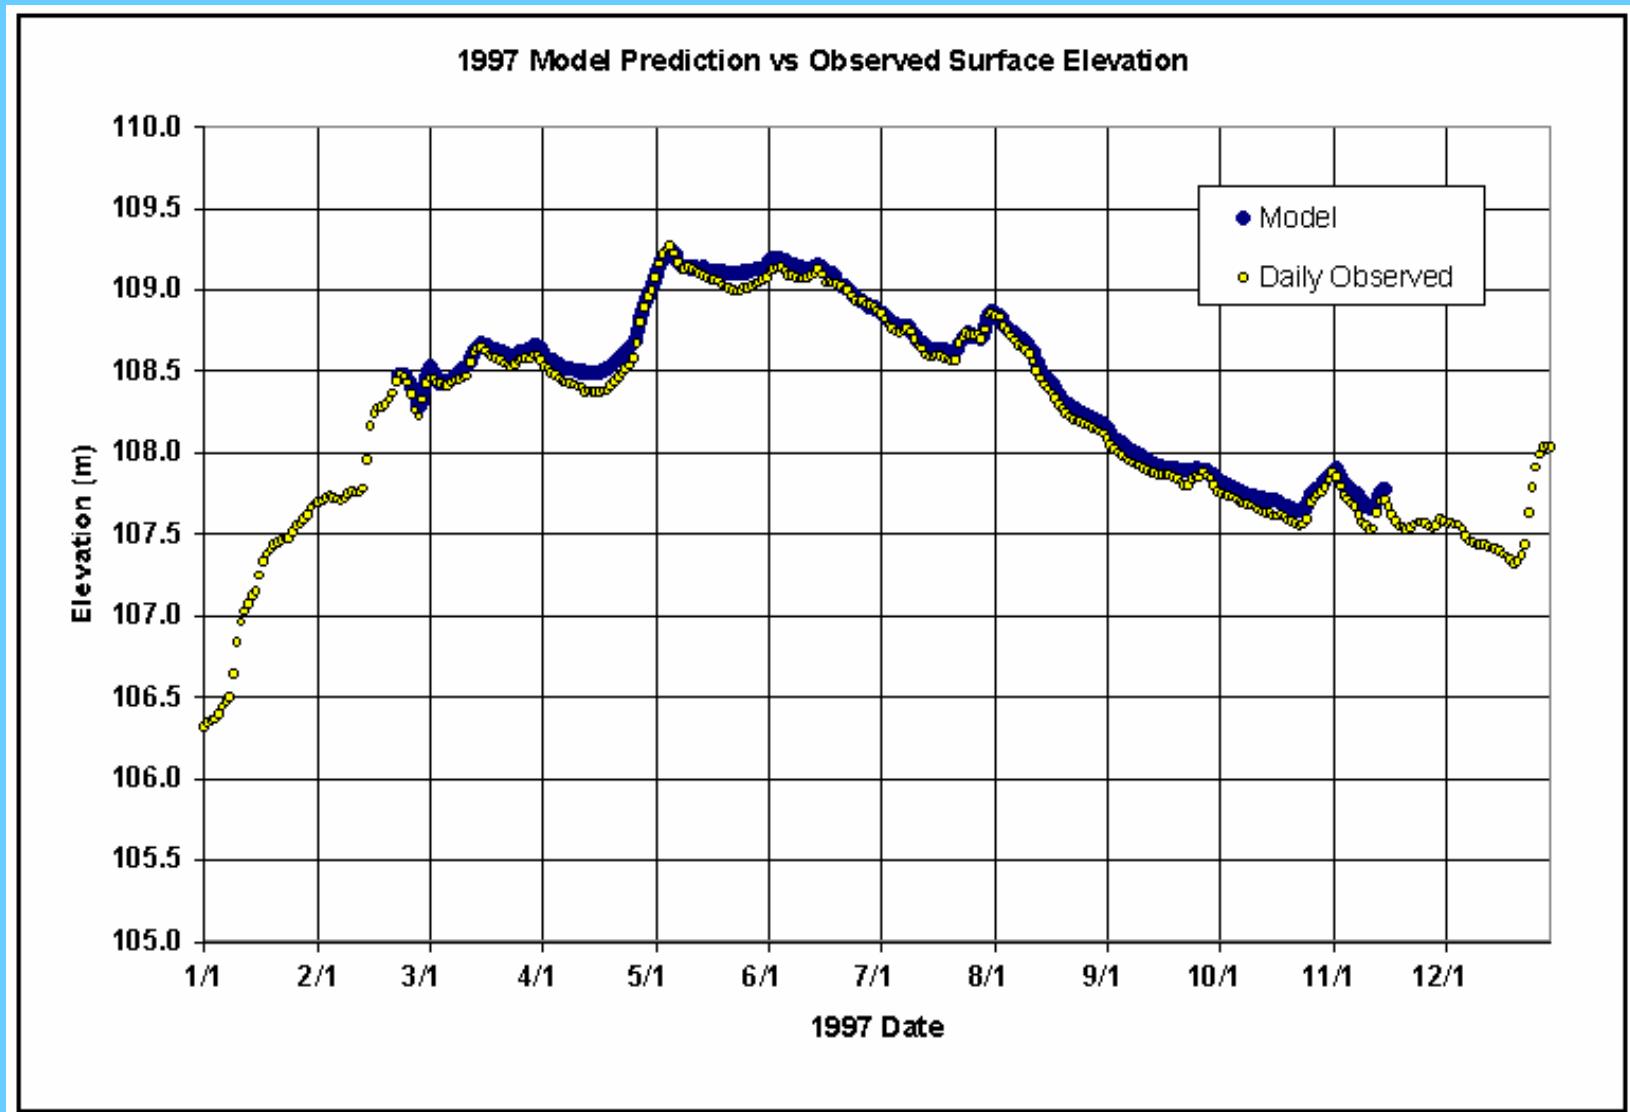


Primary Water Quality Calibration Locations

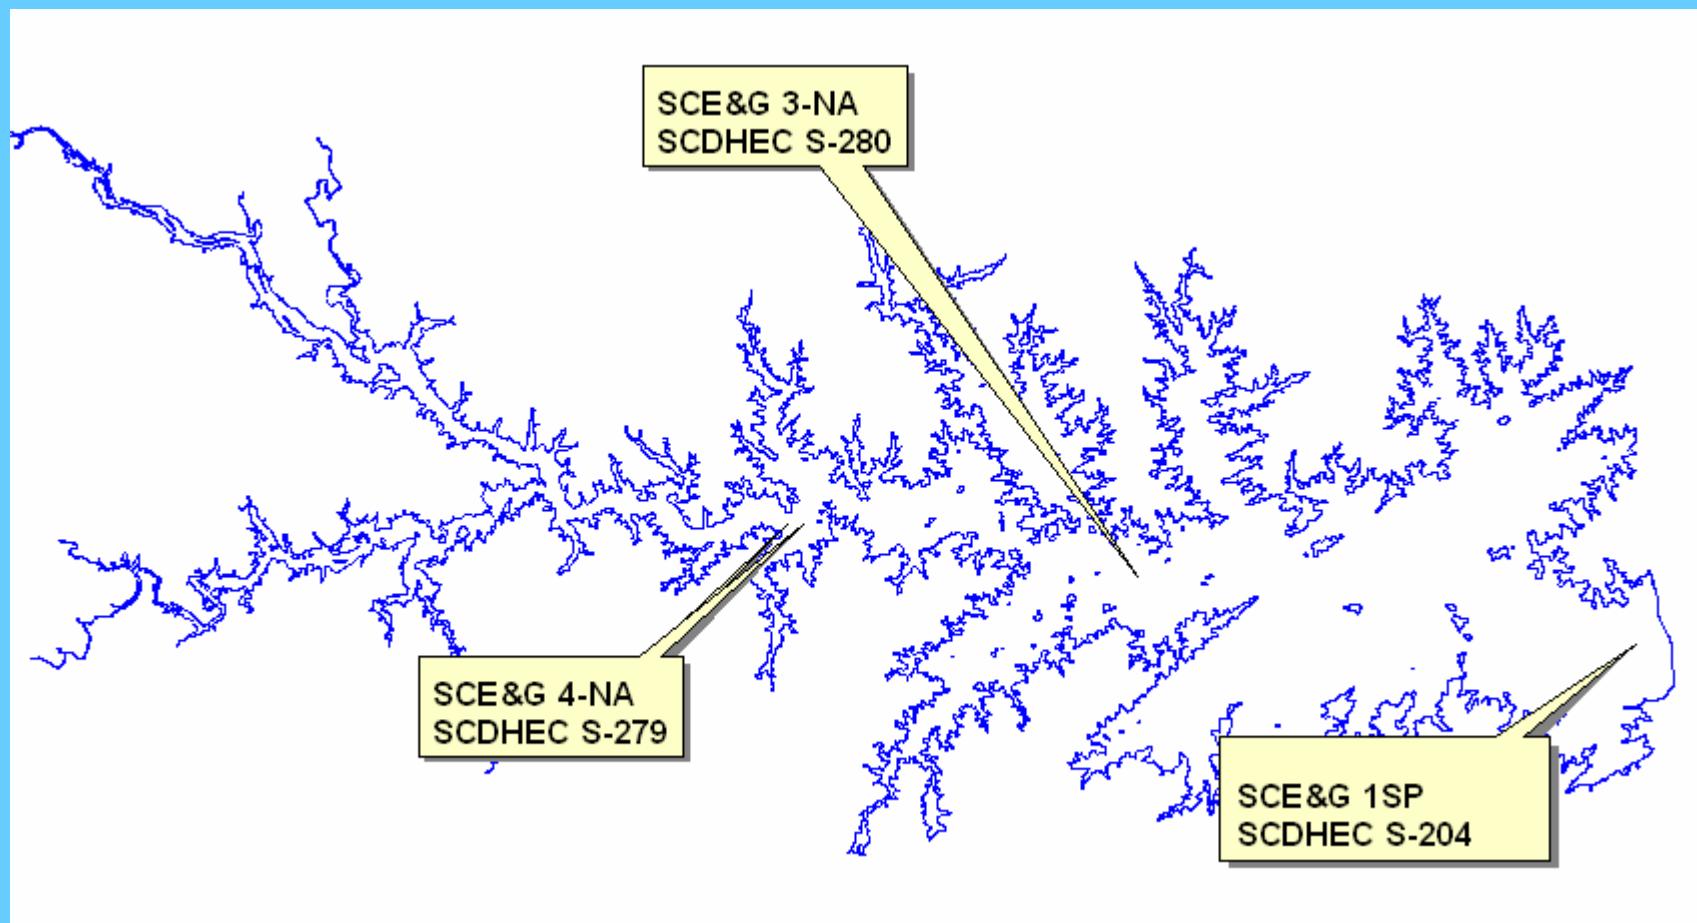


1996 Lake Murray Forebay Temperature Profiles Model vs. Data

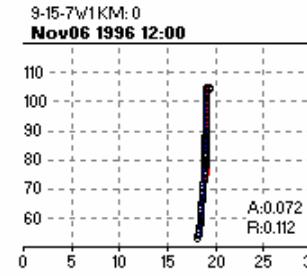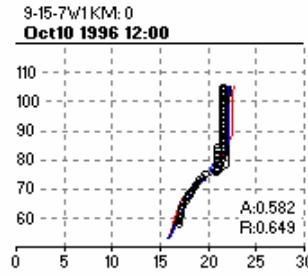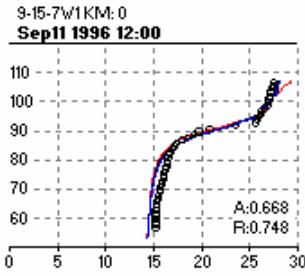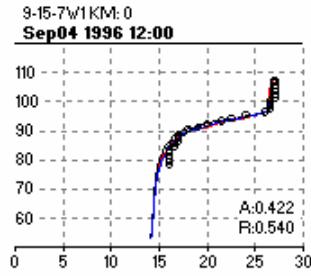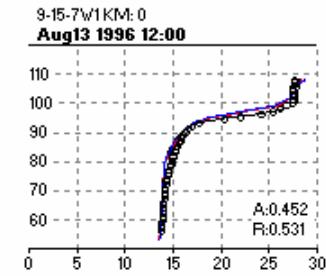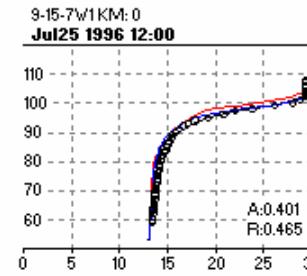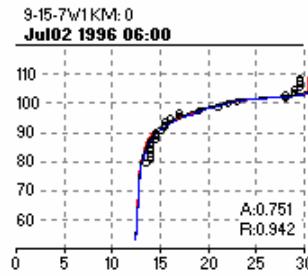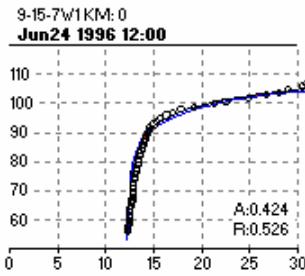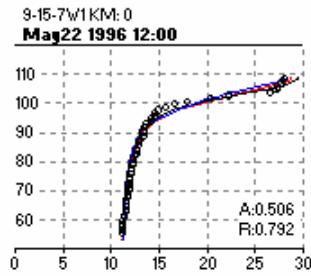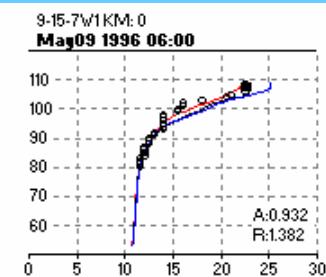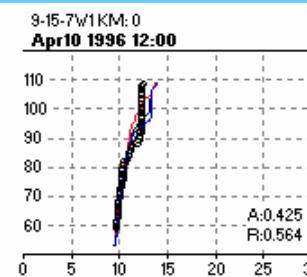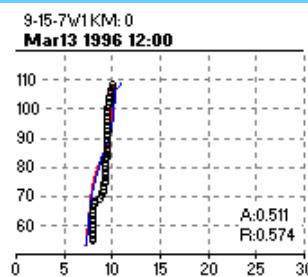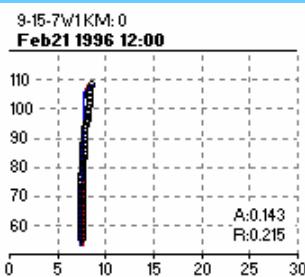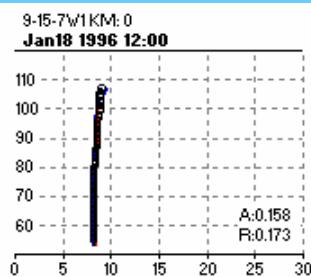


1992 Comparison of Modeled versus Measured Saluda Release Temperatures

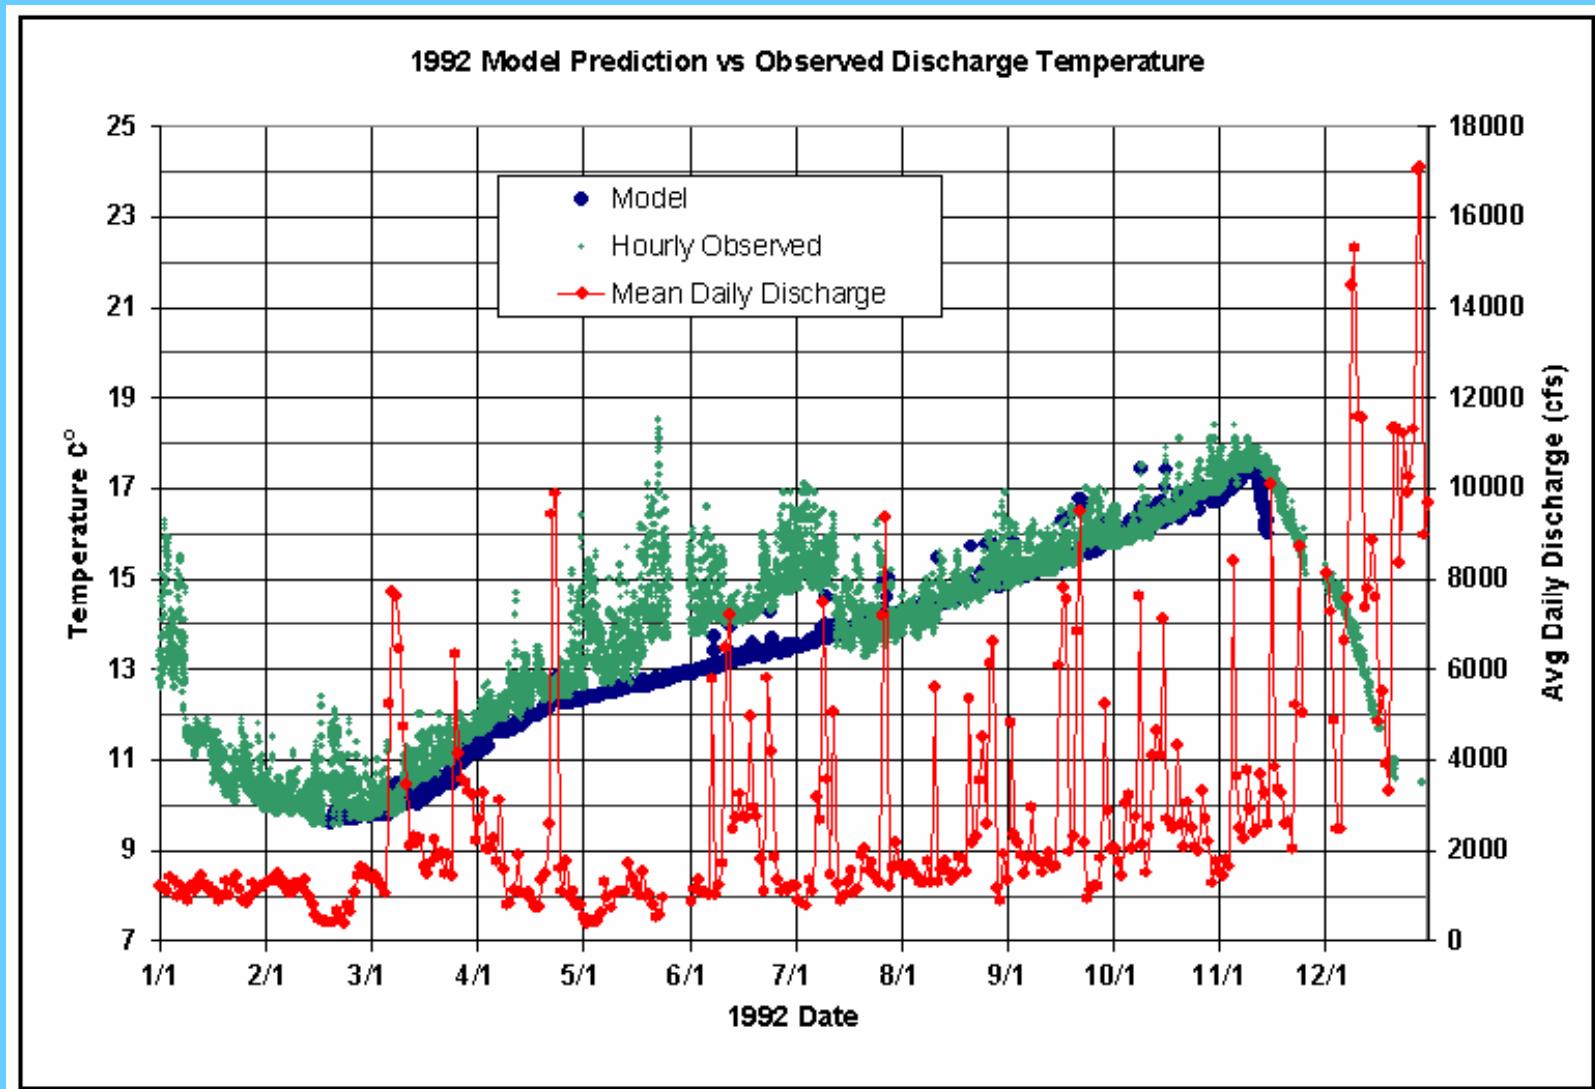


1996 Comparison of Modeled versus Measured Saluda Release Temperatures

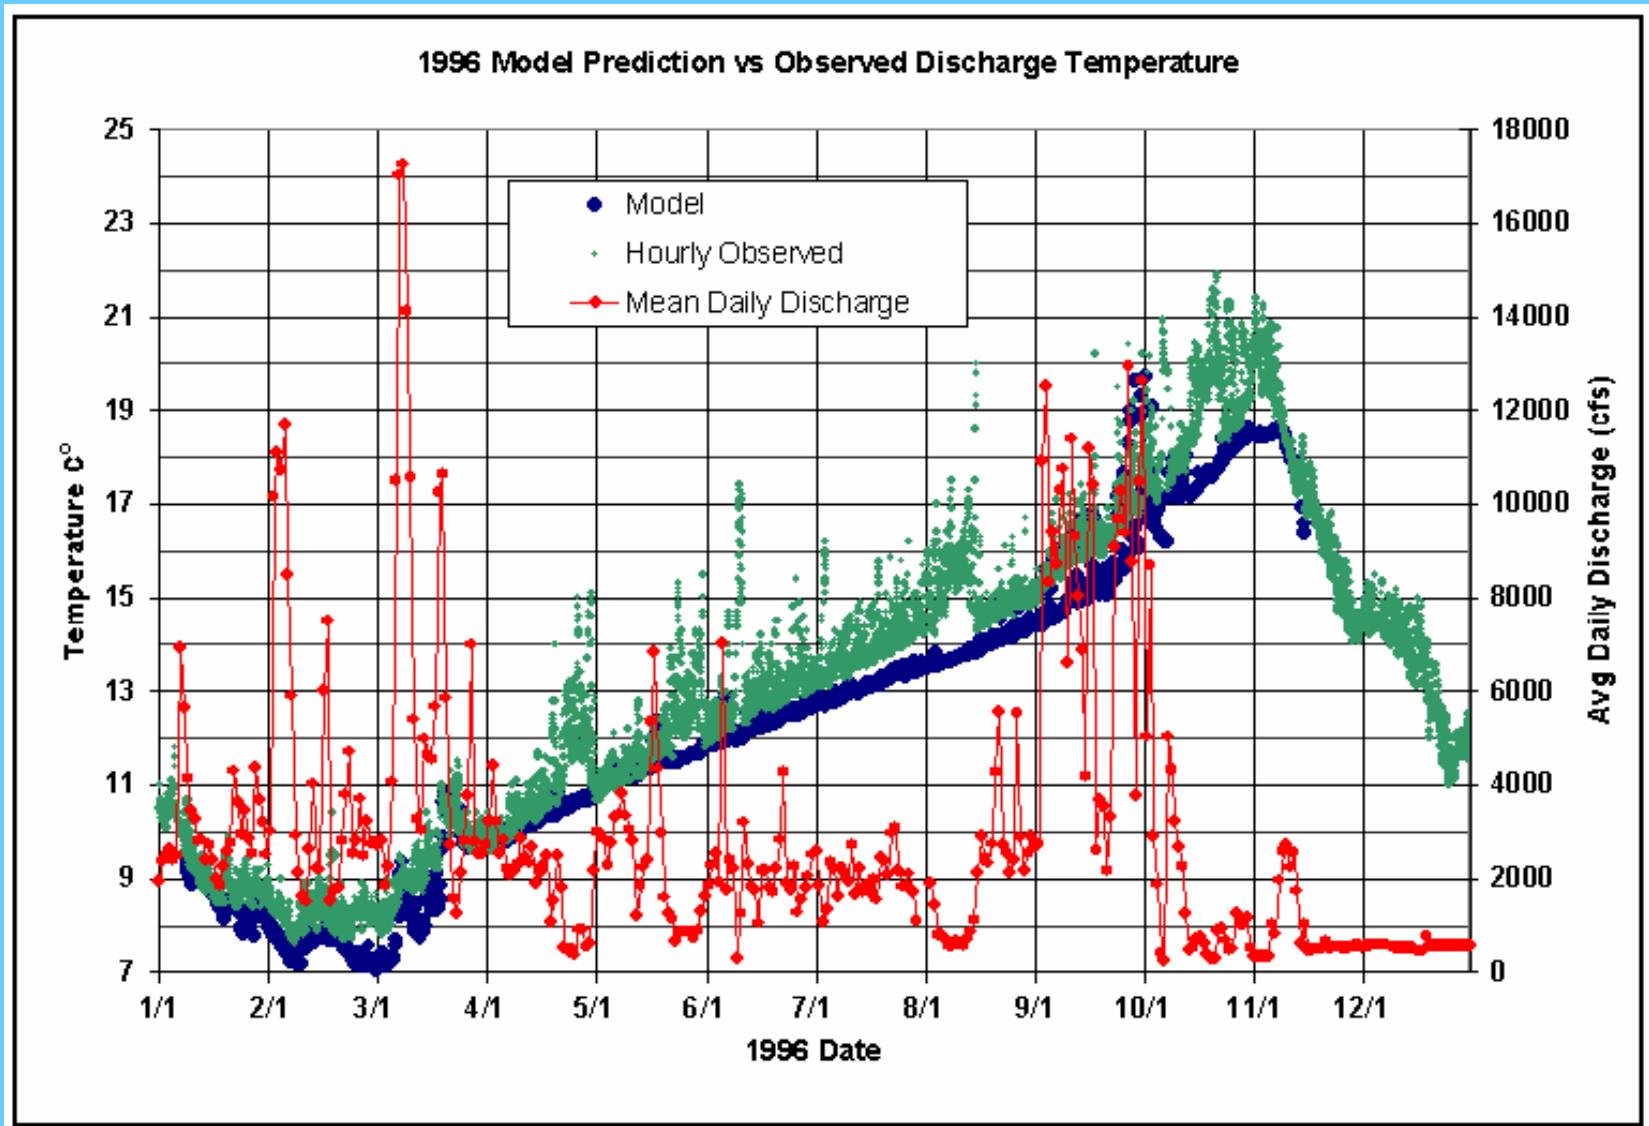


1997 Comparison of Modeled versus Measured Saluda Release Temperatures

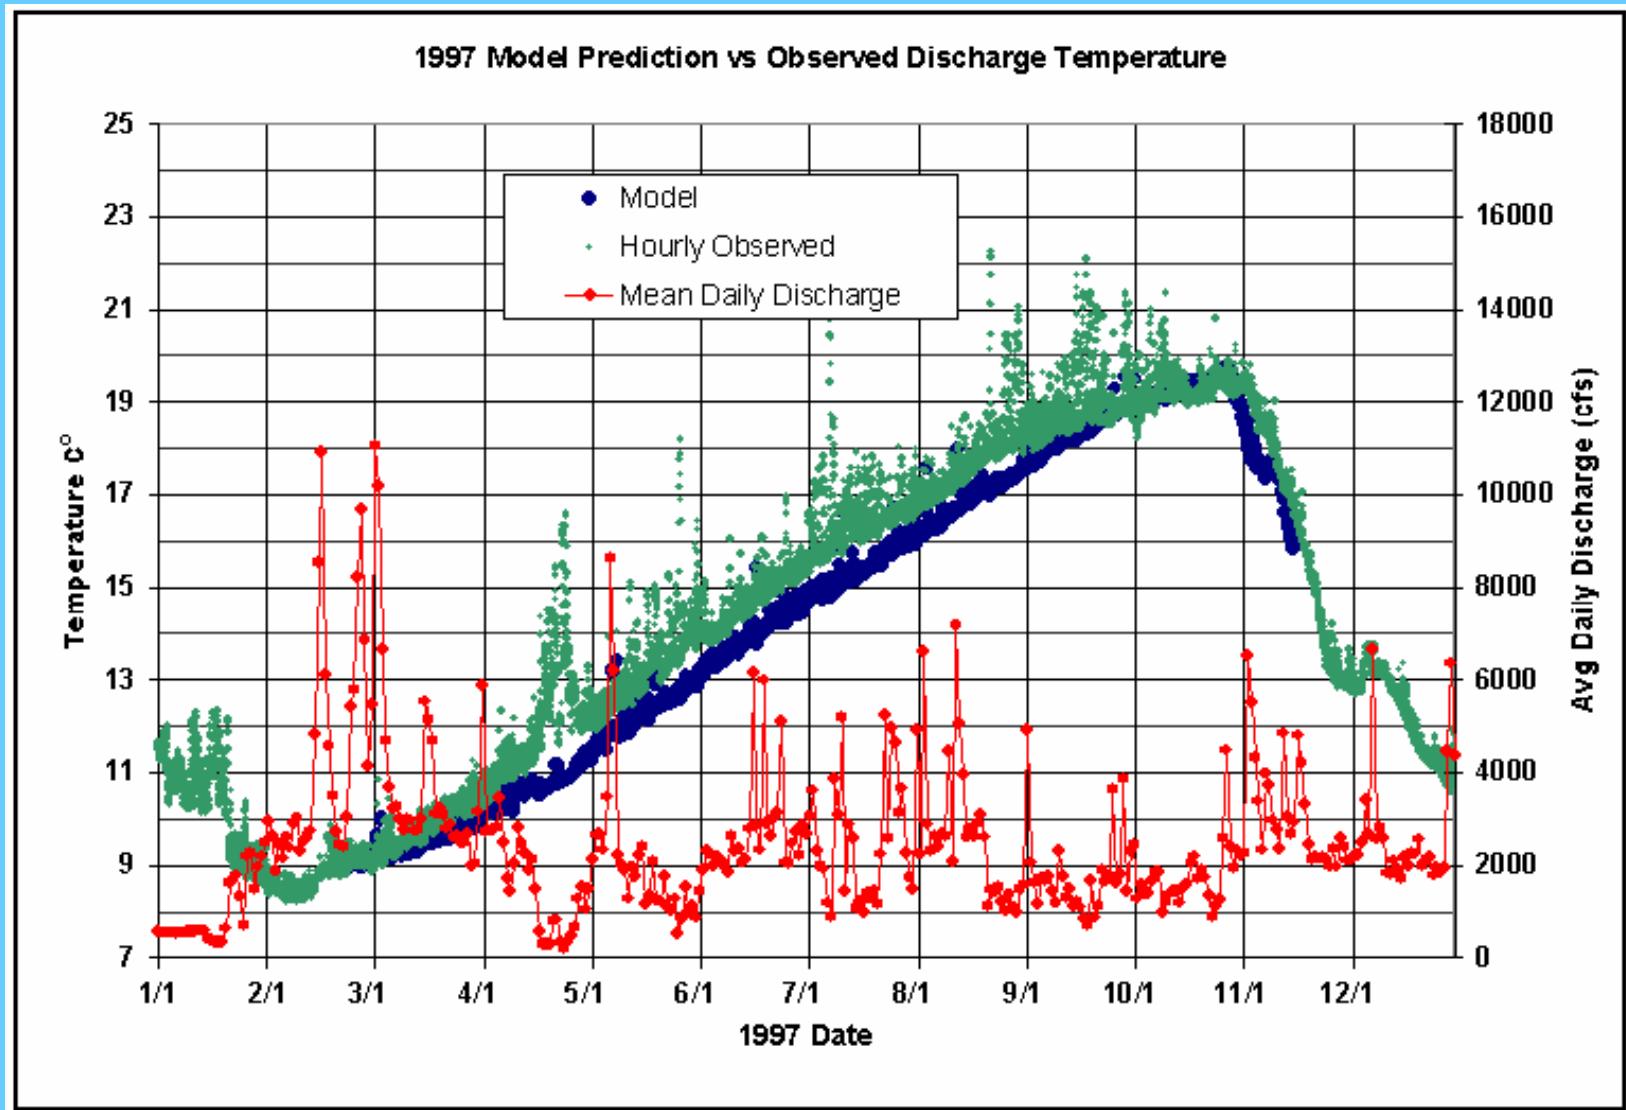


1992 Comparison of Modeled versus Measured Temperature in Front of the Unit 5 Intake

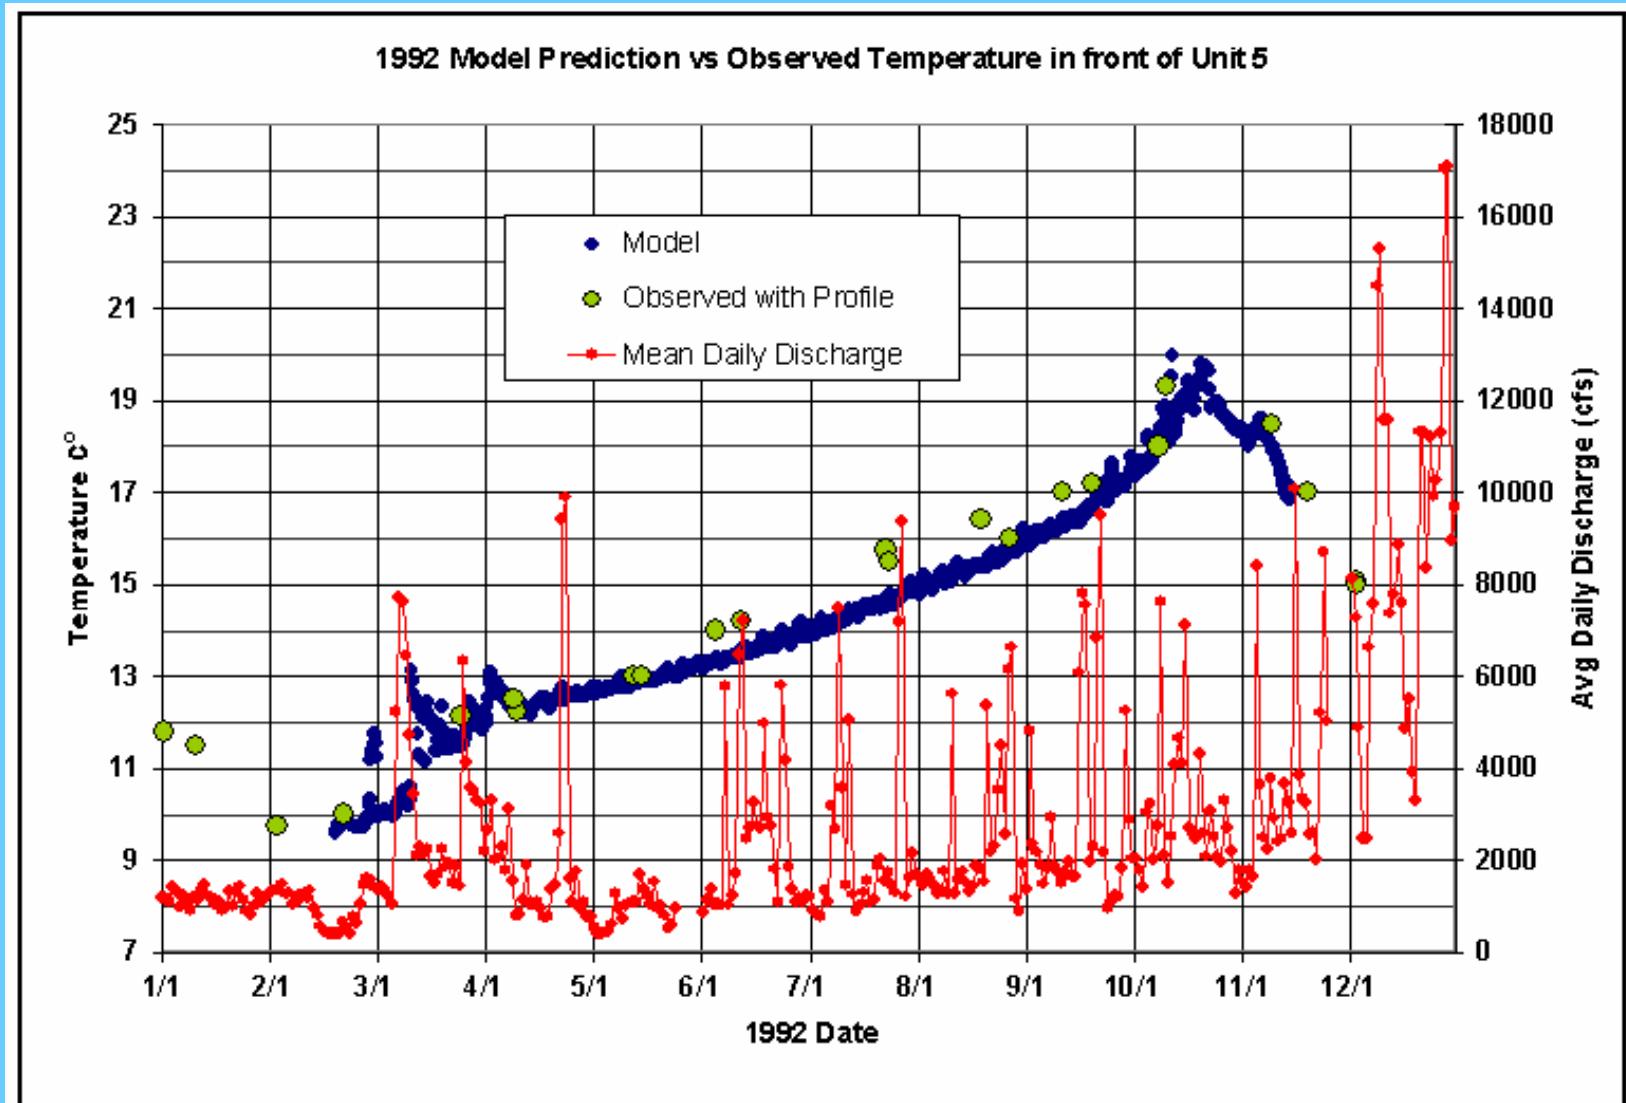





1996 Comparison of Modeled versus Measured Temperature in Front of the Unit 5 Intake

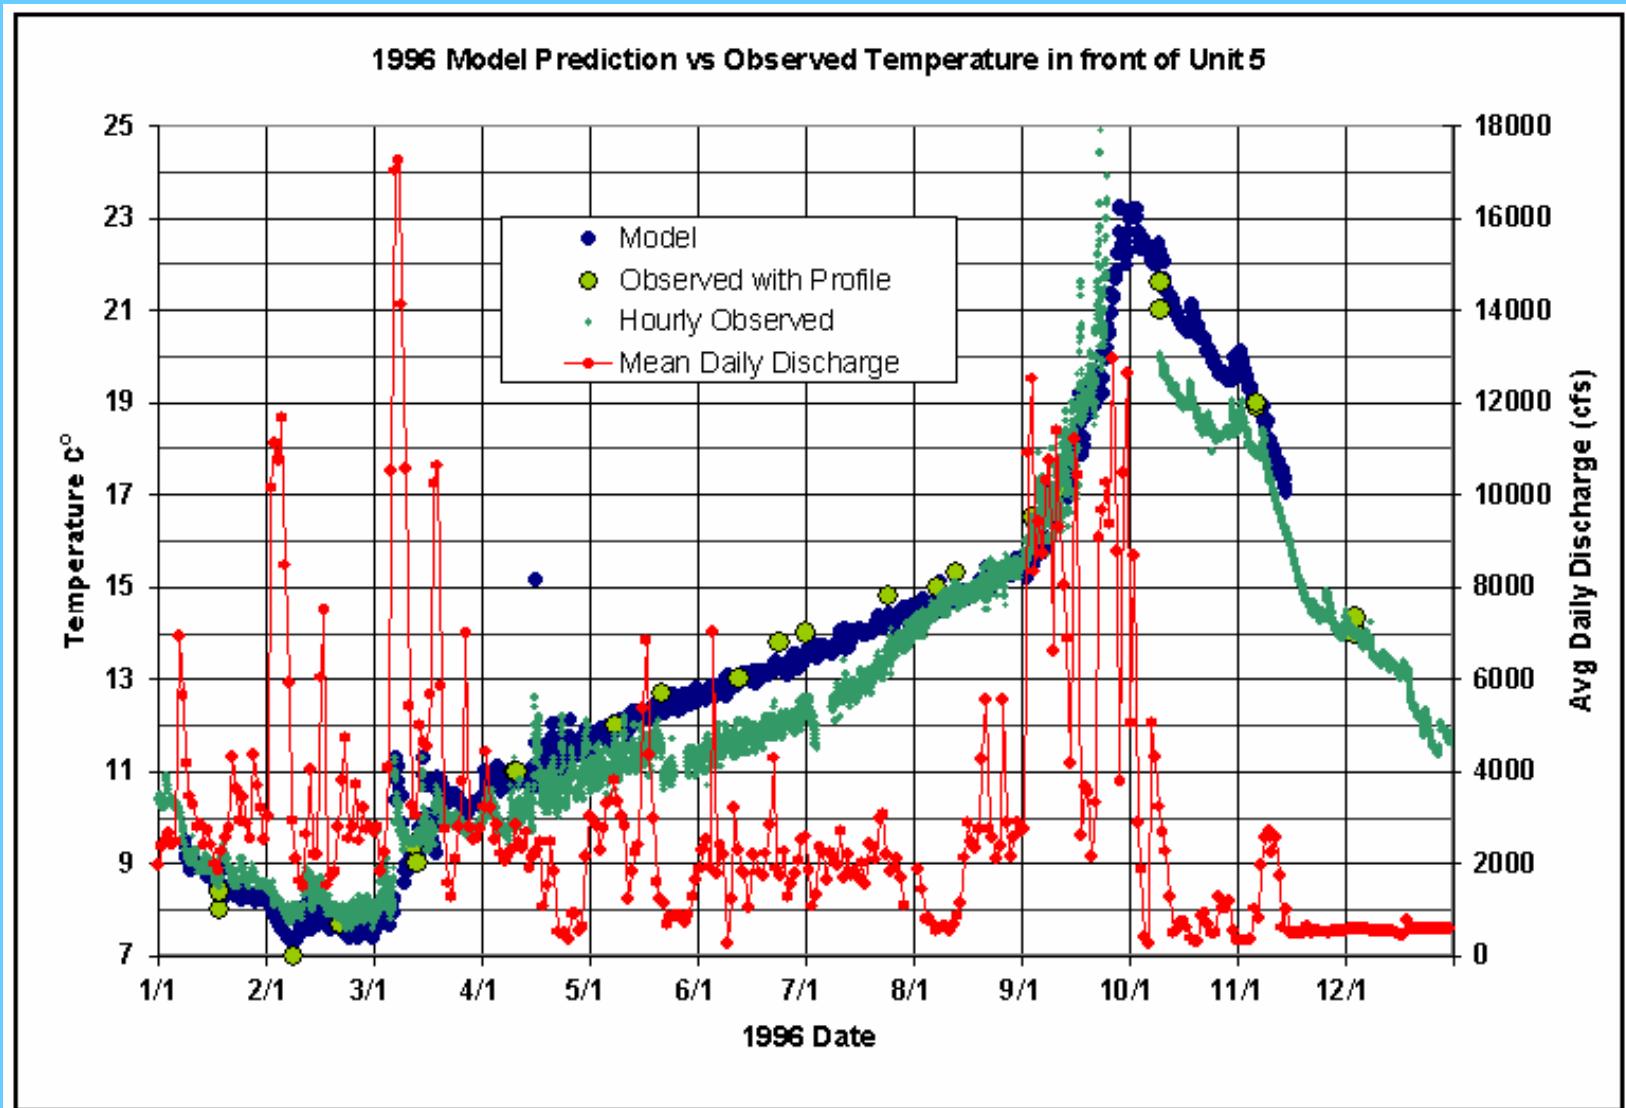





1997 Comparison of Modeled versus Measured Temperature in Front of the Unit 5 Intake

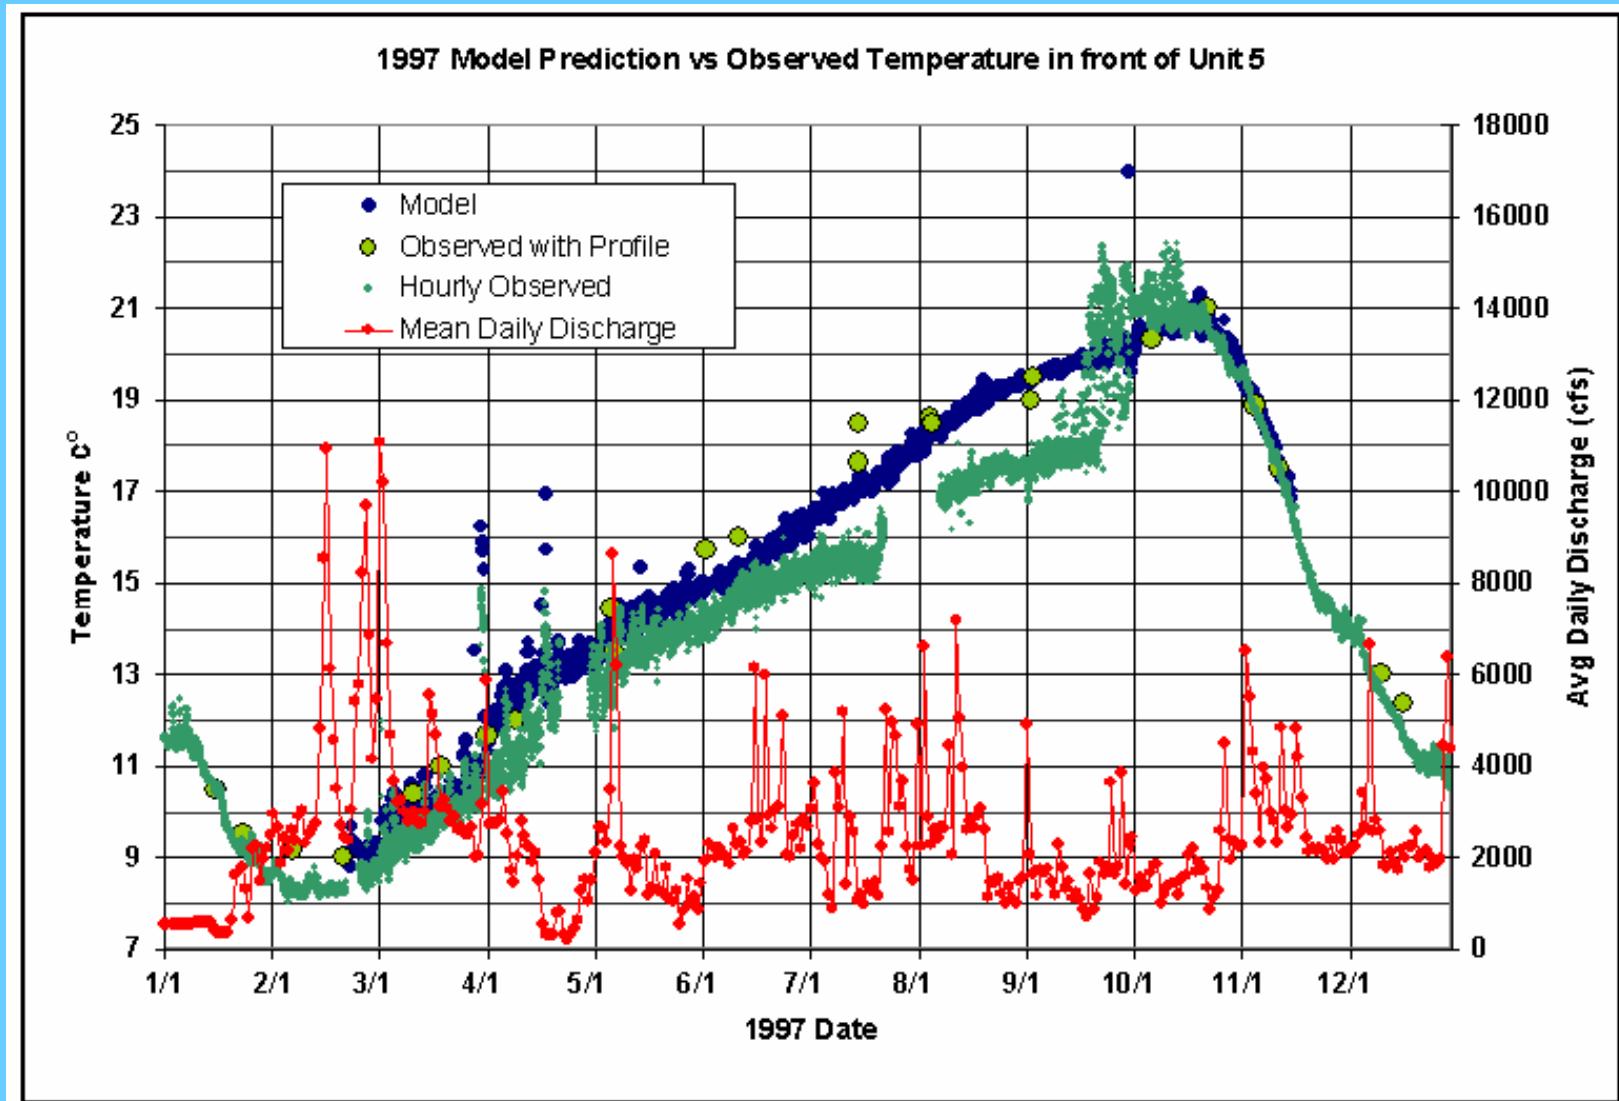





1996 Chlorophyll a at Four Locations in Lake Murray Model vs. Data

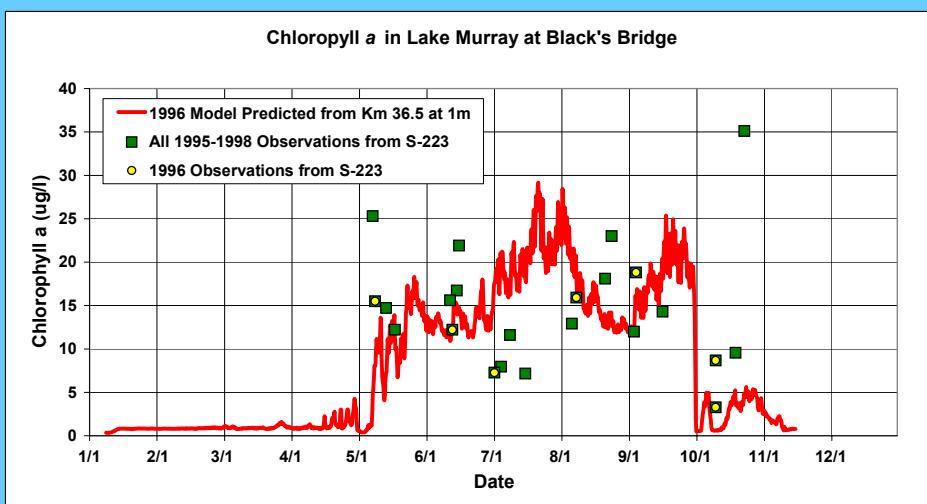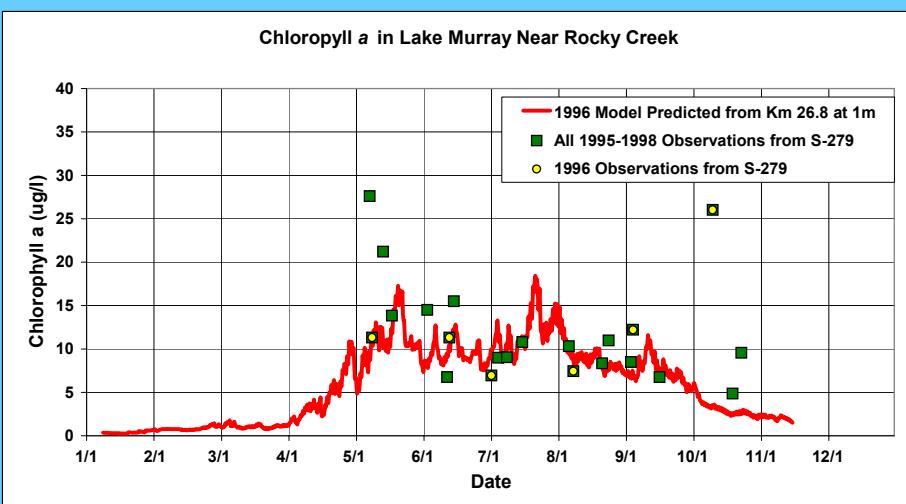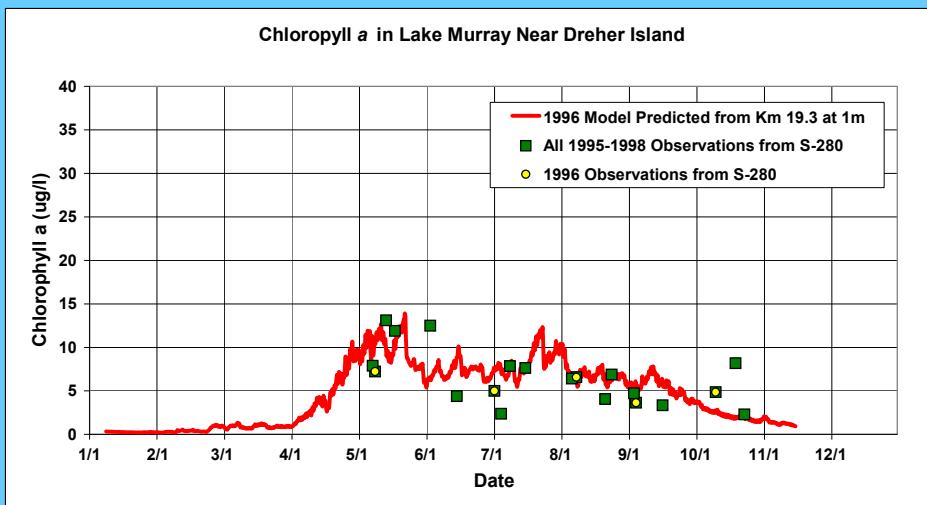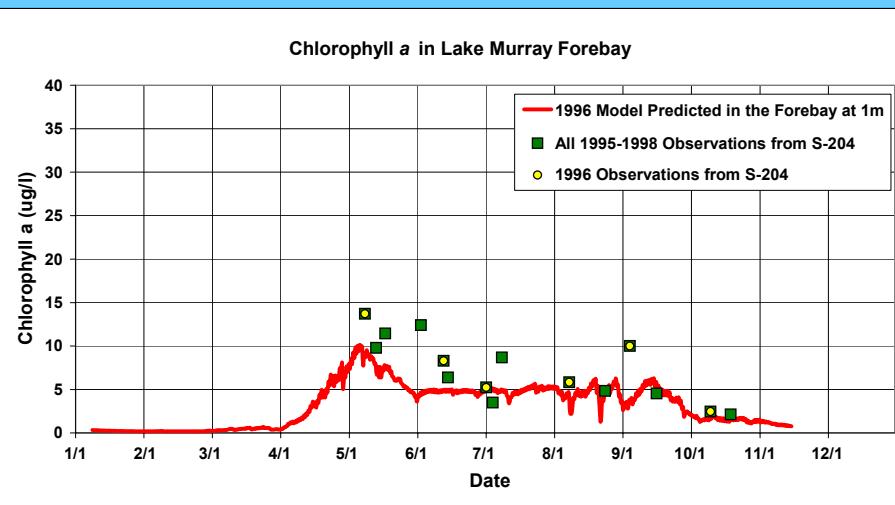





Comparison of Modeled Derived versus Measured Total Phosphorus for 1996 at Four Locations in Lake Murray

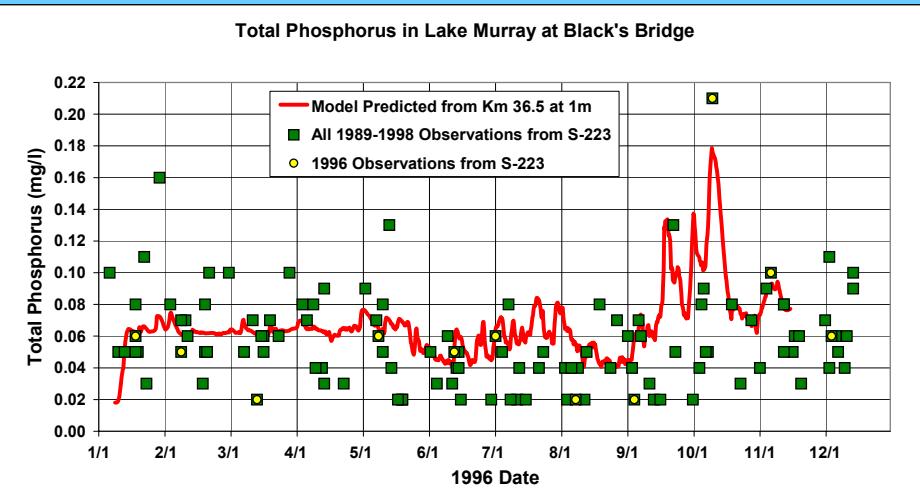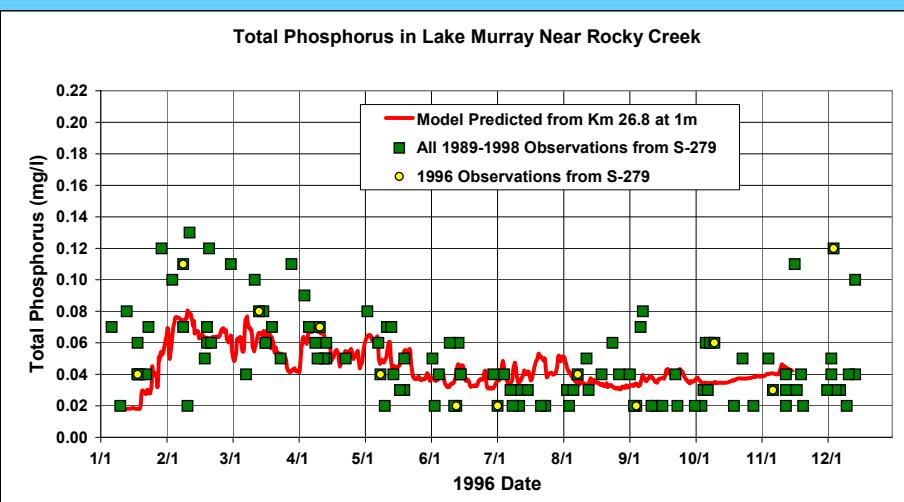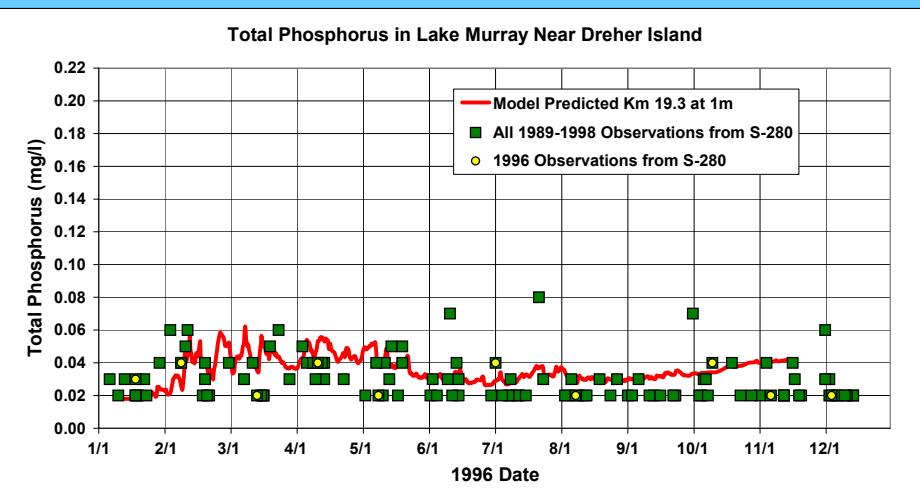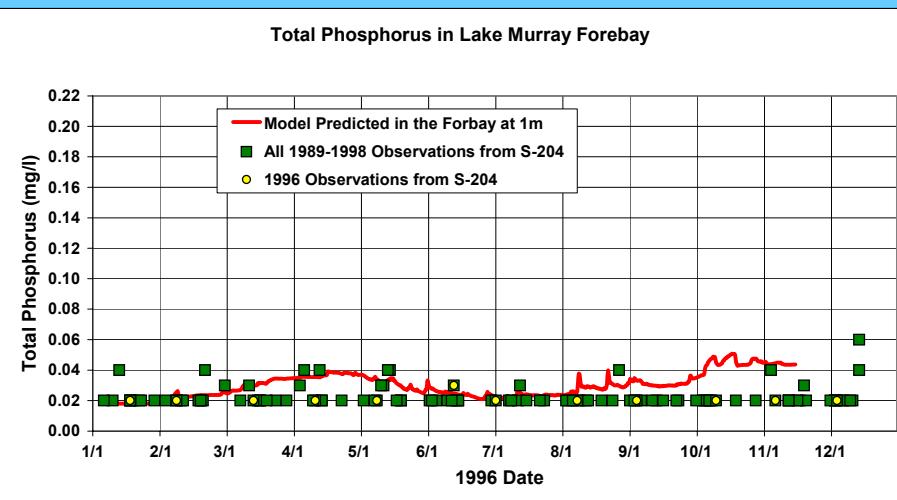















Comparison of Modeled versus Measured Nitrate for 1996 at Four Locations in Lake Murray

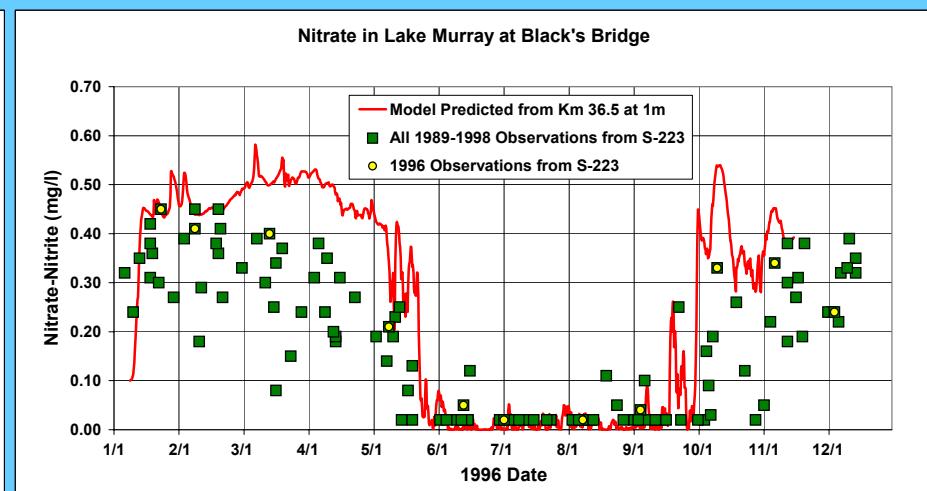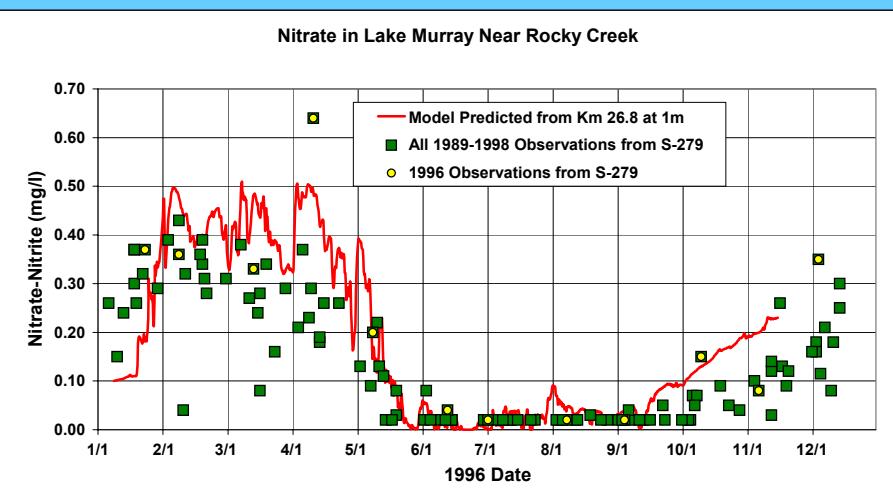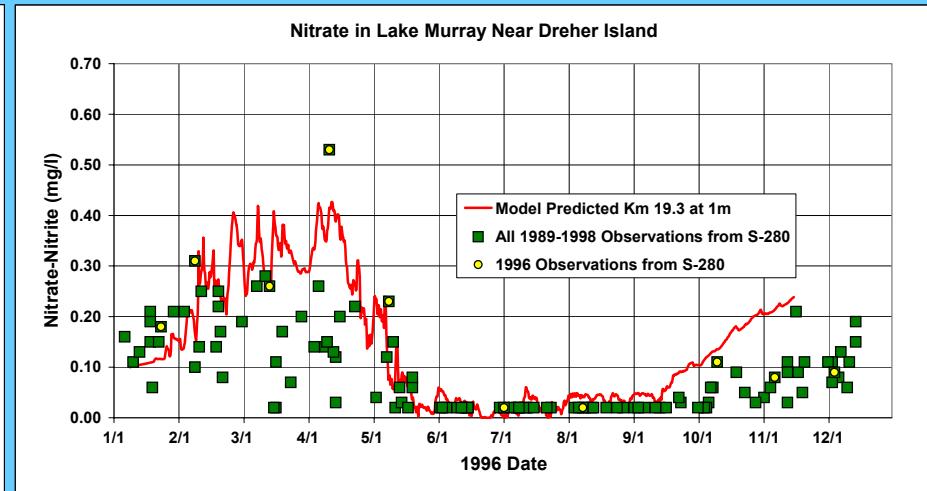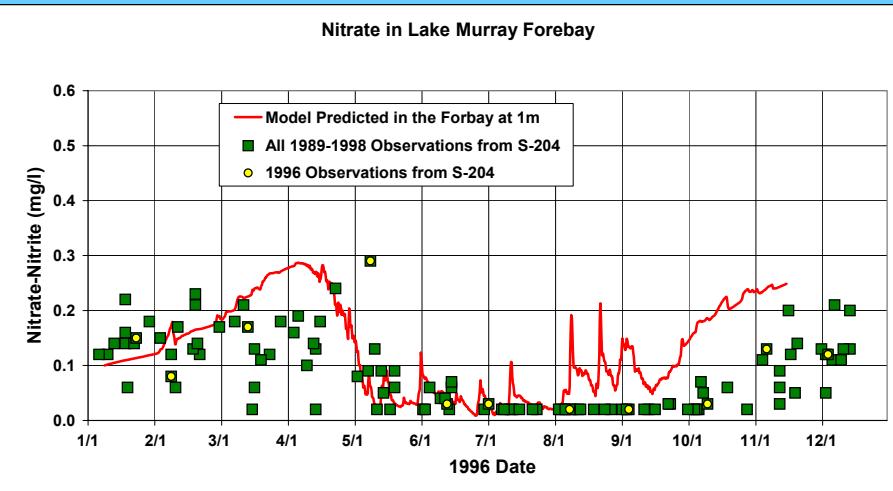


Comparison of Modeled versus Measured Ammonium for 1996 at Four Locations in Lake Murray

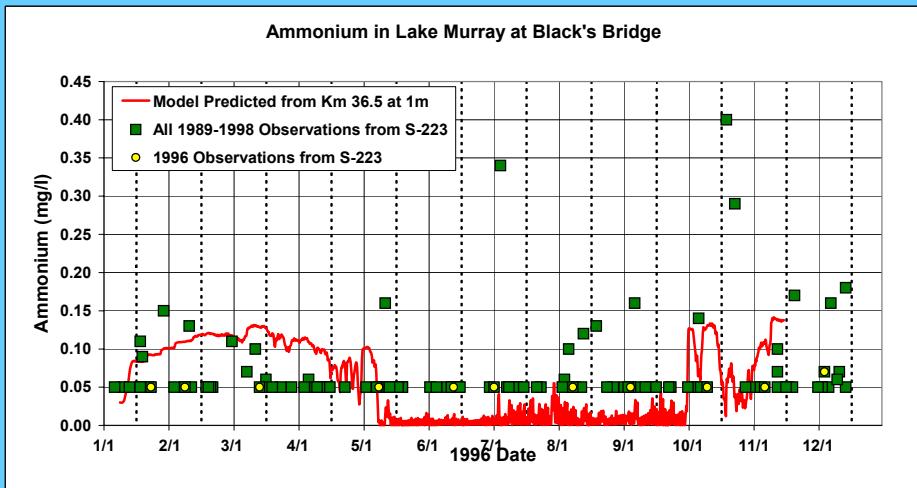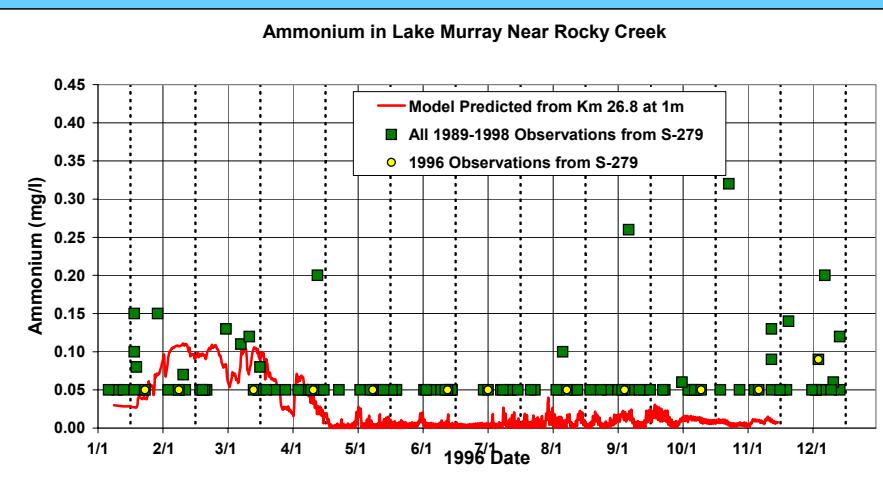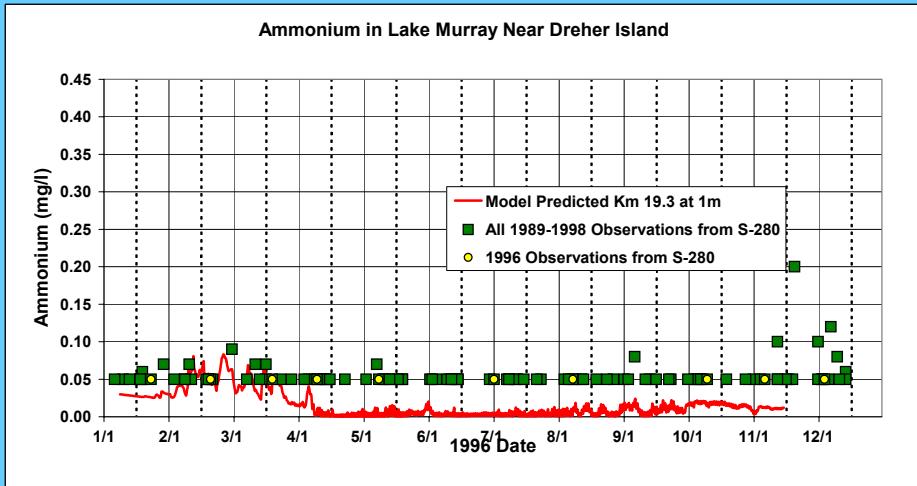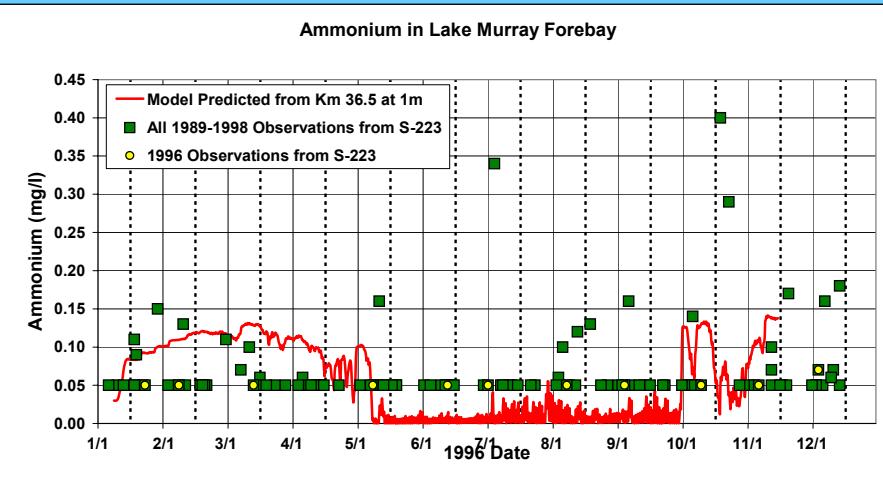


1996 Lake Murray Forebay Dissolved Oxygen Profiles Model vs. Data

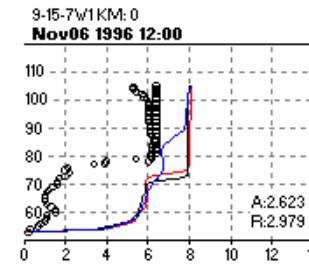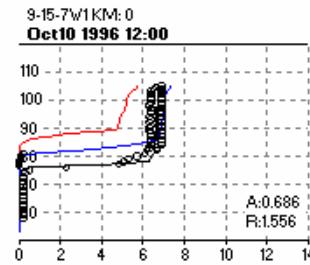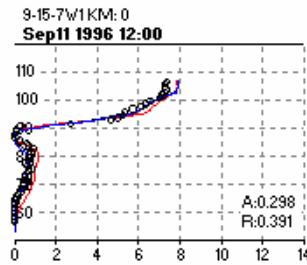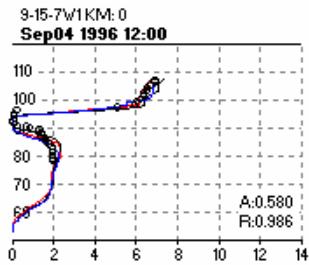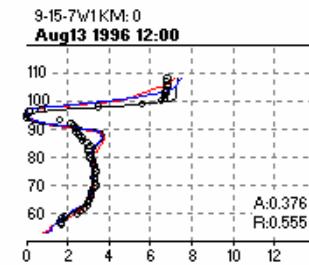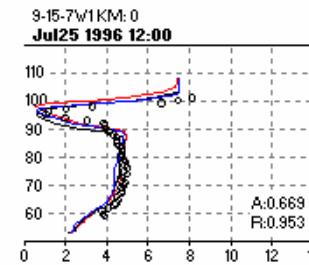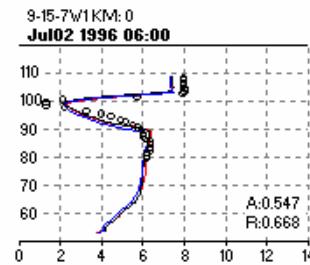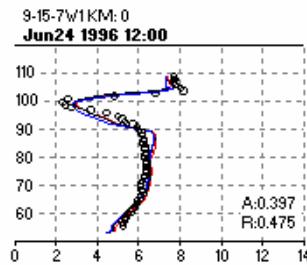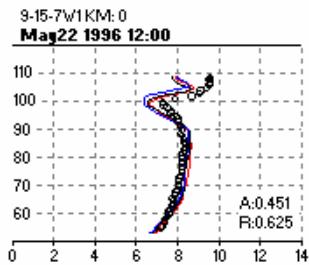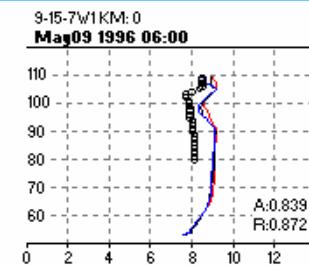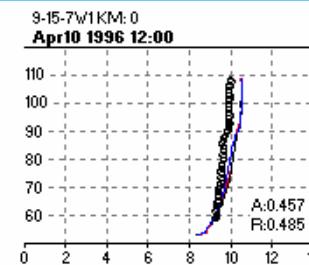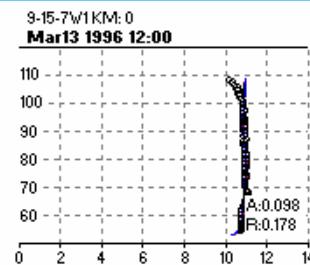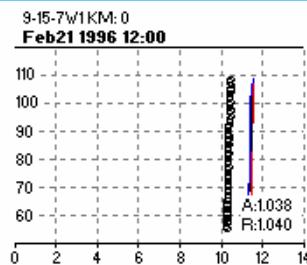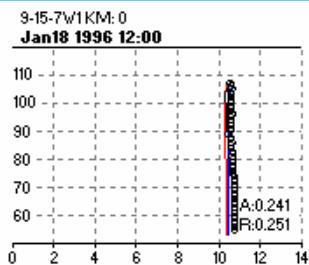


1992 Comparison of Modeled versus Measured Saluda Release DO

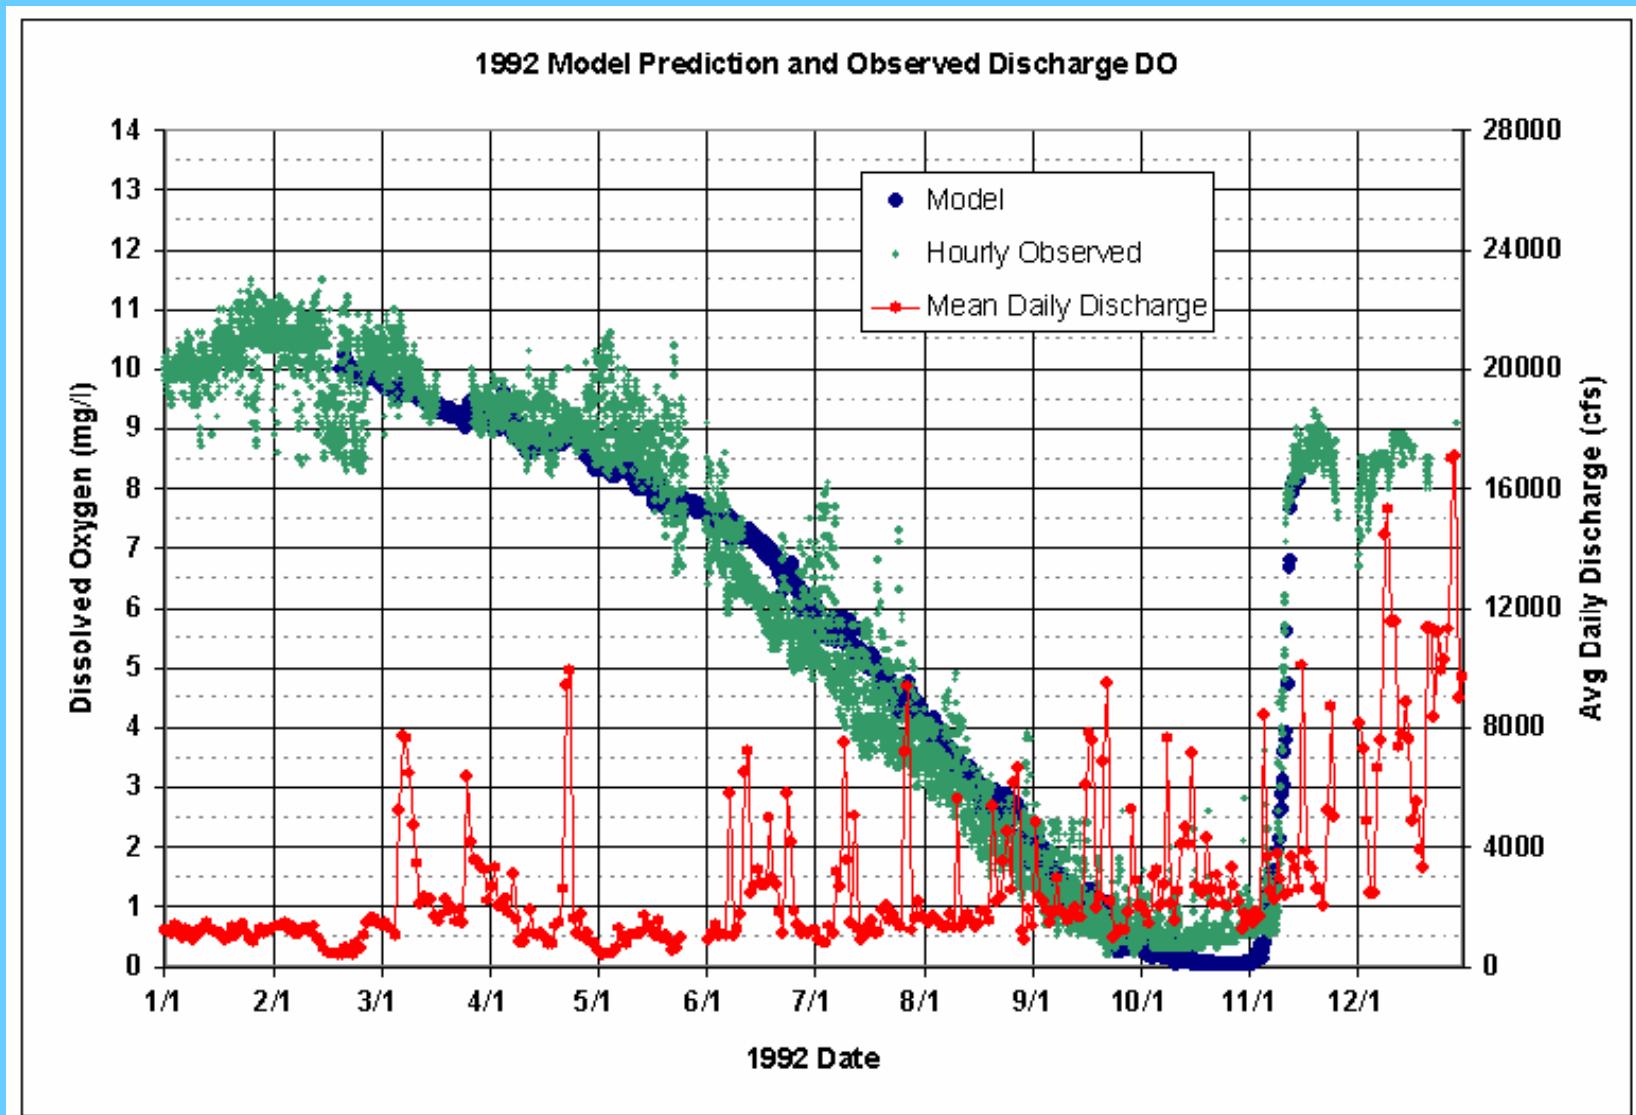


1996 Comparison of Modeled versus Measured Saluda Release DO

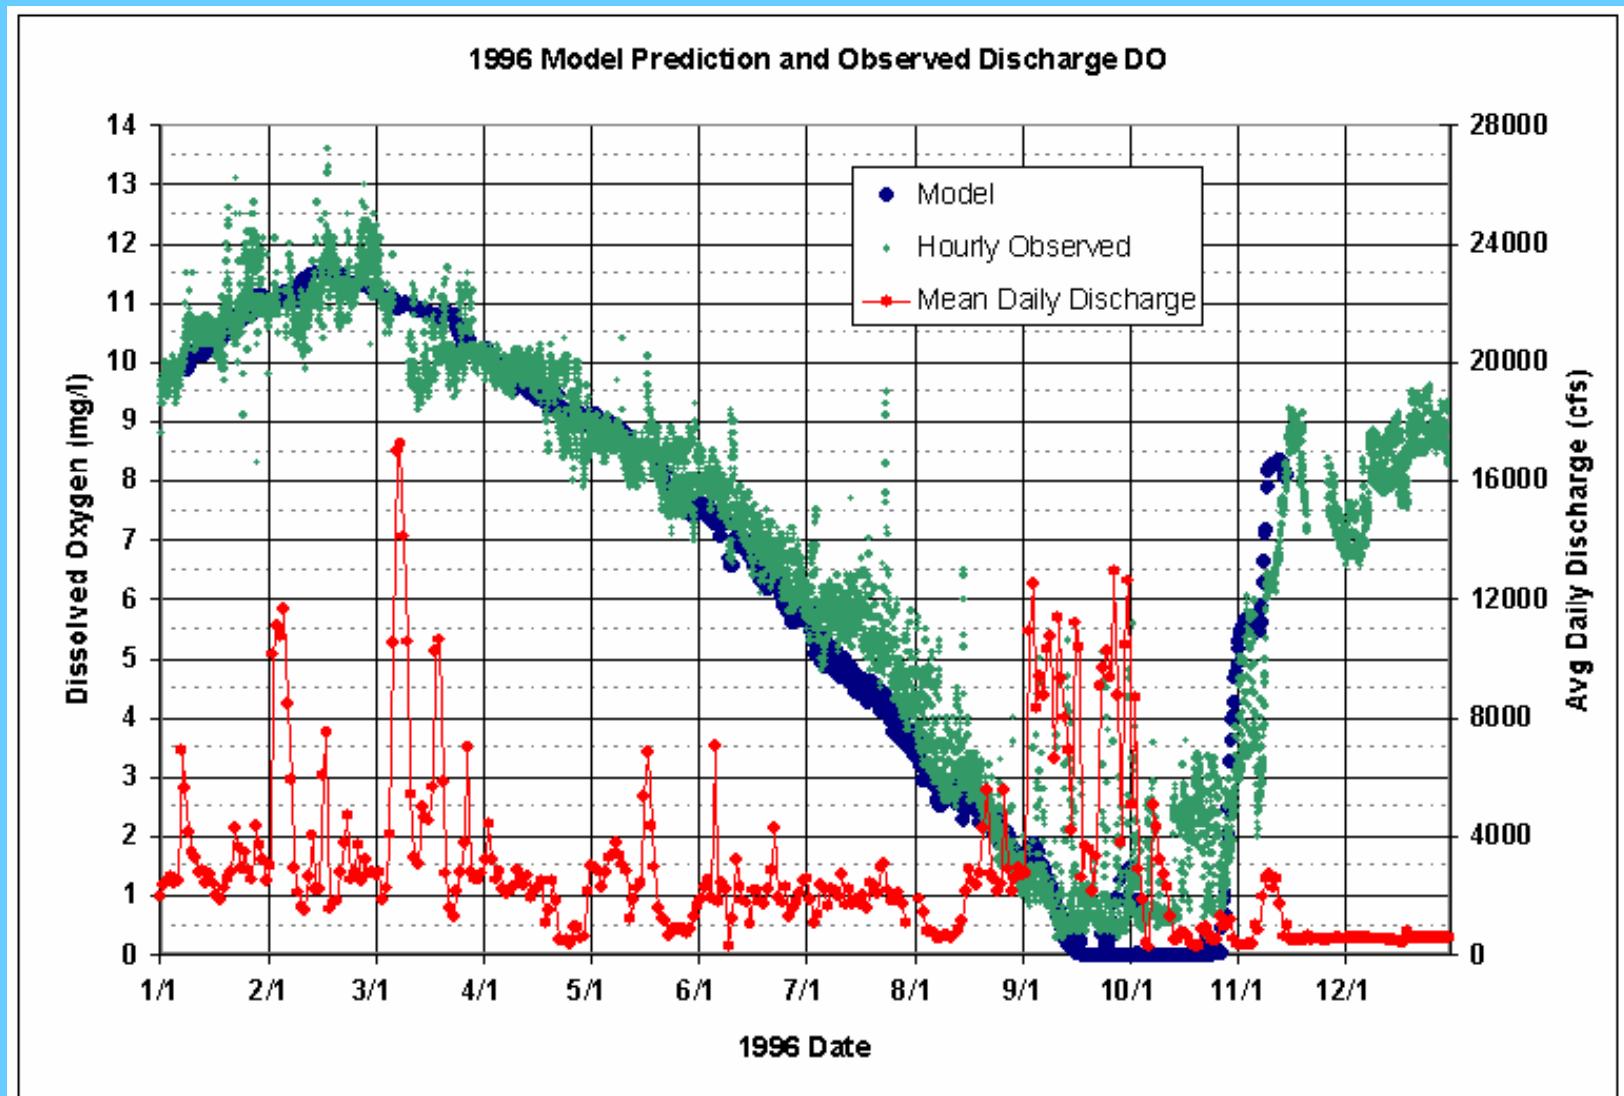


1997 Comparison of Modeled versus Measured Saluda Release DO

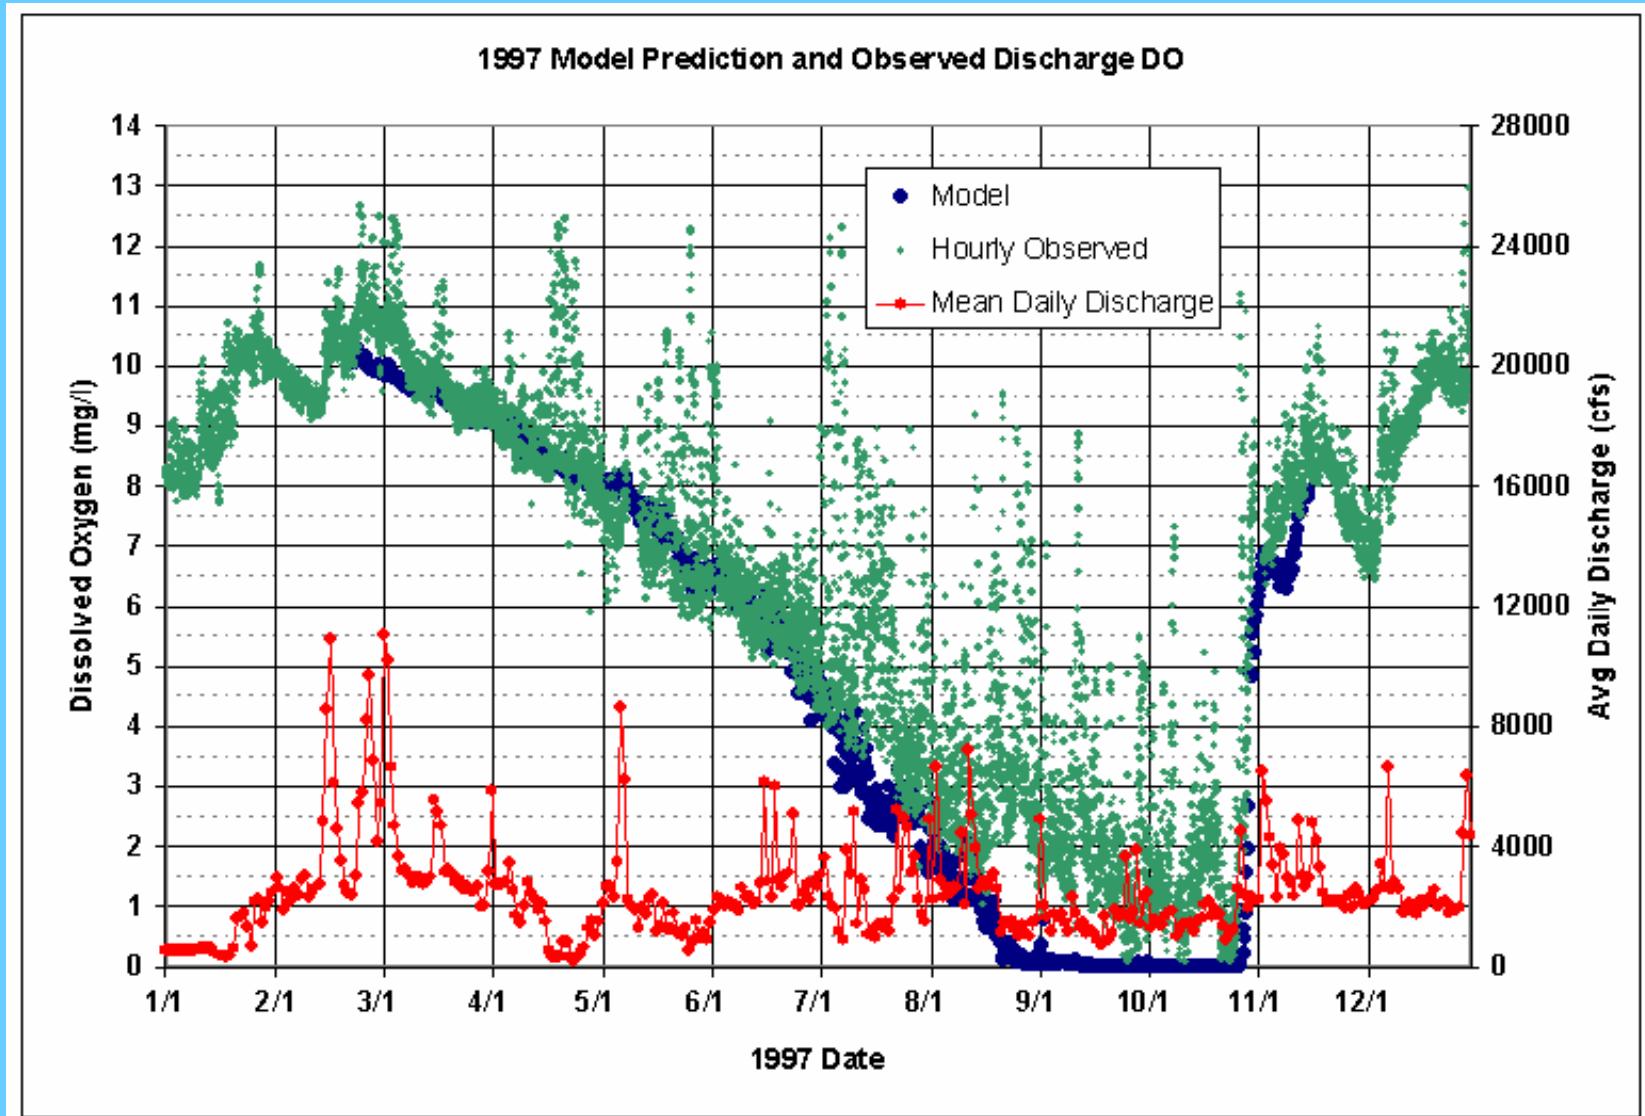


1992 Modeled versus Measured DO at the level of the Unit 5 Intake

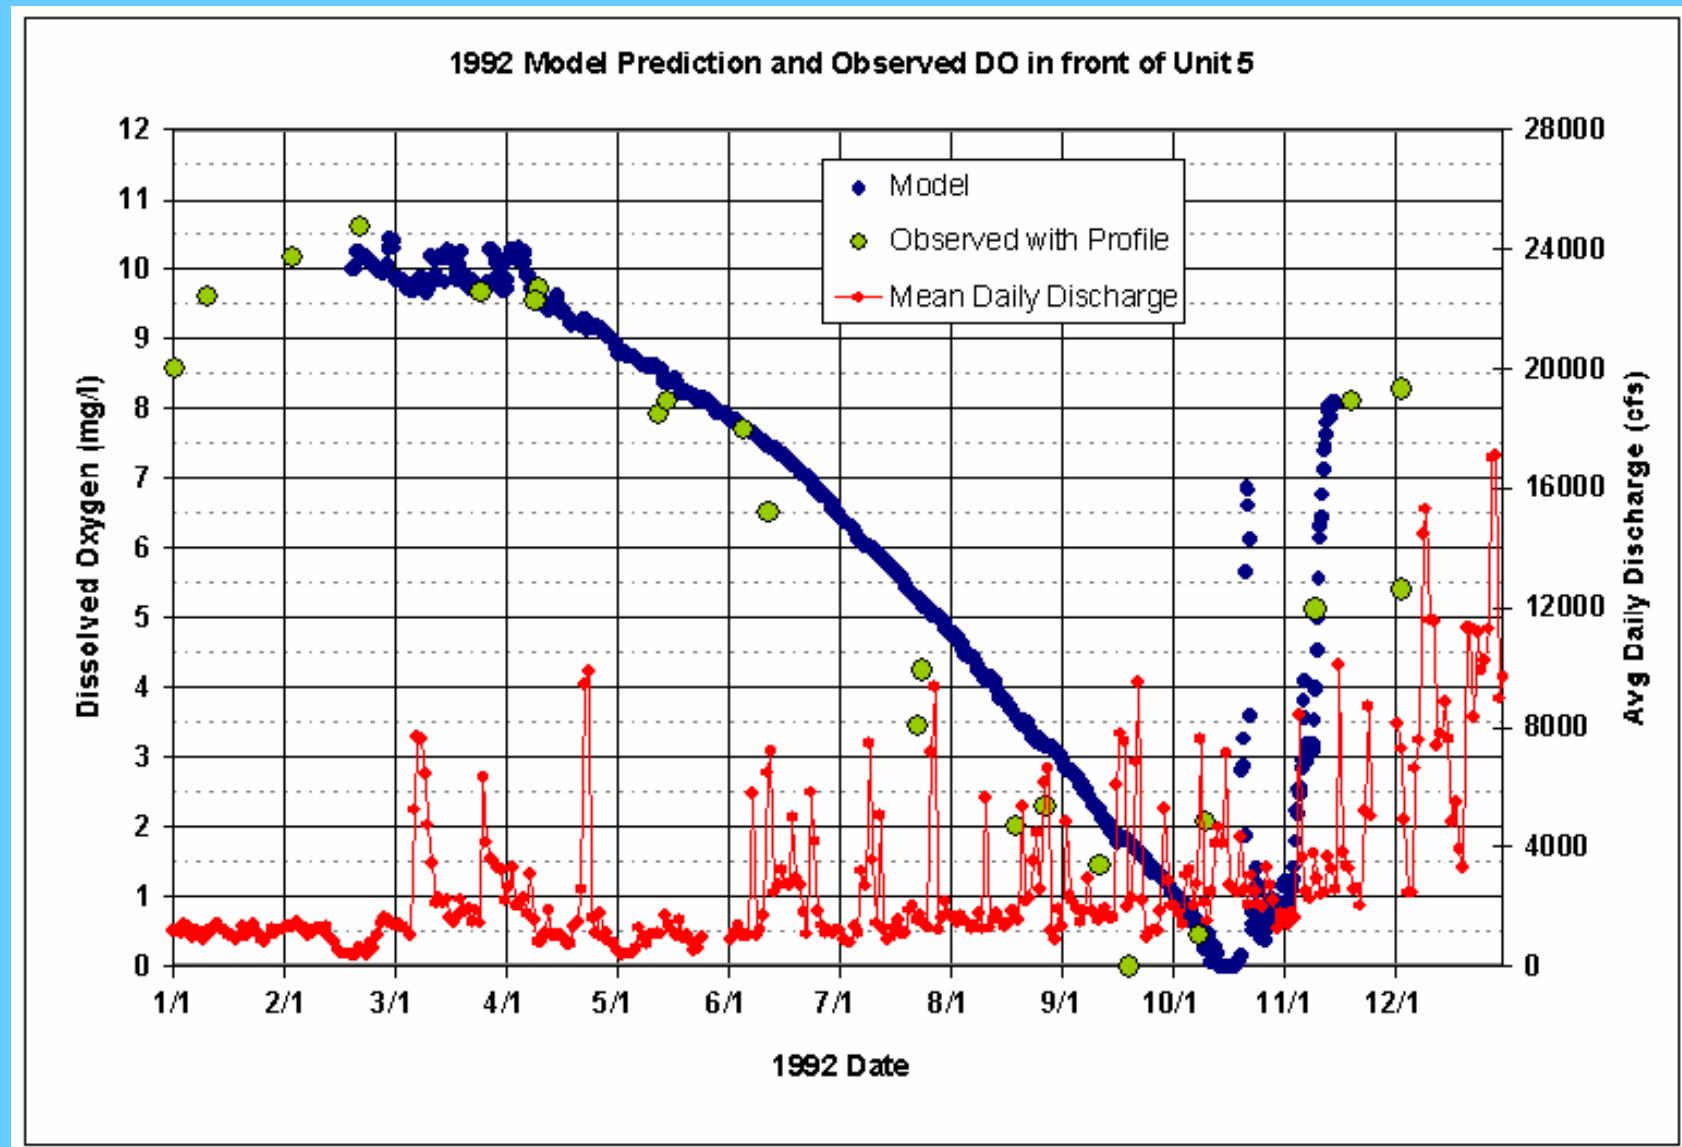

1996 Modeled versus Measured DO at the level of the Unit 5 Intake

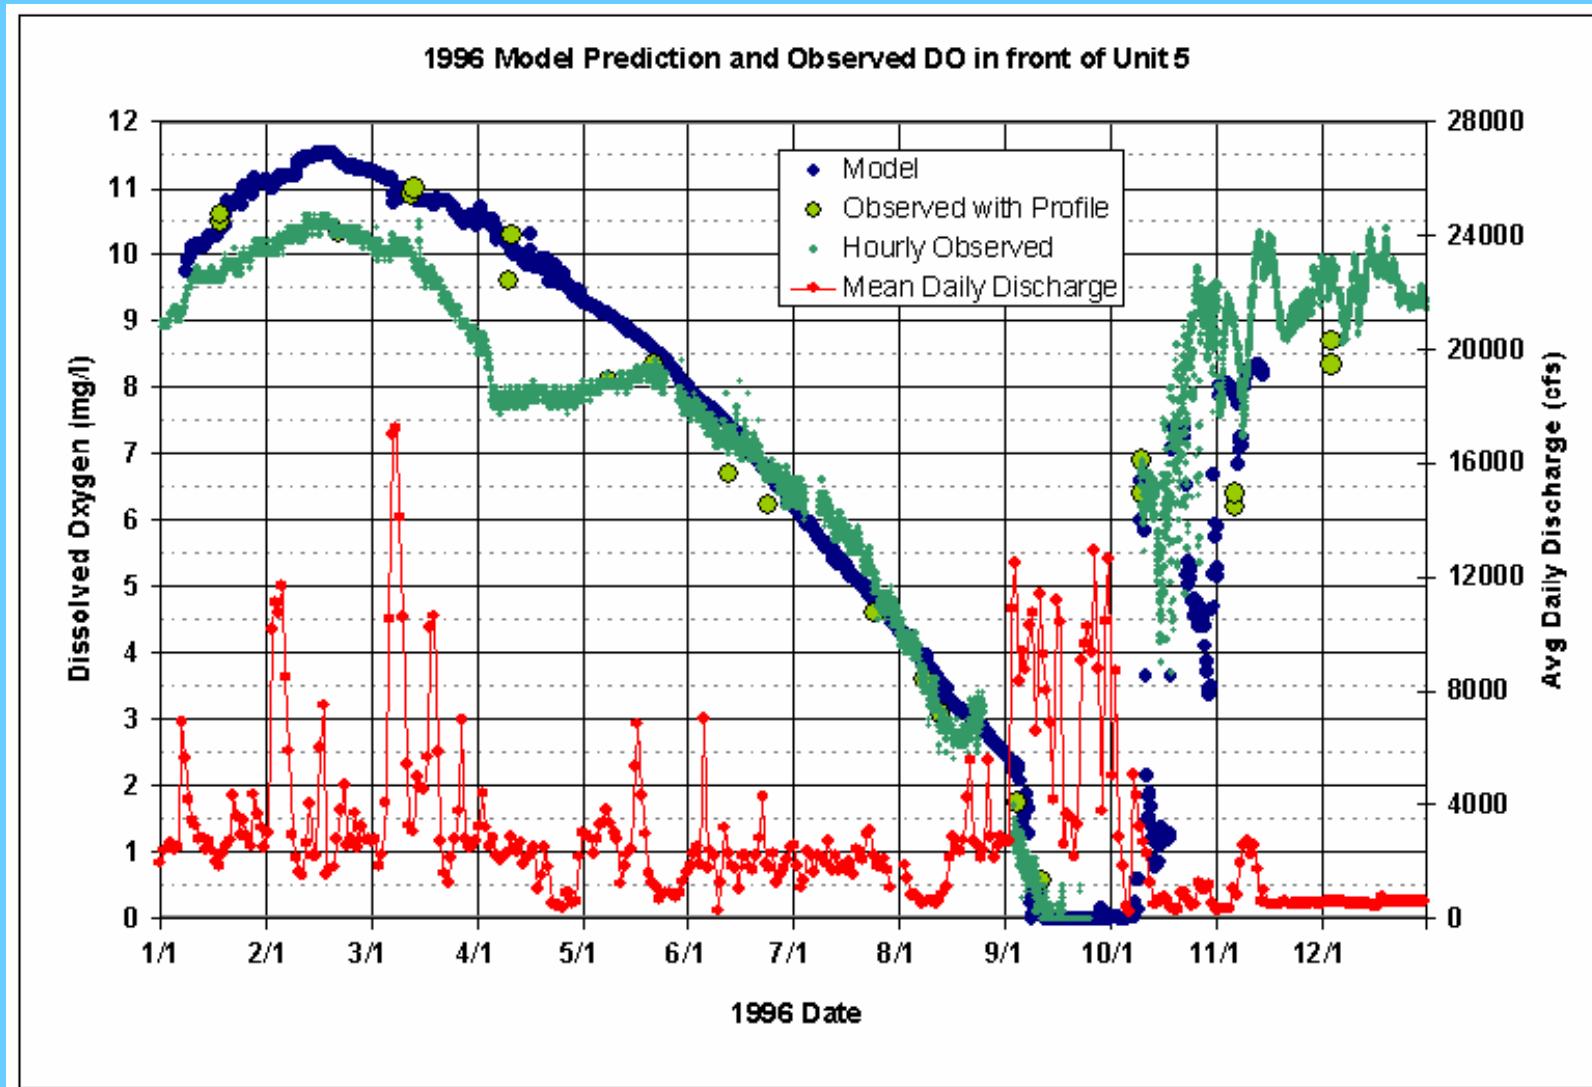

1997 Modeled versus Measured DO at the level of the Unit 5 Intake

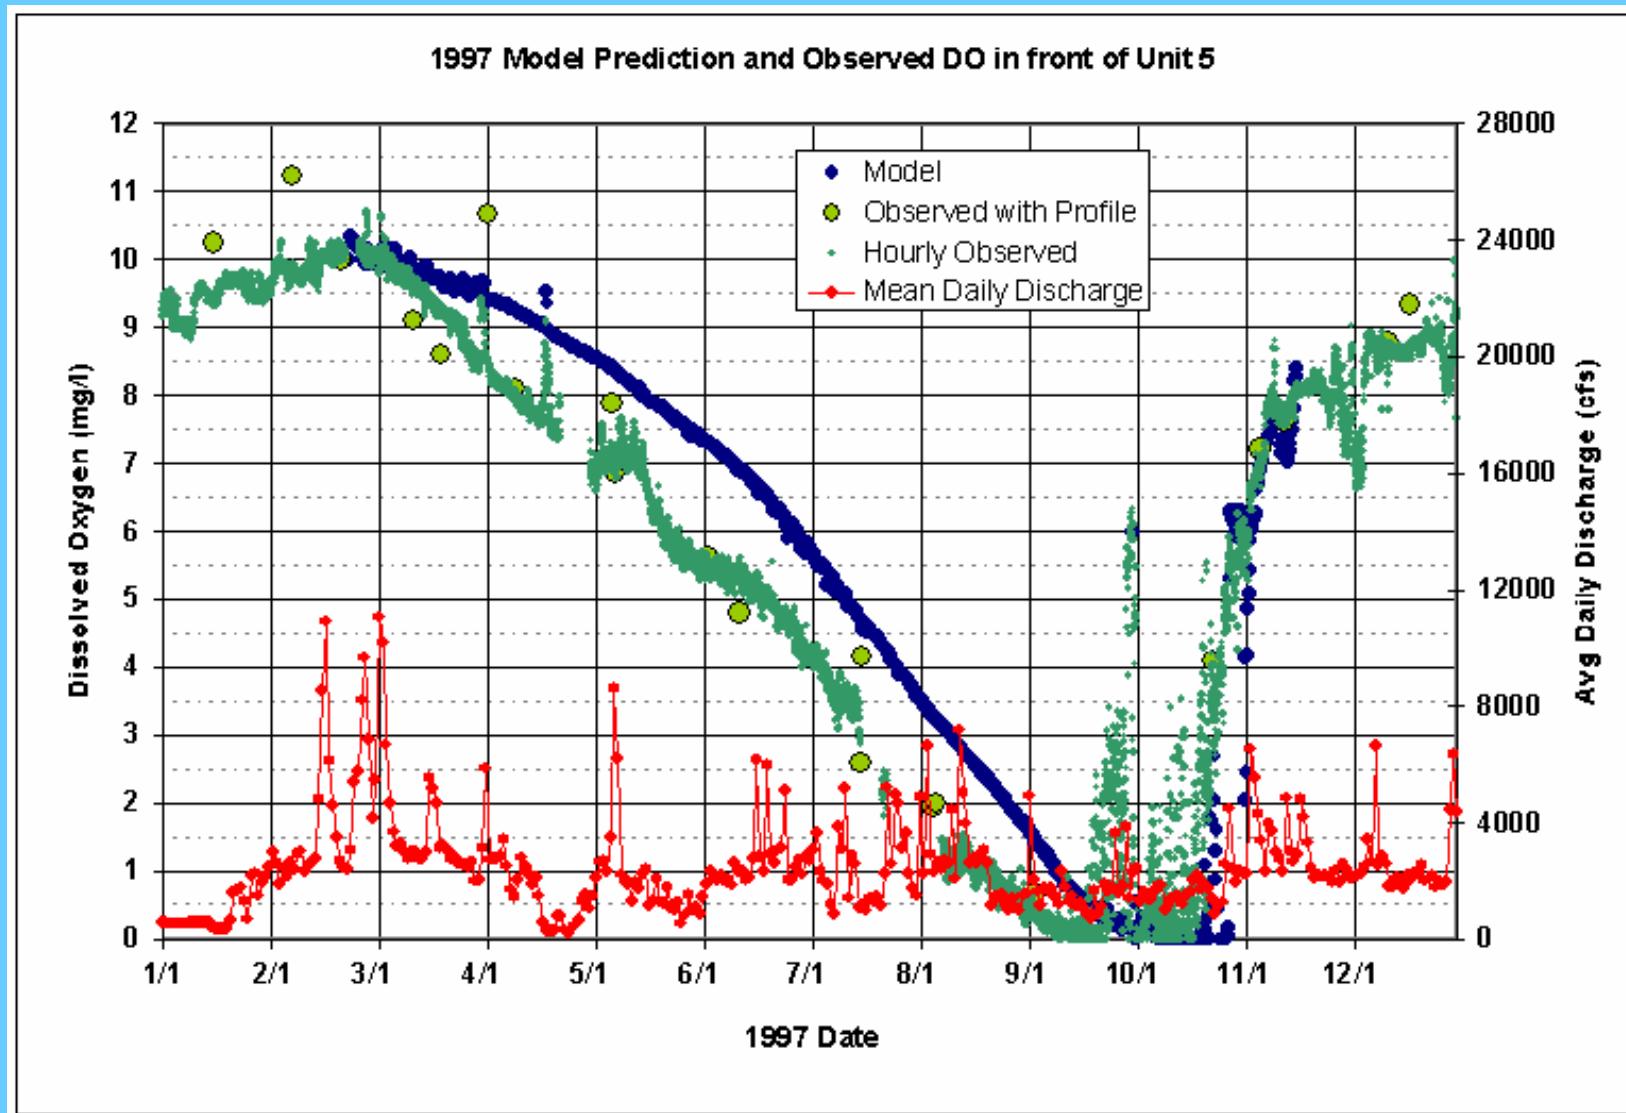

1996 Statistics

1996 Temperature

Date	Julian Day	Kilometers From Dam								Average	
		0.0		2.5		12.3		19.3			
AME	RMS	AME	RMS	AME	RMS	AME	RMS	AME	RMS	AME	RMS
2/21-22	52-53	0.14	0.22	0.12	0.13	0.25	0.47	0.22	0.44	0.18	0.32
3/13-14	73-74	0.51	0.57	0.47	0.51	0.48	0.52	0.52	0.70	0.50	0.58
4/10-11	101-103	0.43	0.56	0.43	0.51	0.50	0.60	0.46	0.60	0.45	0.57
5/22-23	143-144	0.51	0.79			0.69	1.03	0.63	0.85	0.61	0.89
6/24-25	176-177	0.42	0.53	0.46	0.69	0.43	0.63	0.54	0.80	0.47	0.66
7/25-26	207-208	0.40	0.47	0.60	0.73	0.67	0.94	0.61	0.75	0.57	0.72
8/13-14	226-227	0.45	0.53	0.40	0.47	0.45	0.63	0.76	1.09	0.52	0.68
9/11-13	255-257	0.67	0.75	0.56	0.62	0.39	0.52	0.17	0.21	0.45	0.52
10/9-10	283-284	0.58	0.65	0.50	0.57	0.91	0.99	0.83	0.90	0.71	0.78
11/5-6	310-311	0.07	0.11	0.17	0.18	0.19	0.22	0.04	0.05	0.12	0.14
		0.42	0.52	0.41	0.49	0.50	0.65	0.48	0.64	0.45	0.57


1996 DO

Date	Julian Day	Kilometers From Dam								Average	
		0.0		2.5		12.3		19.3			
AME	RMS	AME	RMS	AME	RMS	AME	RMS	AME	RMS	AME	RMS
2/21-22	52-53	1.04	1.04	1.04	1.04	0.62	0.67	0.78	0.82	0.87	0.89
3/13-14	73-74	0.10	0.18	0.21	0.23	0.24	0.28	0.48	0.56	0.26	0.31
4/10-11	101-103	0.46	0.49	0.56	0.59	0.82	0.88	1.10	1.21	0.73	0.79
5/22-23	143-144	0.45	0.63			0.39	0.44	0.74	0.85	0.53	0.64
6/24-25	176-177	0.40	0.48	0.75	0.87	0.62	0.74	0.64	0.92	0.60	0.75
7/25-26	207-208	0.67	0.95	1.01	1.27	0.49	0.73	0.91	0.99	0.77	0.98
8/13-14	226-227	0.38	0.56	0.82	0.98	0.50	0.62	0.62	1.20	0.58	0.84
9/11-13	255-257	0.30	0.39	0.24	0.45	0.60	0.93	0.79	1.12	0.48	0.72
10/9-10	283-284	0.69	1.56	0.93	1.52	0.83	0.90	1.36	1.37	0.95	1.34
		0.50	0.70	0.69	0.87	0.57	0.69	0.82	1.00	0.65	0.81

Distribution of TP Loads to the Upper Region of Lake Murray


Current

% Distribution for Current TP Inflows to Upper Region of Lake Murray

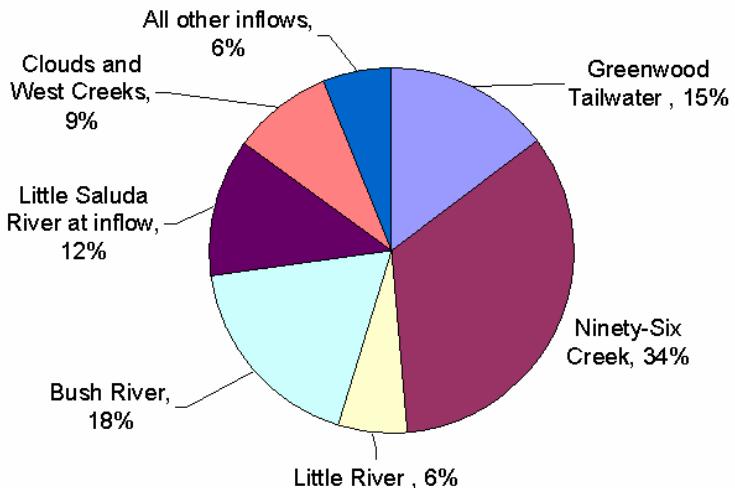


Assumed Reductions in TP


% Distribution for Reduced TP Inflows to Upper Region of Lake Murray

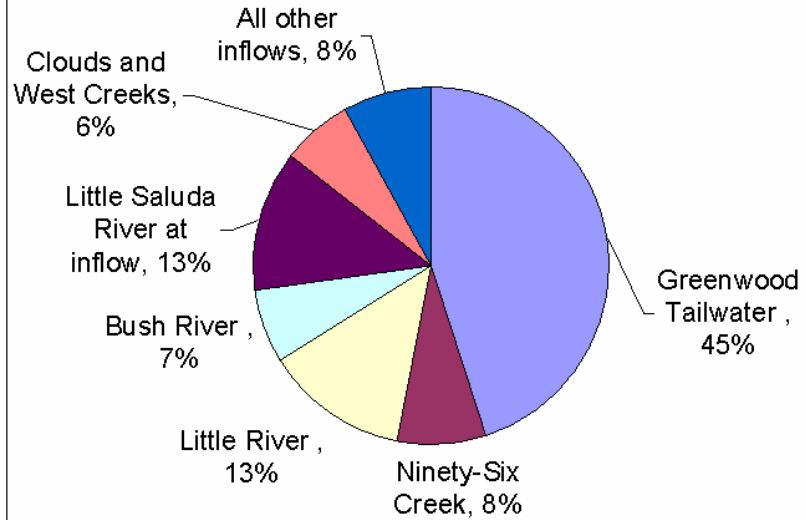





1996 Discharge DO for Current Phosphorus Loads and Two Scenarios for Reduced Phosphorus

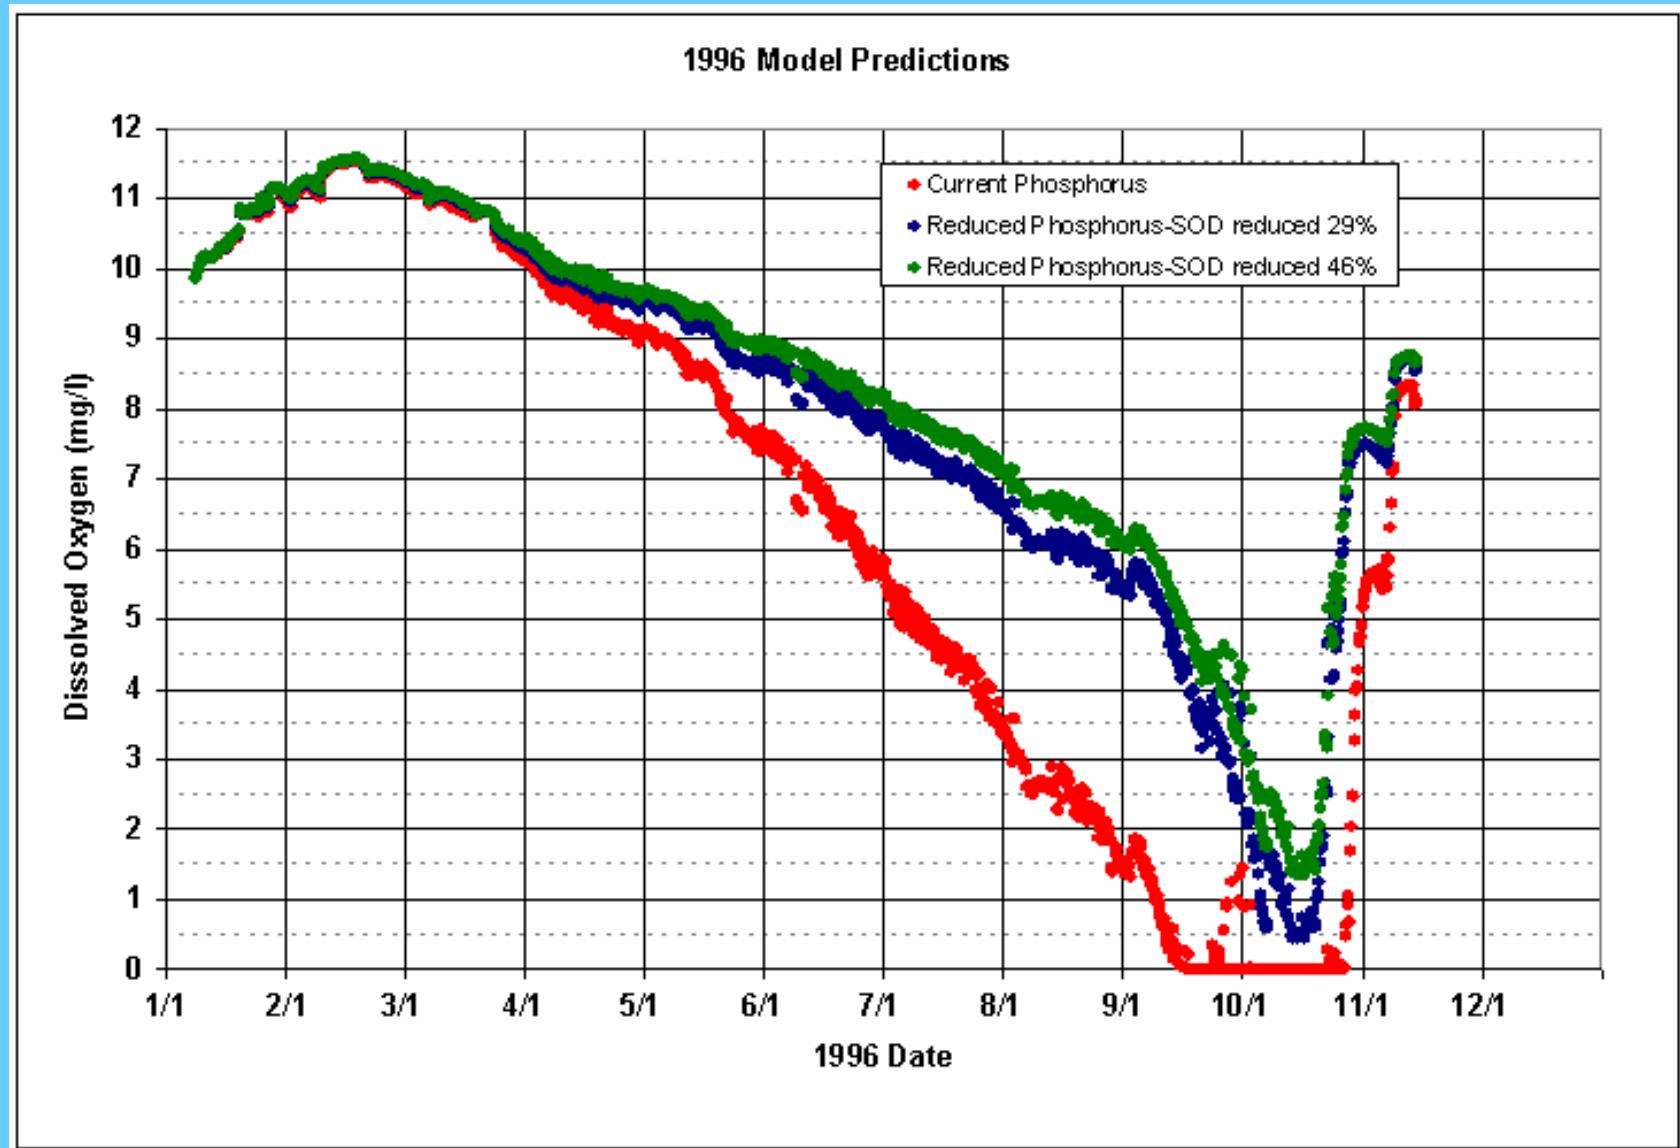

1996 DO at the Level of the Unit 5 Intake for Current and Reduced Phosphorus

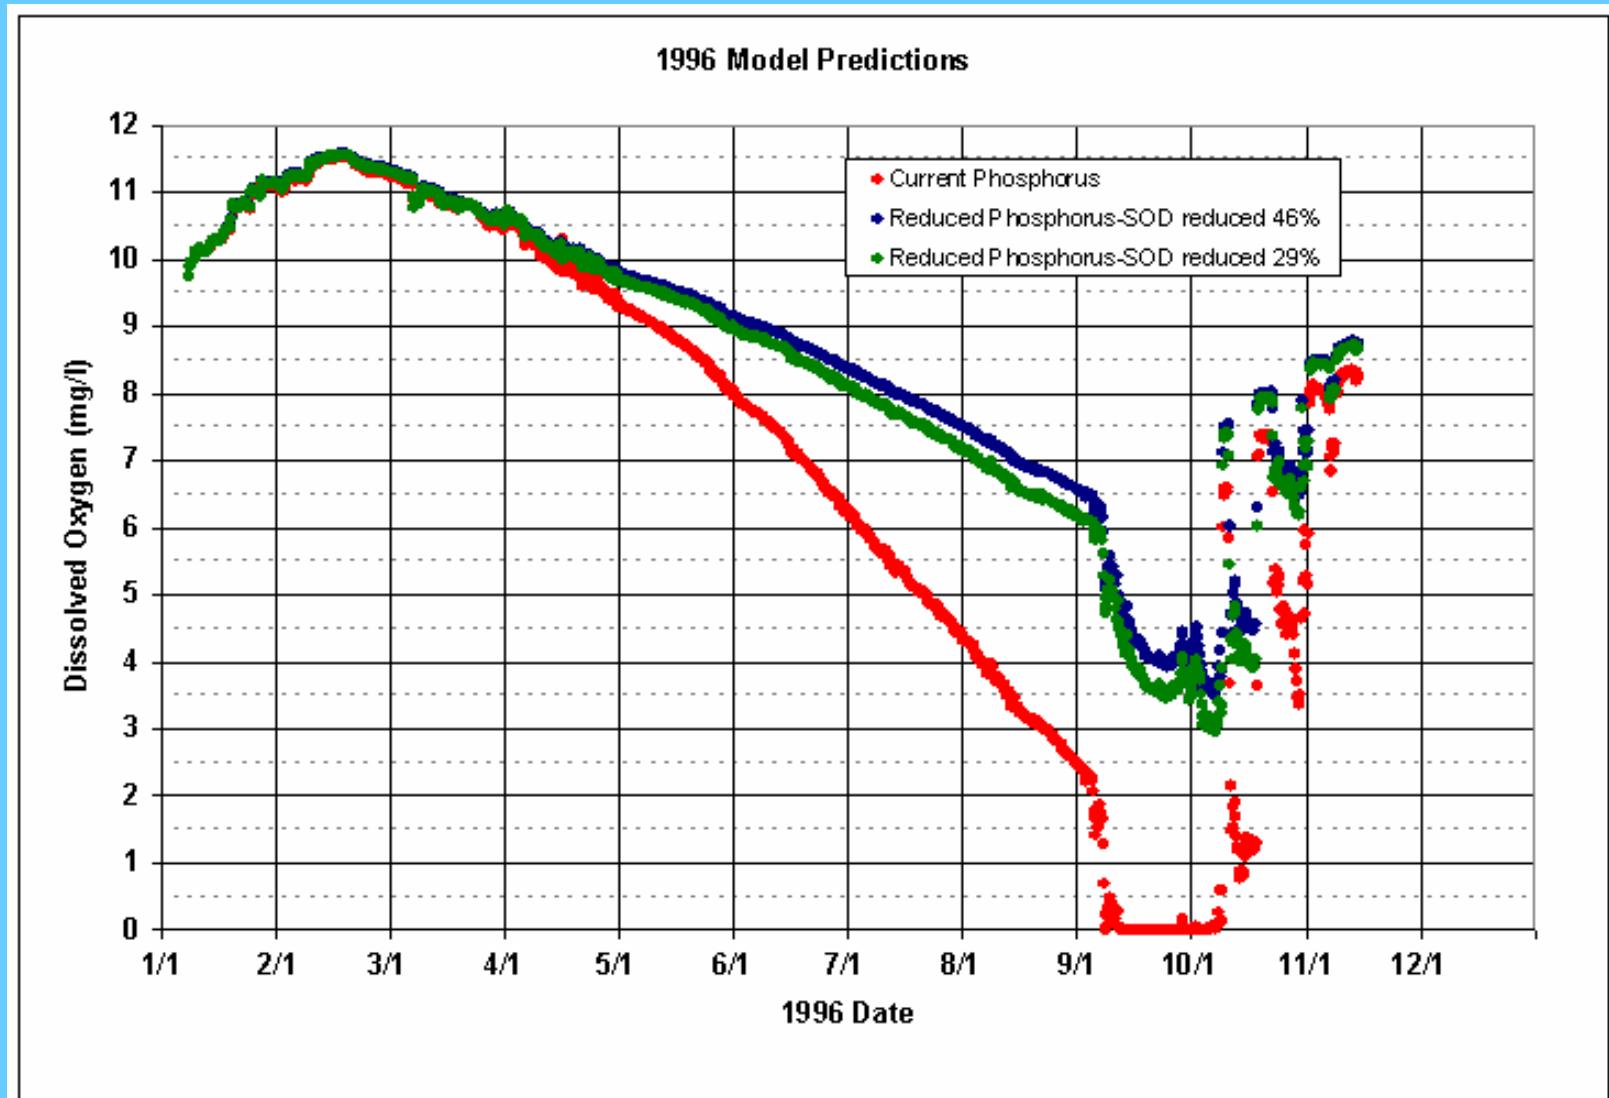


Comparison of 1996 Current and Reduced Phosphorus Predictions of Chlorophyll a at 1 Meter Depth at Four Locations in Lake Murray

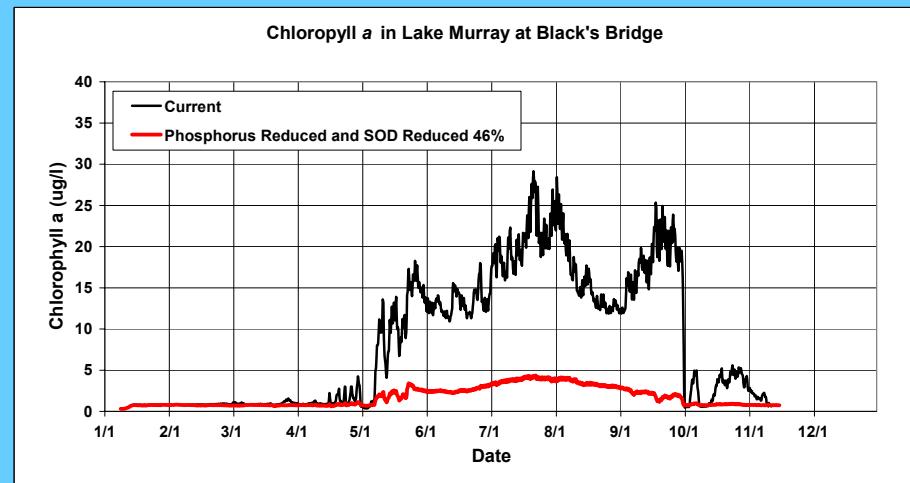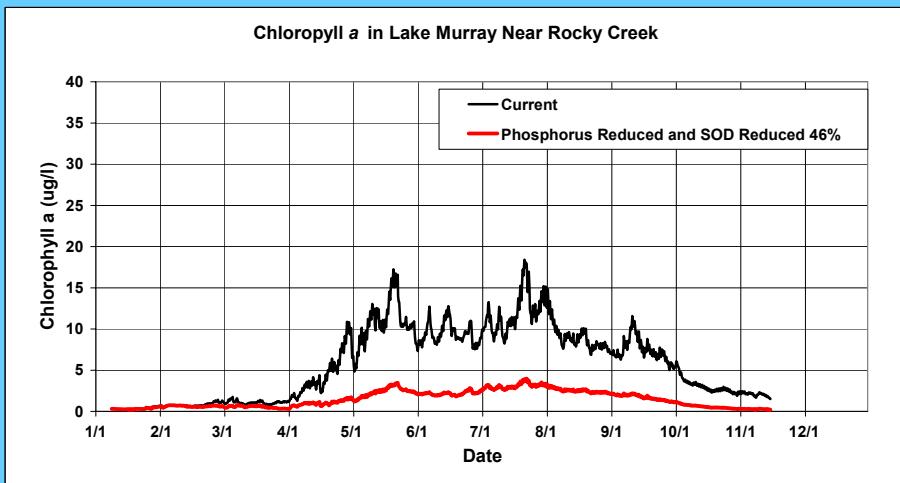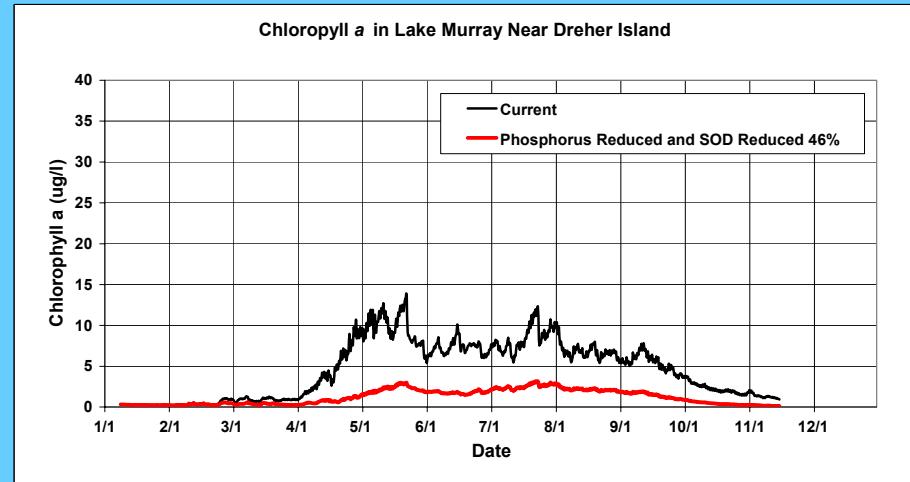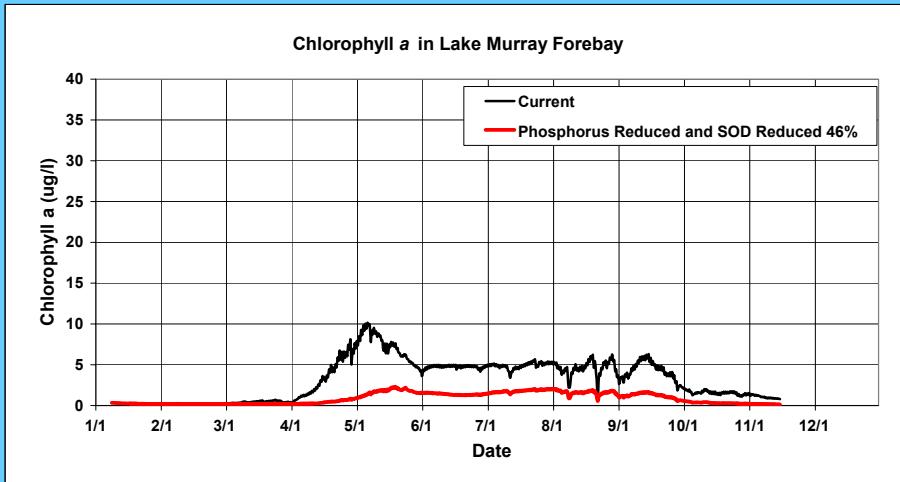


Animation

Current vs. Reduced Phosphorus


Comparison of Water Surface Elevations for Various Years at Lake Murray

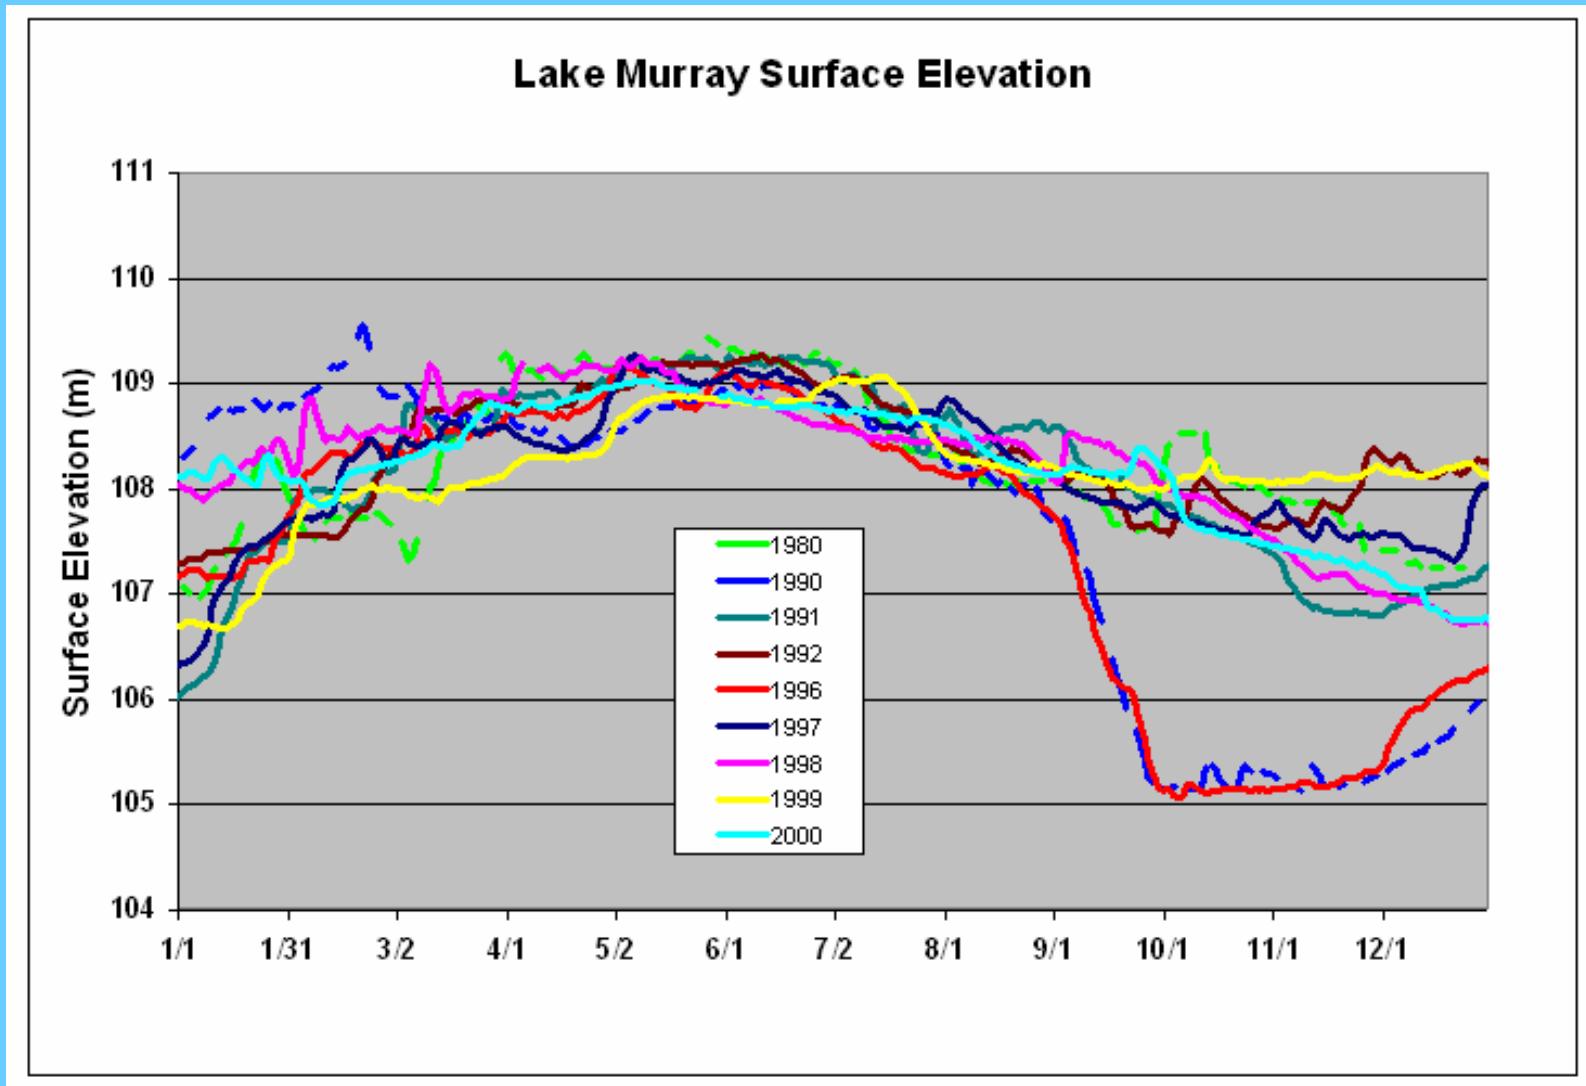


1996 Discharge DO for Current and Reduced Phosphorus, and without the Special Drawdown

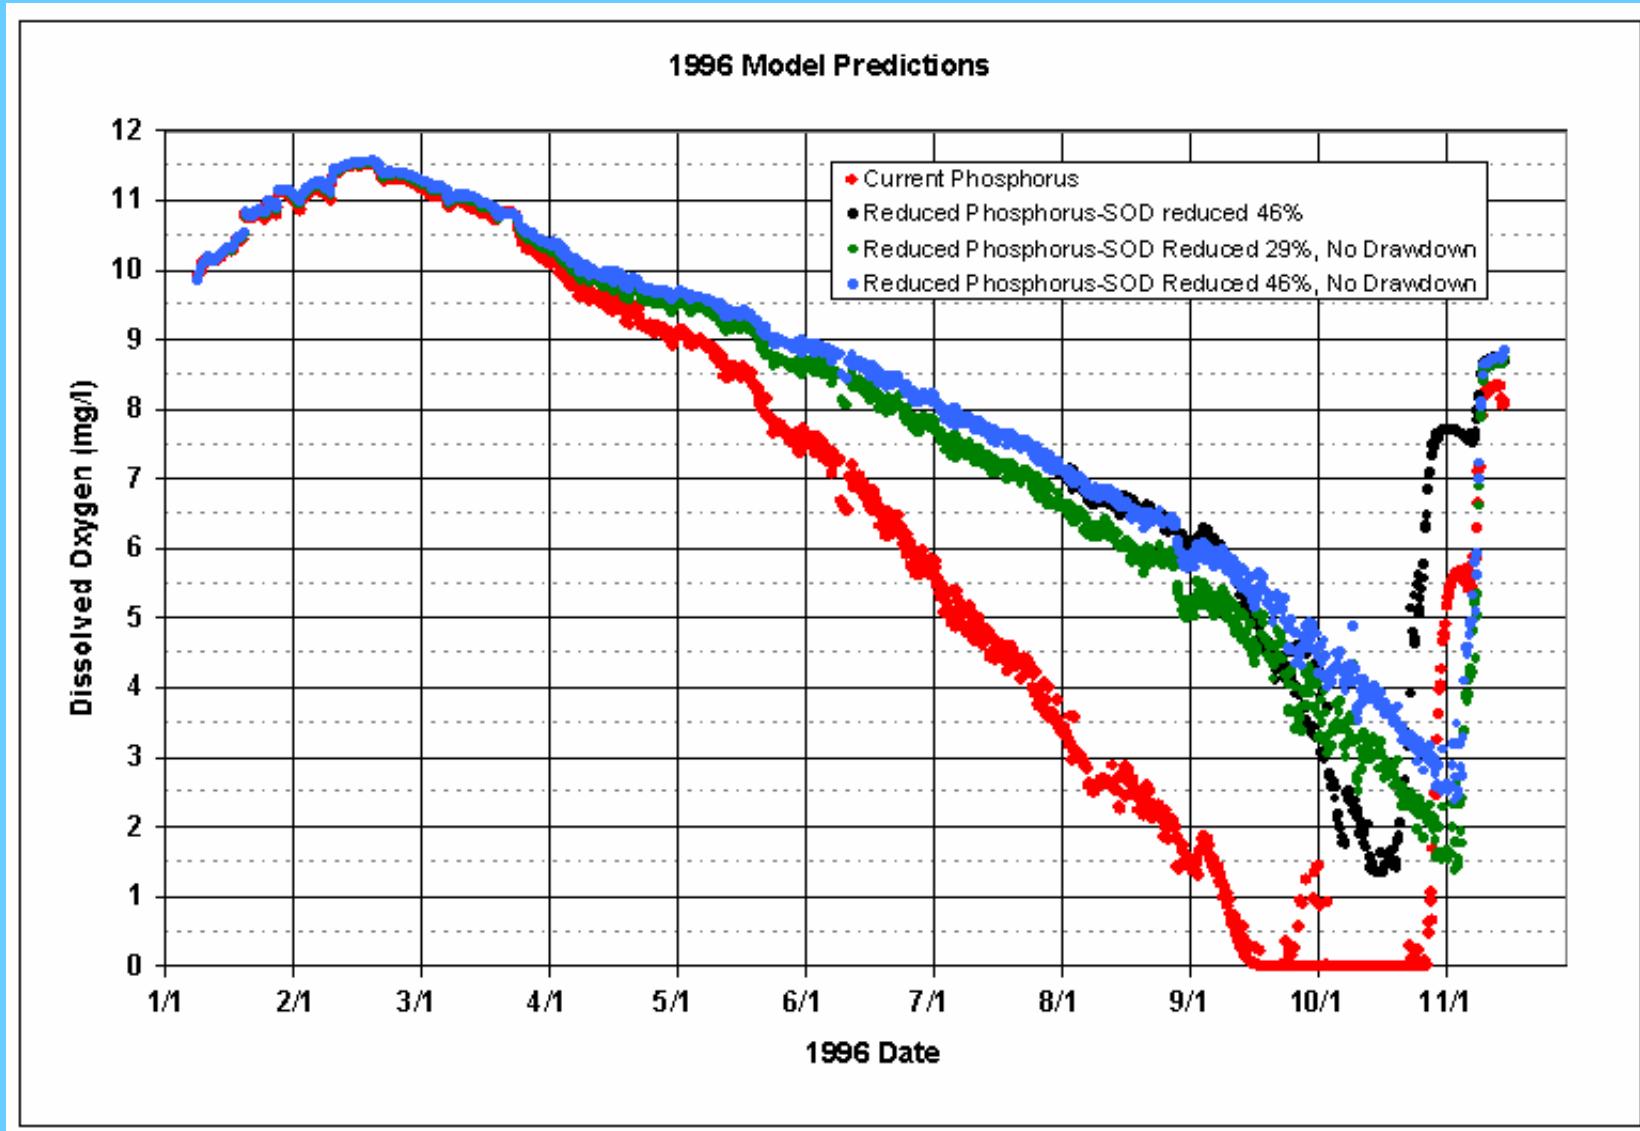


1996 DO at the Elevation of the Unit 5 Intake for Current and Reduced Phosphorus, and without the Special Drawdown

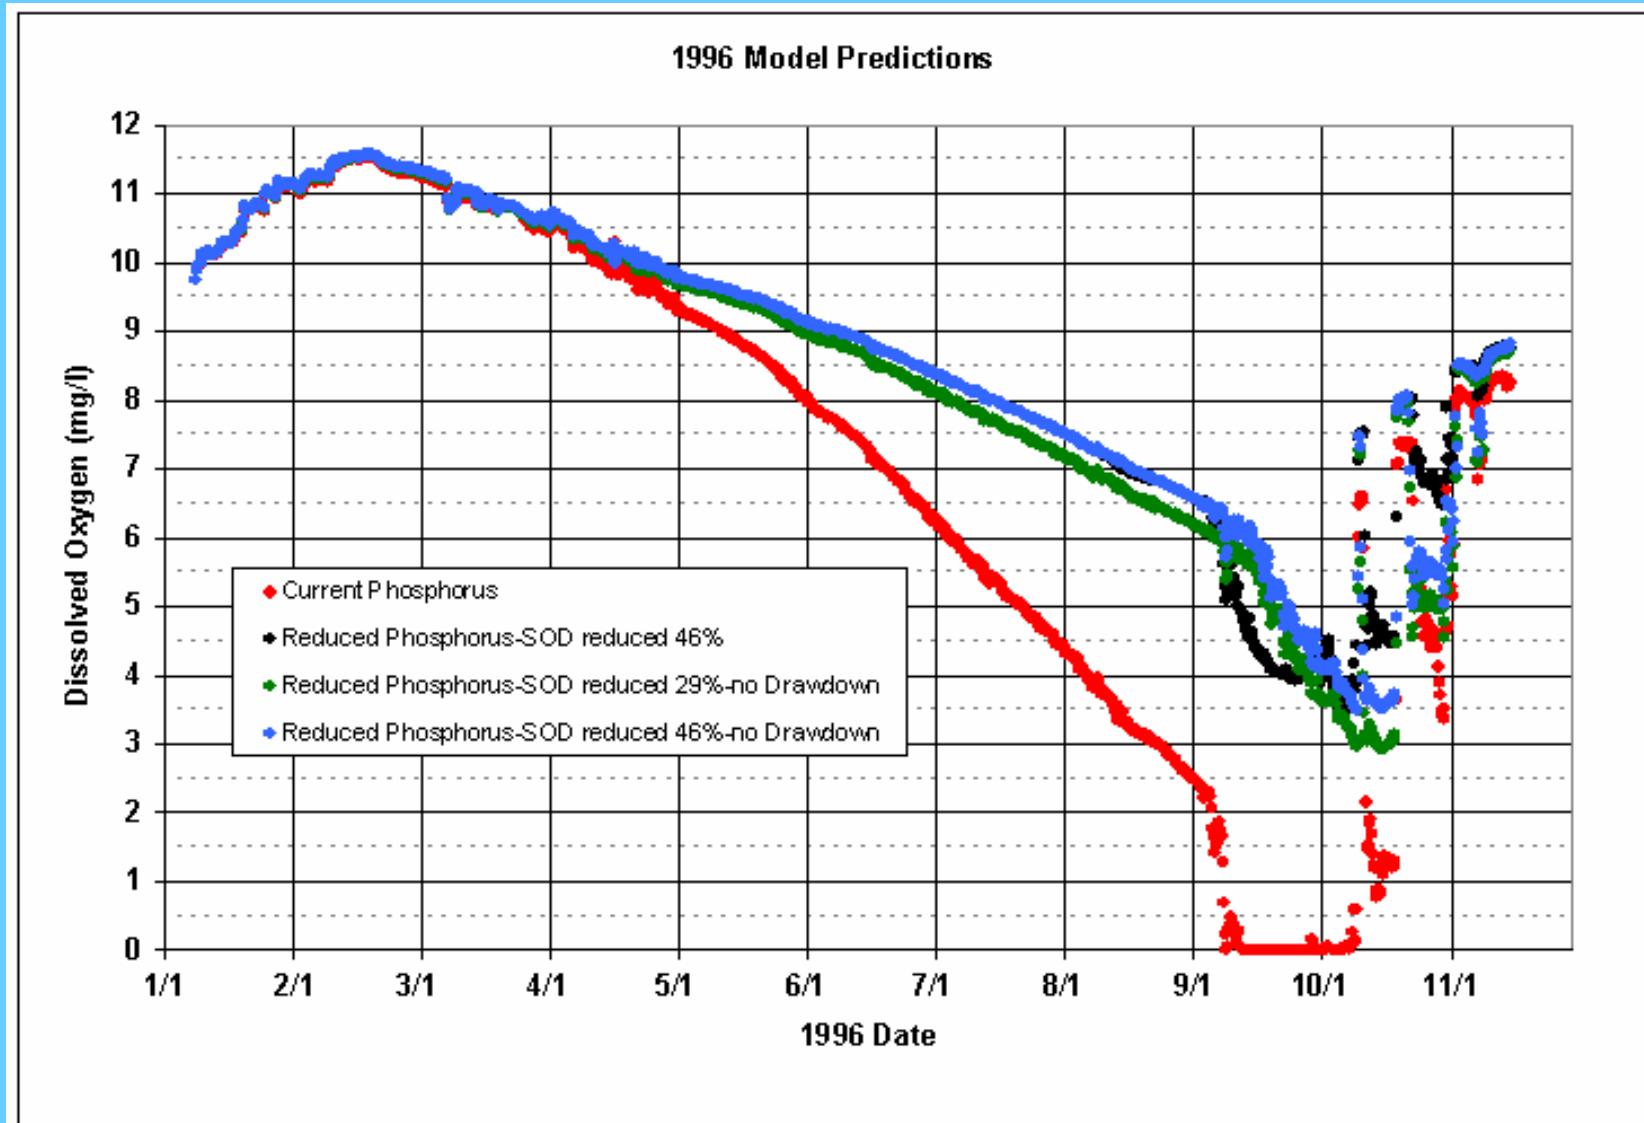


1992 Discharge DO for Current and Reduced Phosphorus

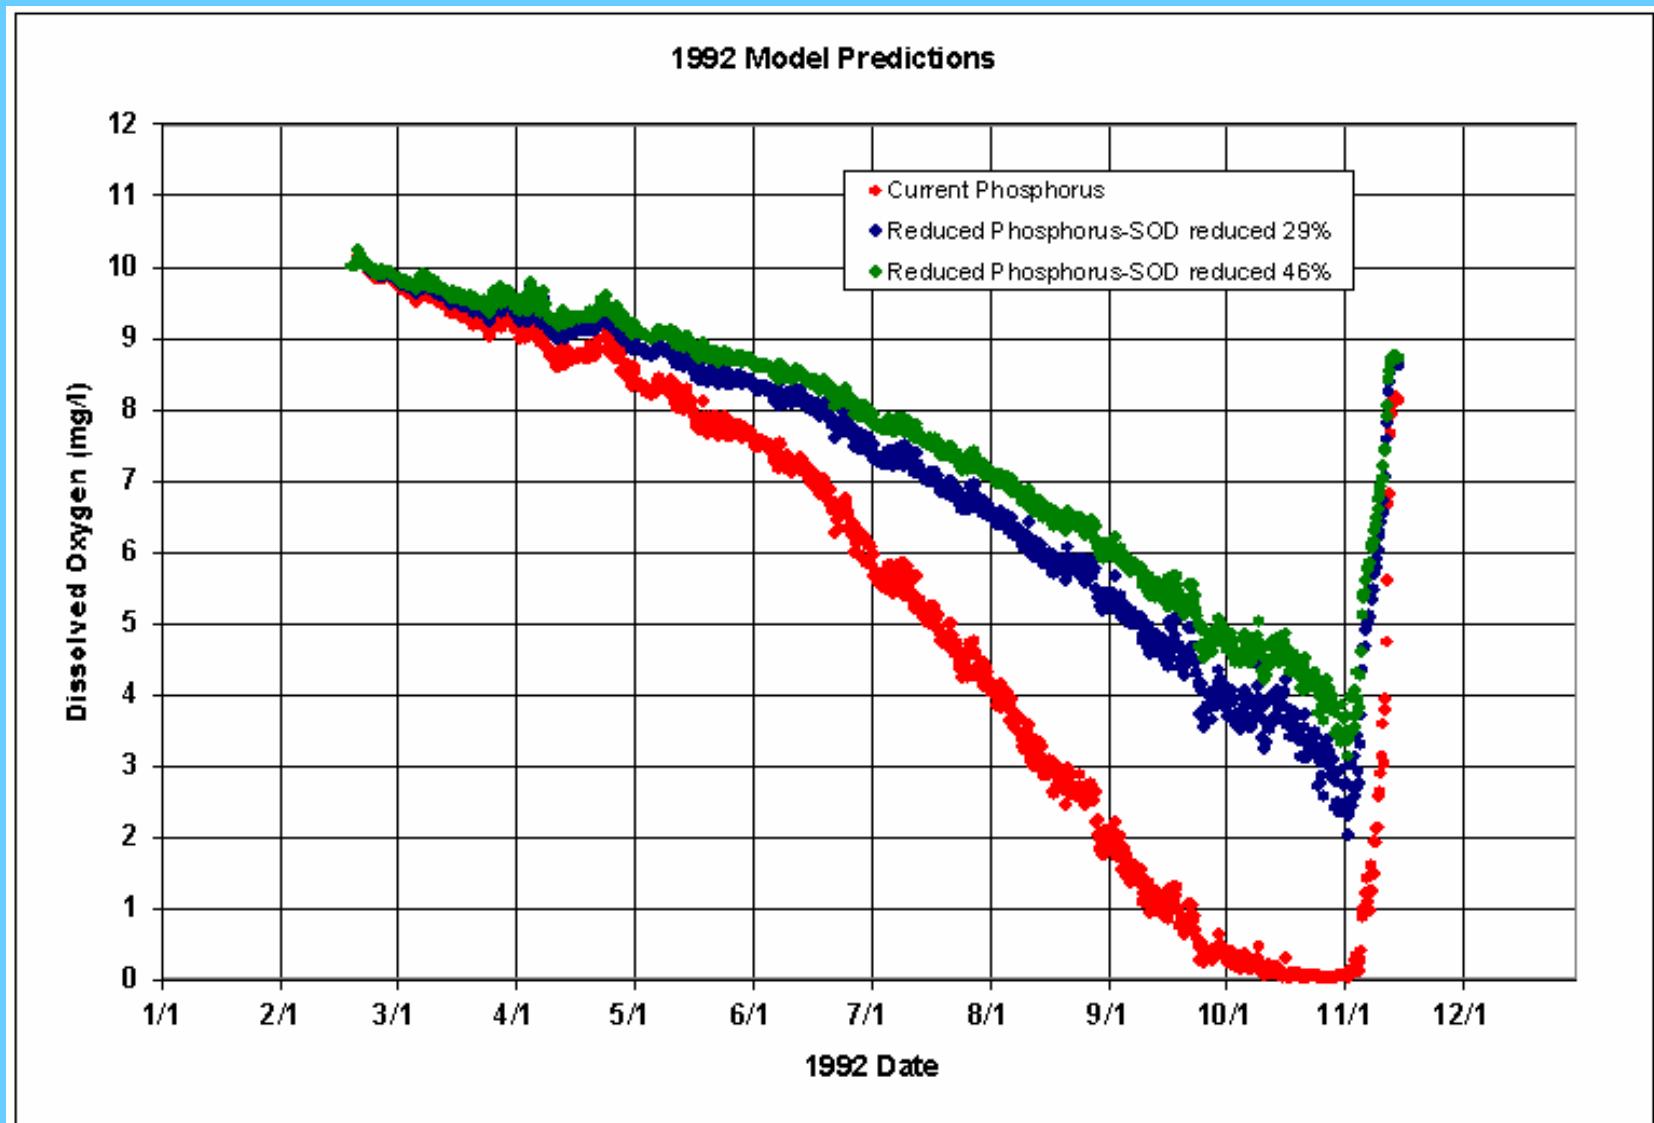


1997 Discharge DO for Current and Reduced Phosphorus

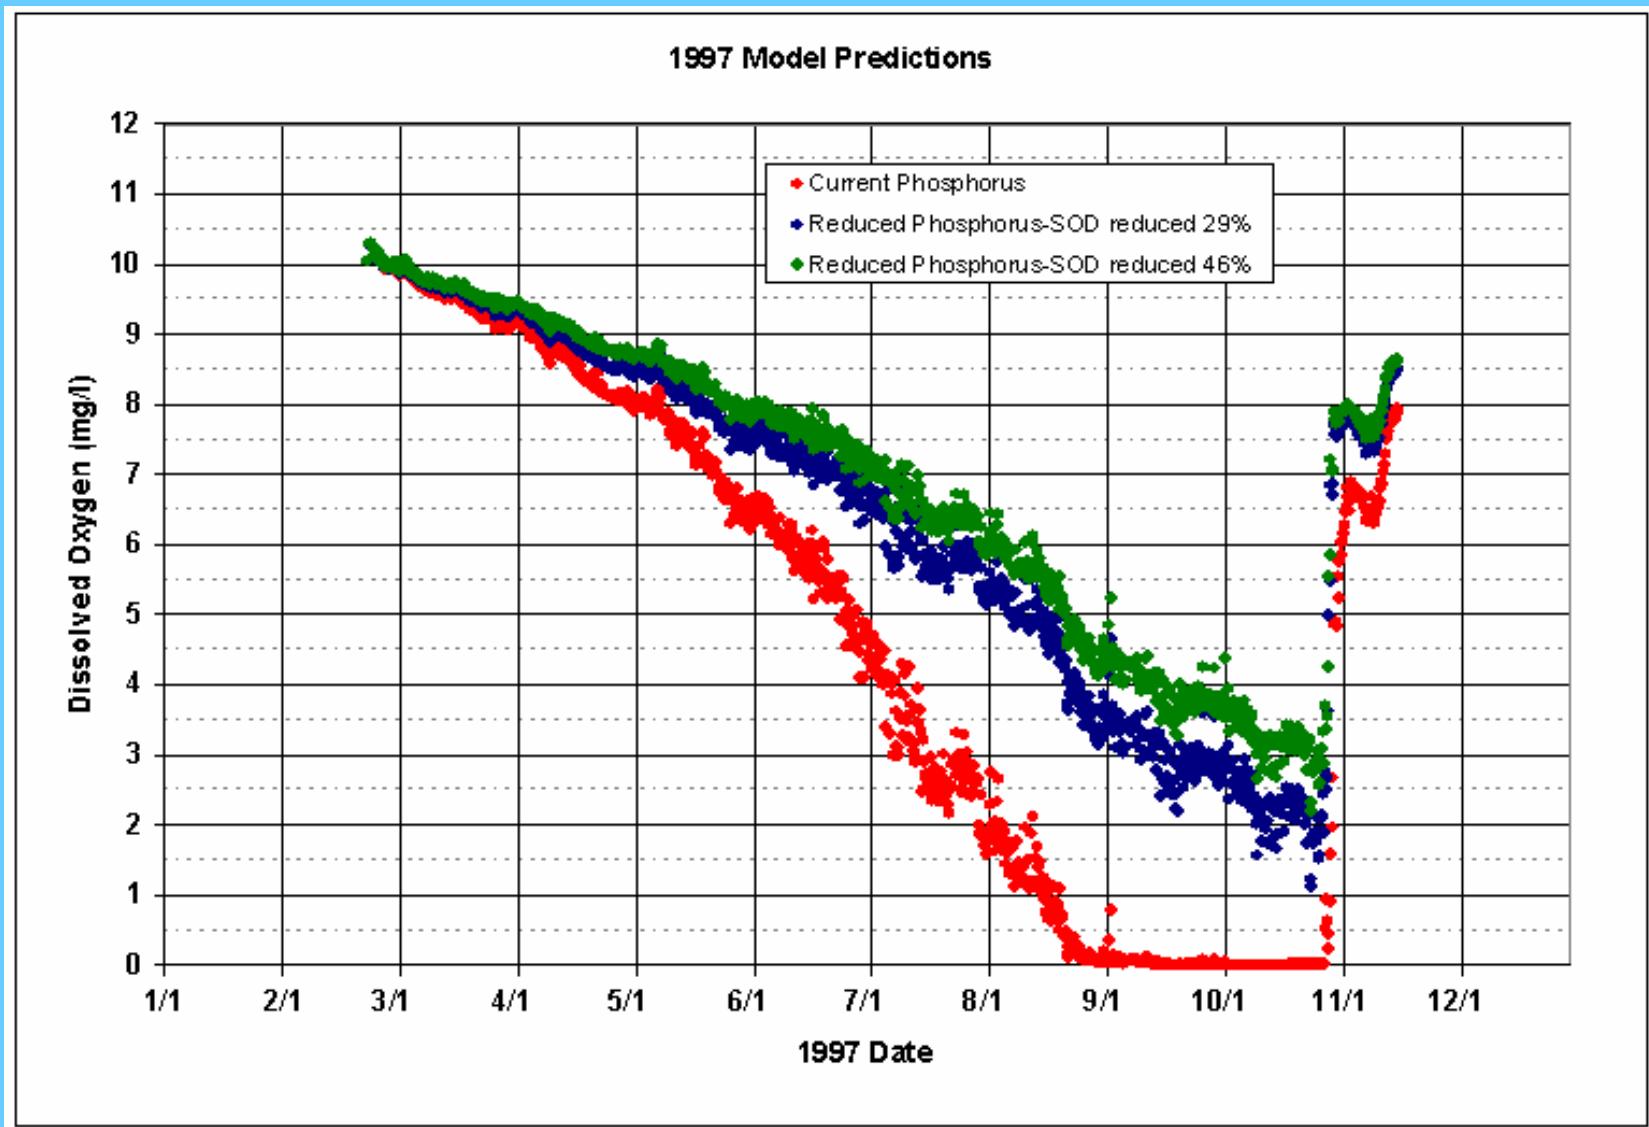

1992 DO at the Level of the Unit 5 Intake for Current and Reduced Phosphorus

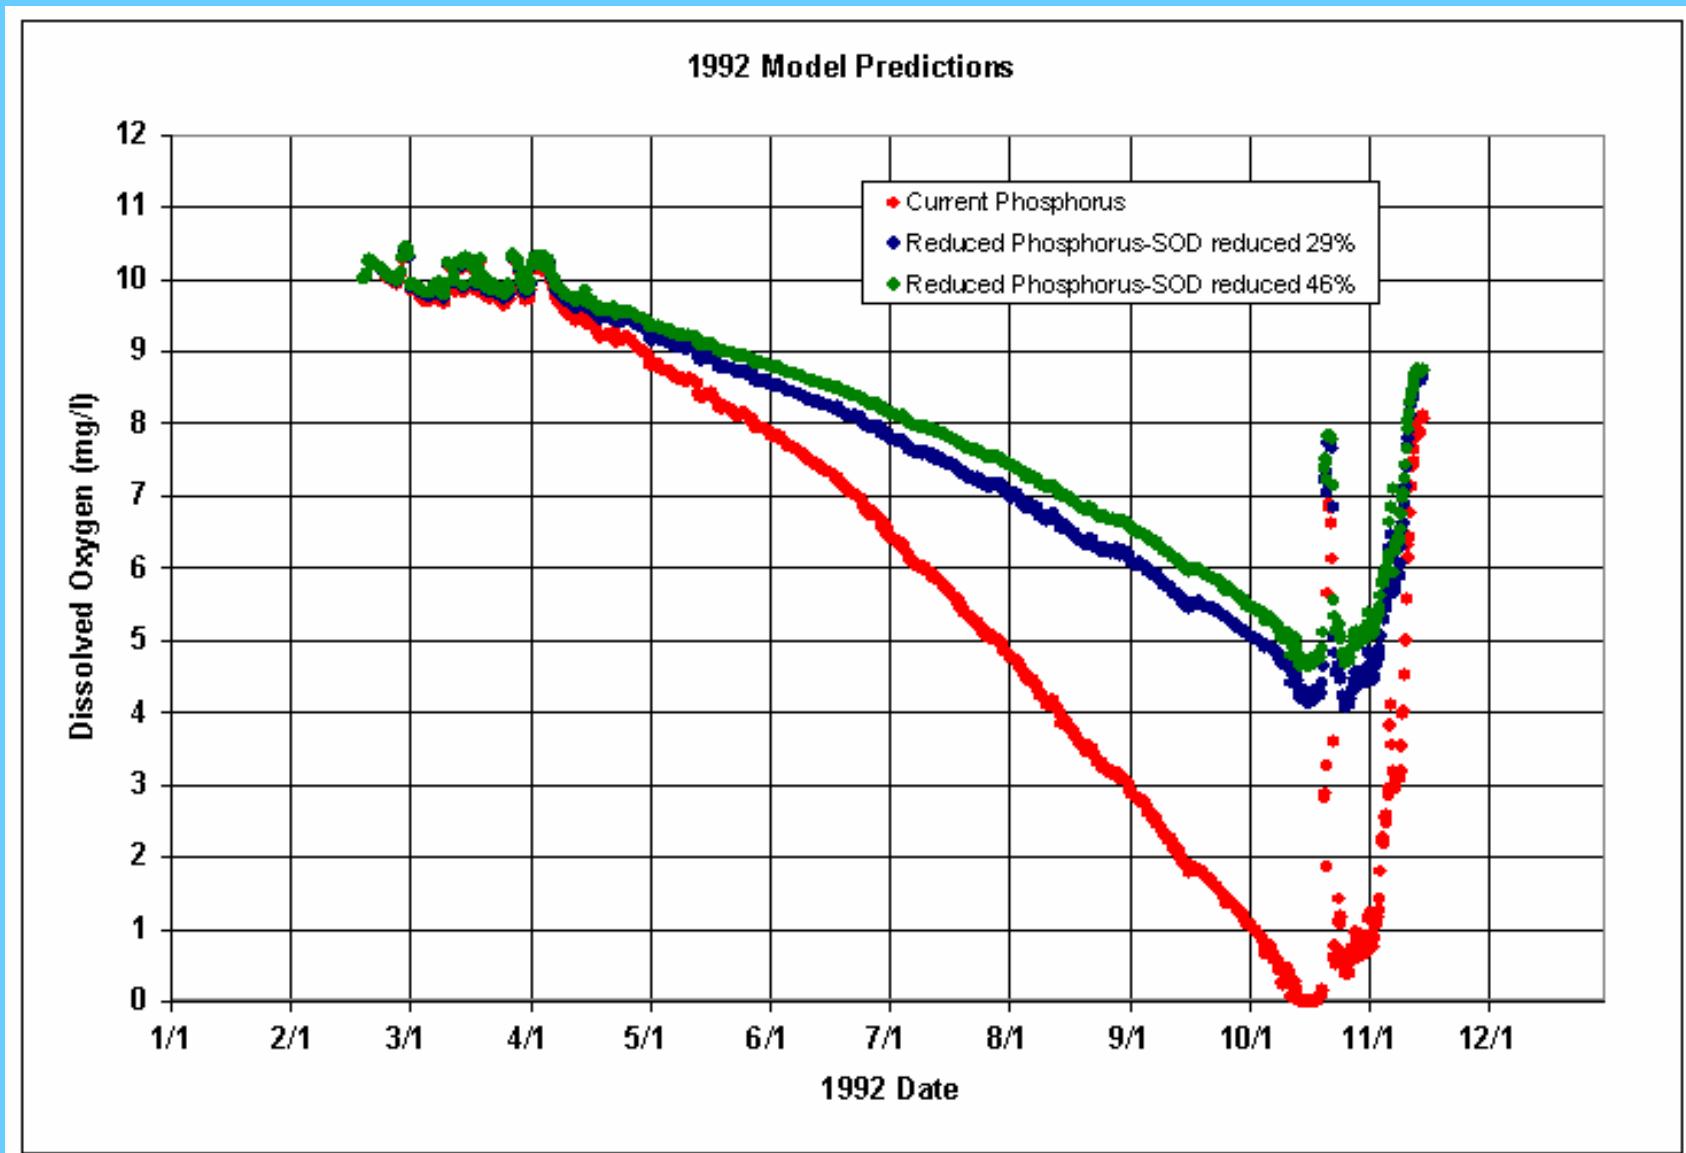

1997 DO at the Level of the Unit 5 Intake for Current and Reduced Phosphorus

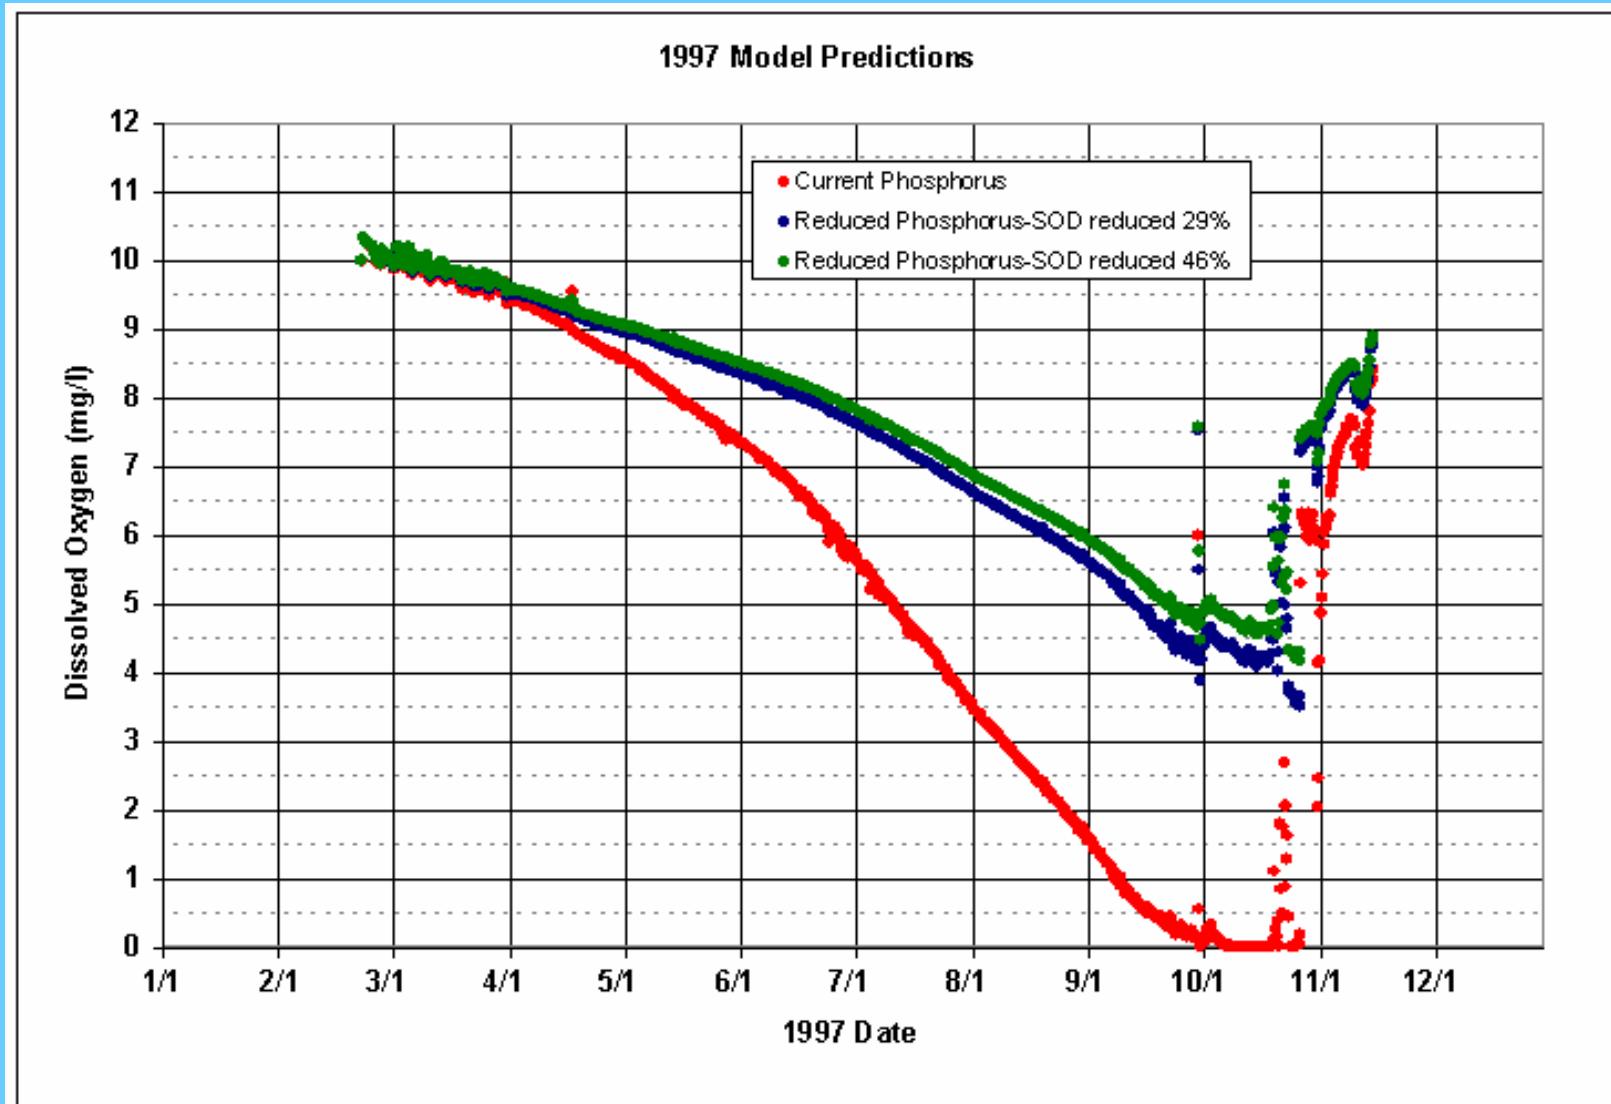

Animation

Striped Bass Habitat Highlighted

End

Water Quality Update



Lake Murray ----Lower Saluda River


December 7, 2005

Andy Miller Watershed Manager

Saluda and Santee Basins



State's Ambient Water Quality Monitoring Network

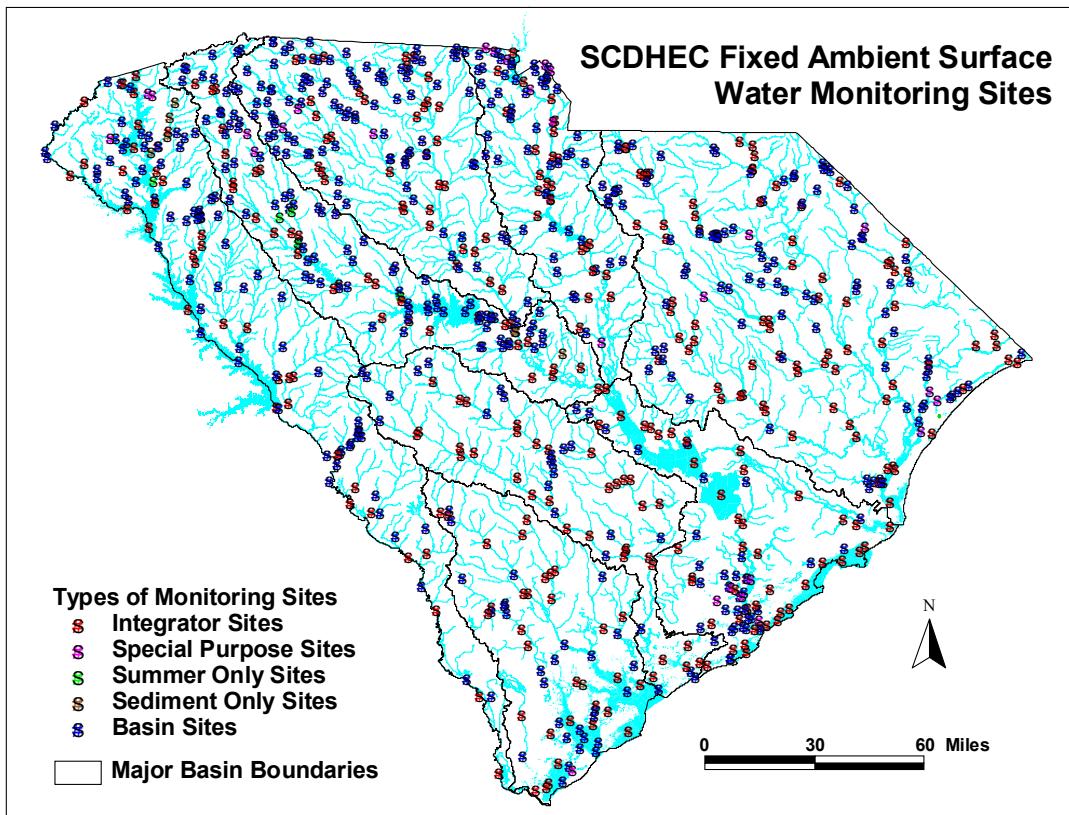


State's Ambient Water Quality Monitoring Network

- 1400 Stations State-wide
- 212,000 Water Quality Tests
 - Sampled by Regional Env. Quality Control Region Staff
 - Analysis at:
 - Field
 - Regional Labs
 - Central Lab-Parklane Rd Columbia



SCDHEC Fixed Ambient Surface Water Monitoring Sites

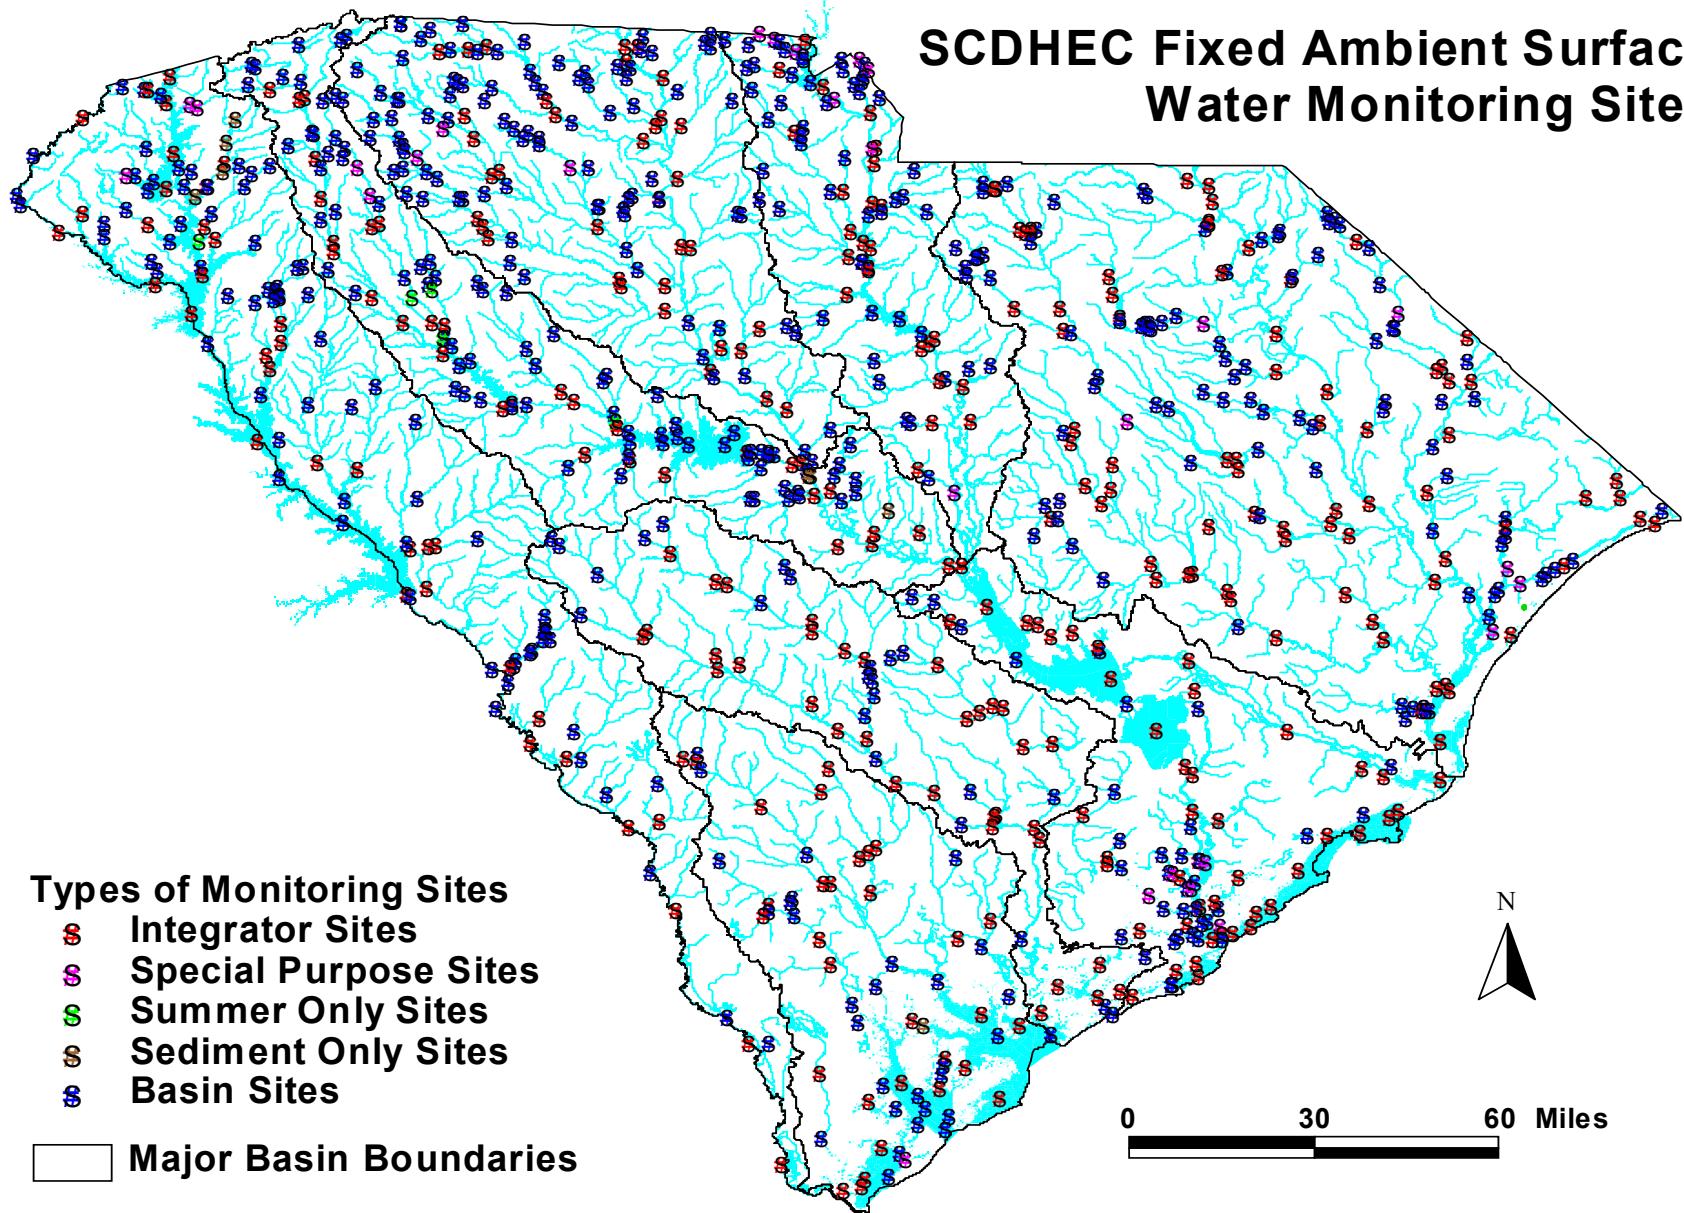

Lake Murray –Lower Saluda Sites

- 41 Total Sites

- 7 Integrator sites-Monthly every year
- 23 Basin sites-Monthly every five years
- 8 Random sites-Monthly for one year
- 2 Special purpose-Monthly as needed
- 1 Summer only



Lake Murray –Lower Saluda Sites

- 31 Lake Murray Watershed Sites
 - 18 Lake Sites
 - 14 Contributing watershed Stations
- 10 Lower Saluda Watershed Stations
 - 3 River stations
 - 7 Contributing watershed stations

Lower Saluda WQ Status '06

- 3 Sites meet criteria
 - S-152, S-298, S-149 Main stem of the L Saluda
- 7 Sites exceed criterion:
 - 6 fecal coliform
 - 4 aquatic macro invertebrates
 - 2 dissolved oxygen
 - 2 pH
 - 1 Mercury in fish tissue

New for '06:

S-149 Meets for FC

S-152 Meets for pH


S-260 Exceeds for BIO

S-287 Exceeds for DO,pH


S-294 Exceeds for BIO,pH



Watershed Map Lower Saluda

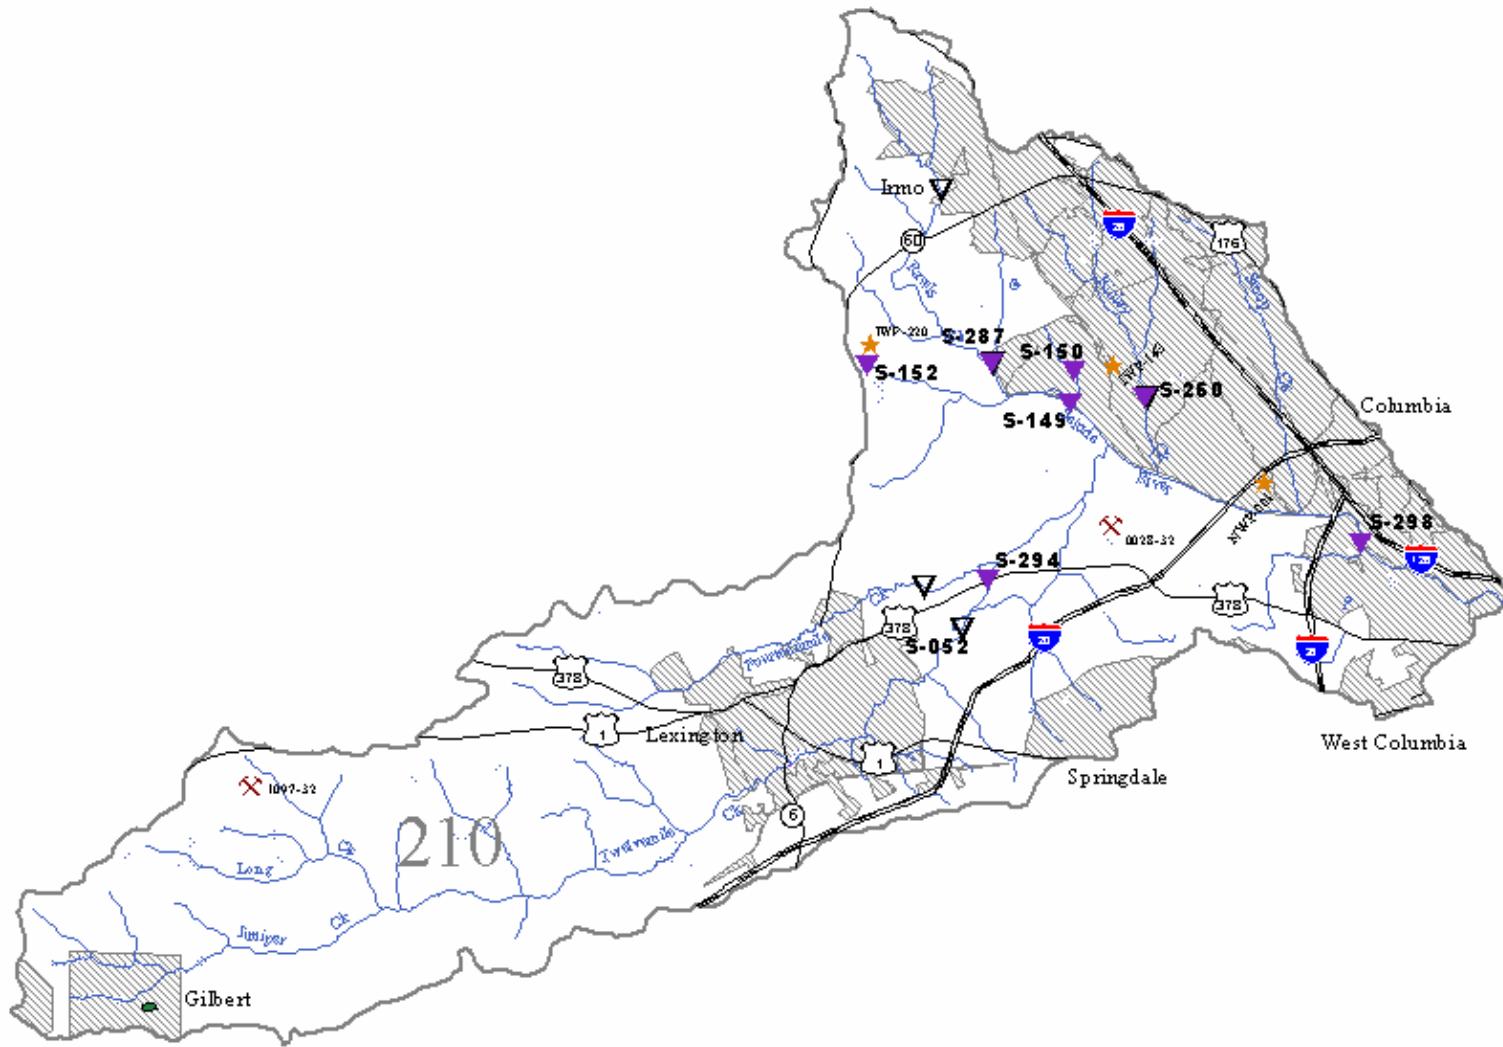

Lake Murray Water Quality Status 2004-2006

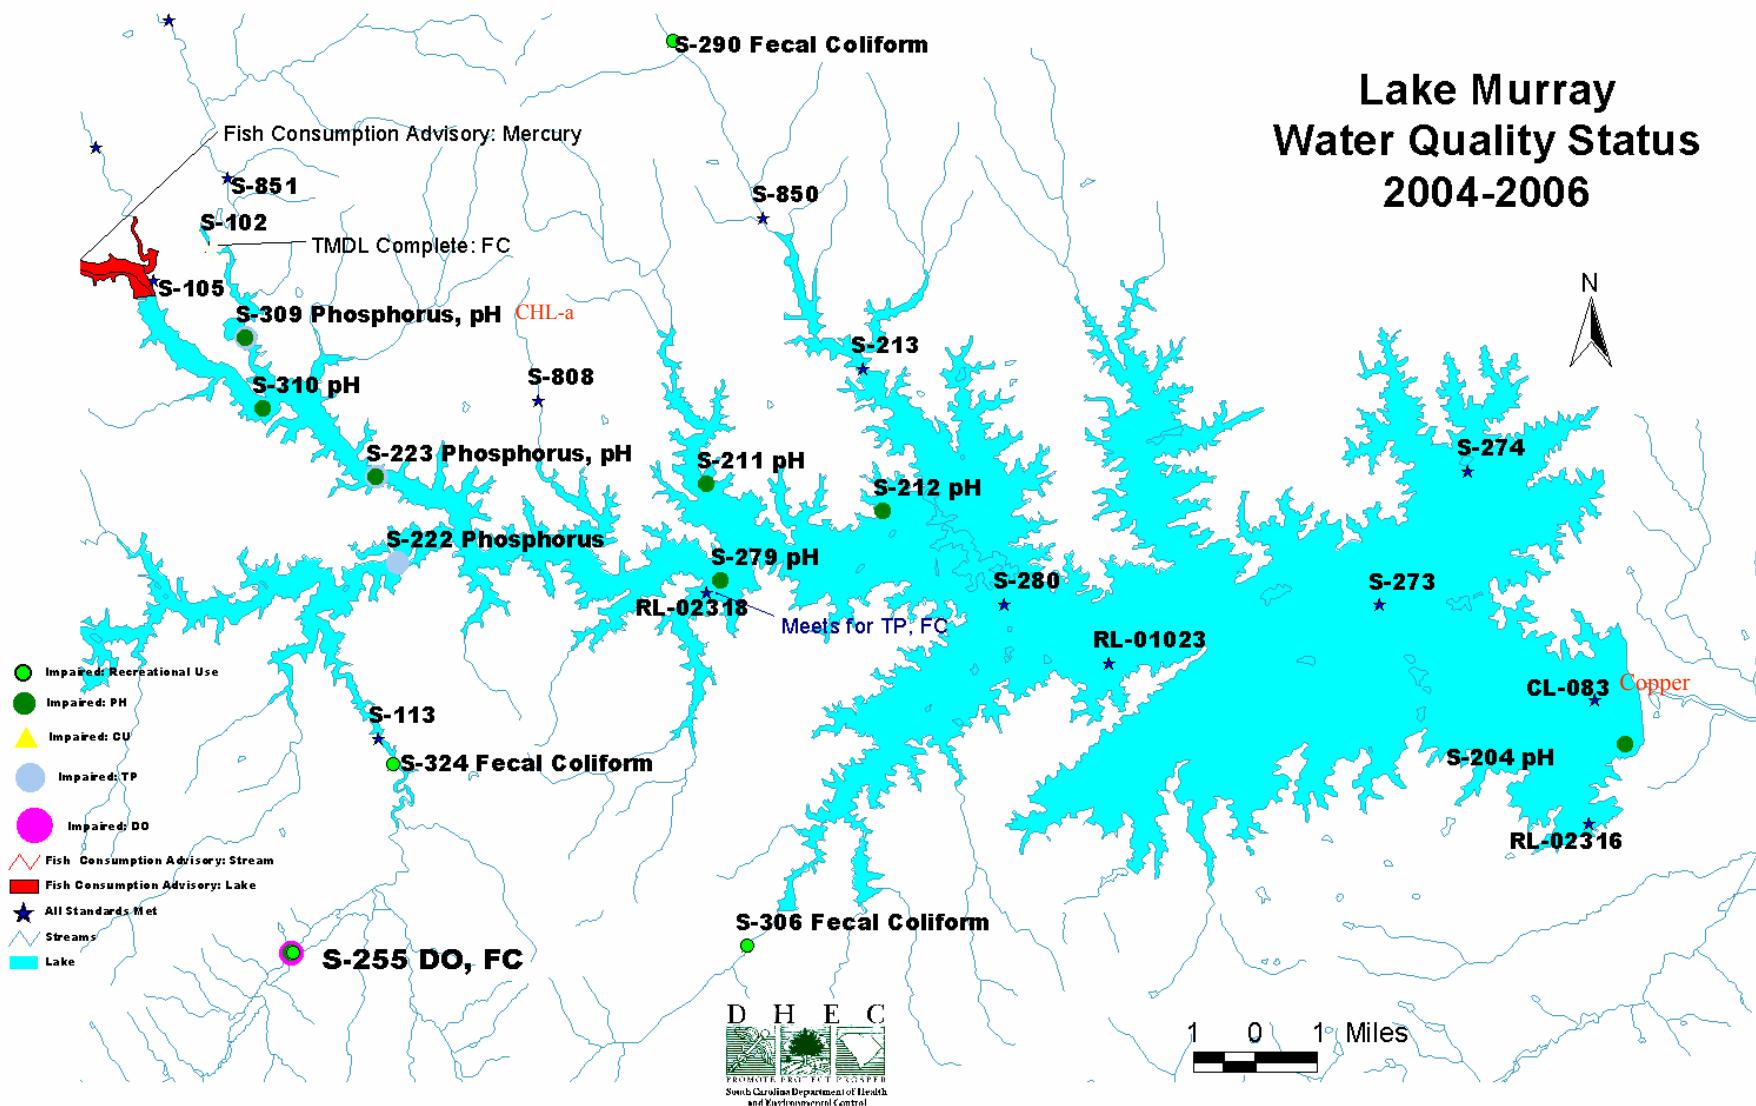

Lake Murray: WQ Status '06

■ Lake Stations

- 9 Meet criteria(Eastern Side of Lake)
- 10 Exceed criterion
 - 9 pH (High)
 - 2 Phosphorus
 - 1 Copper
 - 1 Chlorophyll-a

New for 06:

S-279 now meets for P, FC
S-309 exceeds for chl-a
CL-083 exceeds for copper

■ Watershed Stations

- 1 Meet criteria (Clouds Creek)
- 13 Exceed criterion
- 11 Fecal Coliform
 - 4 Dissolved Oxygen
 - 2 ph (low)
 - 1 Aquatic macro-invertebrates




Sources

- Point

- Domestic wastewater treatment
- Industrial

- Nonpoint

- Urban
- Agricultural
- Atmospheric deposition

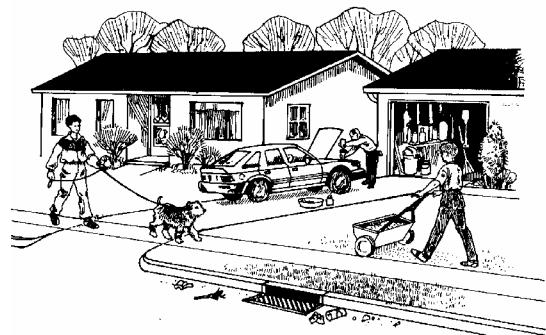

For further information

- SC list of Impaired Waters (303d list)
 - <http://www.scdhec.gov/water/tmdl/index.html#303d>
- South Carolina Surface Water Quality Program
 - <http://www.scdhec.gov/water/html/surface.html>

Call me:

- Andy Miller-Saluda-Santee Watershed manager
 - 803-898-4031



Developing a Site-Specific Dissolved Oxygen Standard for the Lower Saluda River

Fisheries and Wildlife and Water Quality
Resource Conservation Groups
Joint Meeting

December 7, 2005

Summary of DO Criteria and Standards

- Prior to the 1986 revision, the USEPA Criteria was a simple 5 mg/L minimum.
- This criterion was overprotective against acute mortality if rigorously applied.
- It was also potentially underprotective against chronic effects.
- In addition, states often used 5 mg/L as a daily mean value, allowing unacceptably lower true daily minima.

Criteria Improvement

- In the early 1980s EPA began developing new water quality criteria that included two numbers.
- One number protected against **short-term lethal** effects and the other protected against **long-term chronic** effects.
- A similar approach was needed to provide more adequate and scientific criteria for DO.

Key Features of the Latest EPA DO Criteria Approach

- The new DO criteria contained specific minima and long-term average concentrations for various habitats (e.g. cold-water fisheries).
- Growth was the most sensitive chronic effect and a 30-day moving average was recommended to protect growth.
- Monthly averages can be less protective by allowing continuous weeks of lower DO if they don't all happen to fall within the same month.

Latest EPA Trout-Water Criteria

- For survival of trout: a minimum of 3 mg/L.
- For growth protection: a 6.5 mg/L 30-day average.
- For sensitive cold-water invertebrates: a 4 mg/L minimum.

Site-specific DO Criteria

- Because the 6.5 mg/L 30-day mean is based upon continuous exposure to various DO levels in lab tests, EPA sought a way to apply these data to real-world situations with variable DO levels.
- **EPA and TVA jointly developed a fish growth model that integrates the growth effects of variable DO, allowing site-specific chronic standards to be set that are both protective and realistic.**

Model Calibration

- This modeling approach was used to develop a site-specific chronic standard for the LSR.
- To apply the TVA/EPA model to the LSR, Site-specific trout growth data were needed.

2002- 2003 Trout Growth Study

Objectives


- Provide site-specific trout growth data for the LSR
- Provide a food availability term for the bioenergetics model
- Provide general indication of the suitability of current conditions in the LSR


Field Methods

- XXXXX rainbow trout were tagged at SCDNR's Walhalla Fish Hatchery
- Collaborative effort between Clemson University (USDA Coop Unit), SCDNR, SCE&G and Kleinschmidt




Vi-Alpha Tag Application

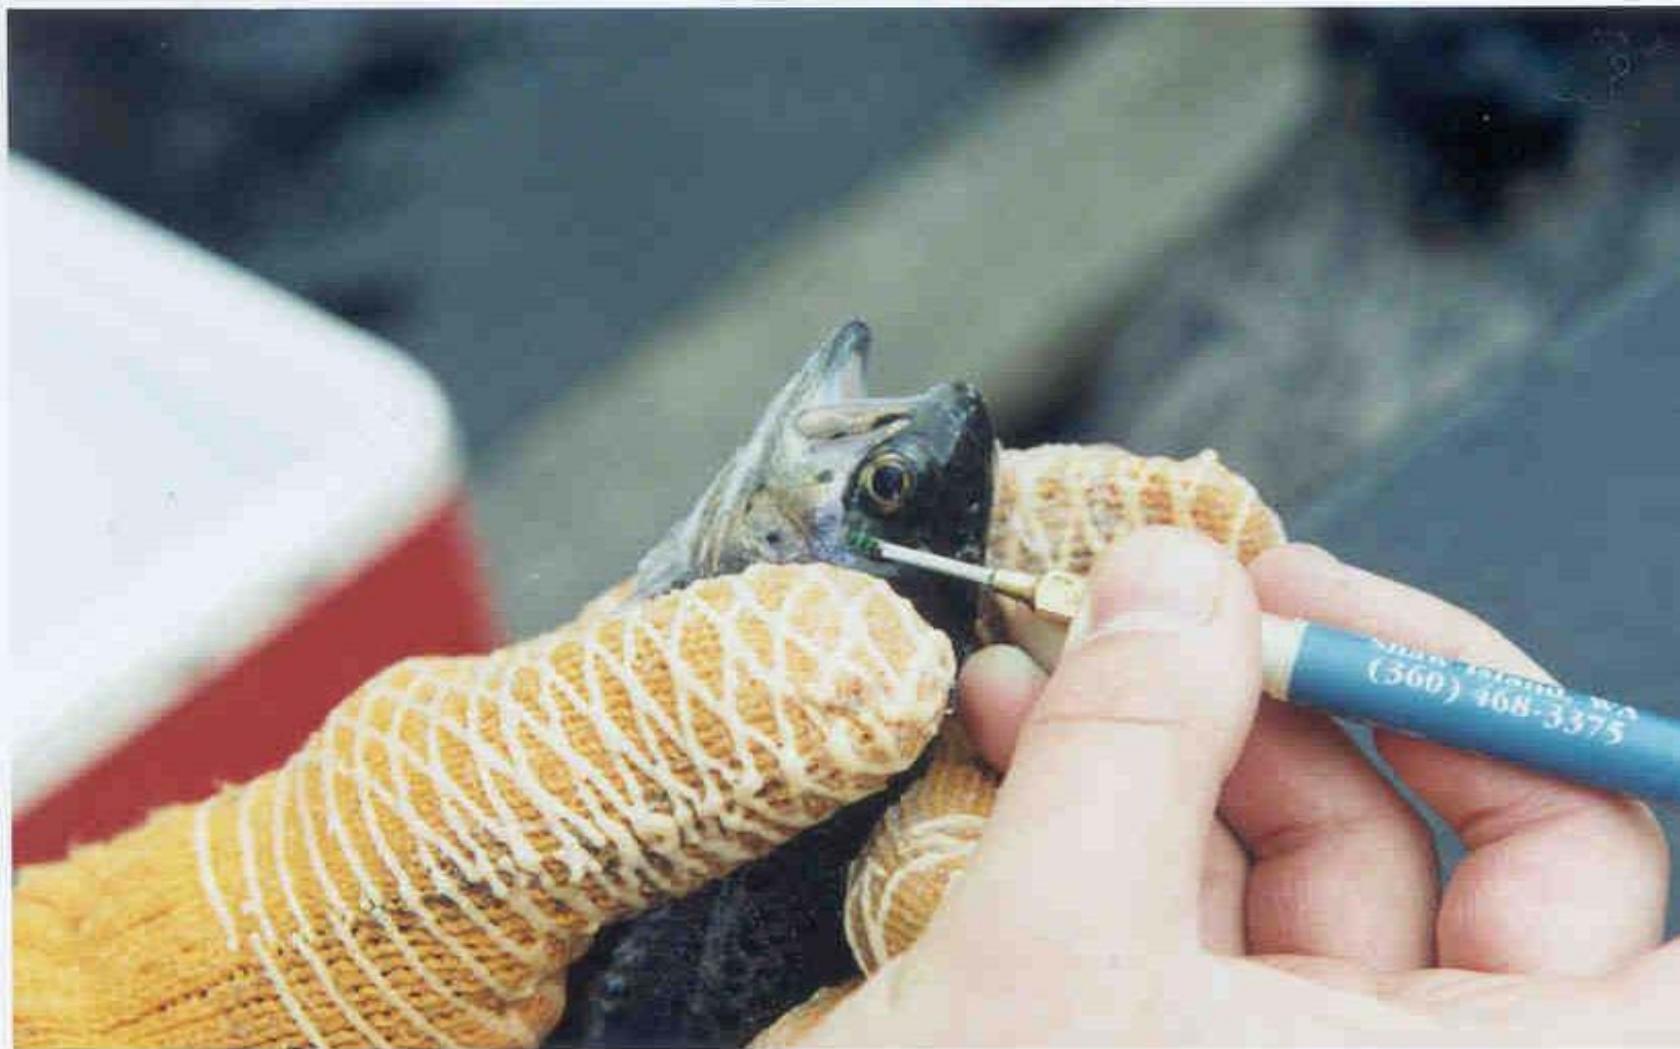

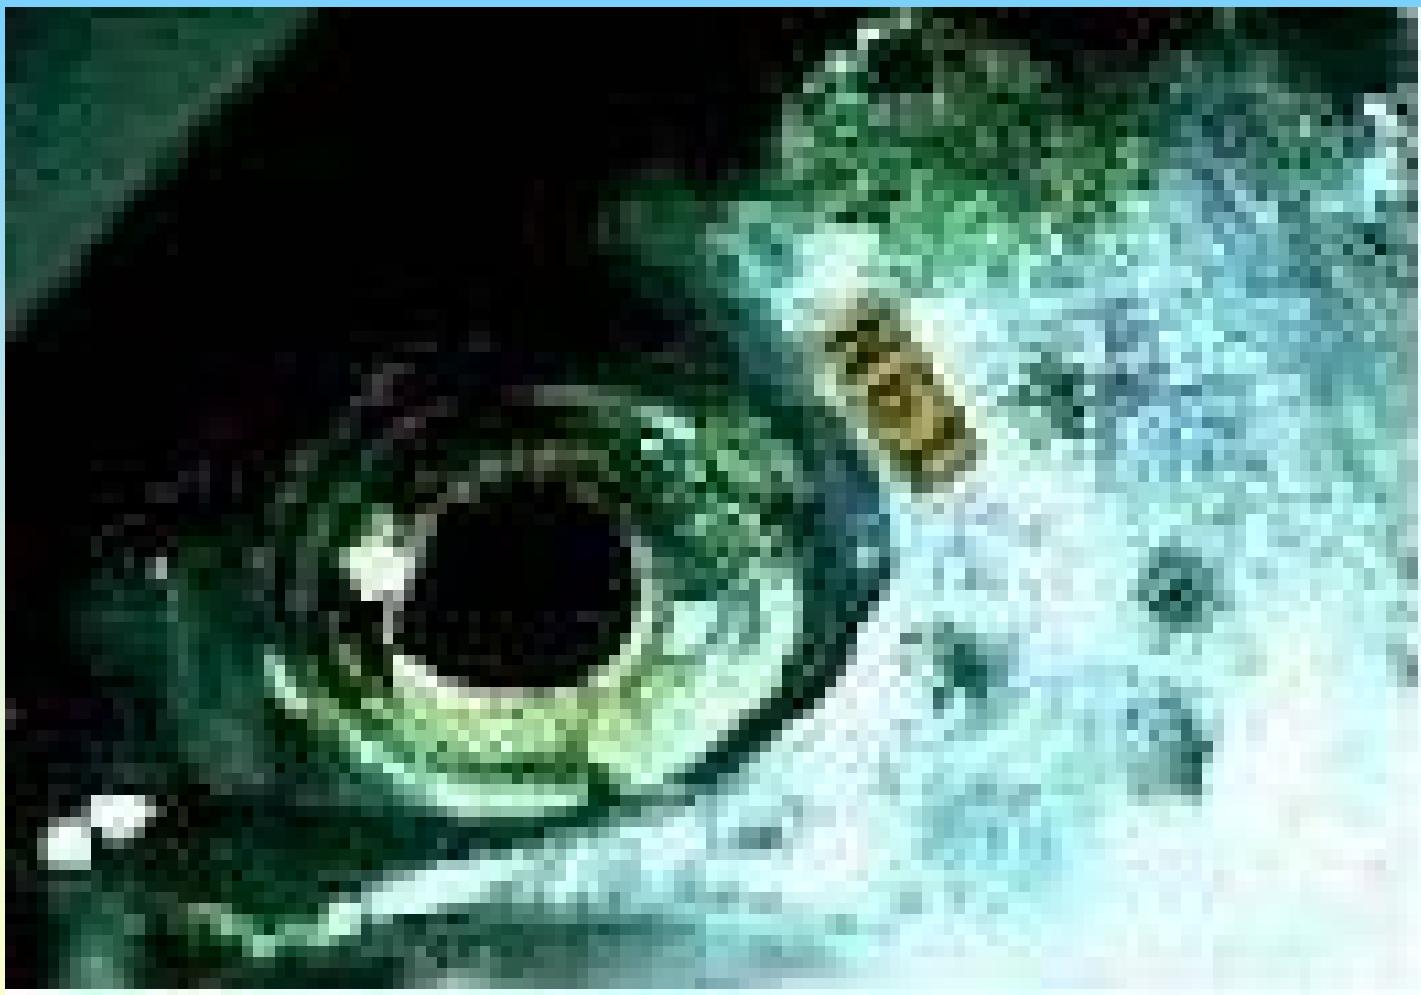

Release and Recapture Sites

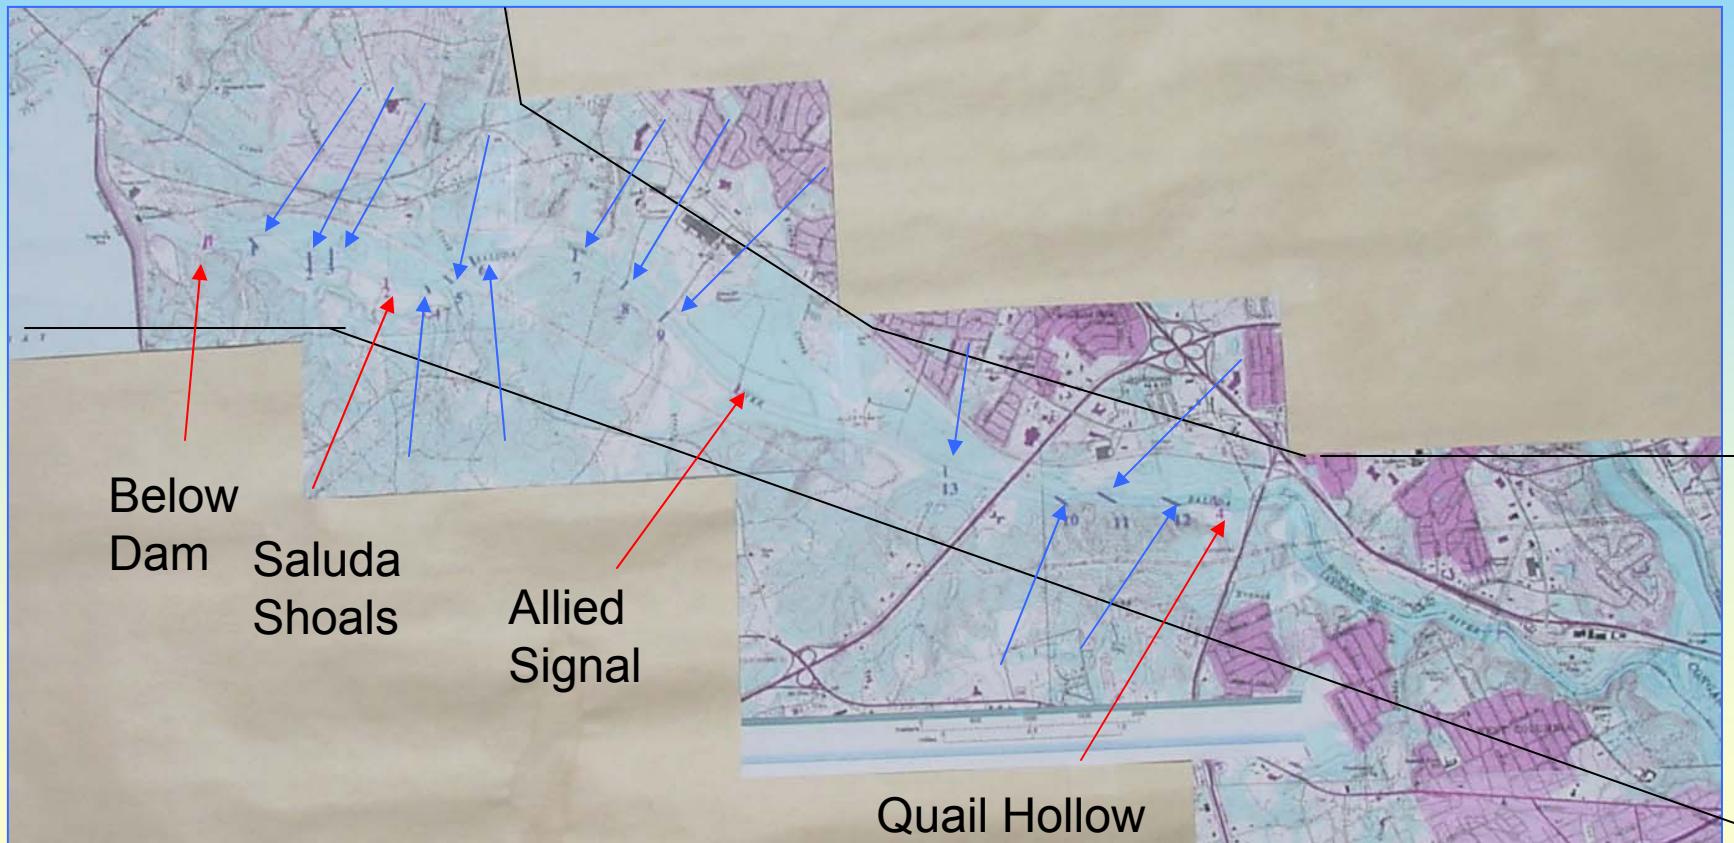






Recapture Results

- Fish collected in April, May and June through electrofishing and angler surveys
- Total of 111 fish recaptured
- Number of fish recaptured by stocking months

December	23
January	32
February	26
March	30

Rainbow and Brown Trout collected during Electrofishing Sampling

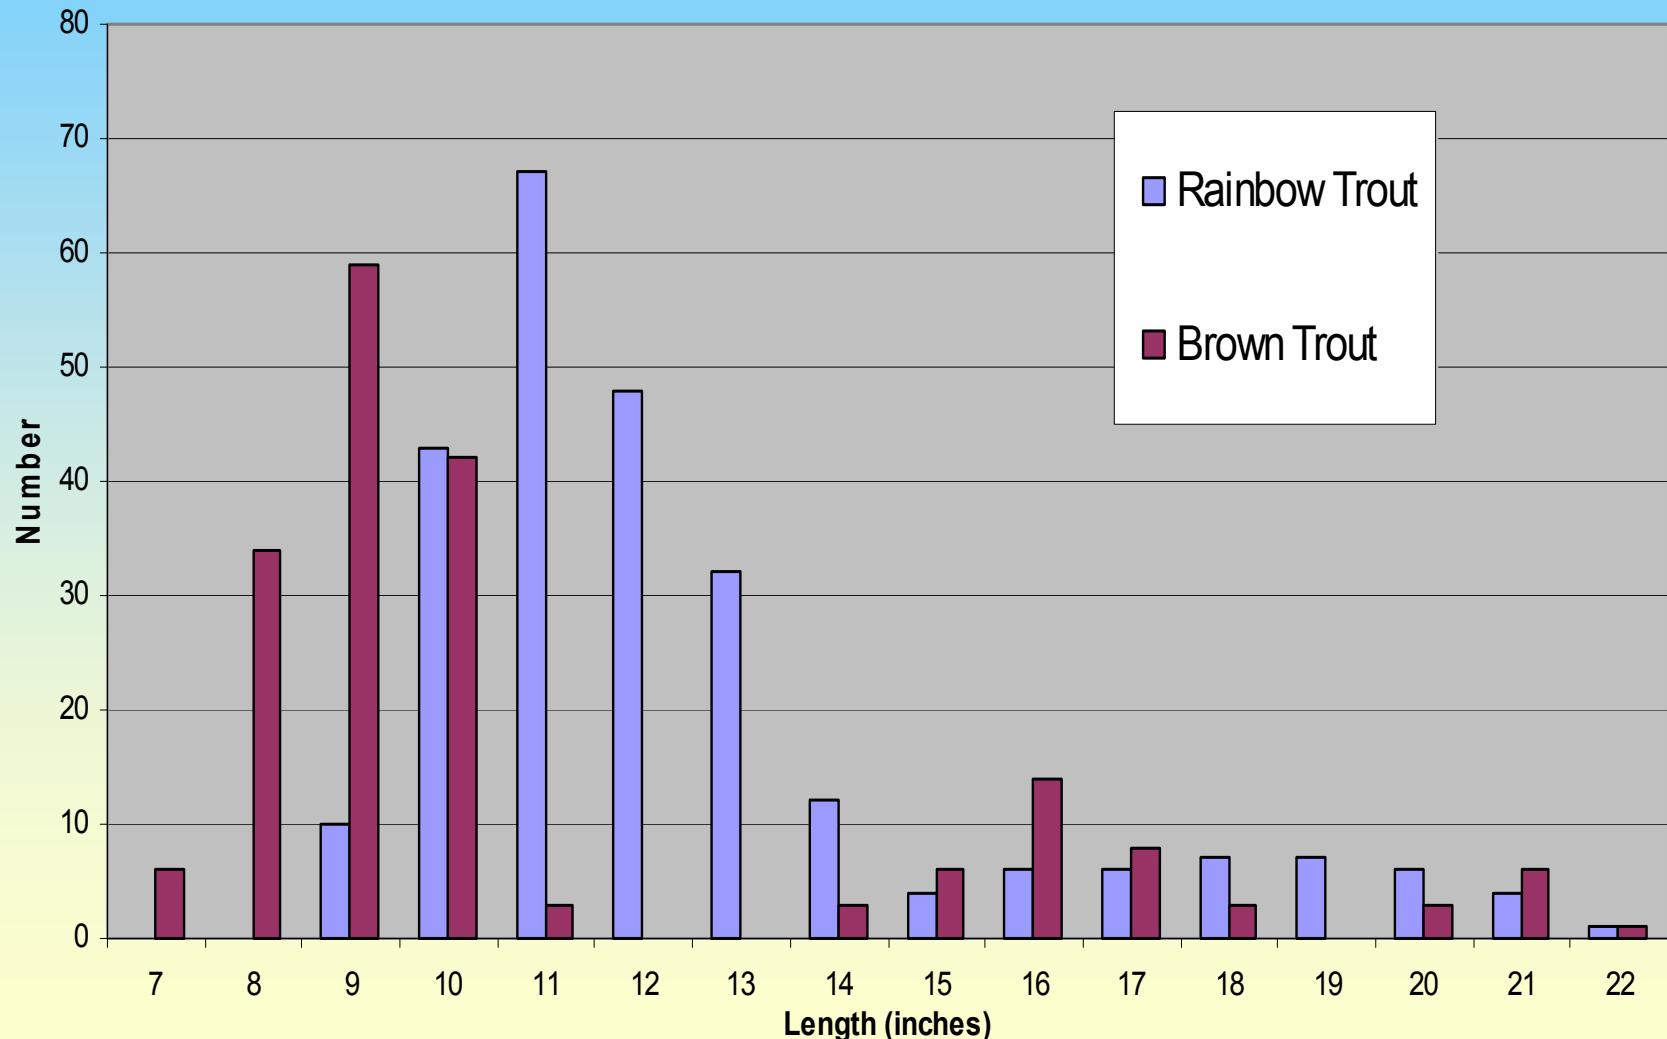

Additional Trout Fishery Information Collected

- Total of 441 trout collected during sampling


253 Rainbow Trout: 225 – 550 mm (9 - 22 in)

188 Brown Trout: 175 – 550 mm (7 - 22 in)

37 Rainbow trout collected > 16 inches

35 Brown trout collected > 16 inches

SCDNR collected 24 in brown trout during
standardized sampling in May 2003

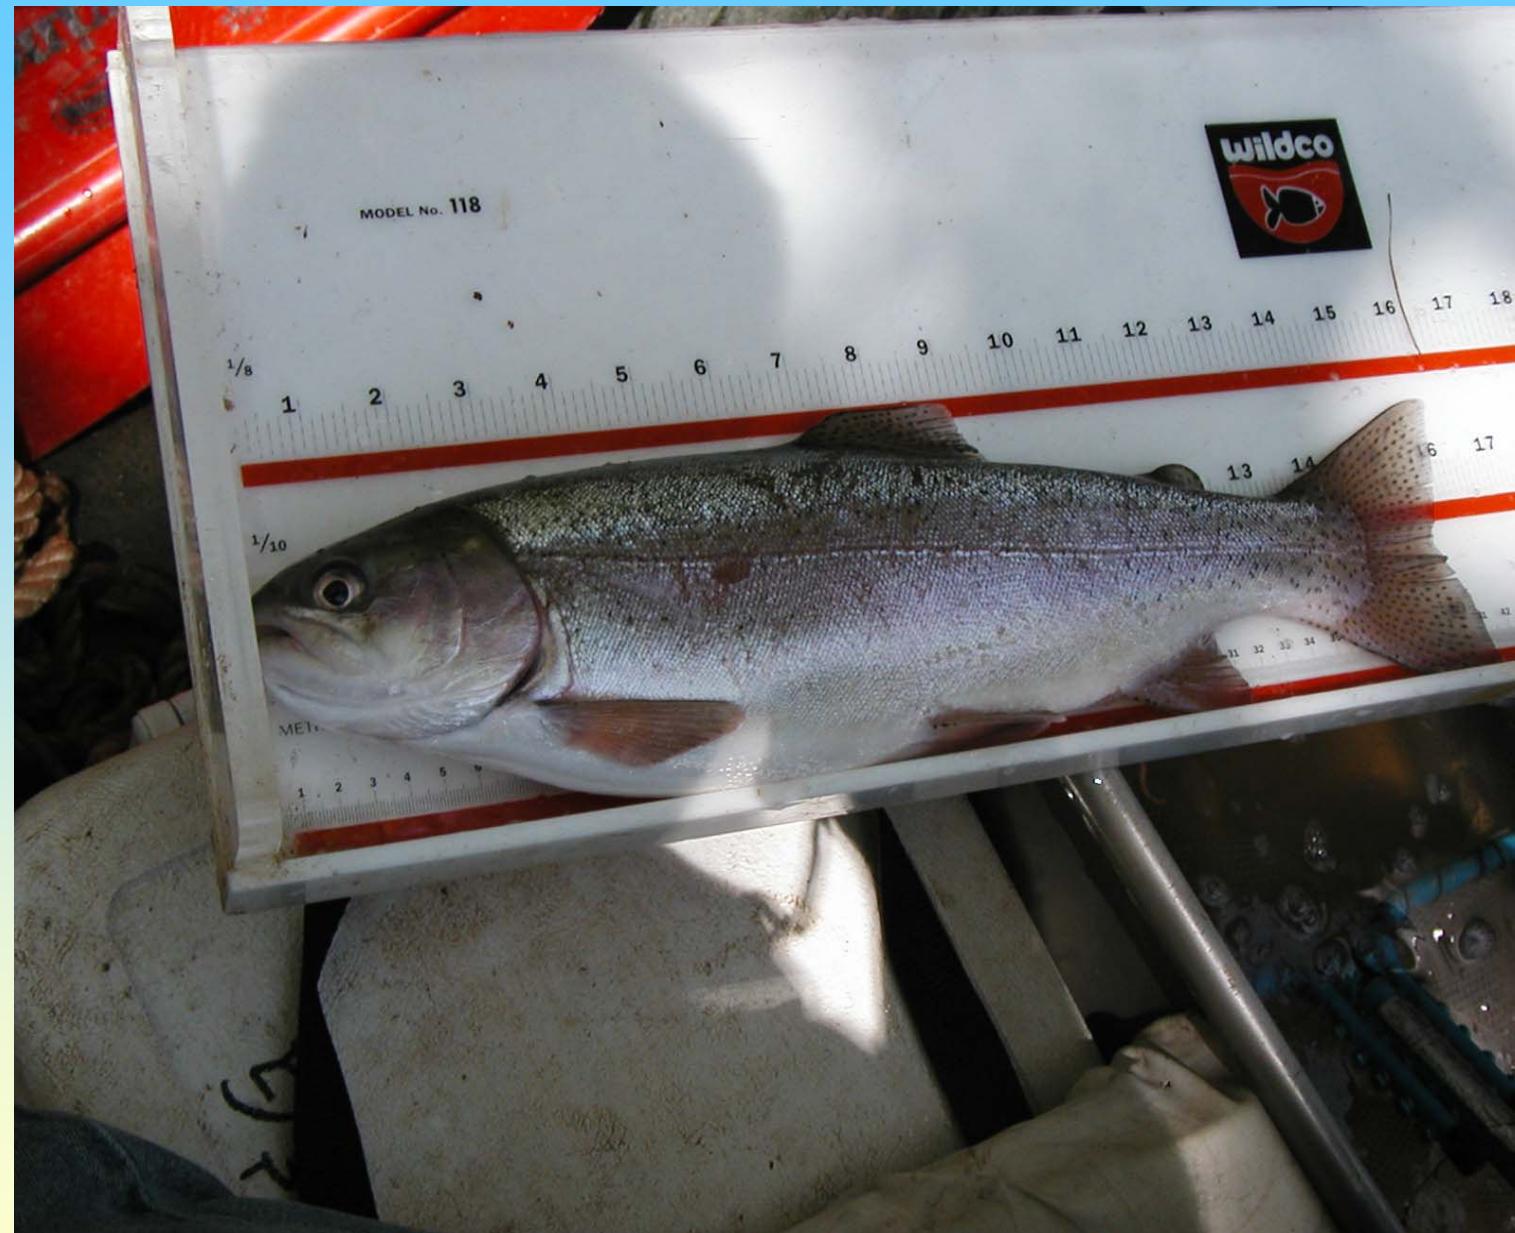




Dust 1411



General Observations


- Trout appear to be healthy
- Fish pressure for trout appears high
- Noticeable decline in trout numbers as striped bass moved in, especially small brown trout numbers
- Fisherman observed using rainbow trout as bait for Striped bass
- Movement of stocked trout limited but does sporadically occur
- Tagged Trout caught in Congaree River between Gervais Street Bridge and Railroad Trestle
- Trout appear to be feeding on Crayfish and Chironomids

Available Data from the Study

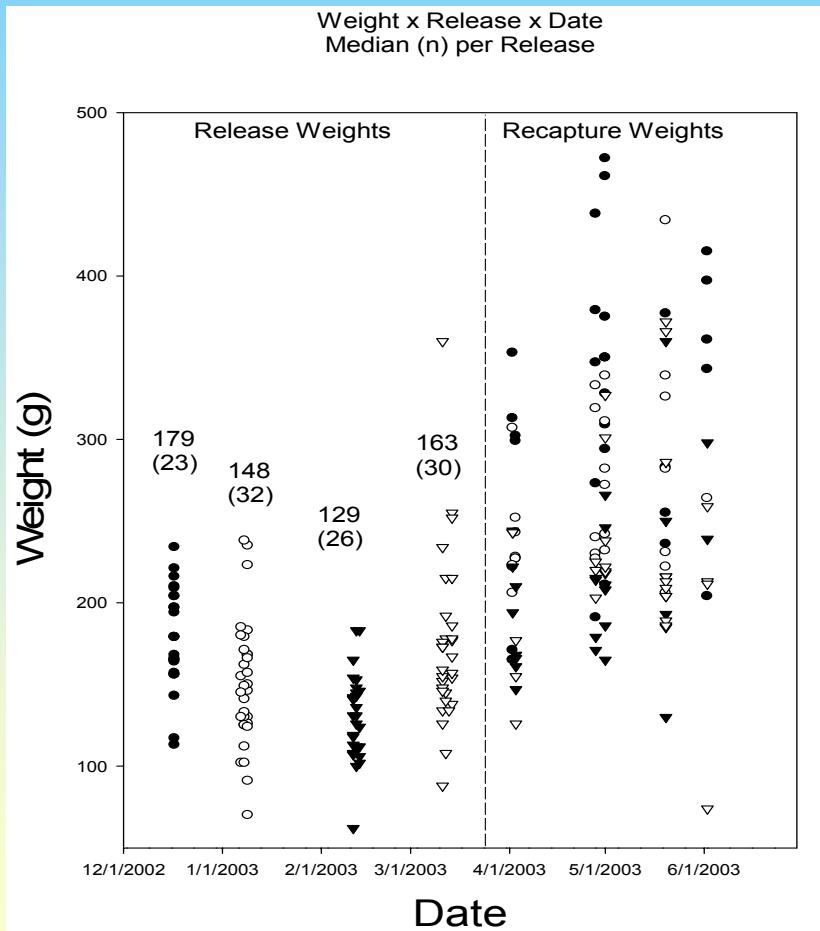


- A total of 111 fish were recaptured from the four releases.
- Detailed analysis of the data was needed to understand effects of size, movement in the stream, stocking site, stocking date and other factors.

Growth and Release Site

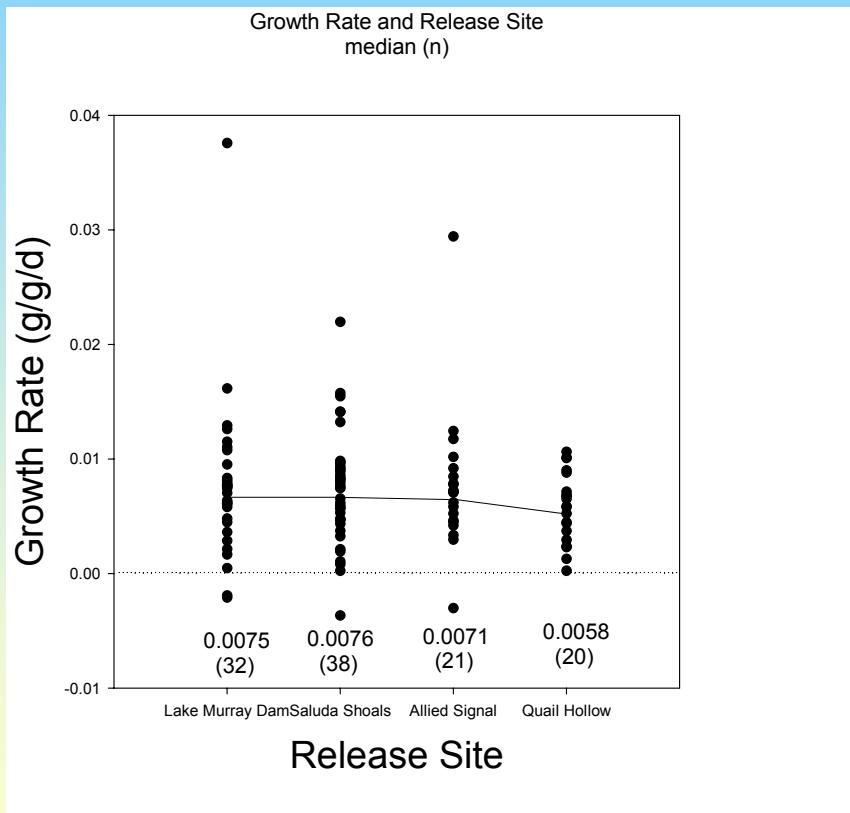

- Wide range in growth rate among individual fish at each sites
- Median growth rates similar among four sites, with but slightly lower at downstream site

Growth and Release Date

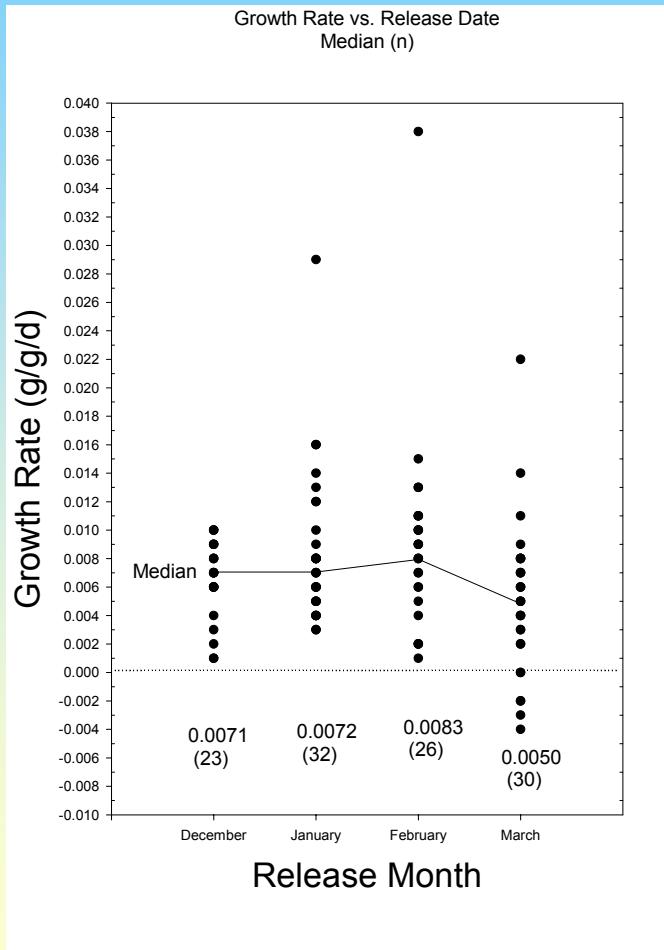

- Growth rates were similar between all release dates.
- Trout released in March grew at a slightly lower rate than other releases.


Median Growth Rates (g/g/d) by Site and Date of Release (n)

	Dec.	Jan.	Feb.	Mar.	All Months
Below Dam	0.0072 (2)	0.0070 (6)	0.0095 (11)	0.0048 (13)	0.0075 (32)
Saluda Shoals	0.0077 (11)	0.0083 (12)	0.0075 (9)	0.0063 (6)	0.0076 (38)
Allied Signal	0.0078 (6)	0.0065 (14)	No release	-0.0030 (1)	0.0071 (21)
Quail Hollow	0.0030 (4)	No release	0.0095 (6)	0.0055 (10)	0.0056 (20)
All Sites	0.0071 (23)	0.0072 (32)	0.0083 (26)	0.0056 (30)	0.0071 (111)

Factors with potential to influence growth in the study


- Size of trout at release
- Condition of trout at release
- Location of recapture and possible residency
- Direction of movement after release (upstream or downstream)
- Distance traveled after release

Growth vs. Size at Release

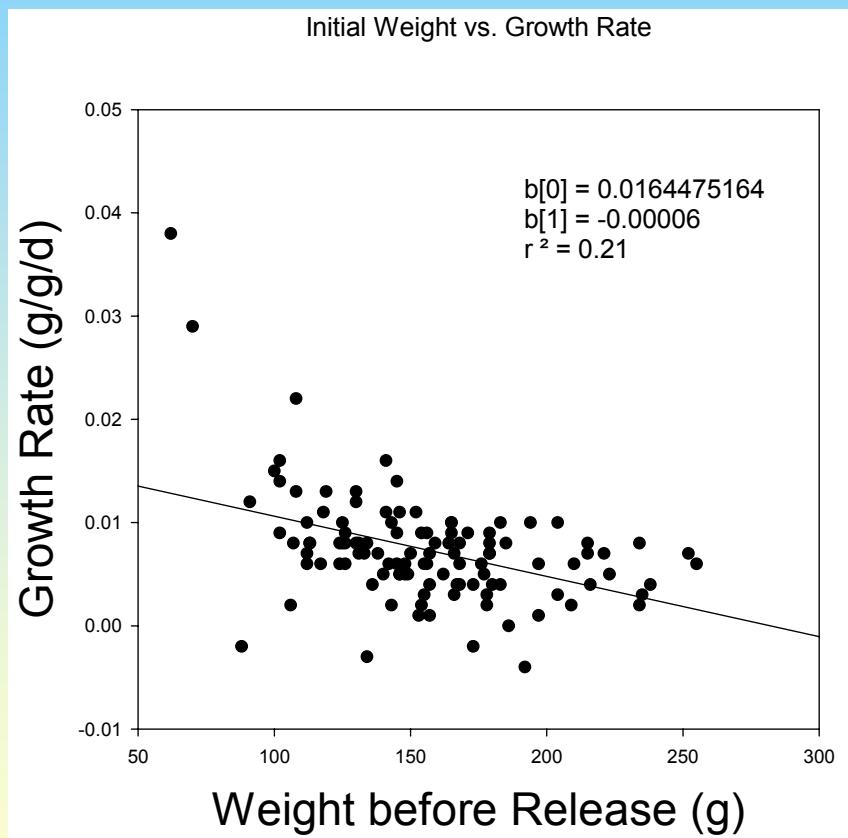

- There was a slight tendency ($r^2 = 0.21$) of smaller fish to grow at a faster rate than larger fish.
- This is typical of fish with adequate rations.

Growth and Condition Factor

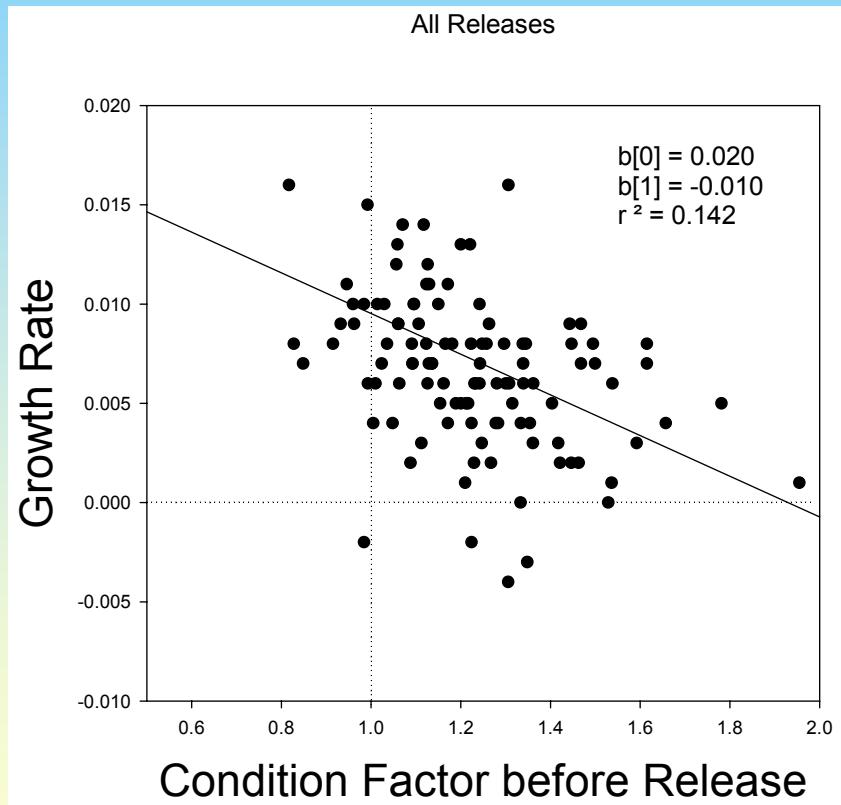


- There was also a tendency for higher growth rates for fish with lower initial condition factors.
- i.e., skinny fish grew faster than fat fish
- Effect of natural vs. hatchery environment

Summation of growth and size and condition at release


- Smaller fish grew a little faster than larger fish (both for initial weight and initial length)
- Fish with lower condition factors grew at a faster rate than fish with higher condition factors
- Condition factors tended toward a central value of about 1.1

Size and movement after release

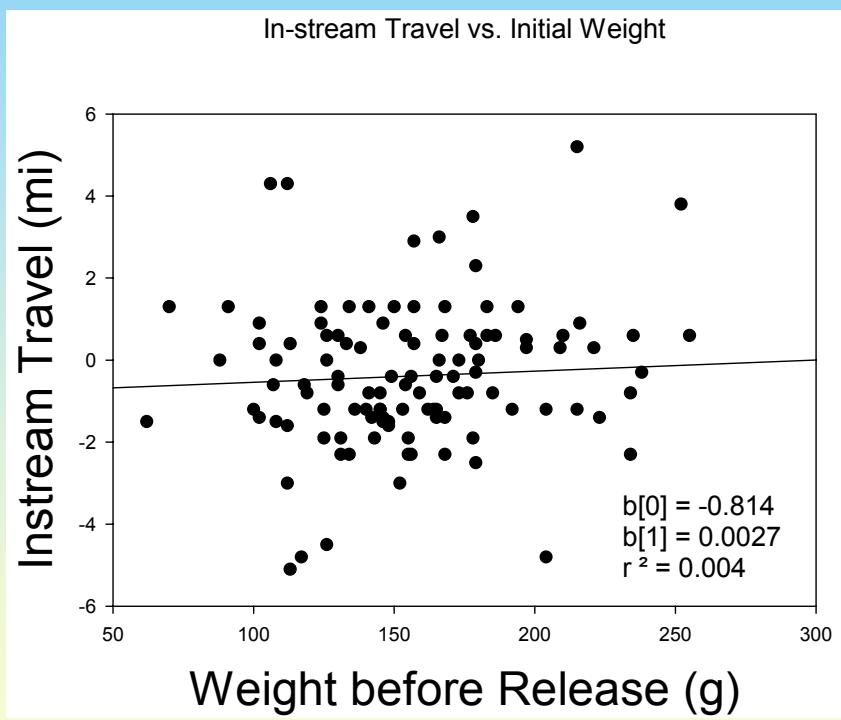


- There was no effect of size at release on distance or direction of travel after release
- Fish moved as much as five miles up- and down-stream
- No sampling below RM 3 (Quail Hollow)

Condition factor and movement after release

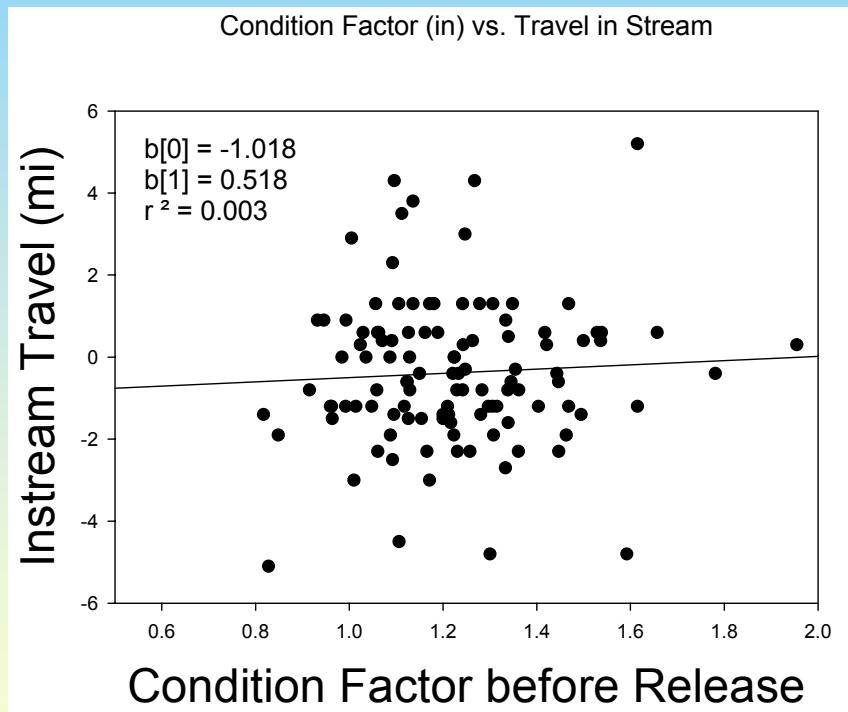


- There was no effect of condition factor on direction or distance traveled after release

Growth and time between release and recapture

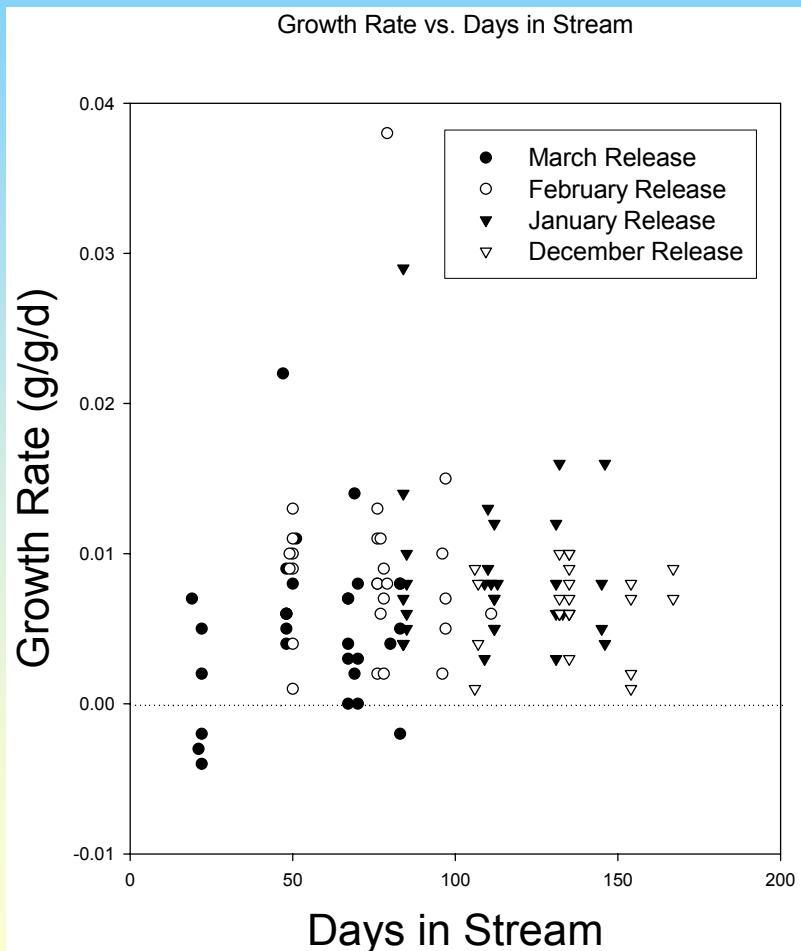

Growth and Recapture Site

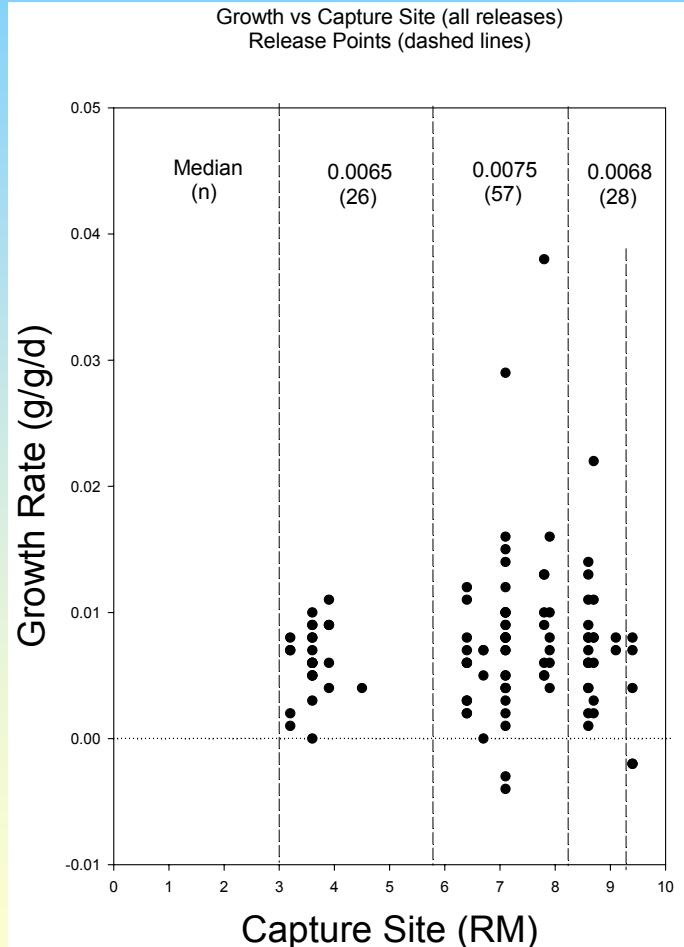

- Fish recaptured between the two lowest release points showed slightly lower growth rates than fish in the upper four miles of the tailwater
- Upper areas see lowest DO levels

Decisions regarding bioenergetic model inputs

- There was a wide range of growth rates seen among the recaptured trout.
- Differences in growth rates were not greatly influenced by release site, release dates, size at release, condition at release, movement in stream, or recapture location.
- We decided to use the overall median growth rate from the study for determining general food availability for use in the bioenergetics model.


Saluda Tailwater Turbine Venting Model Calibration

Gary E. Hauser, P.E.
Loginetics, Inc.

Gary E. Hauser, P.E.


- MS Civil Engineering, University of Kansas, water resources engineering
- 23 yrs on TVA reservoir release improvements team, responsible for reservoir and tailwater modeling and minimum flow/aeration technologies, especially aerating weirs, at 30 hydroprojects for TVA and other utilities.
- 12 yrs as leader of WQ modeling team - TVA Engineering Laboratory.
- Co-developer of EPA-TVA bioenergetics model to predict fish growth in fluctuating temperature and DO regimes.
- Developer of hydrodynamic, water quality, and fish habitat models for TVA River Modeling System.
- Author of 100+ technical publications on aeration and modeling to resolve hydropower environmental problems.
- 2 patents on aerating weir technologies.

Turbine Venting Model Calibration

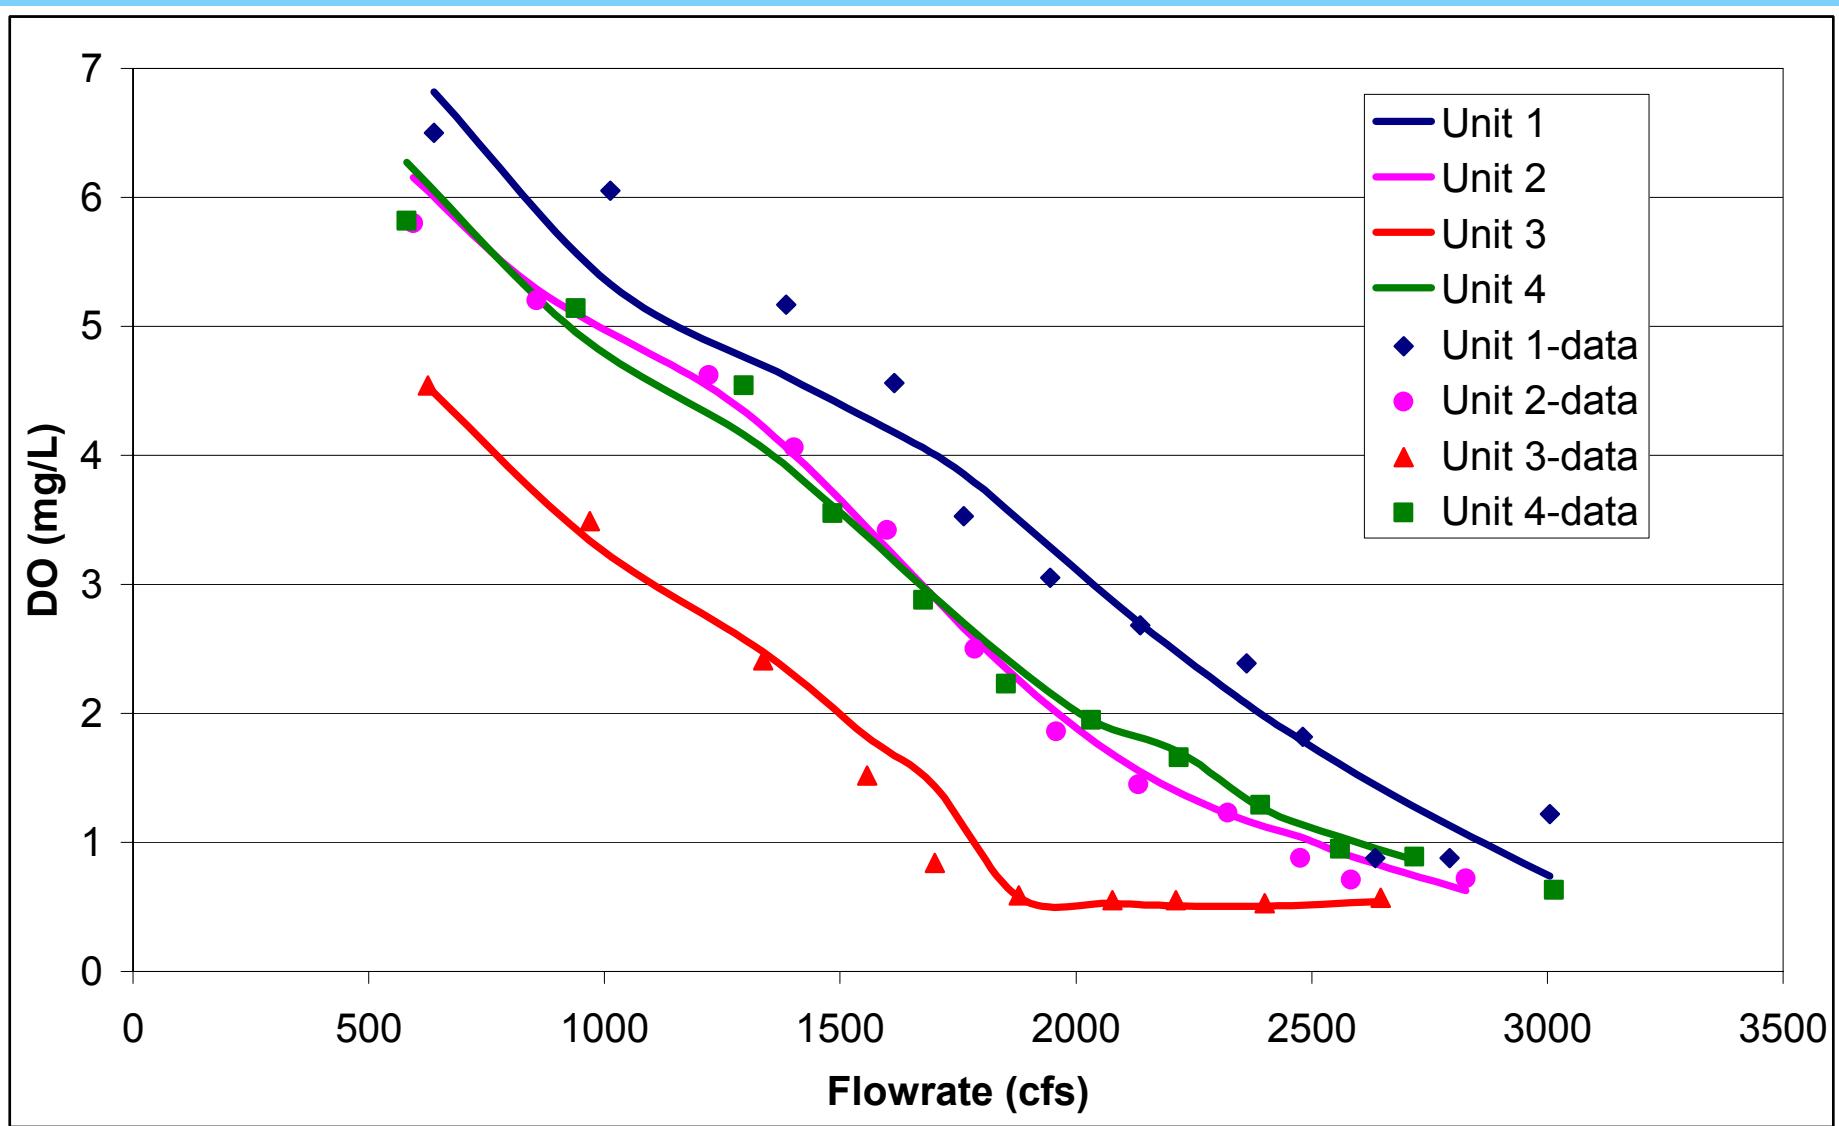


Turbine Venting Model Calibration

Predicted and Measured DO versus Flow for Unit 5

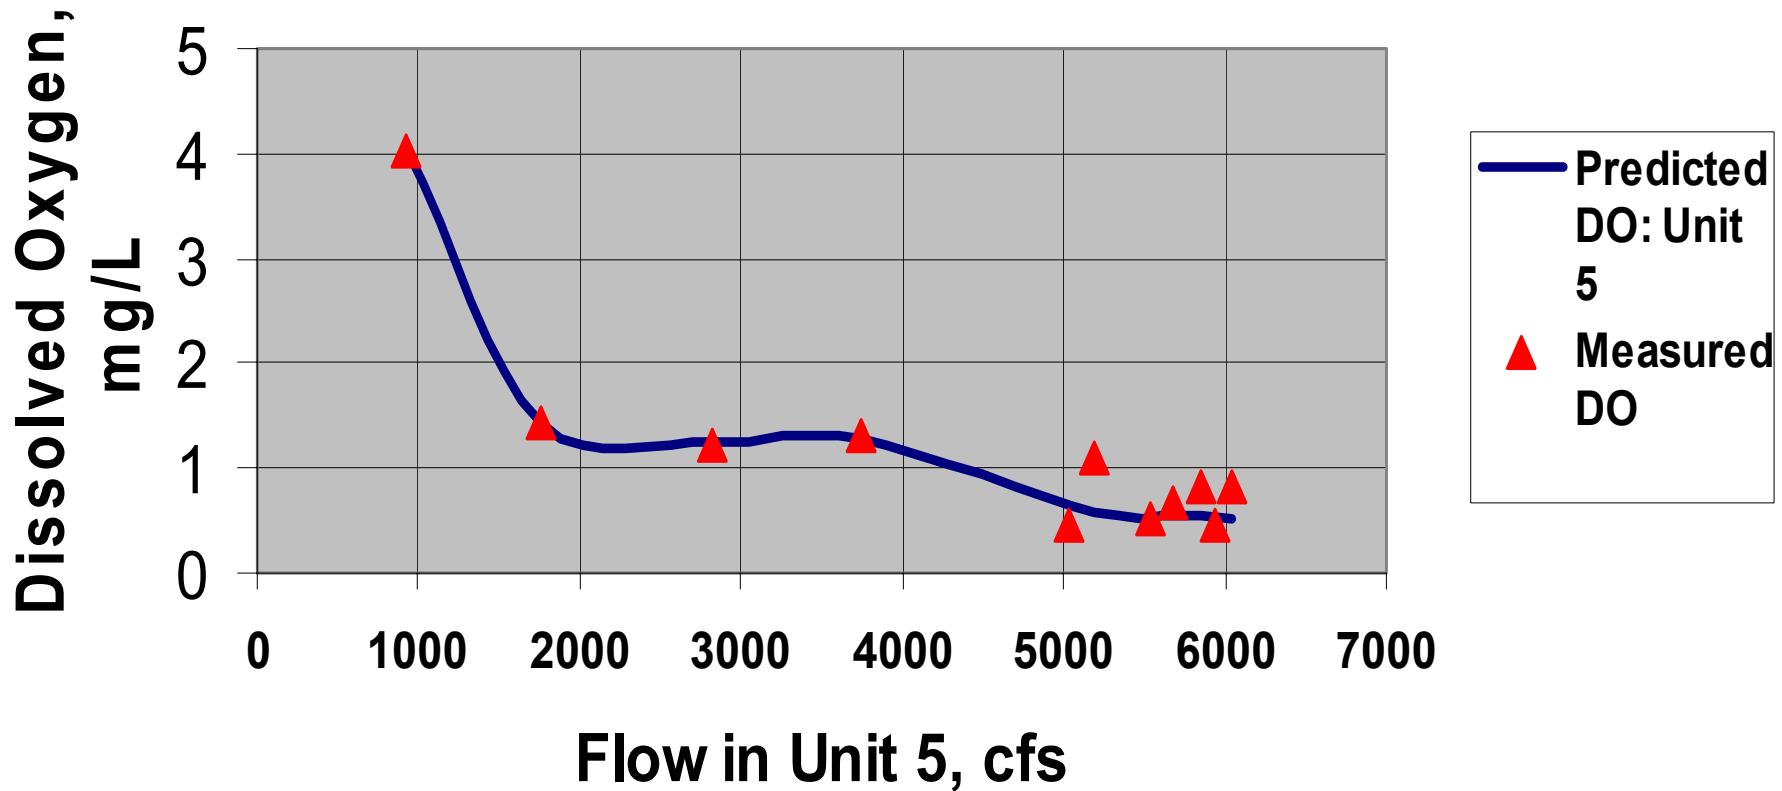


Turbine Venting Model DO Simulation

Model Predictions for DO in Units 1 Through 5 for the Hub Baffle Scenario

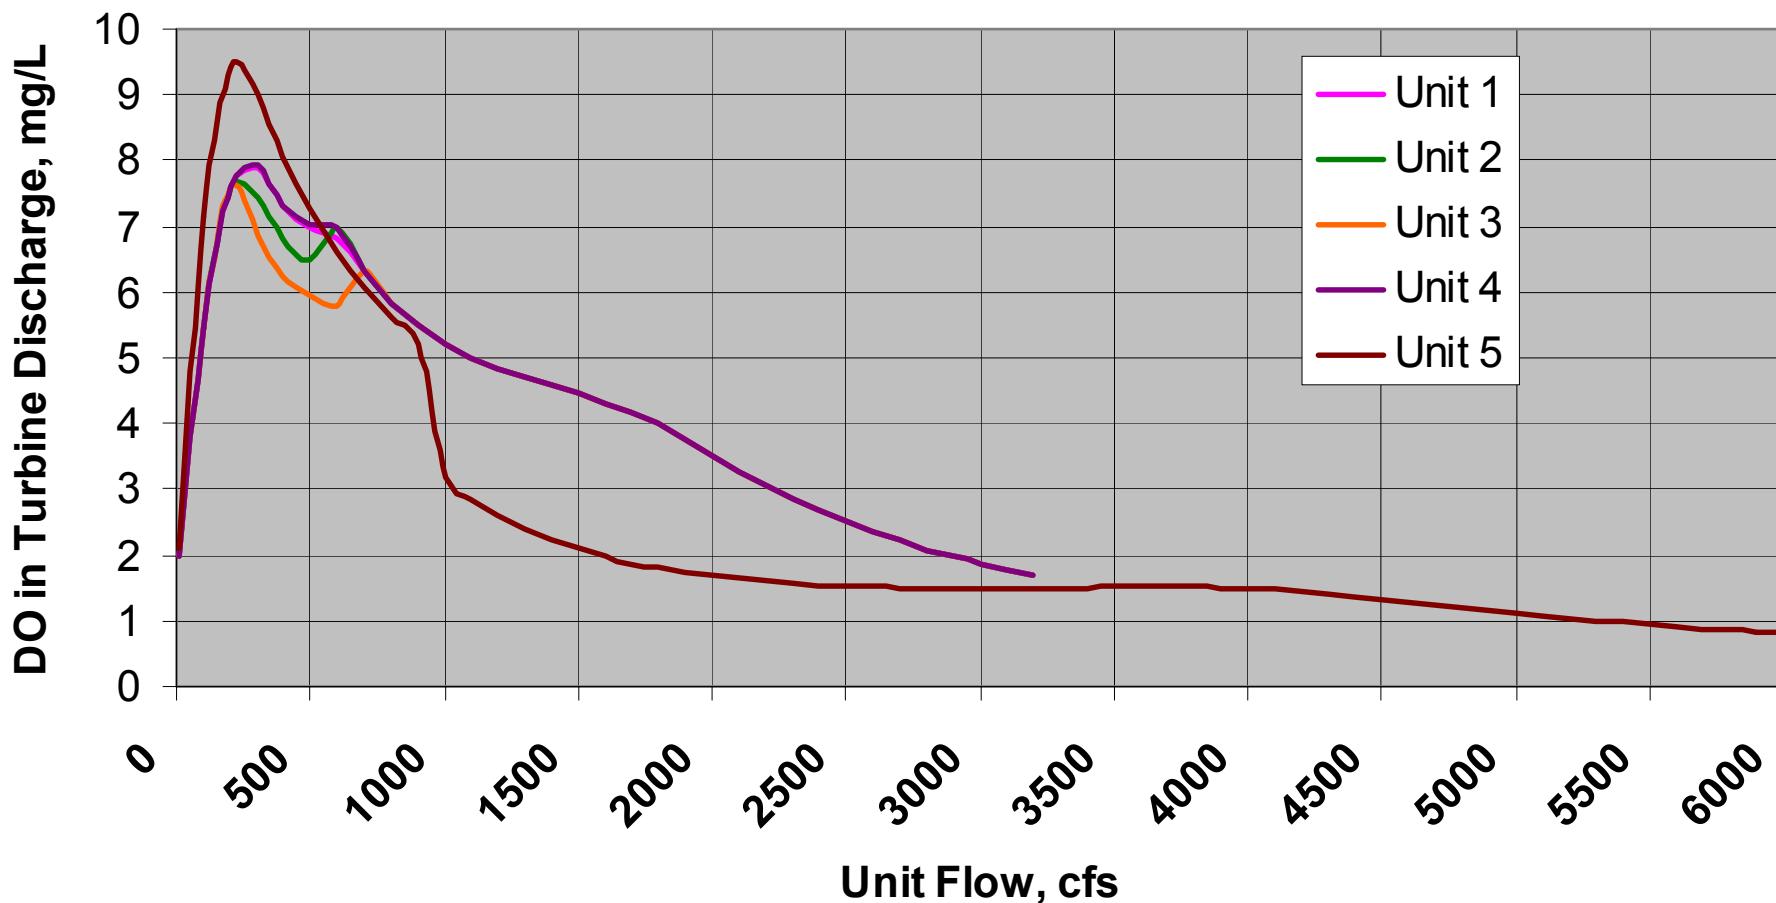

Turbine Venting Model DO Simulation

Model Predictions for DO in Units 1 Through 5 for the AVT Scenario

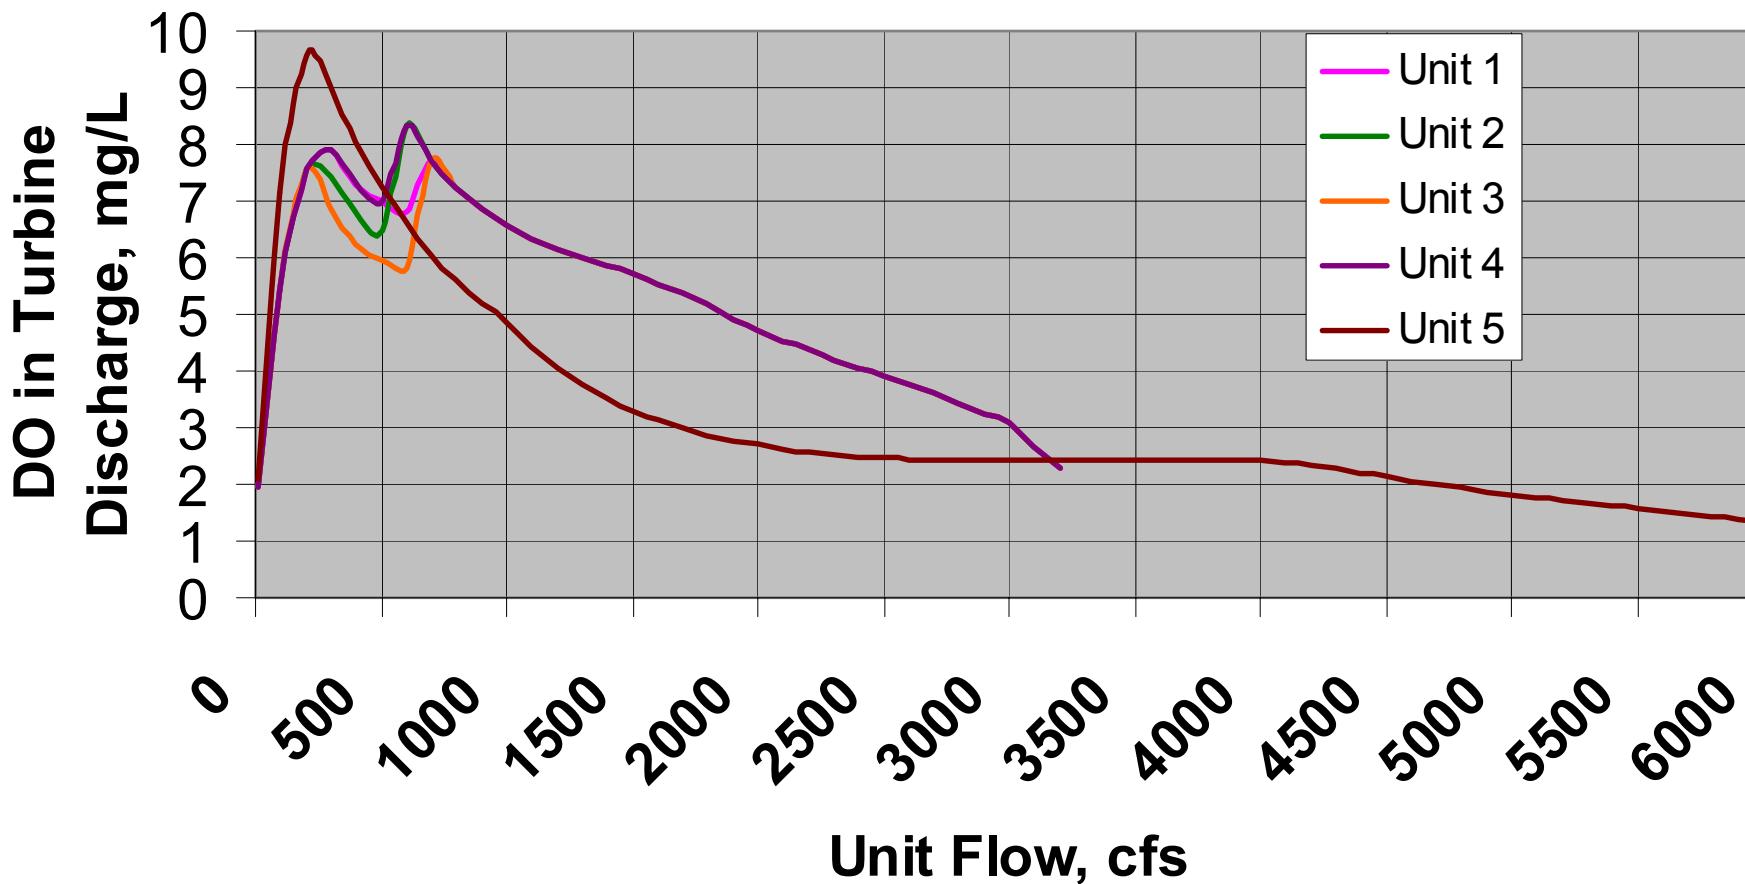

Saluda Tailwater Bioenergetics Model Calibration

Gary E. Hauser, P.E.
Loginetics, Inc.

Overview of Bioenergetics Model Processes

Growth = Food Consumption - Waste - Respiration


G R O W T H

RESPIRATION =

- energy for metabolism=f(W,T,activity)
- energy for digestion=f(EAT)

EAT =

- food availability
- appetite=f(T,W, DO)

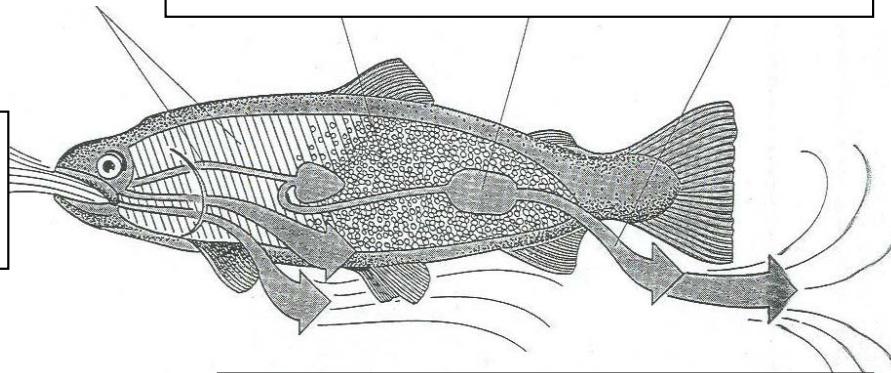

LEGEND


EAT = food consumption
T = temperature
W = weight
DO = dissolved oxygen

WASTE =

- ammonia excretion
- feces=f(EAT * assimilation efficiency)

RBT Food Consumption, Respiration = f (T)


Ref: From & Rasmussen (1984)

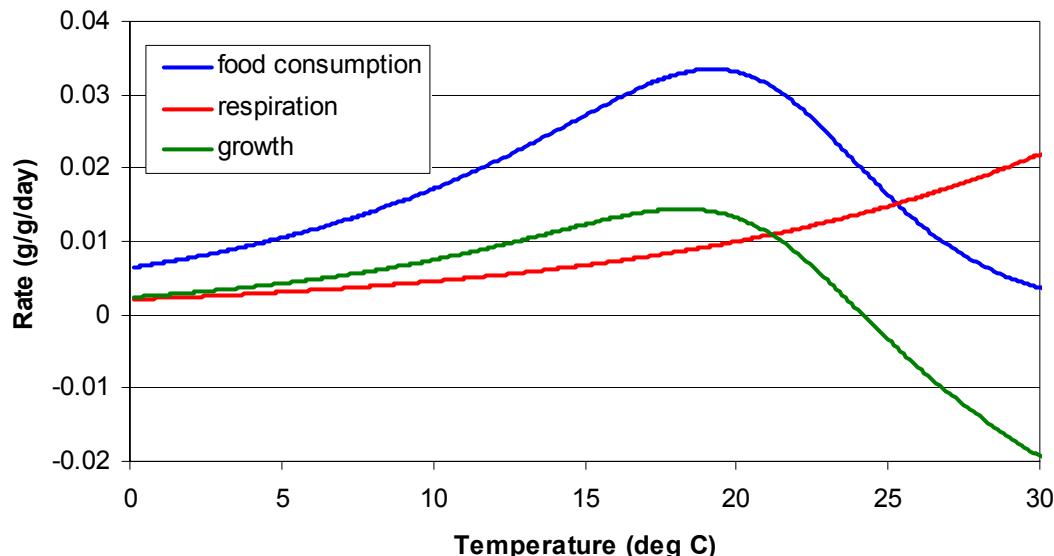

Bioenergetics Model Rainbow Trout Characteristics

RBT Appetite = f (DO)


Ref: EPA-Duluth data

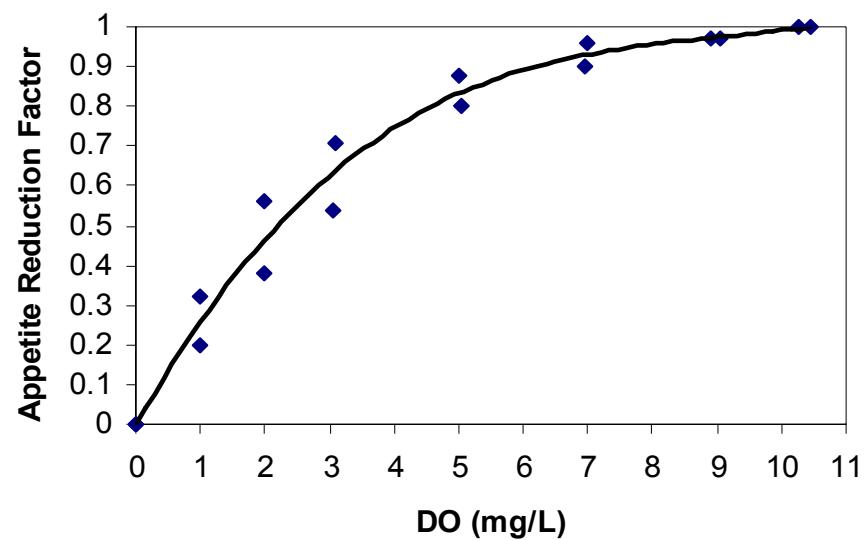


Calibration Process

- Calibrate tailwater model
- Run tailwater model: 1988-1989 2002-2003
- Run bioenergetics model for various food availability levels (fraction of appetite)
- Compare modeled vs measured growth
- Quantify food availability level that best matches growth study results

Use of 2002-2003 RBT Growth Data for Model Calibration

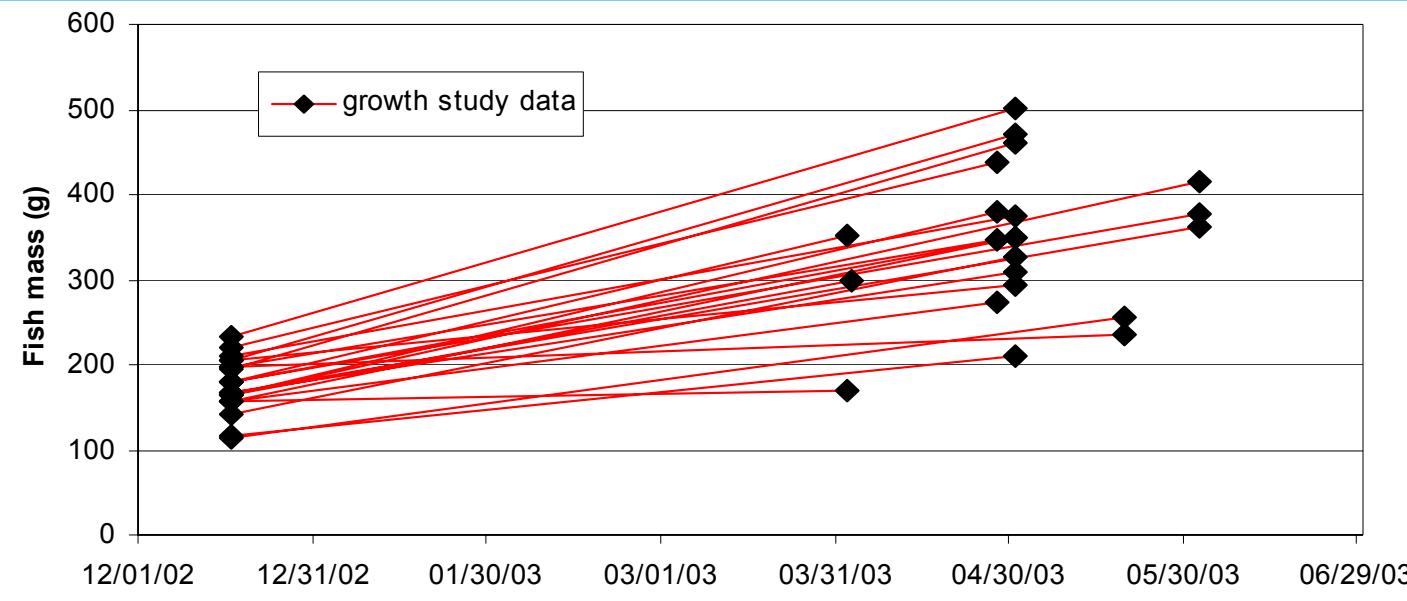


meaning of
measurements

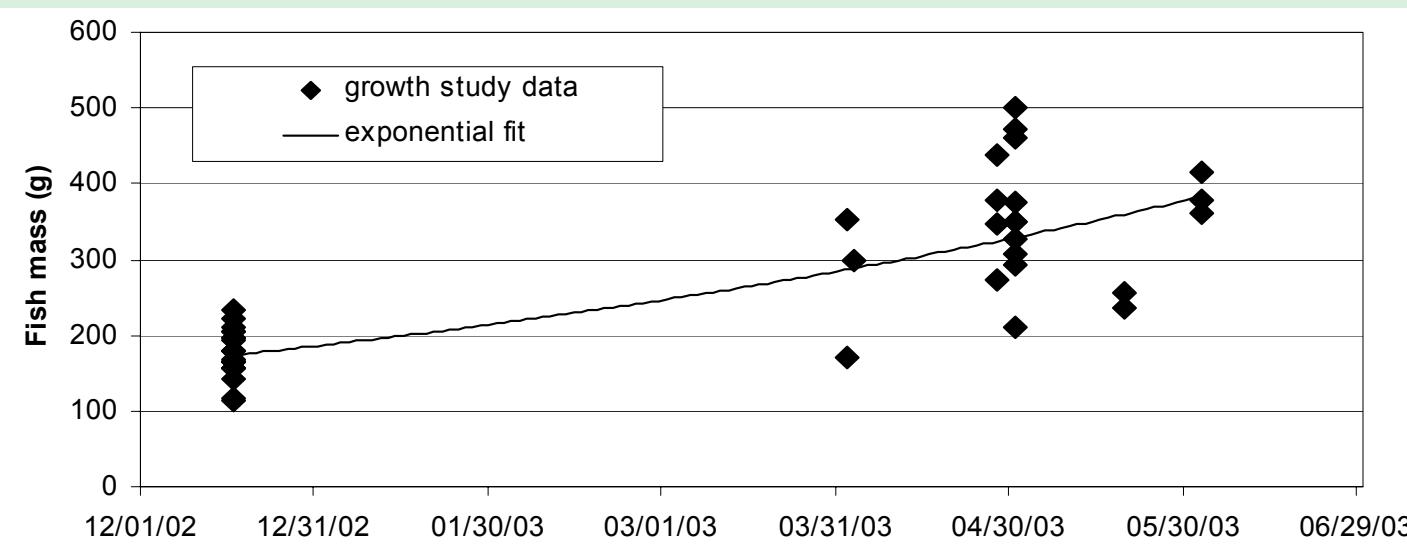

prepared
for
model
calibration

Bioenergetics Model Calibration 2002-2003 Growth Study

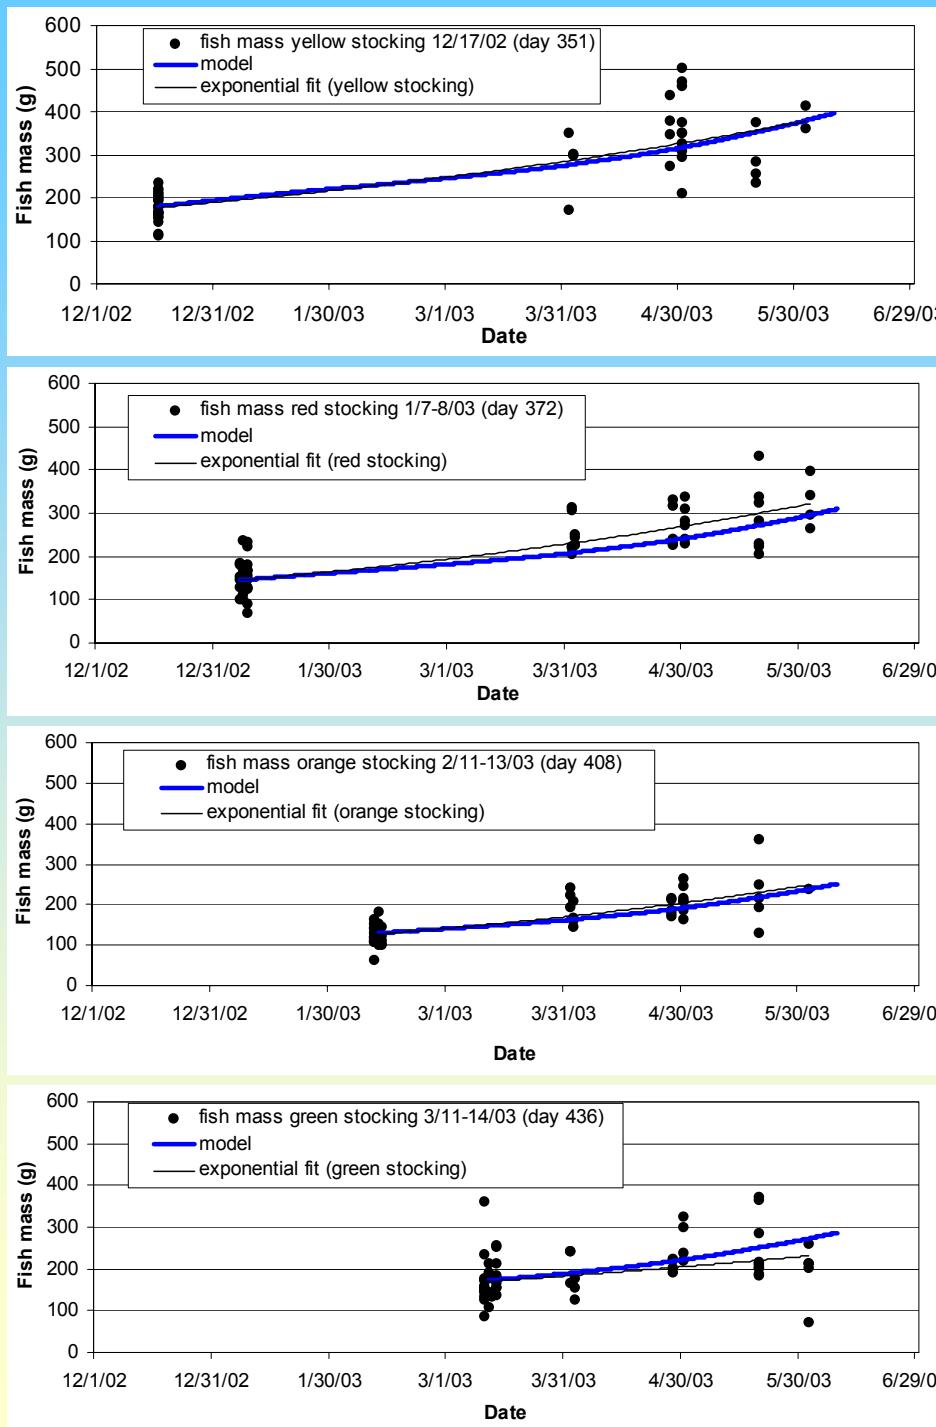

Average growth = 0.67 in/mo

Food availability = 68% of maximum appetite

Growth Rate Comparison – SE Tailwaters

Dam	State	Length (mi)	Period	Start size (in)	T (deg C)	DO (mg/L)	Grow rate (in/mo)	Notes
various	KY	--	current				0.5	per KDFWR staff – BT, RBT
Wolf Creek	KY	50	Apr-Nov 1997	7.5	9-27	3-10	0.52	Dreves (2003) KDFWR - BT
			Apr-Nov 1998	8.2	9-27	3-10	0.48	
			Apr-Nov 1999	8.2	9-27	3-10	0.49	
			Apr-Nov 2000	7.0	9-27	3-10	0.71	
			Apr-Nov 2001	7.4	9-27	3-10	0.69	
			Apr-Nov 2002	7.7	9-27	3-10	0.54	
Center Hill	TN	26	Mar-Jul 1997	9.4		4-7	0.51	Devlin (1999) TTU - RBT
Norris	TN	30	Jan-May 1975	9.3	7-10	>8	0.62	1993 TVA data - RBT bioenergetics model report weights using CF=1.1; growth probably T limited
			Jan-May 1985 abv weir	7.5-8.0	5-9	>8	0.48	
			Jan-May 1985 bl weir	7.5-8.0	5-9	>8	0.30	
			Jan-May 1986 abv weir	7.0-7.5	6-10	8-10	0.38	
			Jan-May 1986 bl weir	7.0-7.5	6-10	8-10	0.43	
South Holston	TN	14	Mar-July 1992	4.72	6-8	8-12	0.58	1992 TVA - RBT data Most growth in late summer/fall when the DO=12 mg/L T=8 C Bettoli, et al (TTU) - RBT Bettoli, et al (TTU) - RBT Bettoli, et al (TTU) - BT
			July-Sep 1992	7.64	6-8	8-12	1.69	
			Mar-Sep 1992	4.72	6-8	8-12	0.90	
			1997 – Mar. stocking		<22	>6	0.35	
			1997 – Sep stocking		<22	>6	0.63	
			1997		<22	>6	0.43	
Wilbur	TN		1998 – Mar stocking				0.27	Bettoli, et al (TTU) - RBT
			1998 – July stocking				0.19	
Saluda	SC	10	Nov 1988-Apr 89	6 (40g)	10-18	0.5-12	0.25	Before aeration - RBT
			Dec 2002-Jun 2003	10 (150g)	8-15	4-12	0.67	Current aeration - RBT

Growth Rate Comparison – Other Locations

Sierra Nevada streams	CA		Avg 1987-1996 site #1 (fall-spring) Avg 1987-1996 site #2 (fall-spring) Avg 1987-1996 site #1 (summer) Avg 1987-1996 site #2 (summer)	Age 0 Age 0 Age 1 Age 1	Avg 7.2 Avg 10.2 Avg 14.9 Avg 18.1		0.44 0.54 0.20 0.06	Railsback and Rose (1999) - RBT
-----------------------	----	--	--	----------------------------------	---	--	------------------------------	---------------------------------

Saluda Tailwater Bioenergetics Model Application

**Modeled Effects of Aeration Options
on Trout Growth**

Gary E. Hauser, P.E.
Loginetics, Inc.



Notes on Growth Simulations For Various Aeration Options

- Used turbine venting model release DO results directly
 - no tailwater aeration or photosynthesis-respiration
- Used measured temperature at monitor d.s. of dam.
- Used 68% food availability for all cases
- Growth based on temperature, DO, food availability
 - Avoidance, predation, competition not simulated
 - Mortality not simulated – negative growth only (could have mortality or avoidance if exposed to DO < 2)



Aeration Scenarios

- No aeration
- Current aeration
- Hub baffles
- Auto - venting turbines (AVT)
- AVT with 4.0 mg/L minimum
- AVT with 6.0 mg/L minimum



1990 (wet year)

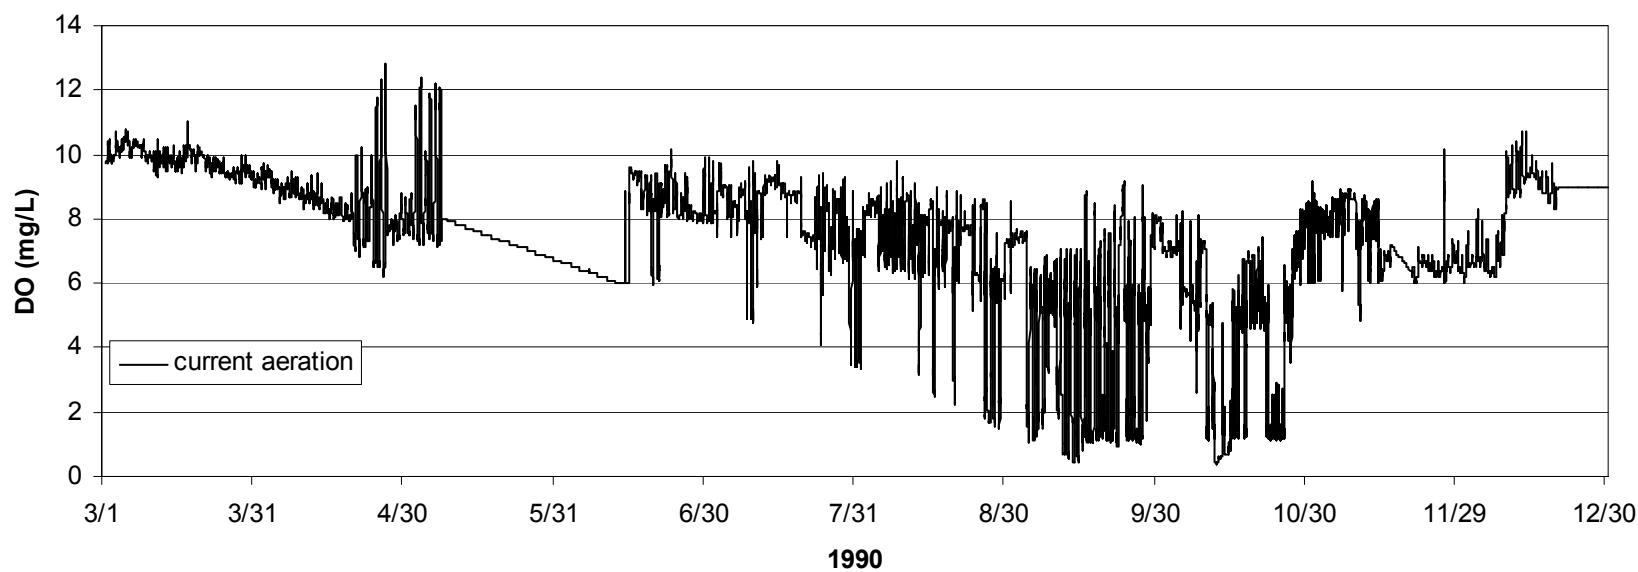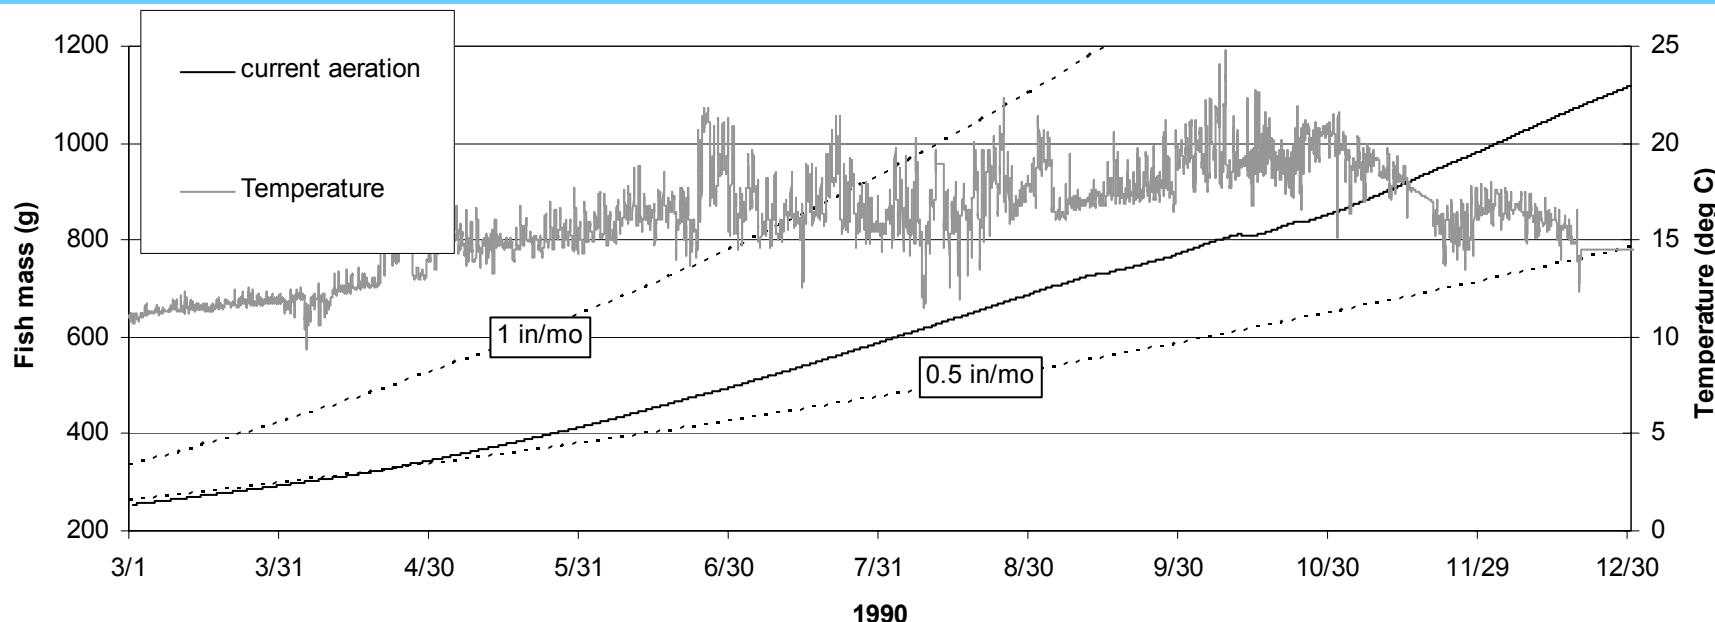



1990 (wet year)

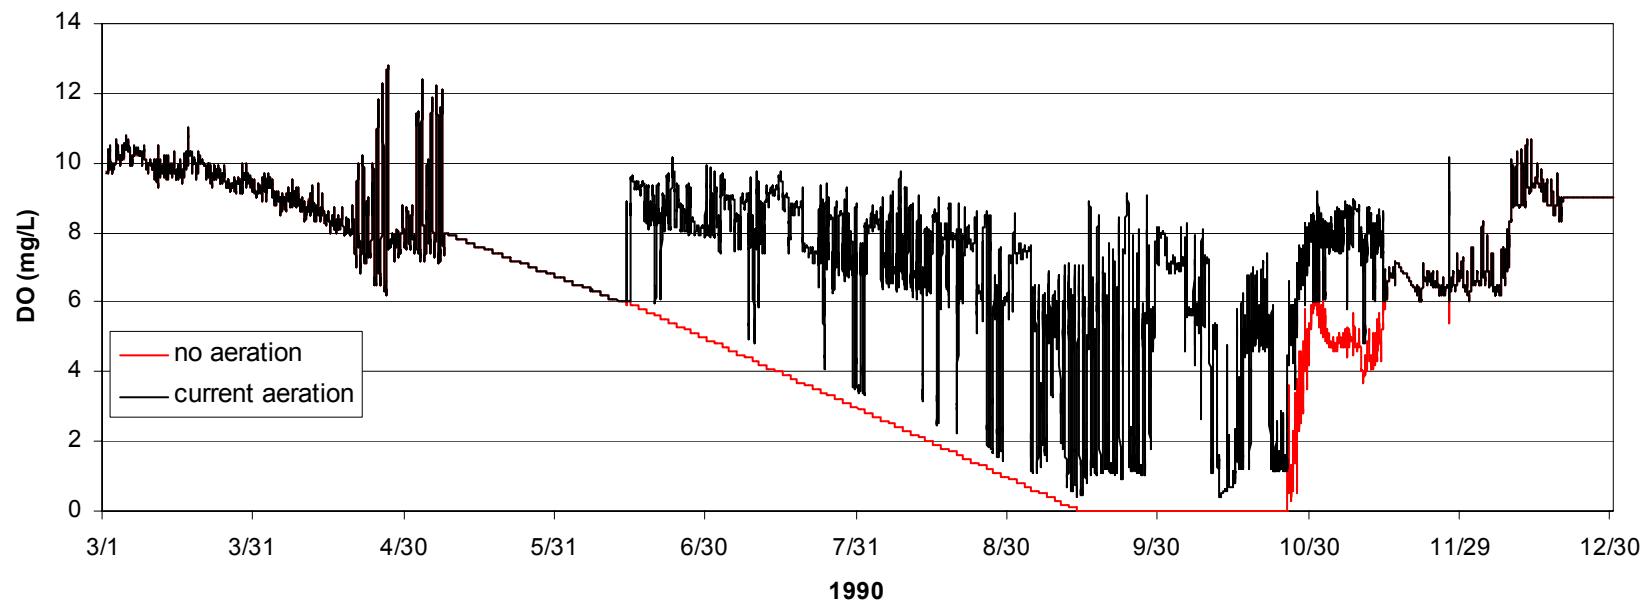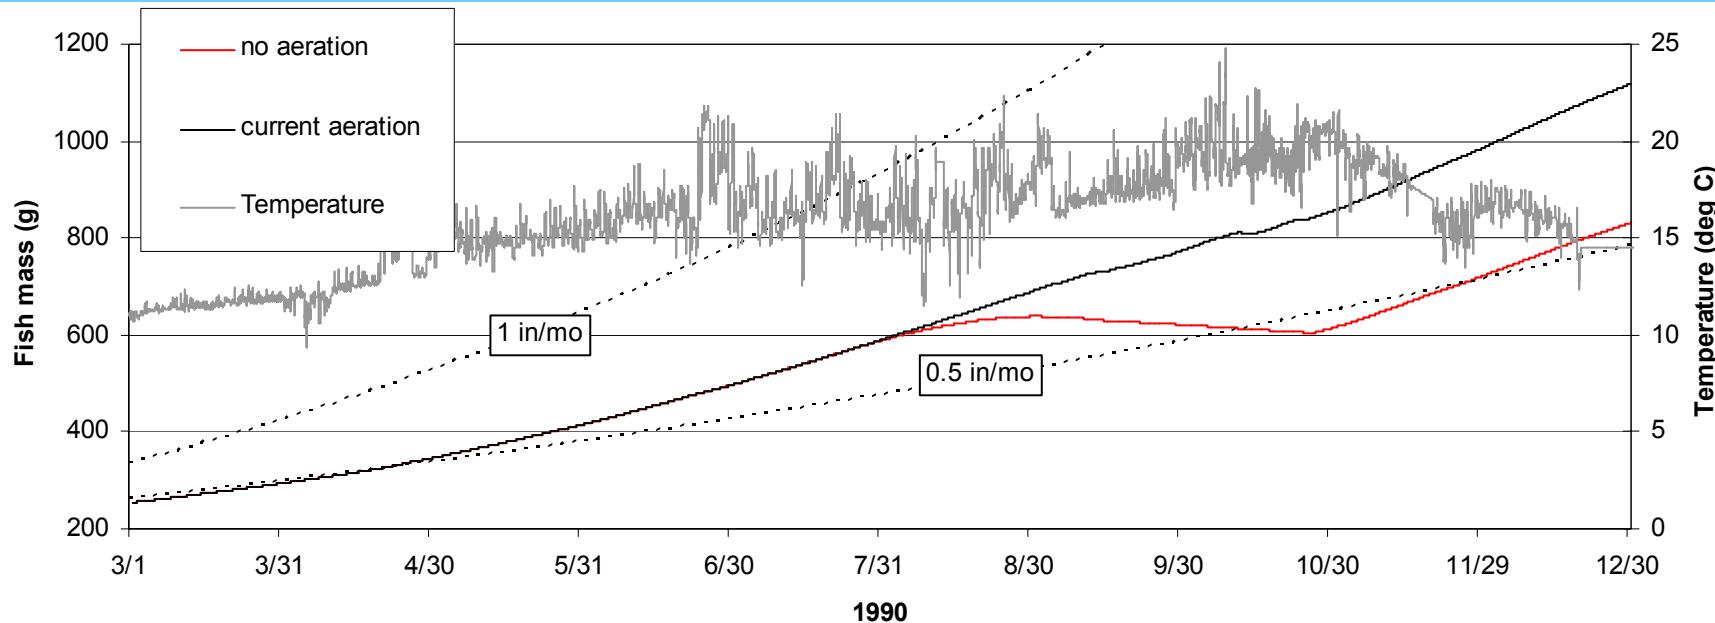



1990 (wet year)

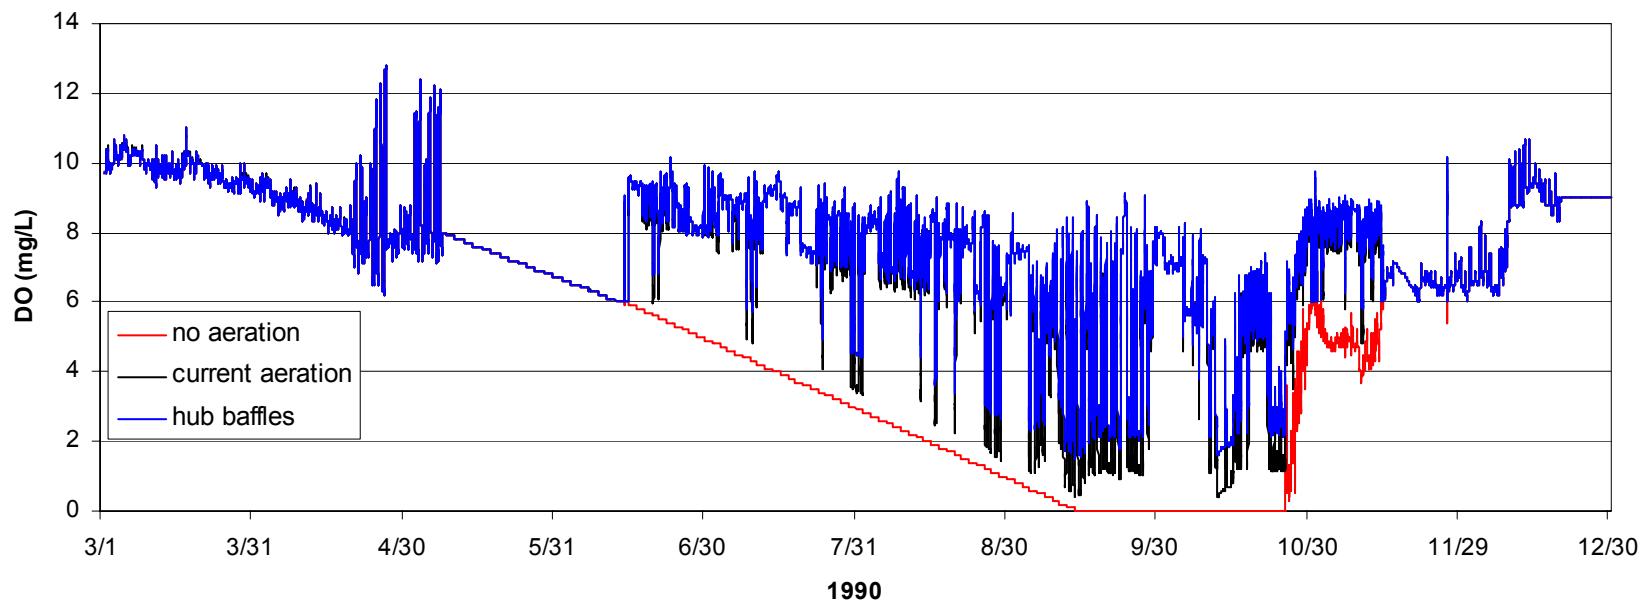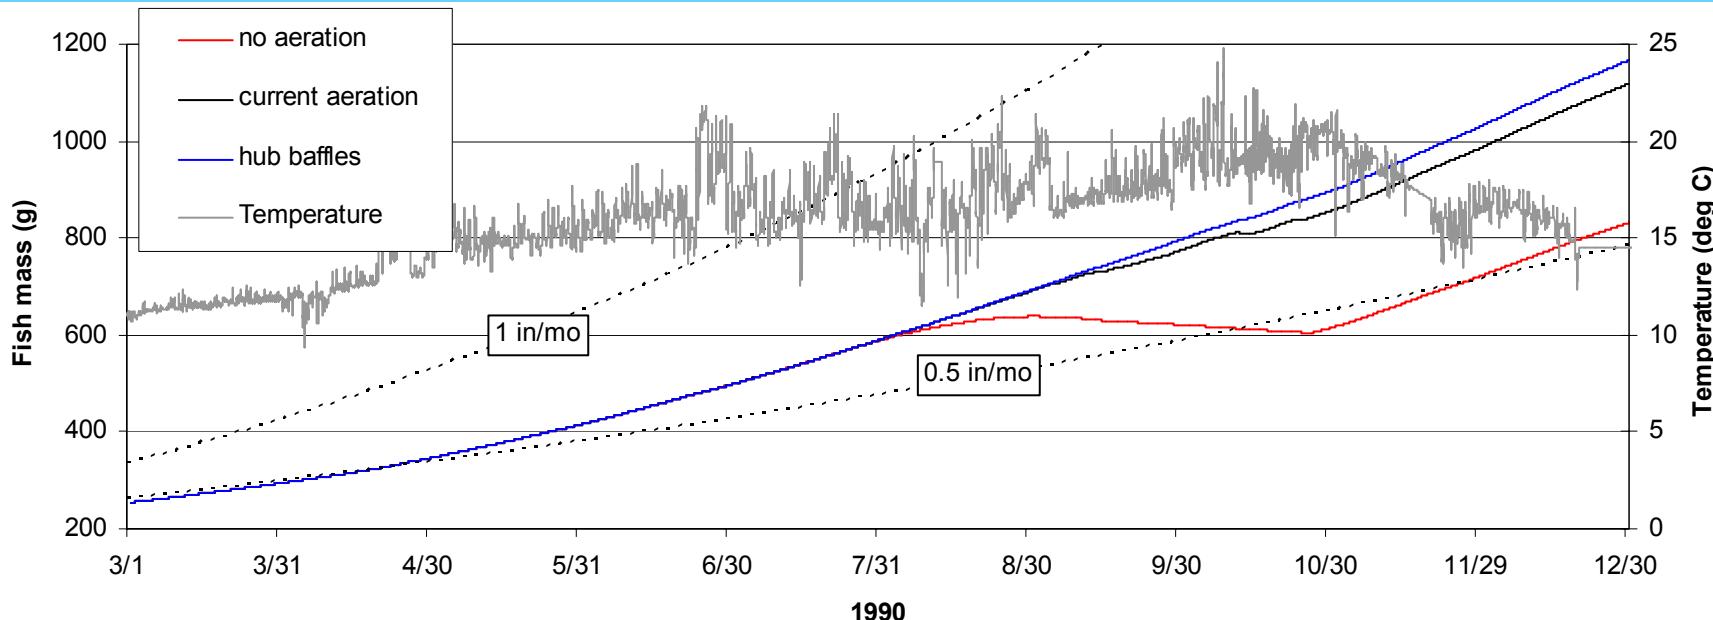



1990 (wet year)

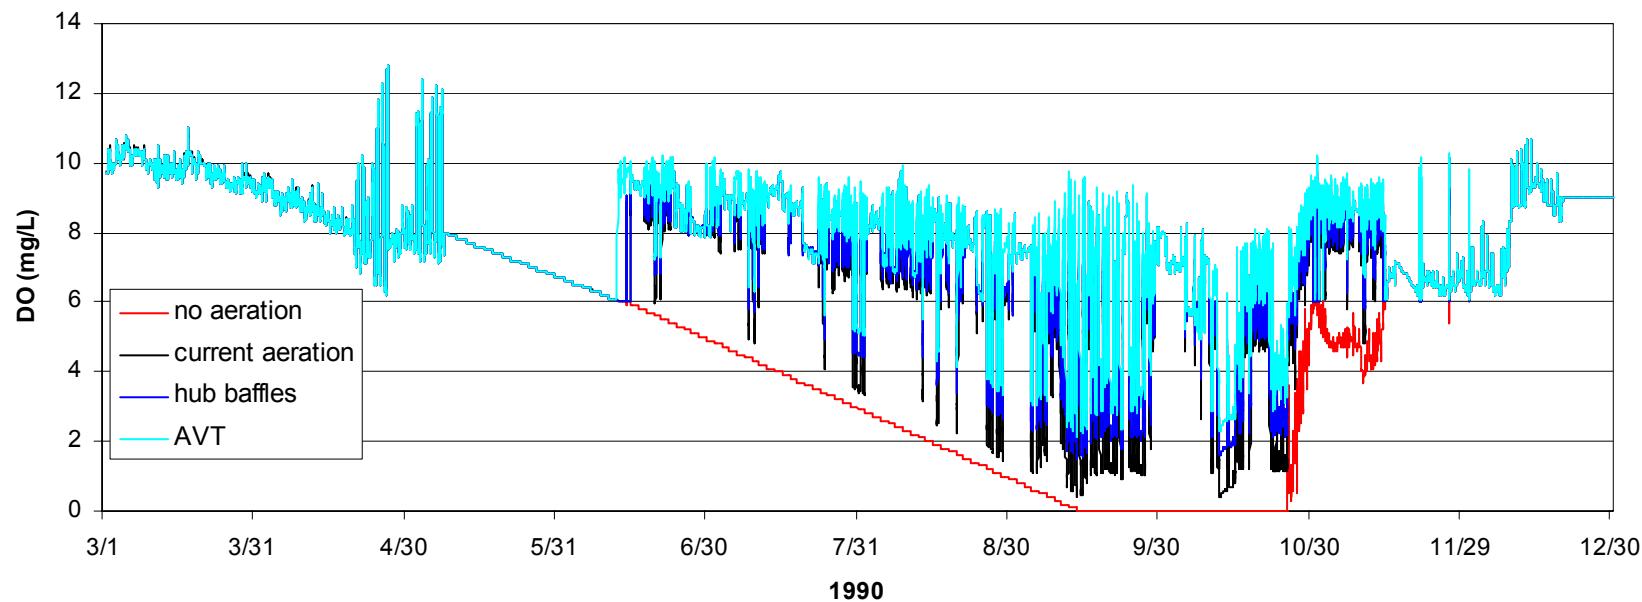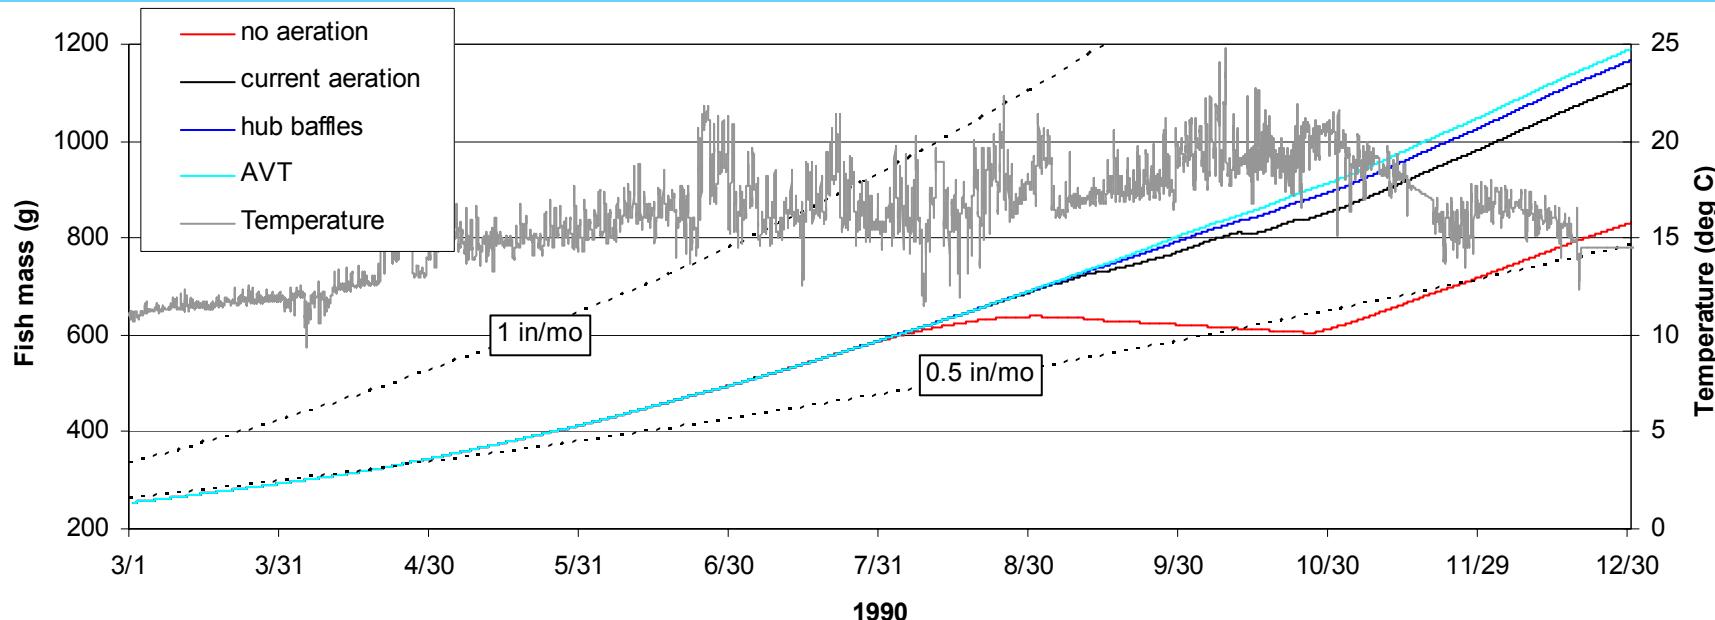



1990 (wet year)

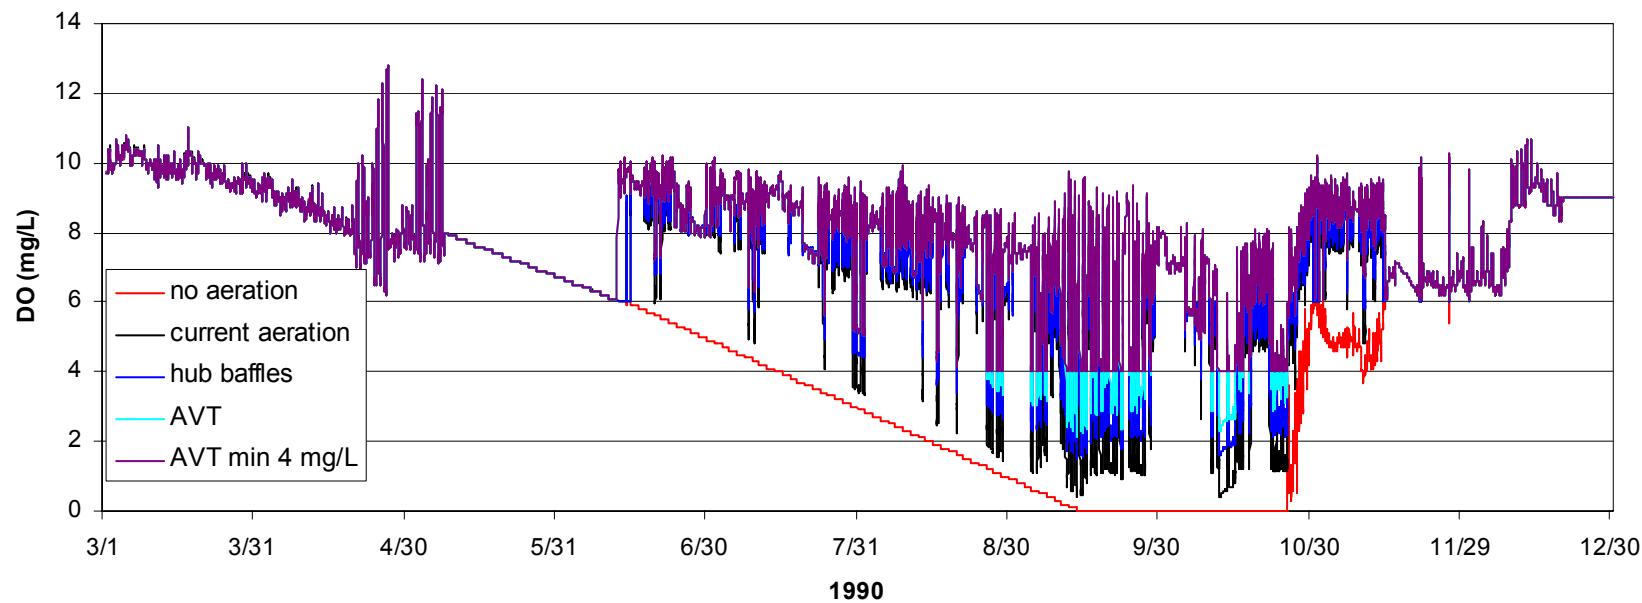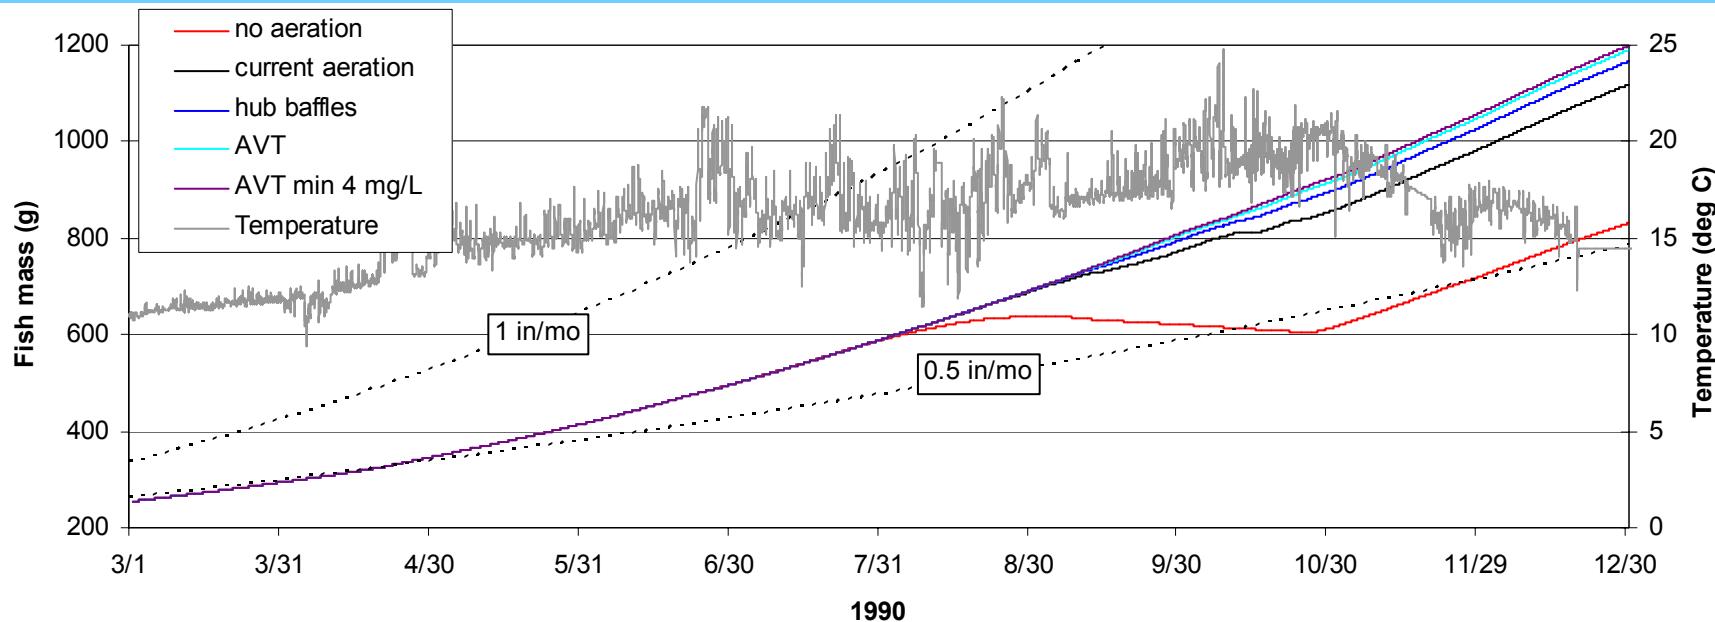



1990 (wet year)

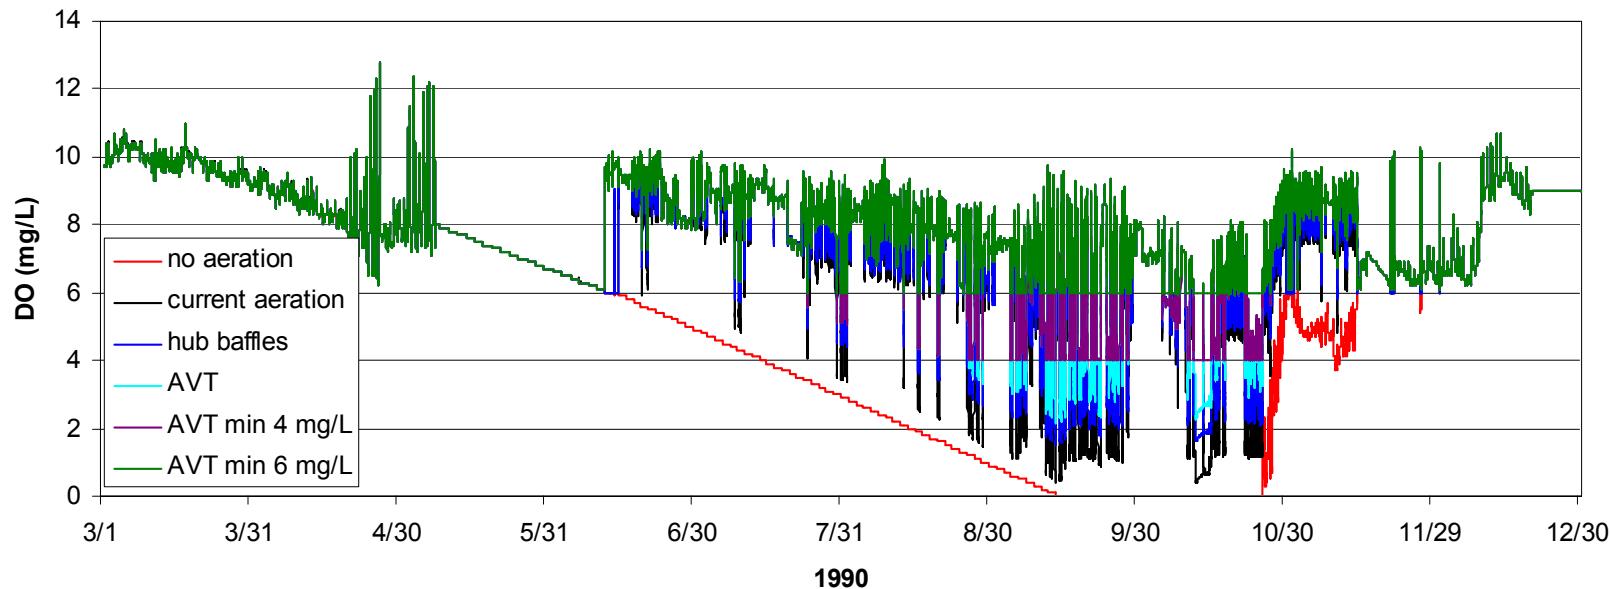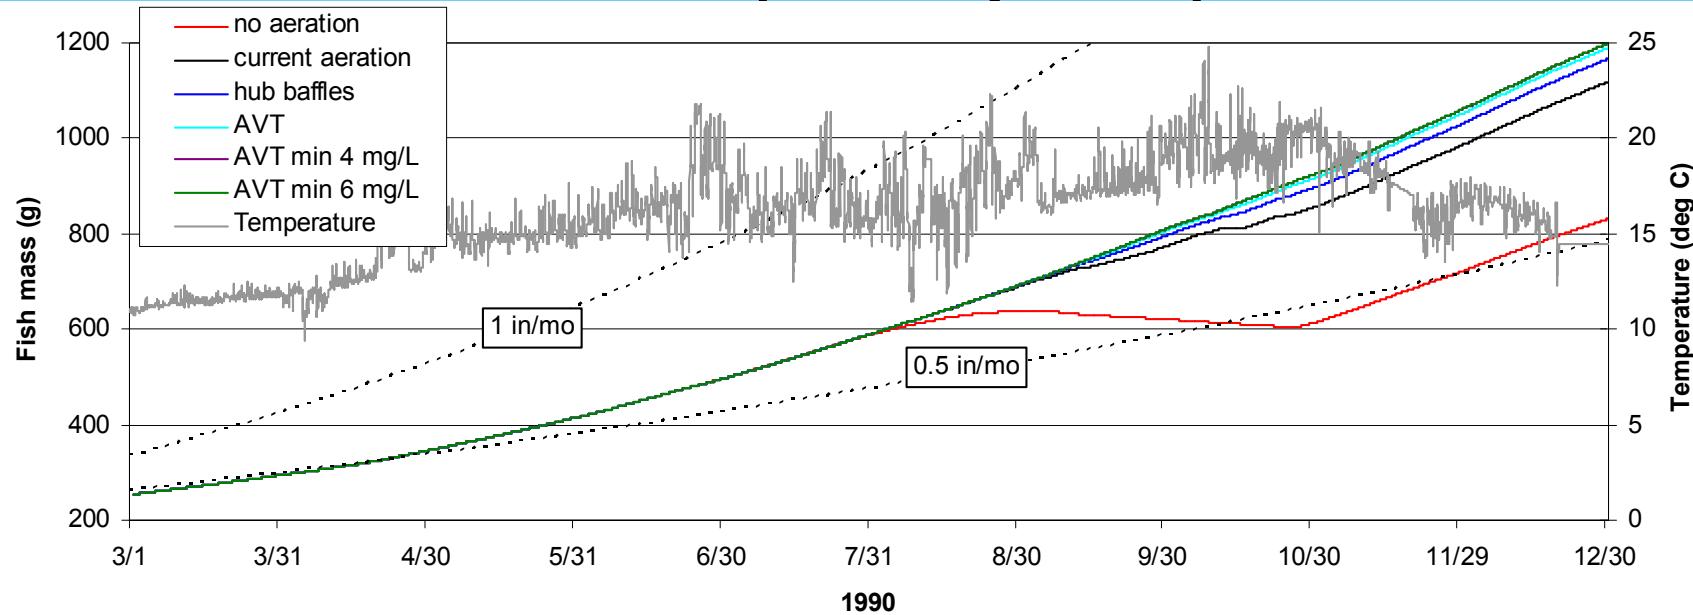



1996 (mod. wet year)

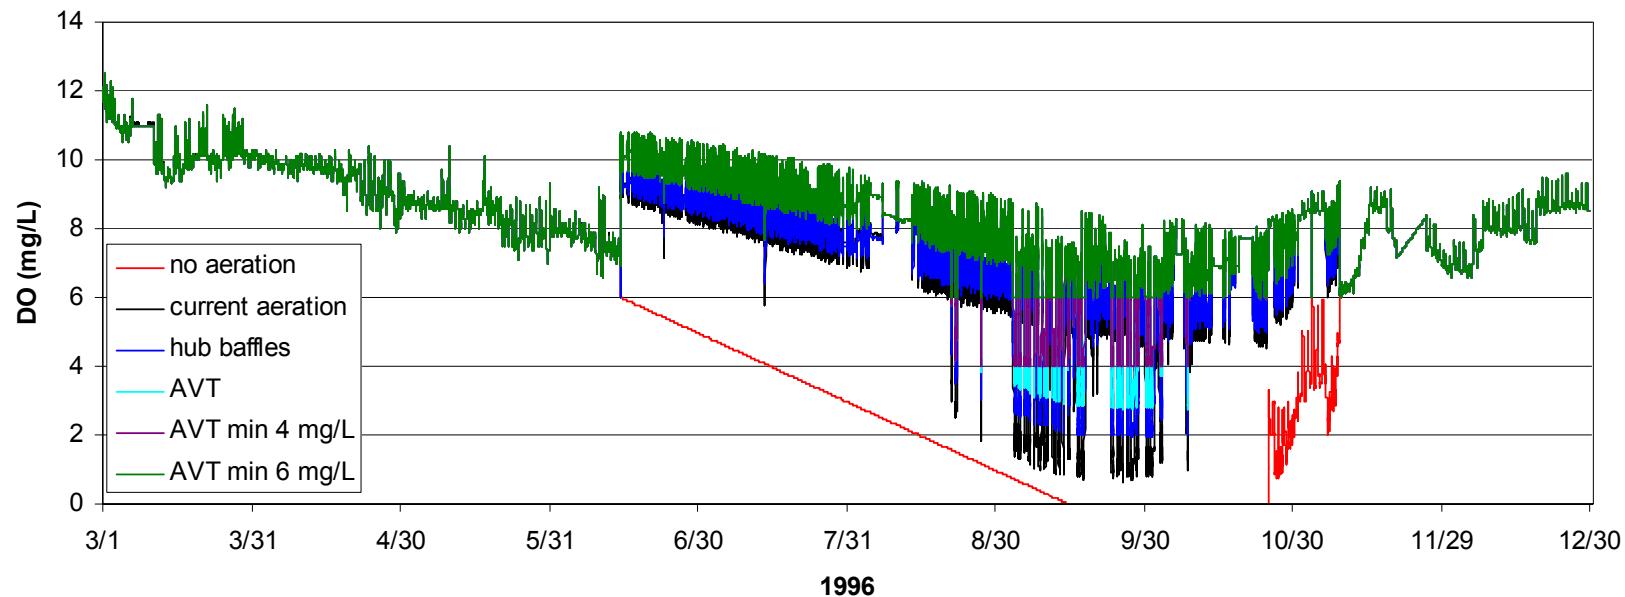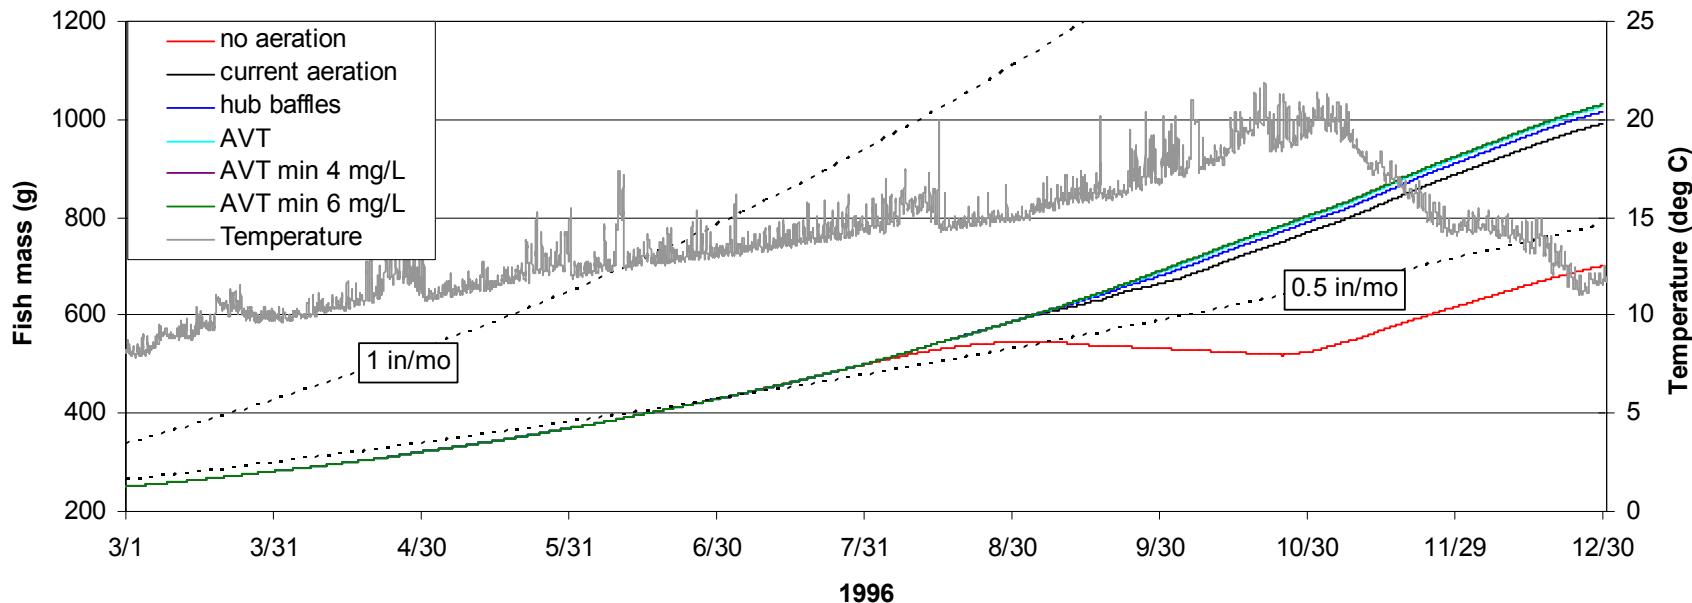

1992 (avg year)

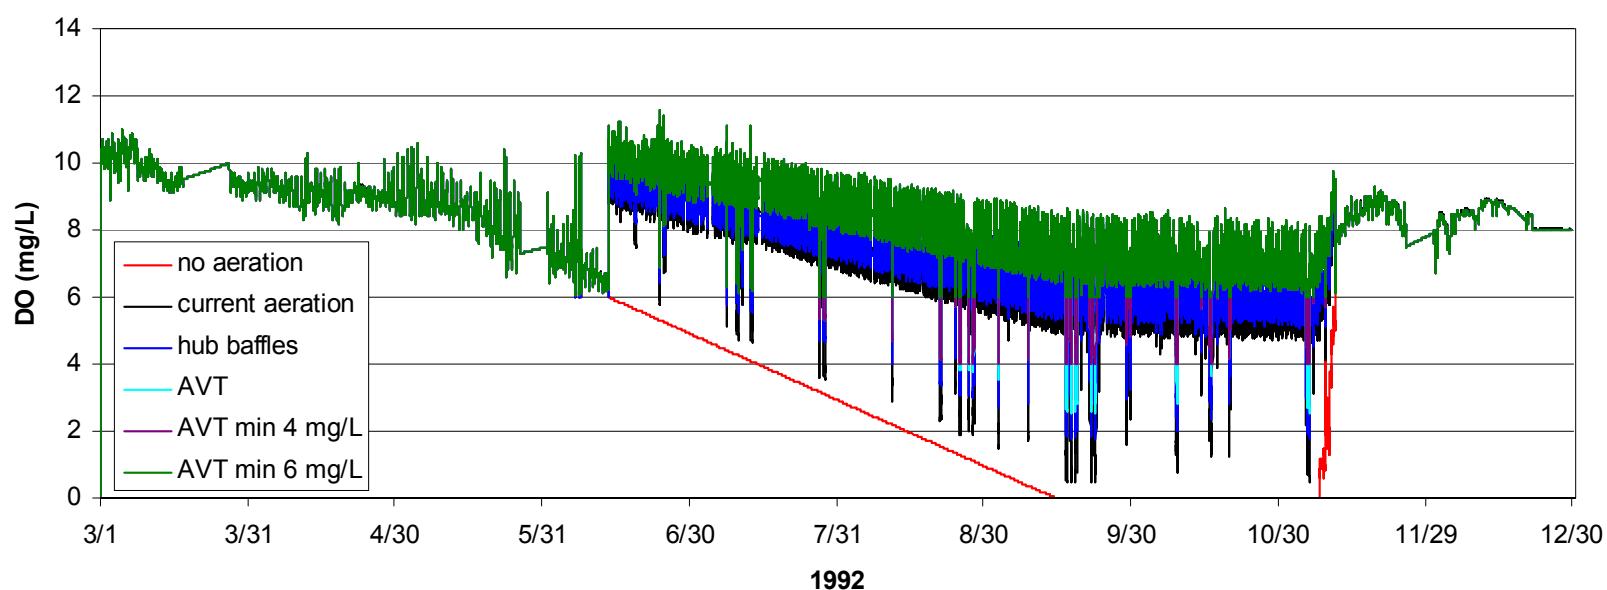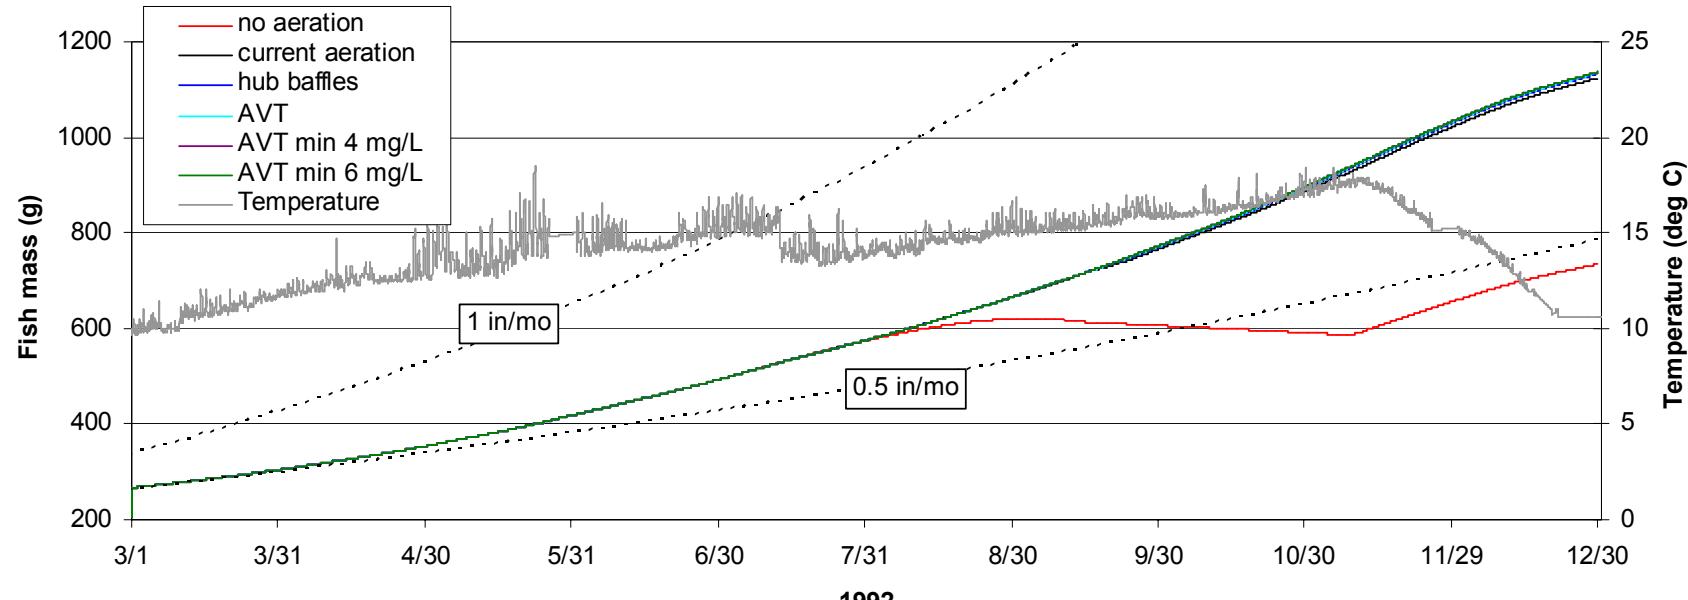



1999 (dry year)

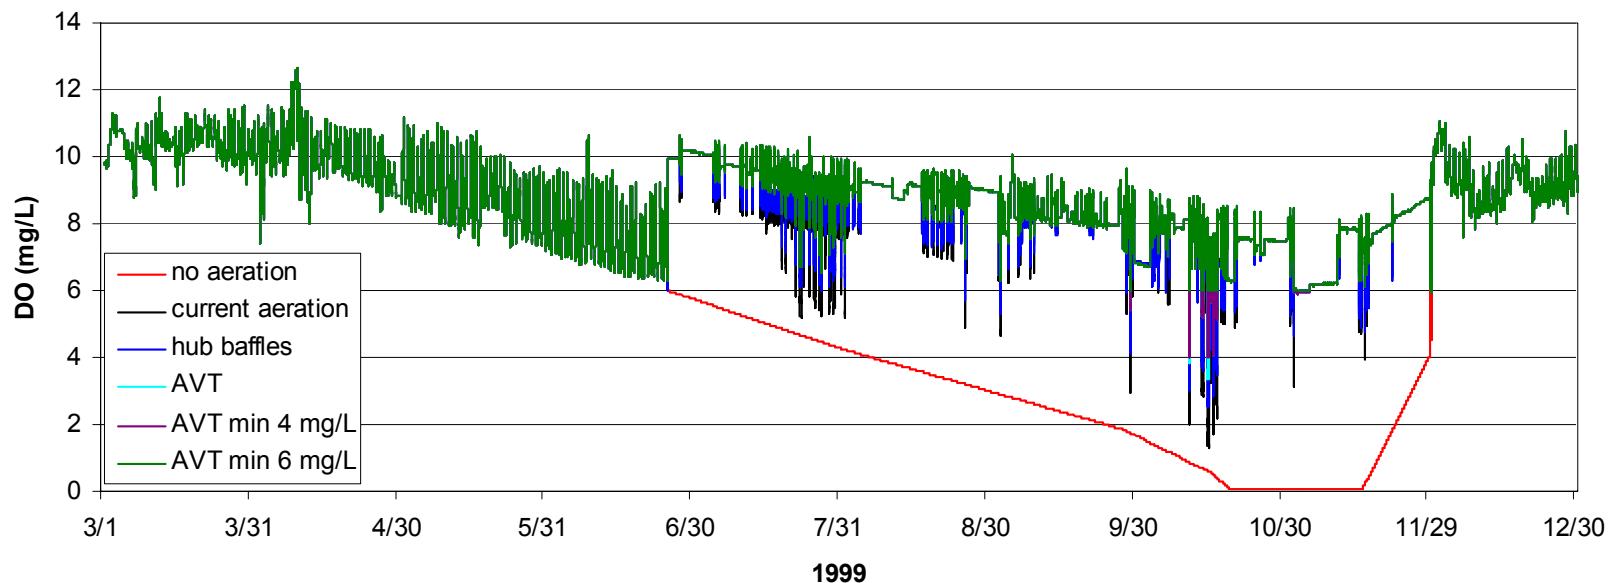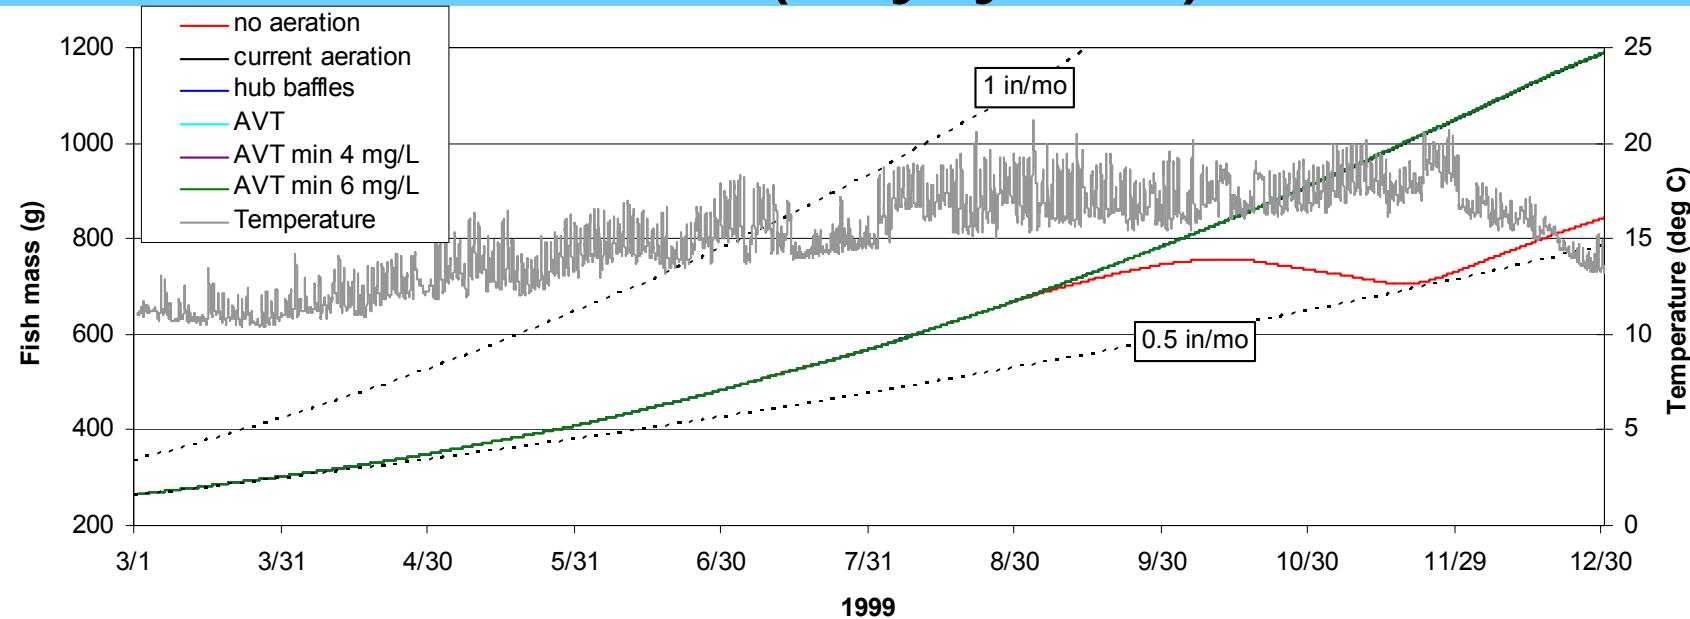

Results of the Study and Considerations for Setting The Site-Specific Standard for DO


Jim Ruane
Reservoir Environmental
Management, Inc

- I will present the results from the previous sections and compare the results of the fish modeling to DO metrics that summarize the DO conditions to which the fish were exposed in the fish model.
- The DO metrics presented here focus on those that might be considered for setting a site-specific standard. In considering regulatory DO standards it is important to set DO thresholds which are intended to be met or exceeded under defined conditions. Hence most of the discussion in the section regarding DO metrics will focus on the minimum values of each of the metrics.

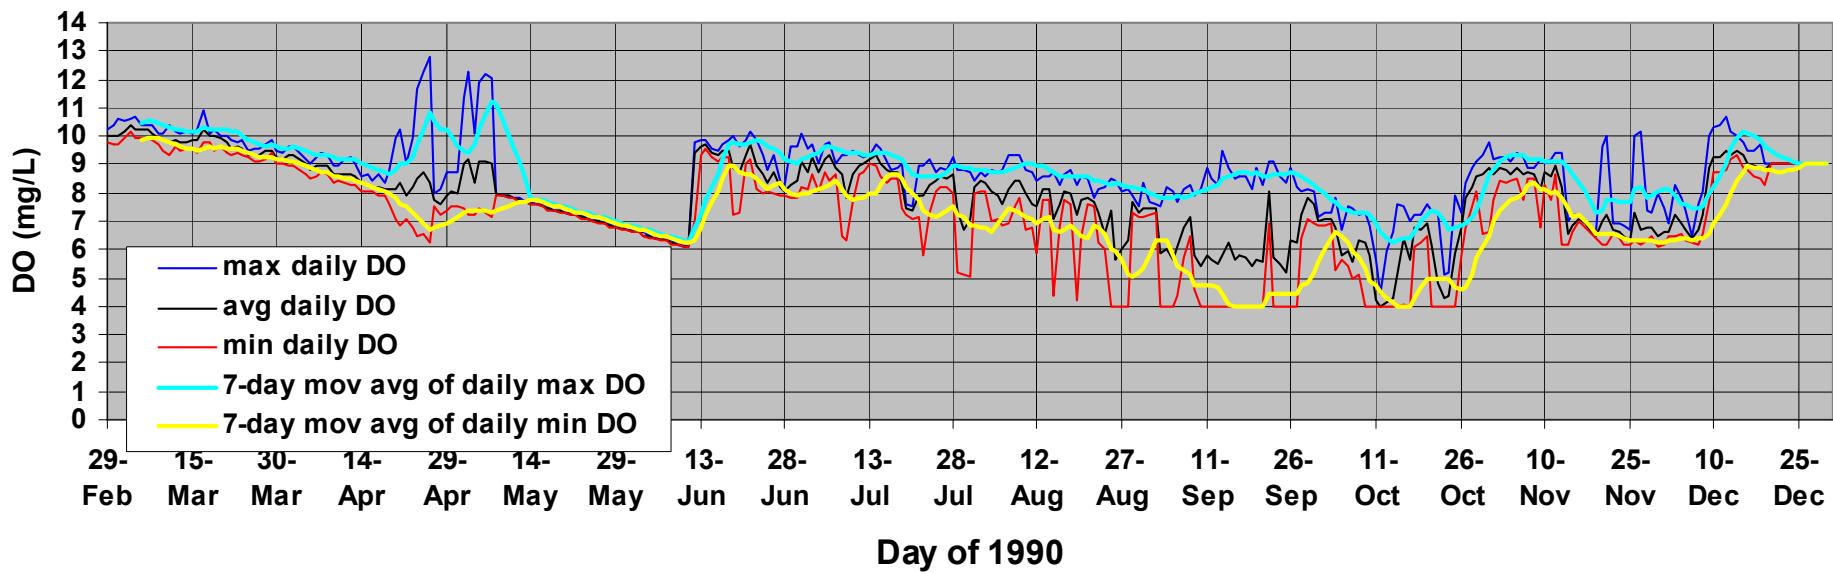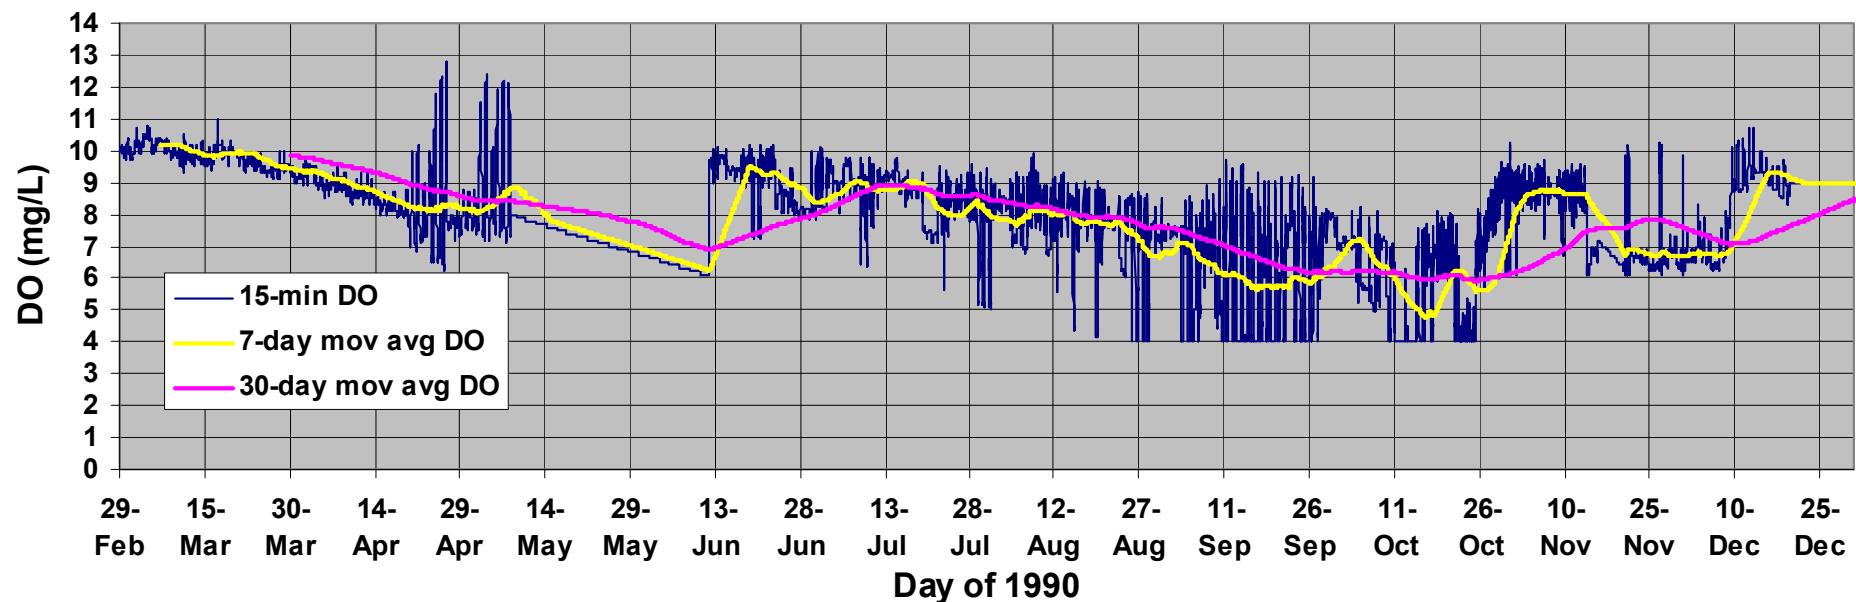


AVT Scenario with 4 mg/L Minimum DO


Year-End Fish Weight and Minimum Daily DO Levels Observed for Each Year For the Aeration Scenarios Considered

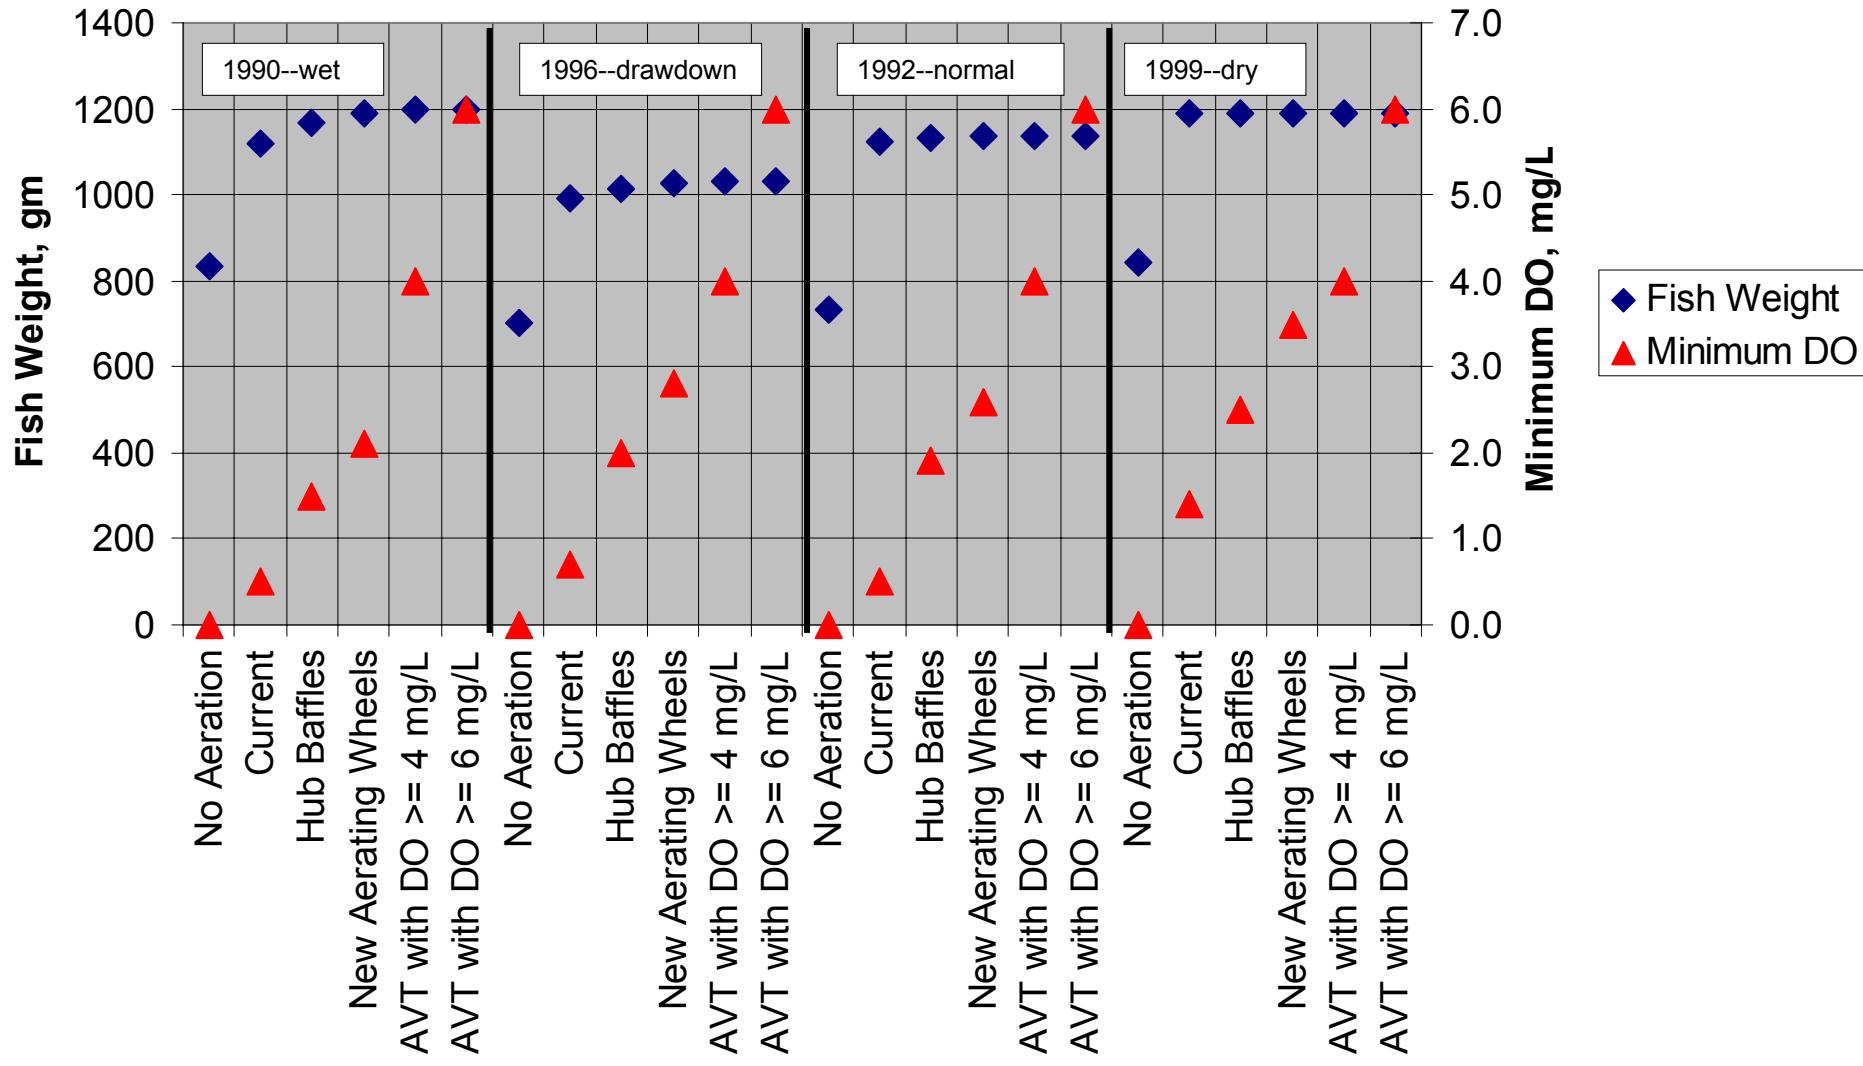

Year-End Fish Weight and Minimum 30-day Average DO Levels Observed for Each Year For Various Aeration Scenarios

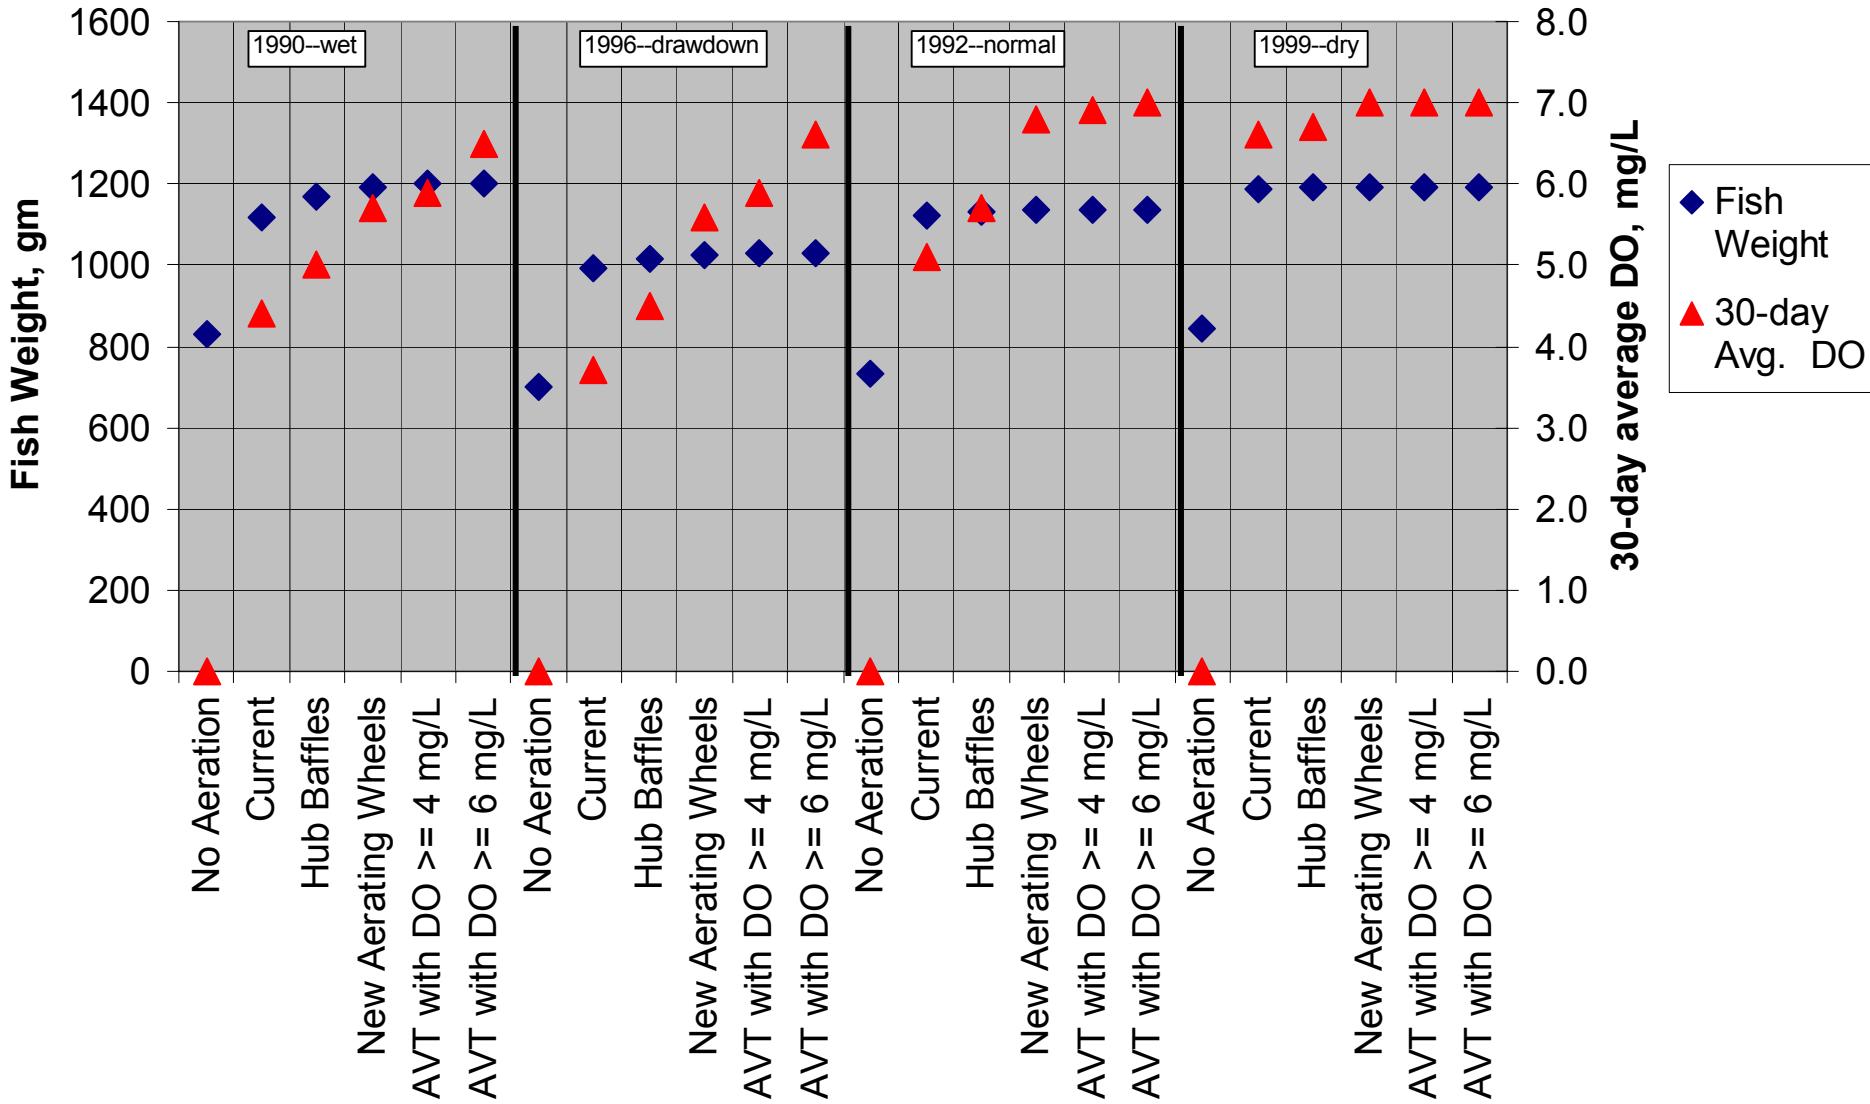

Percent of Time that Various Dissolved Oxygen Concentrations Would be Exceeded in Saluda Hydro Tailwater - for the Low DO Period (~ 7/1 - 11/15)

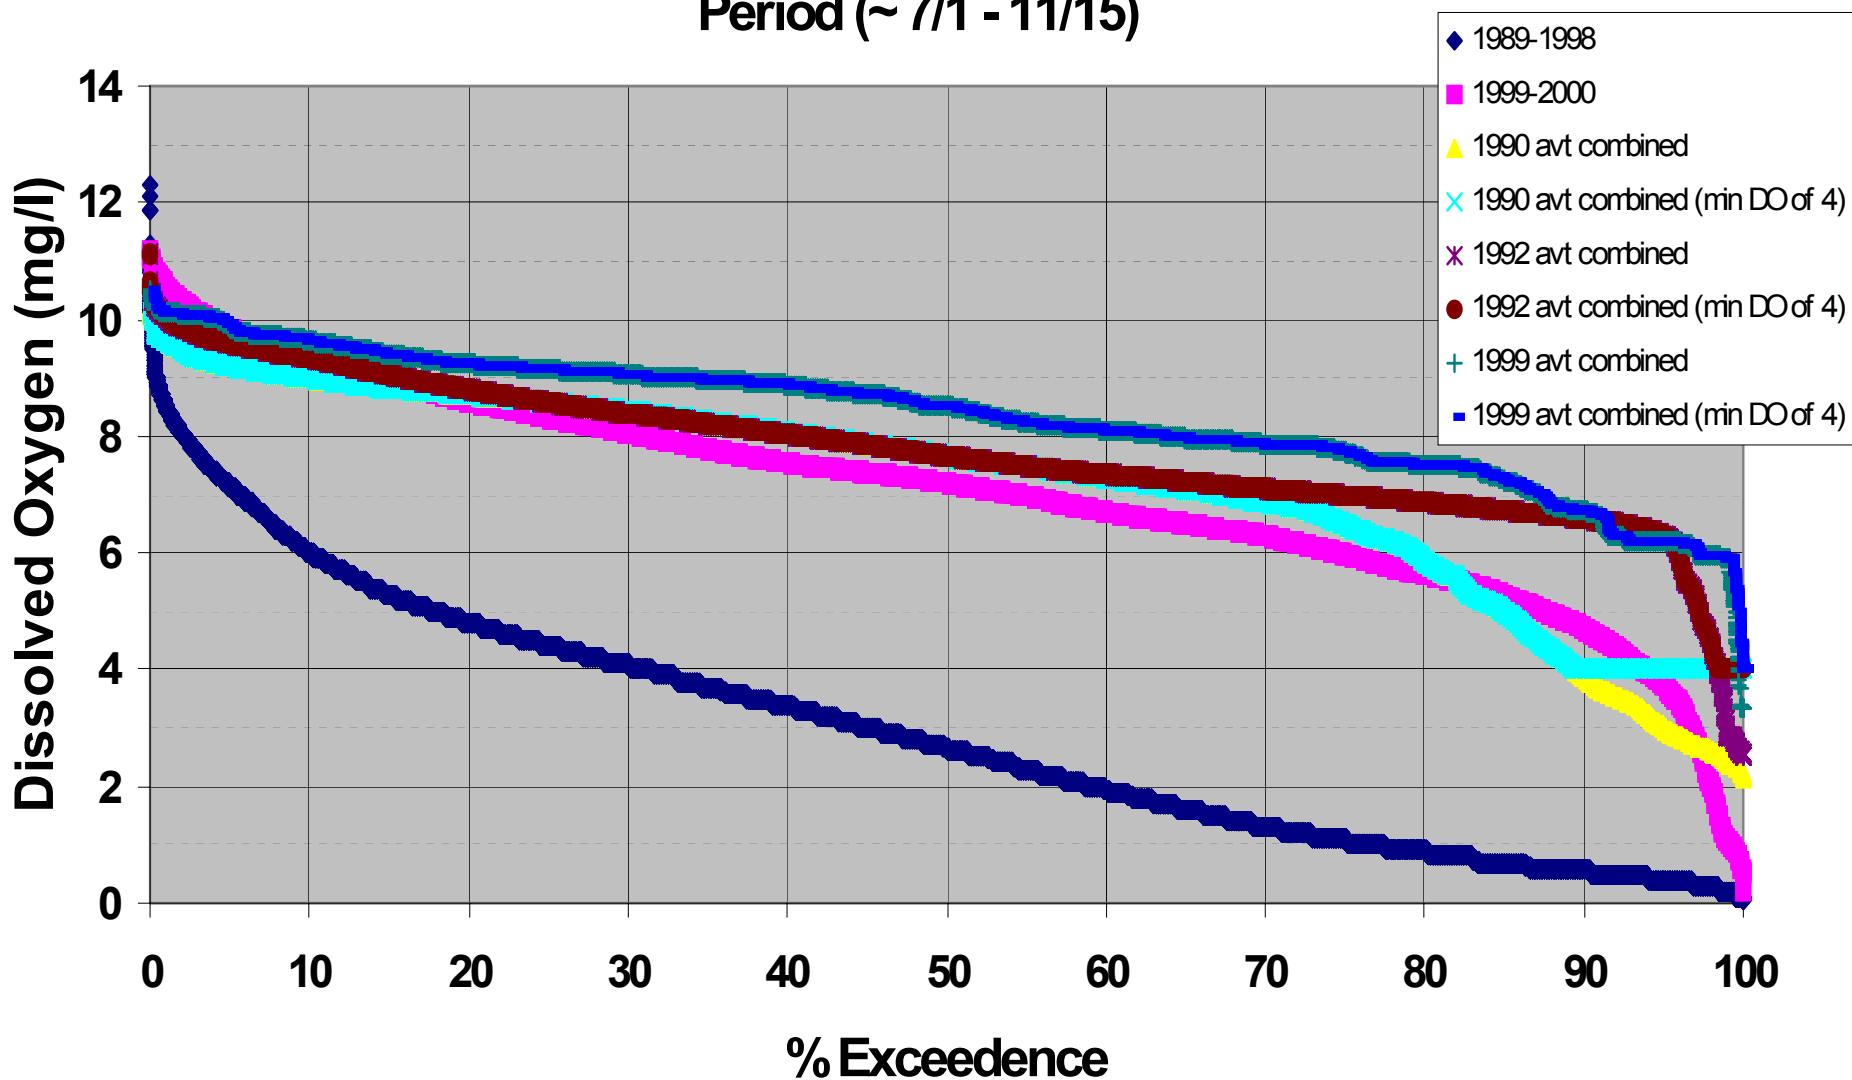

Current Conditions

- Current conditions of the fishery and invertebrate food supply are excellent by comparison to other southeastern hydropower tailwaters, even though DO concentrations have periodically dropped to about 1 mg/L during high flows.
- These fishery conditions can be attributed in large part to SCE&G aeration practices over the past 4 years, in conjunction with drought conditions that have occurred over this same period of time.

Current Conditions, cont.

- The most critical DO conditions occur during high flows. When special drawdowns of Lake Murray occur, especially in wet years, more water has been released during the time of year when DO in the discharges was at its lowest levels. Under these conditions (2 of the last 14 years), low DO occurred more frequently and for longer durations.
- Fish modeling indicates that the current aeration practice would result in good growth, i.e., 0.67 inches/month and year-end fish lengths of about 18 inches and weights of over 2 pounds.
- However, with additional aeration, small increases in growth might occur and mortality and avoidance would be less likely.

At least two DO metrics are needed for the site-specific standard:

1. one to protect against acute toxicity, and
2. one to ensure suitable fish growth.

These metrics should be selected to protect designated uses, as well as allow Saluda Hydro to operate as cost-efficiently as possible.

DO Metric for Acute Toxicity

- DHEC has specified that the minimum be no less than 4 mg/L, and this value is consistent with the EPA criteria for trout waters. (This EPA criterion was set in order to protect insect species that may be more sensitive than trout. EPA suggested a minimum value of 3 mg/L to avoid trout mortality.)
- The trout growth study on the LSR indicates that the 4 mg/L minimum DO is more than sufficient to provide for food supply and protect the trout against mortality.
- Considering that SCDHEC has set 4 mg/L as the minimum DO level, SCE&G has no practical alternative but to consider proposing 4 mg/L as the minimum DO level.

DO Metric For Growth

- The 30-day average DO metric was significantly better than any other metric for being correlated to fish growth, based on a comparison using the other DO metrics (daily average and 7-day average)
- Regression coefficients were determined for the relationships between year-end fish weight and the DO metrics, and R-square values were significantly higher for the 30-day average,
- Average DO metrics for shorter periods like daily and 7-day average fell below 5 mg/L intermittently for brief periods in 1990 and 1996 even when minimum DO was 4 mg/L

DO Metric For Growth, cont.

- An approach using the 30-day average, which best protects fish growth, is recommended in the EPA criteria document.
- Although a 30-day average differs from the daily average DO currently used by SC for most waters of the state, it is more protective as a growth metric when proposed along with a minimum DO standard.
- The 30-day average is more protective because it is a higher level of DO over a longer period of time, which is more important to growth.

Considerations for Setting the Standard

- A 30-day average of 5.5 mg/L can be used with immeasurable differences in weight or length relative to that attainable with a minimum DO of 6 mg/L.
- “Immeasurable” is defined to be 14 grams, 0.5 ounces, or 1/16 inches less than growth achieved using a minimum DO of 6 mg/L.
- The mean difference in year-end fish size with a 30-day average DO of 5.5 mg/L versus a minimum DO of 6 mg/L from all four years was 6 grams, 0.22 ounces, and 1/32 inches.
- Difference in growth in 1990 was also determined to be immeasurable: 12 grams, 0.45 ounces, and 1/16 inches.

More than any other metric, the 5.5 mg/L 30-day average satisfies both DHEC/EPA/DNR objectives for the trout put-grow-and-take use designation and SCE&G's objectives for cost-effective compliance in terms of capital costs, operational costs, and "operator difficulty" for complying with the target DO.

Site-Specific Considerations for Saluda Hydro

- The primary reason that a 5.5 mg/L, 30-day average DO is sufficient for the LSR: low DO values only occur an average of about 1 % of the time.
- DO is low when flow is high (about 10,000 cfs or more). Fishing experience is not likely to be impacted during low DO conditions since fishing is not as prevalent at high flows
- The 30-day average generally requires continuous monitoring. This is difficult to measure and maintain for point source dischargers on unregulated streams, but it is relatively easy to measure for hydropower discharges since continuous monitors are routinely installed.
- The 30-day average provides important flexibility needed for operations of a large hydropower project where the entire river passes through the project, i.e., the hydropower project is challenged to “treat” a whole river that discharges as much as 18,400 cfs, or almost 12,000 MGD or about 200 times the size of the wastewater discharge from the City of Columbia.

§401 Water Quality Certification Process for Federal Energy Regulatory Commission (FERC) Hydro Relicensing



Regulatory Authority

- **Section 401 Clean Water Act**
- **S.C. R. 61-101 Water Quality Certification**
 - S.C. R. 61-68 Water Classification & Standards.
 - S.C. R. 61-69 Classified Waters.
 - S. C. R. 19-450 Permits for Construction in Navigable Waters (new licenses).
 - Pollution Control Act
- Through appropriate State Regulations, the 401 Water Quality Certification allows the Department to regulate hydroelectric facilities in a way that provides a reasonable assurance the water quality standards will not be contravened and that existing and classified uses of affected waterbodies will be maintained.

3-Stage Consultation


Traditional Approach



3-Stage Consultation

- ▶ **First Stage**
 - ▶ Initial review, project modifications, proposed studies
- ▶ **Second Stage**
 - ▶ Completion of studies, determination of mitigative measures, draft application
- ▶ **Third Stage**
 - ▶ Final application filed

Traditional Approach

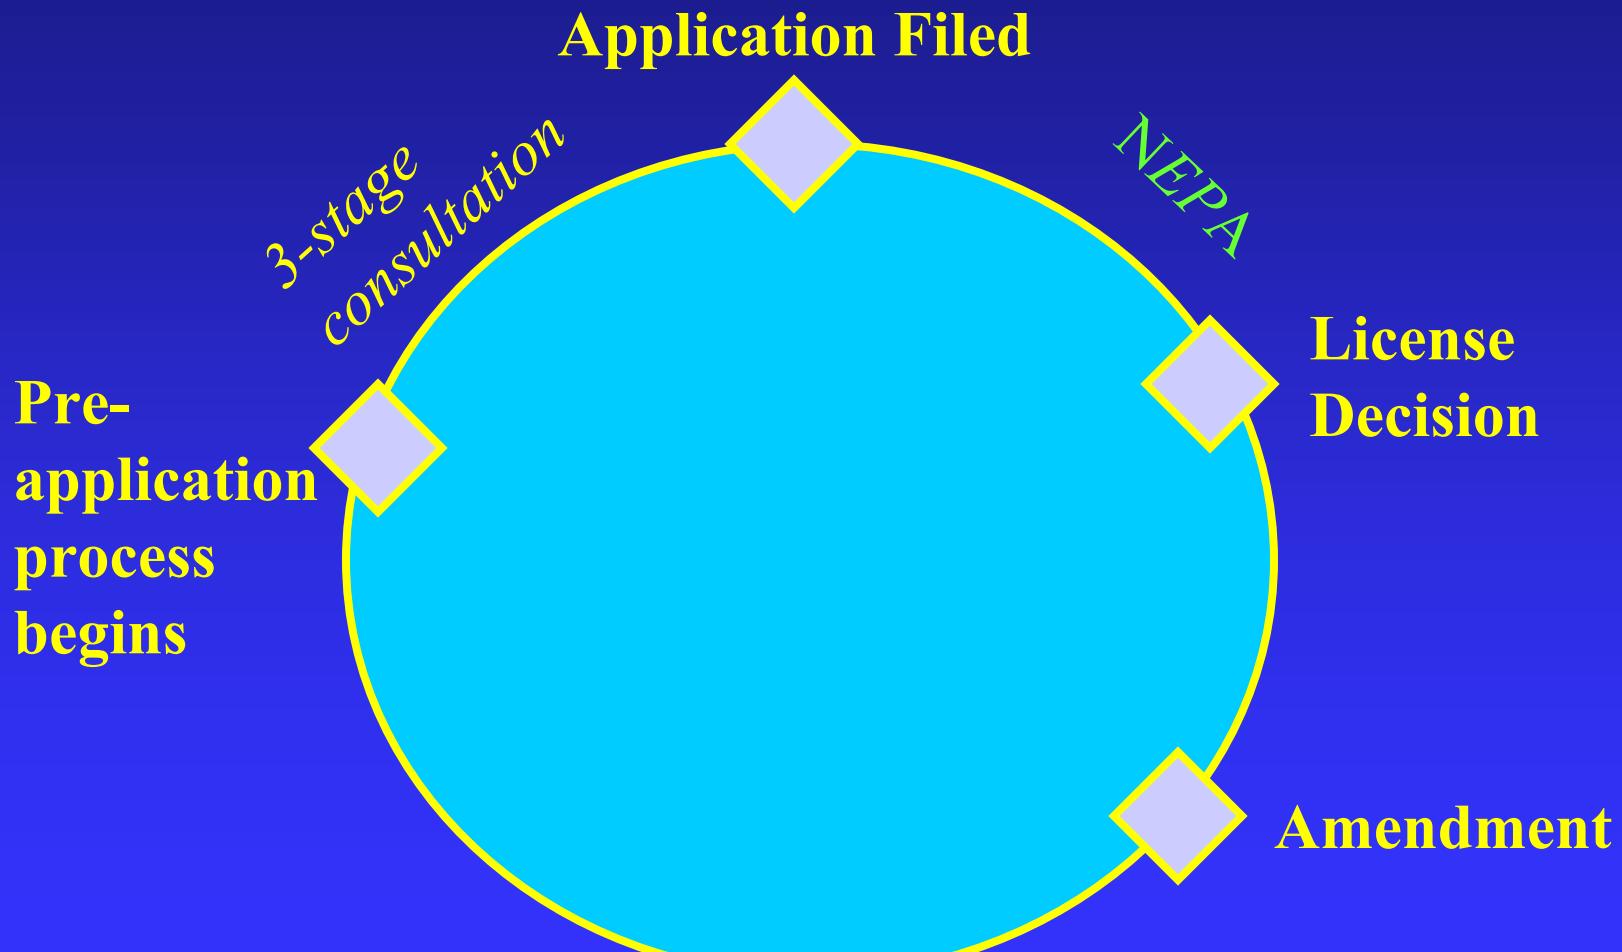

401 Water Quality Certification Process

FERC Stage I

- **Receive and Review Initial Consultation Package**
 - Scope of Review for Operation of Hydro Facilities for Licensing/Relicensing May Include:
 - Water Quality
 - D.O. levels in water released from hydro facilities.
 - Temperature of water released from hydro facilities.
 - Other water quality parameters if influenced by hydro operation.

401 Water Quality Certification Process

- Scope of Review for Operation of Hydro Facilities for Licensing/Relicensing (continued).
 - Minimum flow releases
 - Assimilative capacity for downstream NPDES discharges.
 - Aquatic life habitat (downstream or bypass reach).
 - Endangered Species.
 - Navigation (new licenses).

401 Water Quality Certification Process

FERC Stage I (continued)

- **Attend Interagency Meeting to Discuss Issues**
- **Provide Written Comments**
 - Scope of 401 Issues.
 - Additional information/data needed with justification.
 - Studies needed to provide additional data needed.

401 Water Quality Certification Process

FERC Stage II

- **Study Plans Finalized After Approval By Department**
- **Studies Completed**
 - Data and other technical information provided in reports
- **Applicant Submits Application For 401 Water Quality Certification.**
 - Department reviews application for completeness (study results reported/other technical information requested).
 - Other information required for processing application includes list of adjacent property owners and addresses, applicant contact information, cubic yards of fill/excavation if new license etc.

401 Water Quality Certification Process

- **Complete Application Starts 401 Process**
- **Department issues SCDHEC Public Notice**
 - Distributed to adjacent property owners, resource agencies, other interested parties.
 - Comments to be sent to Department within 30 days.
 - One year clock starts (Department has 1 year from Public Notice date to issue, waive, or deny certification).
 - Department has 180 to issue decision unless waiting for information/processing items from applicant (fee refunded if 180 days exceeded).

401 Water Quality Certification Process

Post Application Process (continued).

- Form sent notifying applicant of fee and newspaper affidavit requirements.
 - Applicant required to publish brief project description in newspaper .
 - Comments to be sent to Department within 15 days.
- Department Holds Public Hearing if at least 20 requests received.
 - Written comments to be sent to Department within 30 days of hearing.
- 401 Technical Review Process Officially Starts

401 Water Quality Certification Process

Post Application Process (continued)

- **Staff Assessment Prepared When Technical Review Complete**
 - Staff Assessment is the document supporting 401 decision and conditions.
 - Written Assessment addresses the water quality impacts of the project and makes conclusions concerning compliance with water quality standards and protection of classified uses.
 - Considers comments received.
 - Conditions are project specific, but may include minimum flow requirements (including bypass reaches), hydro operations addressing water quality (e.g., turbine venting) sediment passage, notification of downstream water users if water withheld, notification of fish kills etc.
 - Coastal Zone Consistency Certification and/or Navigable Waters Permit with Conditions Incorporated (if applicable).

401 Water Quality Certification Process

- **Notice of Proposed Decision (NOPD) Issued**
 - Notice lists conditions and has Staff Assessment attached
 - Notice is sent to applicant, adjacent property owners, resource agencies and other interested (commenting) parties.
 - Gives recipients opportunity to appeal 401 WQC decision within 15 days.
 - If Certification Decision Appealed Legal Department Processes in Accordance with Contested Case Procedures DHEC Regulation 61-72.
- **Final Certification Decision Issued (if no appeal).**
 - Certification letter with conditions issued to applicant

Application Filed

Public Notice of Application (Tendering)

Additional Study Requests, if any *

Adequacy Review

Public Notice (Acceptance)

Comments & Interventions *

Scoping Notice & Scoping Document 1

AIR and response to additional studies

Scoping Meeting *

Scoping Comments *

Scoping Document 2 and AIR

REA Notice

Rec., mandatory conditions *

Draft NEPA Document

NEPA Comments *

10(j) meeting

Final NEPA Document

License Decision

NEPA

Traditional Approach

Water Quality Standards

South Carolina Regulation 61-68,
Water Classifications and Standards



South Carolina Regulation 61-69

Classified Waters

- Contains the specific classification of listed waters
 - Not all waters are listed, but all are classified
- Contains site-specific water quality standards
 - Site-specific standards are only applicable to a specified waterbody

R.61-68.A. Purpose and Scope

- Three categories of water quality standards
 - Narrative and Numeric Criteria
 - Uses
 - Antidegradation Policy

R.61-68.B. Definitions

- Pollution Control Act
- Balanced indigenous aquatic community
- Biological Criteria
- Classified Uses
- Existing uses
- Fishing

R.61-68.B. Definitions

- Natural conditions
- No Discharge Zone
- Primary contact recreation
- Propagation
- Secondary contact recreation

R.61-68.C. Applicability of Standards

- Contains several important statements regarding how, when, and where water quality standards are applied such as:
 - Design flow conditions
 - Protection of ephemeral and intermittent streams as waters of the State
 - Protection and maintenance of downstream uses
 - Mixing zone provisions
 - Site-specific criteria provisions

R.61-68.D. Antidegradation Rules

- Protection of existing uses (Tier 1)
- Protection of high quality water (Tier 2)
 - Both Tier 1 and 2 are applied on a parameter-by-parameter approach
- Protection of exceptional waters (Tier 2½ and Tier 3)
 - Both Tier 2½ and 3 are applied on a designational approach

R.61-68.E. General Rules

- No waters of the State used for treatment purposes
- “Free froms”
- Use removal or downgrade provisions
- Variance provisions
- “Filling” provisions (§401 certification)

R.61-68.E. General Rules

- Nutrient criteria
- Temperature criteria
- Rules for applying in permitting activities
- Rules for evaluating ambient water quality
- Use of other scientifically-defensible information

R.61-68.F. Biocriteria

- General descriptions
- Use of reference conditions

R.61-68.G. Class Descriptions

- All classifications, designations, specific uses, and some specific criteria
- Freshwater (FW) Classification
- FW uses include the following: primary and secondary recreation, source of drinking water, freshwater aquatic life use, industrial, and agricultural

R.61-68.G. Class Descriptions

- Lake Murray is FW
 - Lake Murray is also a No Discharge Zone (NDZ) for marine sanitation devices
 - The tributaries to both Lake Murray and the lower Saluda River below the dam are also classed as FW

R.61-68.G. Class Descriptions

- FW also include specific criteria for items such as dissolved oxygen, temperature, and turbidity as well as the criteria listed in the appendix and narrative criteria listed in other sections of the regulation. There may also be site-specific criteria in R.61-69.

R.61-68.G. Class Descriptions

- Trout – Put, Grow, and Take (TPGT) Classification
- TPGT uses include all of the FW uses and also support growth of a stocked trout population
- Lower Saluda River is TPGT
- Lower Saluda has a site-specific DO water quality standard found in R.61-69
 - DO not less than daily average of 5 mg/l
 - A running thirty day average of 5.5 mg/l
 - With a low of 4.0 mg/l

R.61-68 Appendix

- Priority pollutants
- Nonpriority pollutants
- Organoleptic effects
- Additional Notes and modifications
- Ammonia